


# Drying Tumblers

35 Pound Capacity

Models Starting Serial No. 0602004144

Refer to Page 5 for Model Numbers

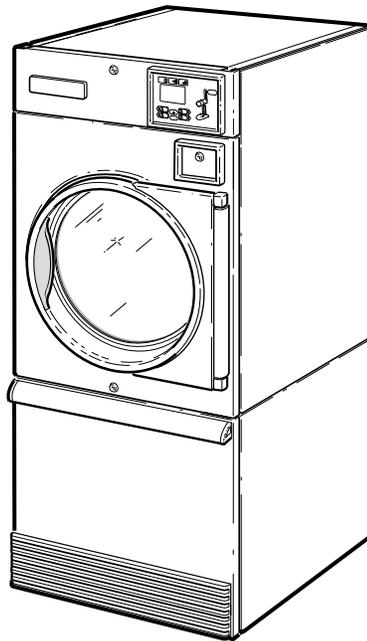

T478C\_70409501

Parts



# Table of Contents

Title	Page
Parts Ordering Information.....	3
Serial Plate Location .....	3
Model Identification .....	5
Product Overview - Heat Source and Voltage .....	6
Product Overview - Control Suffixes (Drawing 1 of 3).....	8
Product Overview - Control Suffixes (Drawing 2 of 3).....	10
Product Overview - Control Suffixes (Drawing 3 of 3).....	12
Single Drop Control Components .....	14
Dual Digital Timer Control Components.....	16
DX4 Control Components .....	18
DMP Control .....	20
OPL Microprocessor Controls.....	22
Coin Drop Components for MDC Models.....	24
Coin Drop Components for MDC Models - Wire Harnesses.....	26
BY and BZ Control Option for MDC Models .....	28
Coin Drops .....	30
Coin Drop Kits.....	32
Coin Drop Components for NetMaster Models .....	34
Card Reader Components for NetMaster Models.....	36
Network Board for NetMaster Models.....	38
Coin Drop Components for Quantum Control.....	40
Card Reader Components for Quantum Control .....	42
Network Board for Quantum Control.....	44
Communication Board .....	46
Coin Drop Components for Galaxy 600 Control .....	48
Card Reader Components for Galaxy 600 Control .....	50
UniLinc Control .....	52
LED OPL Control .....	54
Door Assemblies.....	56
Door Components.....	58
Hinge Components .....	60
Control Panels .....	62
Front Panel Assemblies .....	64
False Fronts .....	66
Cabinet Front Components.....	68
Emergency Stop Button for CE Models .....	70
Lower Cabinet Components .....	72
Cylinder Components .....	74
Cabinet Components .....	76
Fire Suppression System Components .....	78
Fire Suppression System Control Box.....	80

© Copyright 2015, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Drive Motor Components for Nonreversing Models .....	82
Drive Motor Components for Reversing Models .....	84
Blower Components.....	86
Moisture Sensing Components .....	88
Rotation Sensor .....	90
Airflow Switch.....	92
Gas Burner Housing and Secondary Stove Limit .....	94
Gas Valve Assembly - Non-CE and Non-Australian Gas Models .....	96
Gas Valve and Piping - CE and Australian Gas Models .....	98
Electric Heater Components .....	100
Steam Heater Components .....	102
Control Tray Harnesses for Gas Models.....	104
Control Tray for Non-CE and Non-Australian Gas Models .....	106
Control Tray Components for CE and Australian Gas Models (Drawing 1 of 2).....	108
Control Tray Components for CE and Australian Gas Models (Drawing 2 of 2).....	110
Control Tray Harnesses for Steam Models .....	112
Control Tray for Non-CE Steam Models .....	114
Control Tray for CE Steam Models .....	116
Control Tray Harnesses for Electric Models.....	118
Control Tray for Electric Models.....	120
Accessory Box Harnesses for Electric Models.....	122
Accessory Box for Non-CE Electric Models .....	124
Accessory Box for CE Electric Models.....	126
Parts Index.....	129

## Parts Ordering Information


If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.

For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin  
+32 56 41 20 54 Wevelgem, Belgium

## Serial Plate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on serial plate(s) as shown.

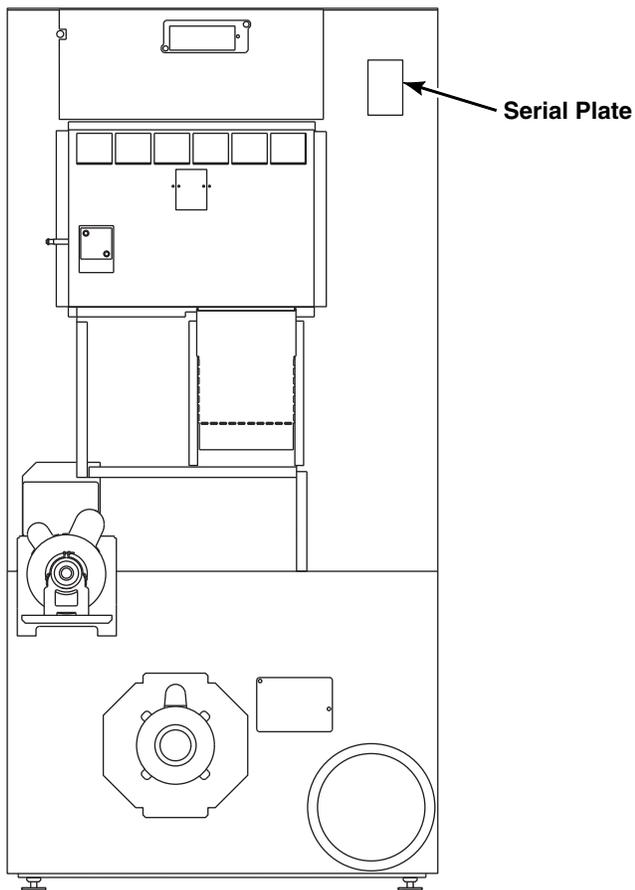

TMB2098N\_70409501




## Model Identification

Information in this manual is applicable to these tumbler models:

CHD35E2-CT035E	AT035E	KA035L	PA035L	UA035L
CHD35E2-CU035E	AT035L	KA035N	PA035N	UA035N
CHD35G2-CA035L	AT035N	KK035N	PK035N	UK035N
CHD35G2-CA035N	AT035S	KT035E	PT035E	UK035R
CHD35G2-CT035L	GA035L	KT035L	PT035L	UT035E
CHD35G2-CT035N	GA035N	KT035N	PT035N	UT035F
CHD35G2-CU035L	GK035N	KT035S	PT035S	UT035L
CHD35G2-CU035N	GT035E	KU035E	PU035E	UT035N
CHD35S2-CT035S	GT035L	KU035L	PU035L	UT035R
CHD35S2-CU035S	GT035N	KU035N	PU035N	UT035S
CK035N	GT035S	KU035S	PU035S	UU035E
CK035R	GU035E	LA035L	SA035L	UU035F
CT035F	GU035L	LA035N	SA035N	UU035L
CT035R	GU035N	LK035N	SK035N	UU035N
CU035F	GU035S	LT035E	SK035R	UU035R
CU035R	HA035L	LT035L	ST035E	UU035S
DR35E2-BT035E	HA035N	LT035N	ST035F	YT035E
DR35E2-BT035F	HK035N	LT035S	ST035L	YT035L
DR35E2-BU035E	HK035R	LU035E	ST035N	YT035N
DR35E2-BU035F	HT035E	LU035L	ST035R	YT035S
DR35G2-BA035L	HT035F	LU035N	ST035S	YU035E
DR35G2-BA035N	HT035L	LU035S	SU035E	YU035L
DR35G2-BK035N	HT035N	MT035E	SU035F	YU035N
DR35G2-BK035R	HT035R	MT035F	SU035L	YU035S
DR35G2-BT035L	HT035S	MT035L	SU035N	
DR35G2-BT035N	HU035E	MT035N	SU035R	
DR35G2-BT035R	HU035F	MT035R	SU035S	
DR35G2-BU035L	HU035L	MT035S		
DR35G2-BU035N	HU035N			
DR35G2-BU035R	HU035R			
DR35S2-BT035S	HU035S			
DR35S2-BU035S	IPD35E2			
	IPD35G2			
	IPD35S2			
	IT035E			
	IT035F			
	IT035L			
	IT035N			
	IT035R			
	IT035S			

# Product Overview - Heat Source and Voltage







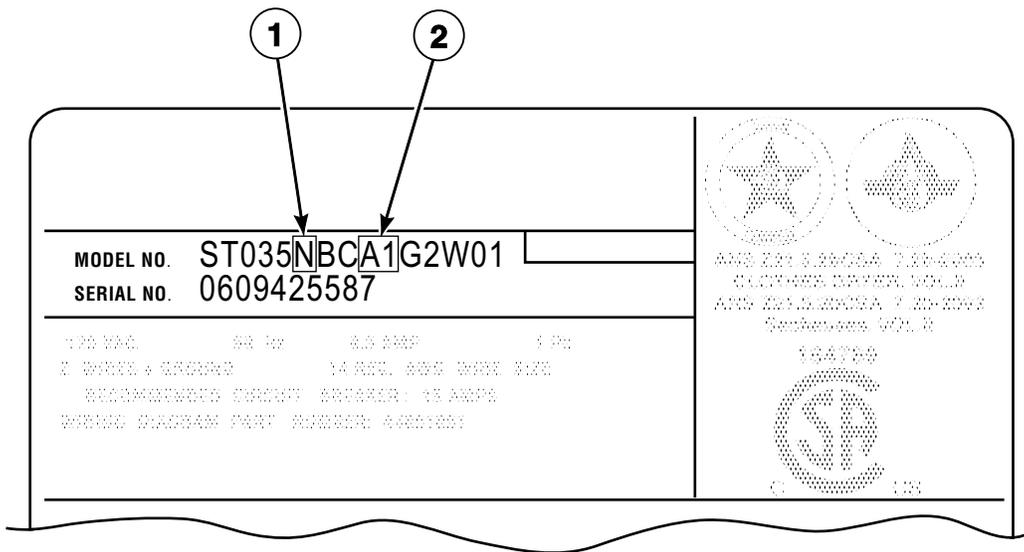


TMB2872P\_70409501

## Product Overview - Heat Source and Voltage

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Heat Source	E: Electric F: Reduced Electric (Eco Line) L: Liquid Petroleum Gas (L.P.) N: Natural Gas (N.G.) R: Reduced Gas, Natural Gas (Eco Line) S: Steam
2	-	Voltage	A1: 100, 200 Volt/50 Hertz/1 Phase A2: 100, 200-220 Volt/60Hertz/1 Phase B2: 120, 208-240 Volt/60 Hertz/1 Phase; For high Amp motors B3: 120, 208-240 Volt/60 Hertz/1 Phase; For low Amp motors F1: 200 Volt/50 Hertz/1 Phase F2: 200 Volt/60 Hertz/1 Phase F4: 200 Volt/50 Hertz/3 Phase F5: 200-208 Volt/60 Hertz/3 Phase F6: 200-208, 240 Volt/60 Hertz/3 Phase G1: 208 Volt/60 Hertz/1 Phase G2: 208-240 Volt/60 Hertz/1 Phase J1: 230 Volt/50 Hertz/1 Phase J2: 230-240 Volt/50 Hertz/1 Phase J4: 240 Volt/60 Hertz/1 Phase J5: 230 Volt/50 Hertz/3 Phase J6: 230-240 Volt/50 Hertz/3 Phase J8: 240 Volt/60 Hertz/3 Phase M1: 380 Volt/50 Hertz/3 Phase M2: 380, 400-415 Volt/50 Hertz/3 Phase M3: 380 Volt/60 Hertz/3 Phase N1: 400-415 Volt/50 Hertz/3 Phase P1: 440 Volt/60 Hertz/3 Phase Q1: 460-480 Volt/60 Hertz/3 Phase

# Product Overview - Control Suffixes (Drawing 1 of 3)

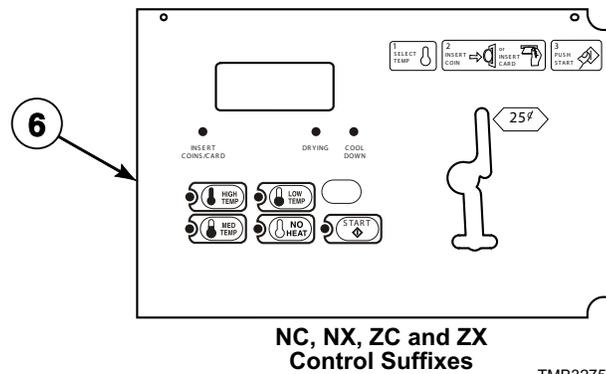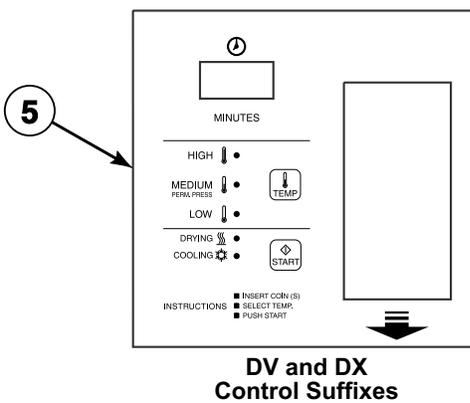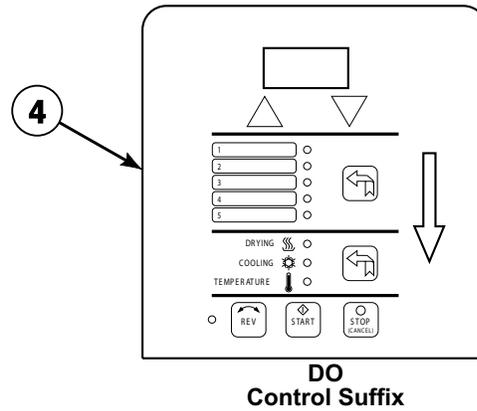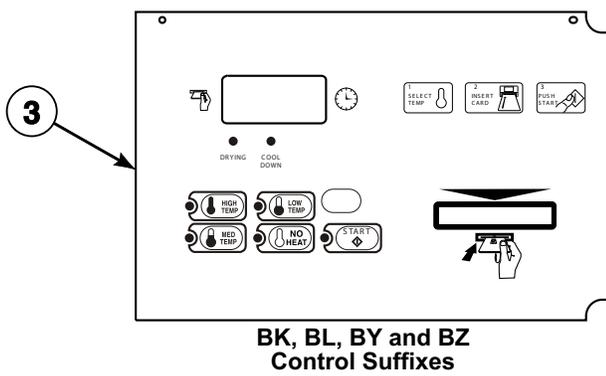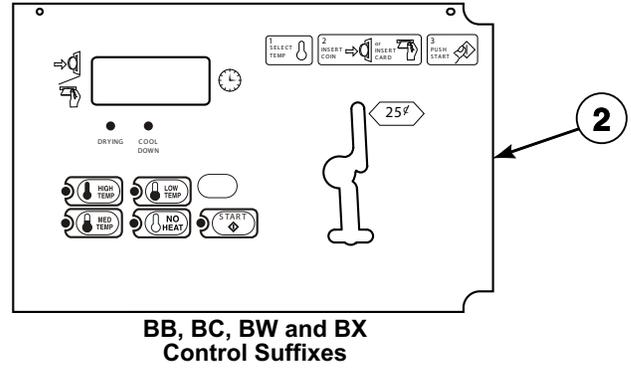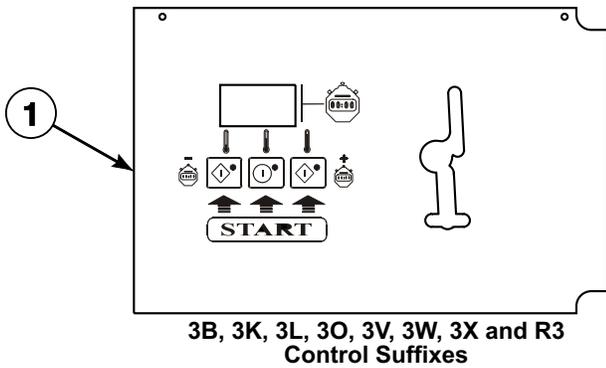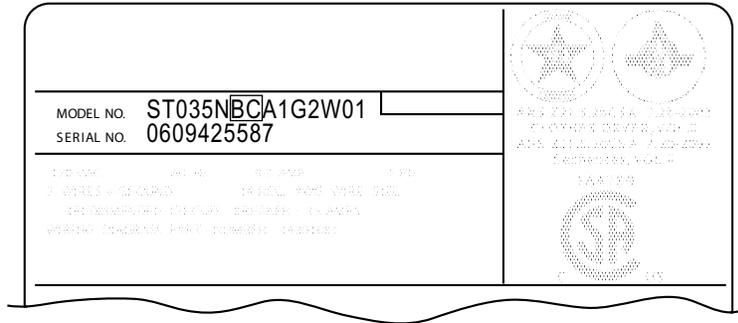

TMB3275P\_70409501


## Product Overview - Control Suffixes (Drawing 1 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	3L: DX4 prep for central pay 3O: DX4 OPL 3V: DX4 vended 3X: DX4 prep for coin
	-	Control - Reversing	3B: reversing DX4 vended 3K: reversing DX4 prep for central pay 3W: reversing DX4 prep for coin R3: reversing DX4 OPL
2	-	Control - Nonreversing	BC: basic electronic, coin BX: basic electronic, prep for coin
	-	Control - Reversing	BB: reversing basic electronic, coin BW: reversing basic electronic, prep for coin
3	-	Control - Nonreversing	BL: basic electronic, prep for central pay BY: basic electronic, prep for card
	-	Control - Reversing	BK: reversing basic electronic, prep for central pay BZ: reversing basic electronic, prep for card
4	-	Control - Nonreversing	DO: DMP OPL
5	-	Control - Nonreversing	DV: DMP vended DX: DMP prep for coin
6	-	Control - Nonreversing	NC: NetMaster coin NX: NetMaster, prep for coin ZC: NetMaster network coin ZX: NetMaster network, prep for coin


**NOTE: Coin models have the following control suffixes: 3B, 3K, 3L, 3V, 3W, 3X, BB, BC, BK, BL, BW, BX, BZ, DV, DX, NC, NX, ZC and ZX**

**NOTE: OPL models have the following control suffixes: 3O, BY, DO and R3**


# Product Overview - Control Suffixes (Drawing 2 of 3)

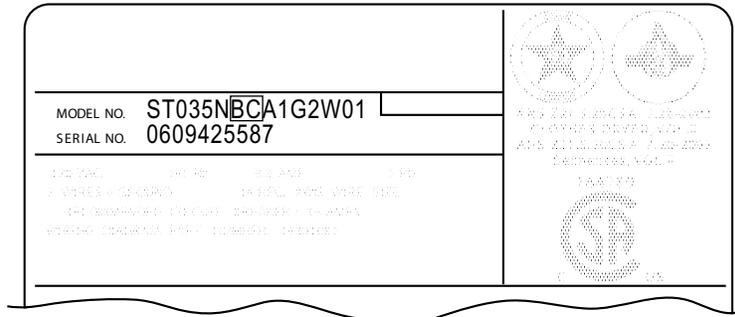

1

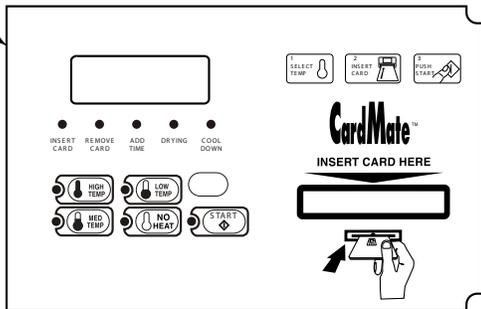


2

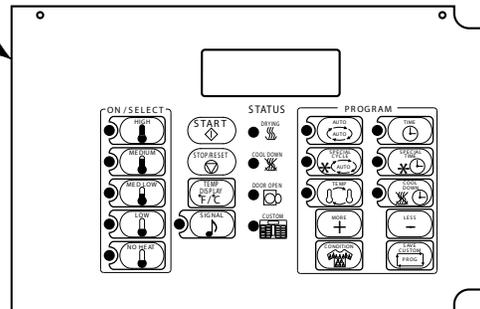


3

**NR and ZR Control Suffixes**

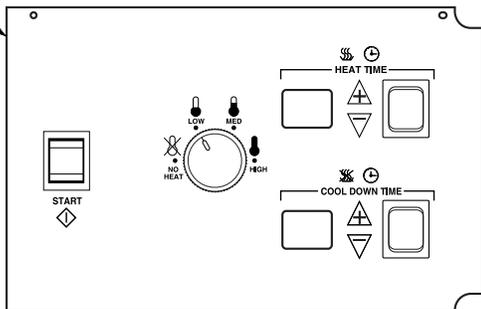


4

**OM Control Suffix**

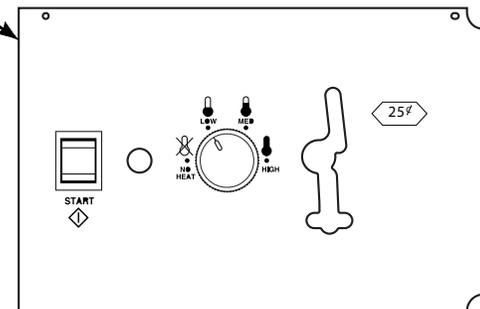


5

**QT and RQ Control Suffixes**

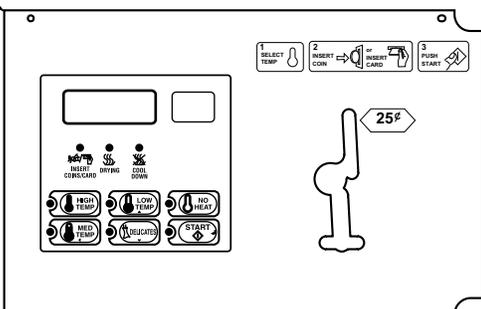

6

**SD and SX Control Suffixes**

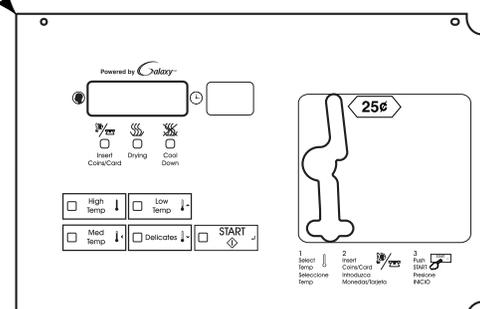

**LB, LC, LK, LL, LW, LX, LY, LZ, WB, WC, WK, WL, WW, WX, WY and WZ Control Suffixes**

**KB, KC, KK, KL, KW, KX, KY and KZ Control Suffixes**

TMB3276P\_70409501


## Product Overview - Control Suffixes (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	NR: NetMaster card ZR: NetMaster network card
2	-	Control - Nonreversing	OM: OPL micro
3	-	Control - Nonreversing	QT: dual digital timer
	-	Control - Reversing	RQ: reversing dual digital timer
4	-	Control - Nonreversing	SD: single drop SX: single drop, prep for coin
5	-	Control - Nonreversing	LC: network adaptable coin LL: network adaptable, prep for central pay LX: network adaptable, prep for coin LY: network adaptable, prep for card WC: network ready coin WL: network ready, prep for central pay WX: network ready, prep for coin WY: network ready, prep for card
	-	Control - Reversing	LB: reversing network adaptable coin LK: reversing network adaptable, prep for central pay LW: reversing network adaptable, prep for coin LZ: reversing network adaptable, prep for card WB: reversing network ready coin WK: reversing network ready, prep for central pay WW: reversing network ready, prep for coin WZ: reversing network ready, prep for card
6	-	Control - Nonreversing	KC: single coin KL: prep for central pay KX: prep for coin KY: prep for card
	-	Control - Reversing	KB: reversing single coin KK: reversing prep for central pay KW: reversing prep for coin KZ: reversing prep for card

**NOTE: Coin models have the following control suffixes: KB, KC, KK, KL, KW, KX, KY, KZ, LB, LC, LK, LL, LW, LX, LY, LZ, SD, SX, WB, WC, WK, WL, WW, WX, WY and WZ**

**NOTE: OPL models have the following control suffixes: NR, OM, QT, RQ and ZR**

# Product Overview - Control Suffixes (Drawing 3 of 3)

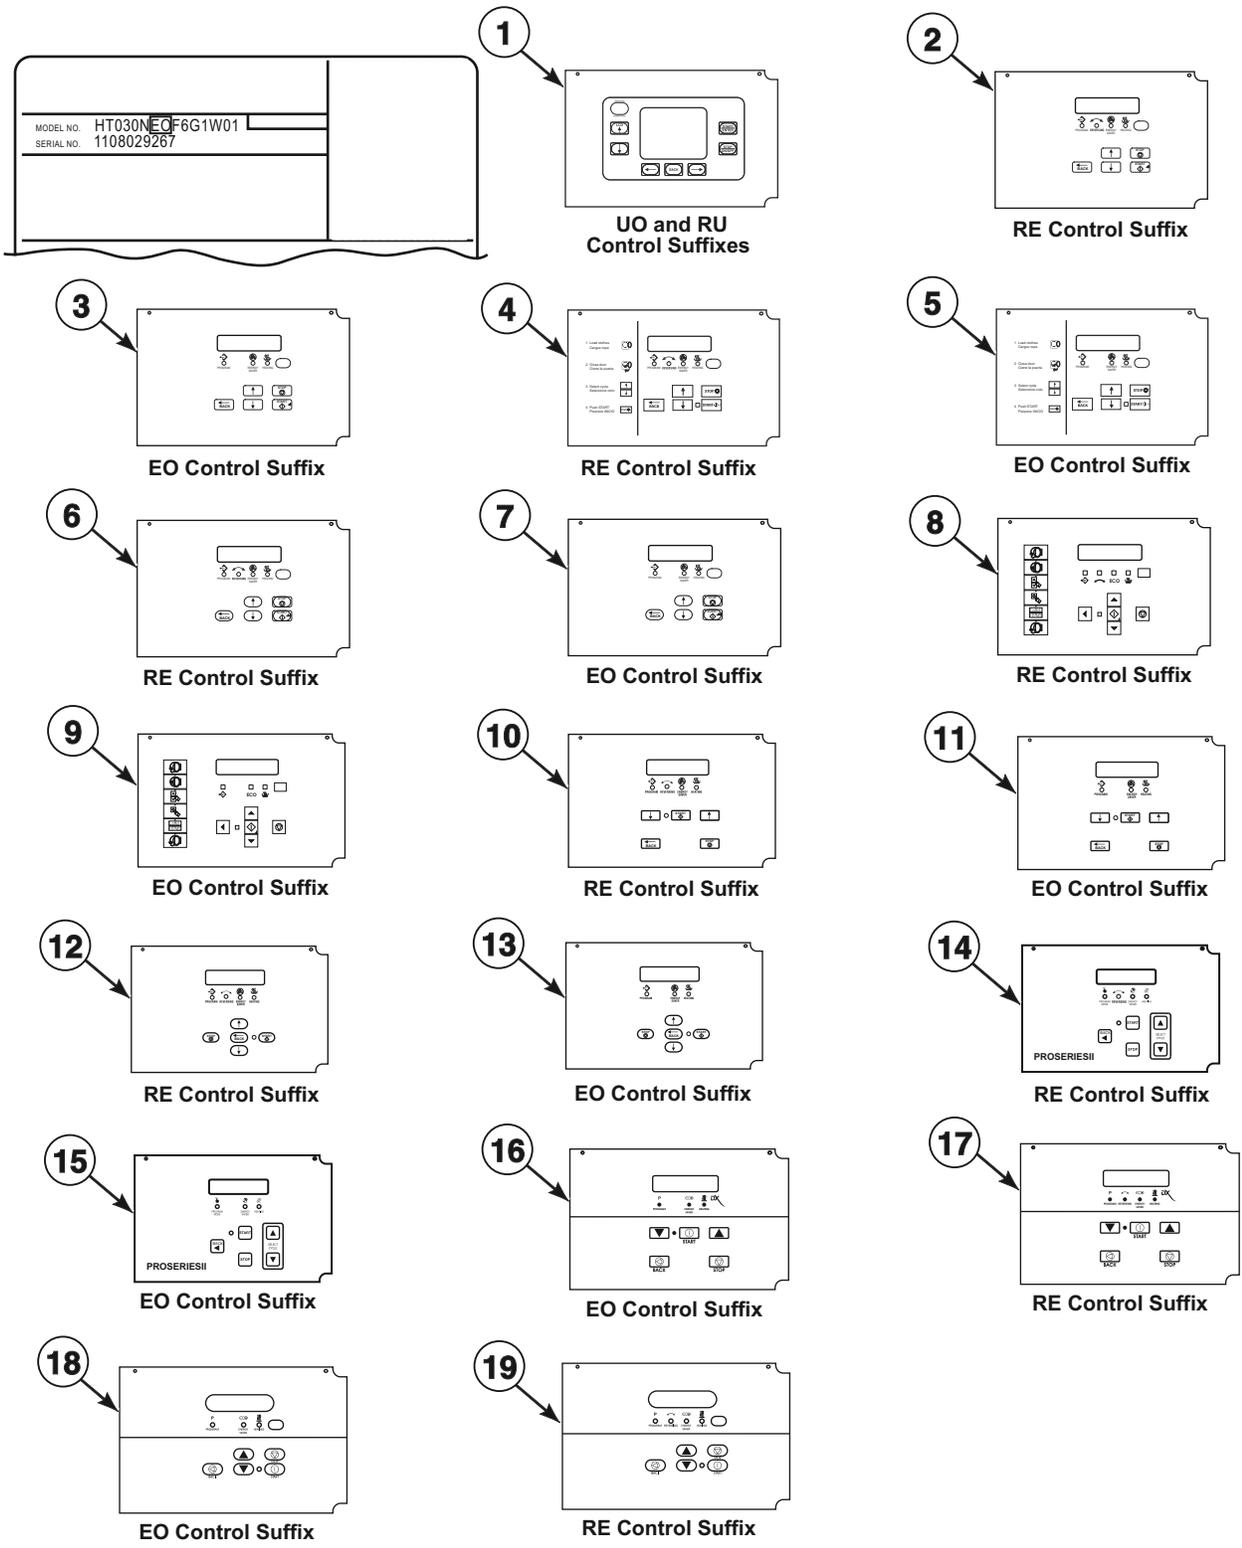

TMB3353P\_70409501


## Product Overview - Control Suffixes (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Reversing	U models; RU: reversing UniLinc OPL
	-	Control - Nonreversing	U models; UO: UniLinc OPL
2	-	Control - Reversing	S models; RE: reversing LED OPL
3	-	Control - Nonreversing	S models; EO: LED OPL
4	-	Control - Reversing	H models; RE: reversing LED OPL
5	-	Control - Nonreversing	H models; EO: LED OPL
6	-	Control - Reversing	U models; RE: reversing LED OPL
7	-	Control - Nonreversing	U models; EO: LED OPL
8	-	Control - Reversing	C, D and I models; RE: reversing LED OPL
9	-	Control - Nonreversing	C, D and I models; EO: LED OPL
10	-	Control - Reversing	P models through 9/30/14; RE: reversing LED OPL
11	-	Control - Nonreversing	P models through 9/30/14; EO: LED OPL
12	-	Control - Reversing	Y models; L models through 5/31/15; RE: reversing LED OPL
13	-	Control - Nonreversing	Y models; L models through 5/31/15; EO: LED OPL
14	-	Control - Reversing	G and K models; RE: reversing LED OPL
15	-	Control - Nonreversing	G and K models; EO: LED OPL
16	-	Control - Nonreversing	P models starting 10/1/14 through 5/31/15; EO: LED OPL
17	-	Control - Reversing	P models starting 10/1/14 through 5/31/15; RE: reversing LED OPL
18	-	Control - Nonreversing	L and P models starting 6/1/15; EO: LED OPL
19	-	Control - Reversing	L and P models starting 6/1/15; RE: reversing LED OPL

**NOTE: OPL models have the following control suffixes: EO, RE, RU and UO**

# Single Drop Control Components

C, H, I and S Models Through 3/31/10 with SD and SX Control Suffixes

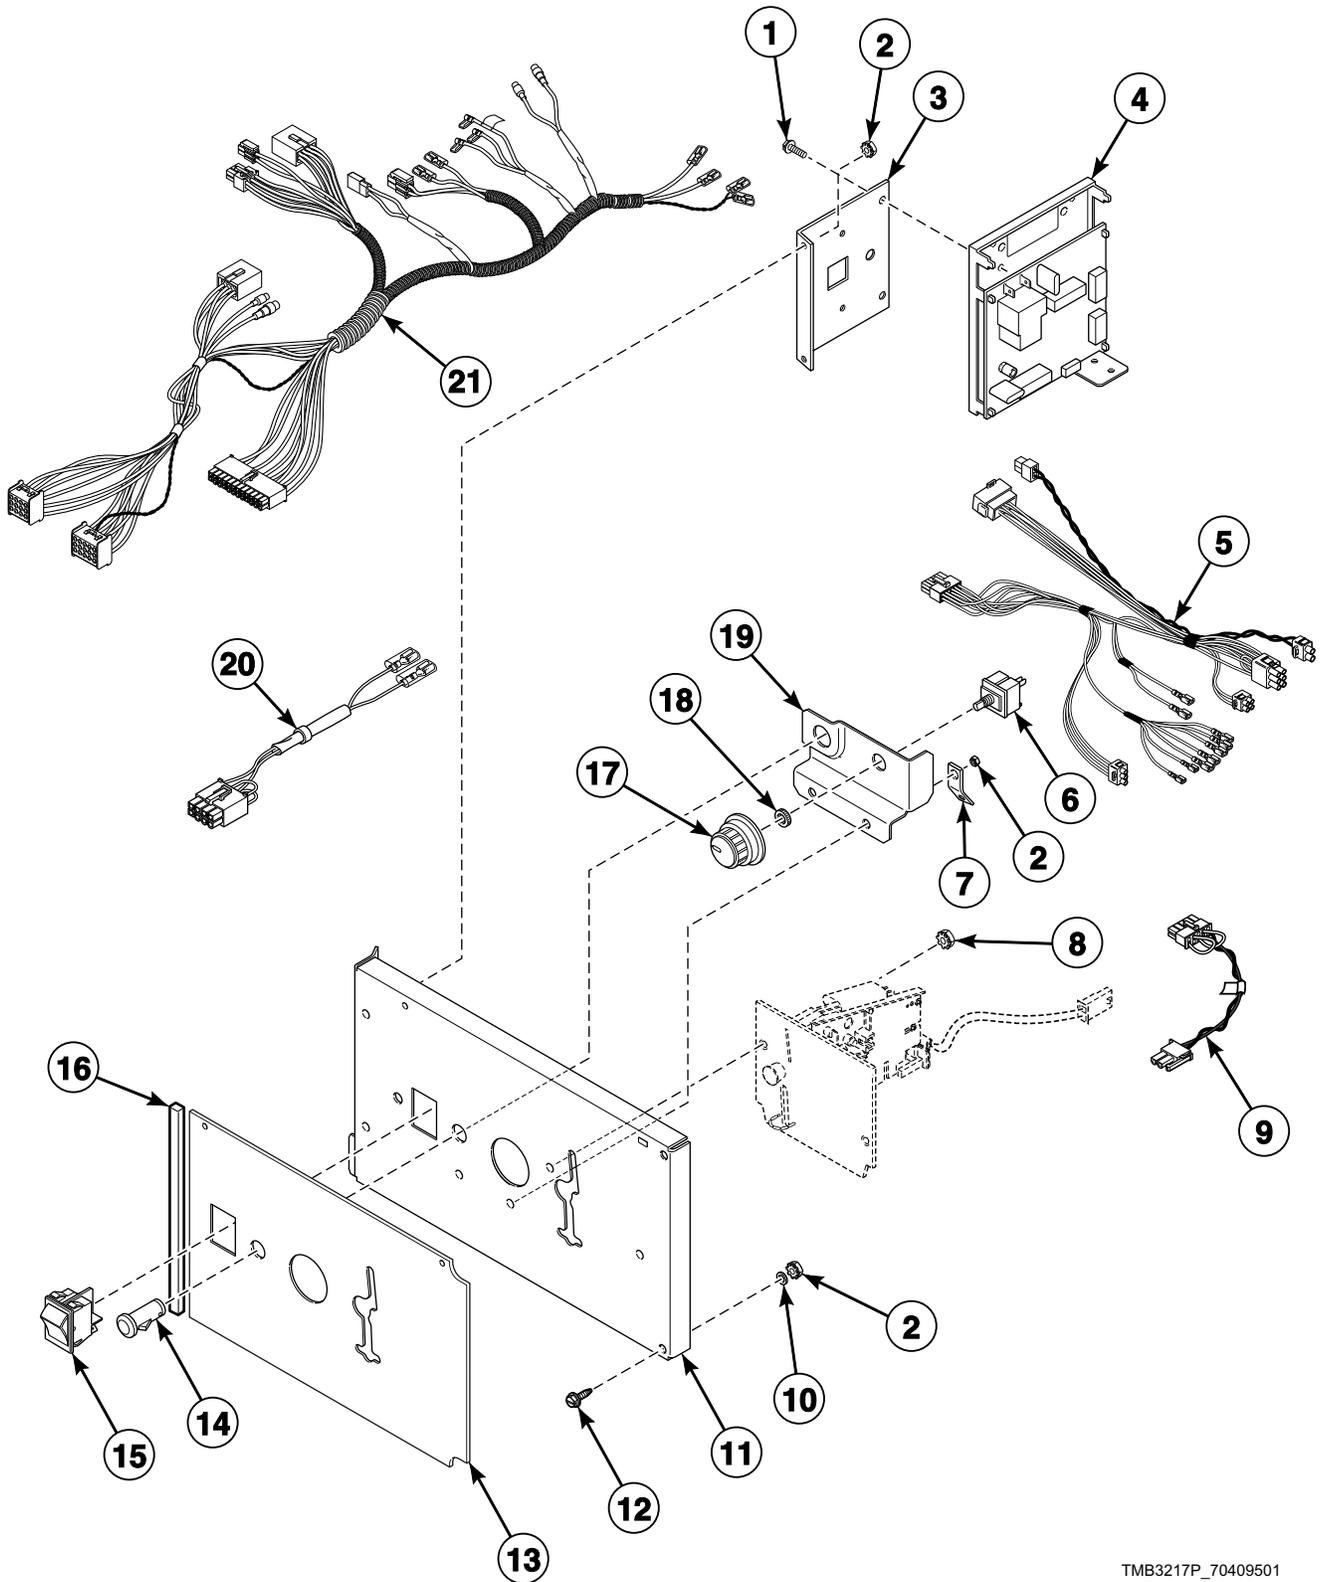


TMB3217P\_70409501

## Single Drop Control Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70370001	Control Set	CE and Australian models; Includes items 1-8, 11, 14, 15, 18 and 19
	70370101P	Control Set	All other models; Includes items 1-8, 11, 14, 15, 18 and 19
<b>1</b>	501524	Screw	
<b>2</b>	70054	Nut	
<b>3</b>	70357901	Control Chassis Mounting Bracket	
<b>4</b>	512199P	Control Assembly	Models through Serial No. 0701012067
	513139P	Control Assembly	Models starting Serial No. 0701012068
<b>5</b>	70398401	Control Panel Harness	CE and Australian models
	70369001	Control Panel Harness	All other models
<b>6</b>	511711	Temperature Selector Switch	
<b>7</b>	00177	Male Tab Terminal	
<b>8</b>	29786	Nut	
<b>9</b>	70324602	Jumper Calibration Wire	
<b>10</b>	M405535	Washer	
<b>11</b>	70363401	Control Door Assembly	
<b>12</b>	70069901	Screw	
<b>13</b>	70362901	Overlay	C, I and S models
	70363001	Overlay	H models
<b>14</b>	801431	Light	
<b>15</b>	70455101	Rocker Switch	Start
<b>16</b>	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge
<b>17</b>	44104601	Temperature Knob	
<b>18</b>	24205	Nut	
<b>19</b>	70350201	Temperature Selector Bracket	
<b>20</b>	70364104P	Coin Vault Switch Harness	Non-CE models
<b>21</b>	70467801	Main Harness	Electric models need 55881 Harness Strap

# Dual Digital Timer Control Components

A, C, H, I, L, P, S, U and Y Models  
G and K Models Starting 1/16/12  
Models with QT and RQ Control Suffixes

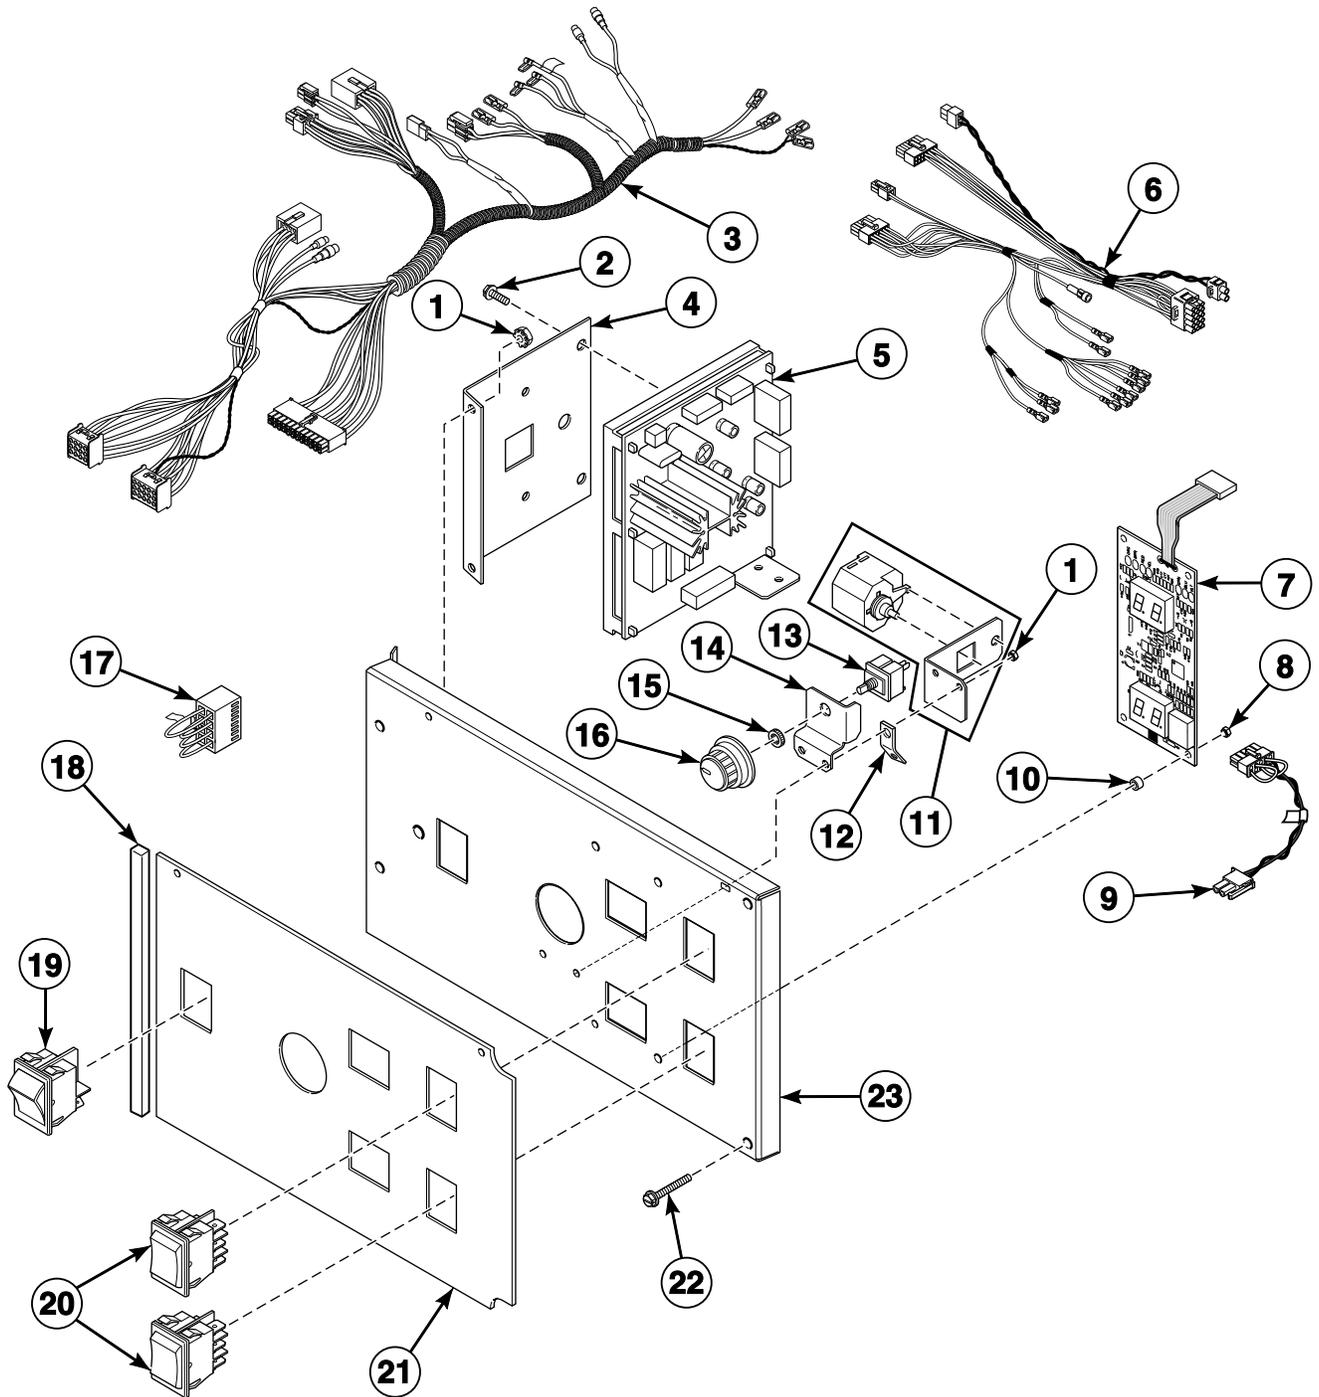


TMB3011P\_70409501

## Dual Digital Timer Control Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70370201P	Control Set	Includes items 1, 2, 4-8, 10, 12-16, 19, 20 and 23
1	70054	Nut	
2	501524	Screw	
3	70467801	Main Harness	Electric models need 55881 Harness Strap; Models through 7/31/11 and starting again 7/9/12
	70441301	Main Harness	Electric models need 55881 Harness Strap; Models starting 8/1/11 through 7/8/12
4	70357901	Control Chassis Mounting Bracket	
5	512202P	Control Assembly	C and I models through 7/14/14; All other models
	70503101P	Control Assembly	C and I models starting 7/15/14
6	70367001P	Control Panel Harness	
7	512218P	Display Assembly	
8	29787	Nut	
9	70324602	Jumper Calibration Wire	
10	56079	Panel Locator	
11	M4860P3	Buzzer Kit	Includes buzzer, bracket and harness
12	00177	Male Tab Terminal	
13	511711	Temperature Selector Switch	
14	70391701	Temperature Selector Switch Bracket	
15	24205	Nut	
16	44104601	Temperature Knob	
17	70364103	Bypass Harness	Non-CE models
18	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge
19	70455101	Rocker Switch	Start
20	70461301	Rocker Switch	
21	70362201	Overlay	G, K, L, S and Y models; C and I models through 7/14/14; P models starting 1/15/15; U models through 8/17/14; Nonreversing
	70362202	Overlay	G, K, L, S and Y models; C and I models through 7/14/14; P models starting 1/15/15; U models through 8/17/14; Reversing
	70504701	Overlay	C and I models starting 7/15/14; Nonreversing
	70504702	Overlay	C and I models starting 7/15/14; Reversing
	70494001	Overlay	U models; Models starting 8/18/14; Nonreversing
	70494002	Overlay	U models; Models starting 8/18/14; Reversing
	70362501	Overlay	H models; Nonreversing
	70362502	Overlay	H models; Reversing
	70362401	Overlay	P models through 1/14/15; Nonreversing
	70362402	Overlay	P models through 1/14/15; Reversing
22	70069901	Screw	
23	70360601	Control Plate Assembly	

# DX4 Control Components

D and I Models with 3B, 3K, 3L, 3O, 3V, 3W, 3X and R3 Control Suffixes

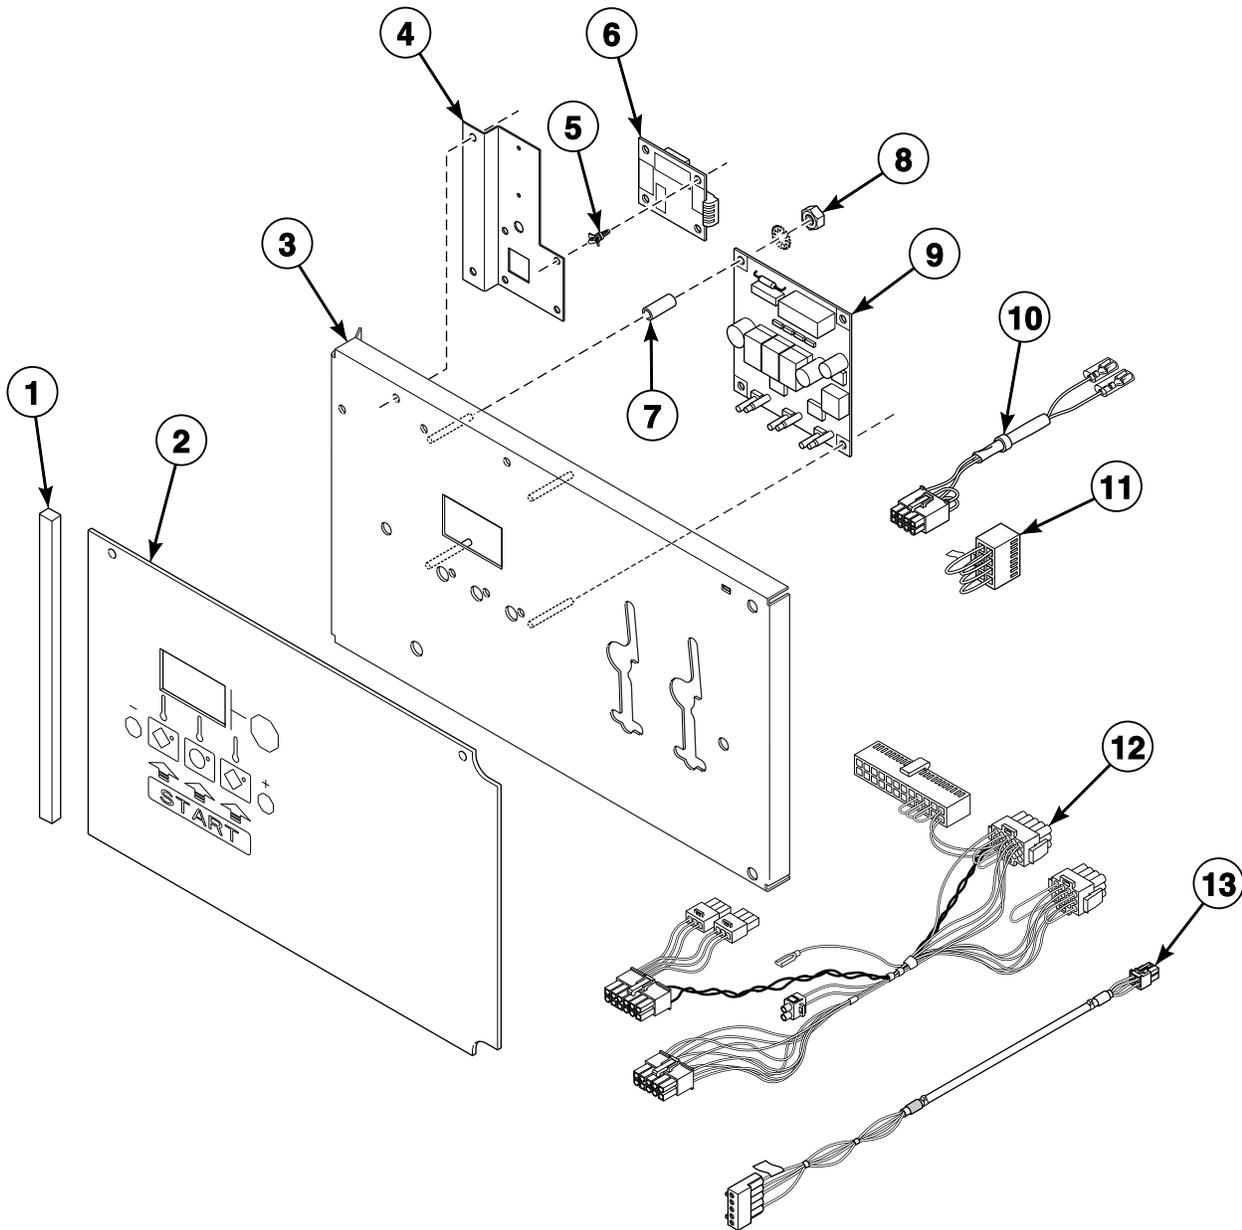



TMB3271P\_70409501

## DX4 Control Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge
2	44050401	Graphic Overlay	OPL; Models through 7/31/11
	44240501	Graphic Overlay	OPL; Models starting 8/1/11
	44050501	Graphic Overlay	Coin; Single drop; Models through 7/31/11
	44050502	Graphic Overlay	Coin; Dual drop; Models through 7/31/11
	44239401	Graphic Overlay	Coin; Single drop; Models starting 8/1/11
	44239402	Graphic Overlay	Coin; Dual drop; Models starting 8/1/11
	44239403	Graphic Overlay	Prep for central pay
3	44050701P	Control Plate Kit	
4	44263501	Bracket	CE models; All other models with 3K and 3L control suffixes
5	211/00119/00	Standoff	4 required
6	209/00471/75	Central Pay Interface Control Assembly	3K and 3L control suffixes
7	44050601	Sleeve	4 required
8	29787	Nut	
9	70462301P	Control Assembly	3O control suffix
	70462302P	Control Assembly	R3 control suffix
	70462361P	Control Assembly	3V and 3X control suffixes
	70462362P	Control Assembly	3B and 3W control suffixes
	70462369	Control Assembly	3K and 3L control suffixes
10	70364104P	Coin Vault Switch Harness	Non-CE models; 3V and 3B control suffixes
11	70364103	Bypass Harness	Non-CE models; 3O, 3W, 3X and R3 control suffixes
12	70489901	Control Panel Harness	CE and Australian models
	70485301	Control Panel Harness	All other models
13	70491501	Central Pay Harness	3K and 3L control suffixes

# DMP Control

C and I Models with DO, DV and DX Control Suffixes  
Coin Through 4/1/10; OPL Through 7/31/11

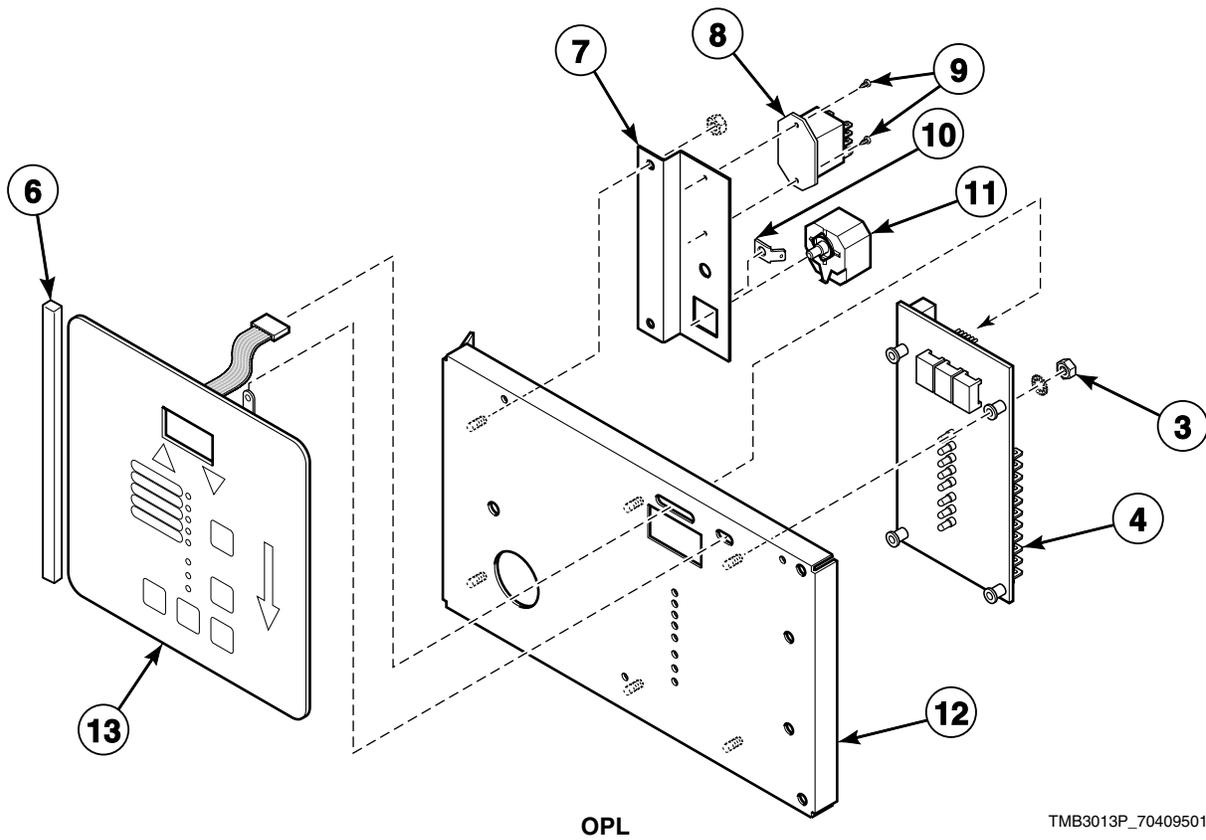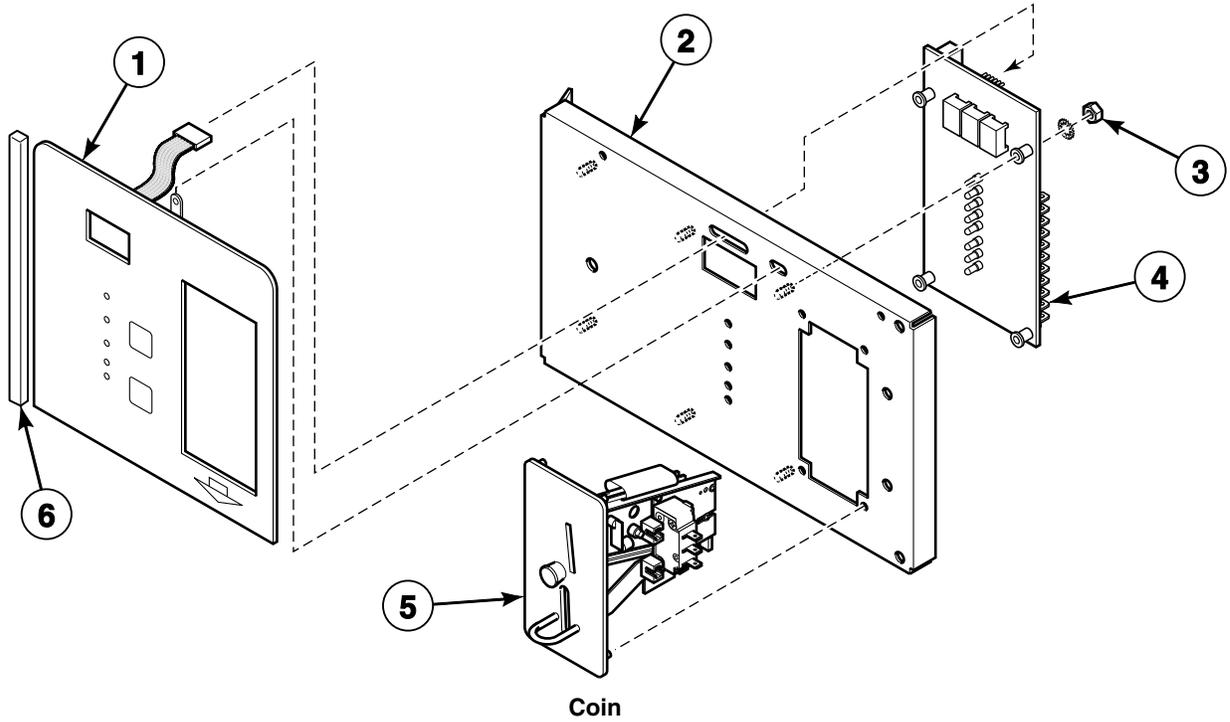


TMB3013P\_70409501

## DMP Control

REF	PART NO.	DESCRIPTION	COMMENTS
1	44039402P	Membrane Switch	Coin; DV and DX control suffixes
2	44041001	Control Plate Assembly	Coin; Includes studs; DV and DX control suffixes
3	29787	Nut	
4	44037801P	Electronic Control	
5	44039701P	Coin Drop Assembly	United States; \$.25
	44039702	Coin Drop Assembly	Mexico; 2 peso
	44039703	Coin Drop Assembly	Token; .880
	44039704	Coin Drop Assembly	Japan; 100 yen
	44039705	Coin Drop Assembly	England; 20 pence
	44039706	Coin Drop Assembly	Token; .800
	44039707	Coin Drop Assembly	England; 50 pence
6	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge
7	44041701	Relay/Buzzer Bracket	
8	M412534	Relay	
9	M402797	Screw	
10	00177	Male Tab Terminal	
11	505447	Adjustable Buzzer	
12	44040901	Control Plate Assembly	OPL; Includes studs; DO control suffix
13	44037901P	Membrane Switch	OPL; DO control suffix

# OPL Microprocessor Controls

H, S and U Models Through 7/31/11  
A, G, K, L, P and YU Models Through 1/1/12  
OM Control Suffix

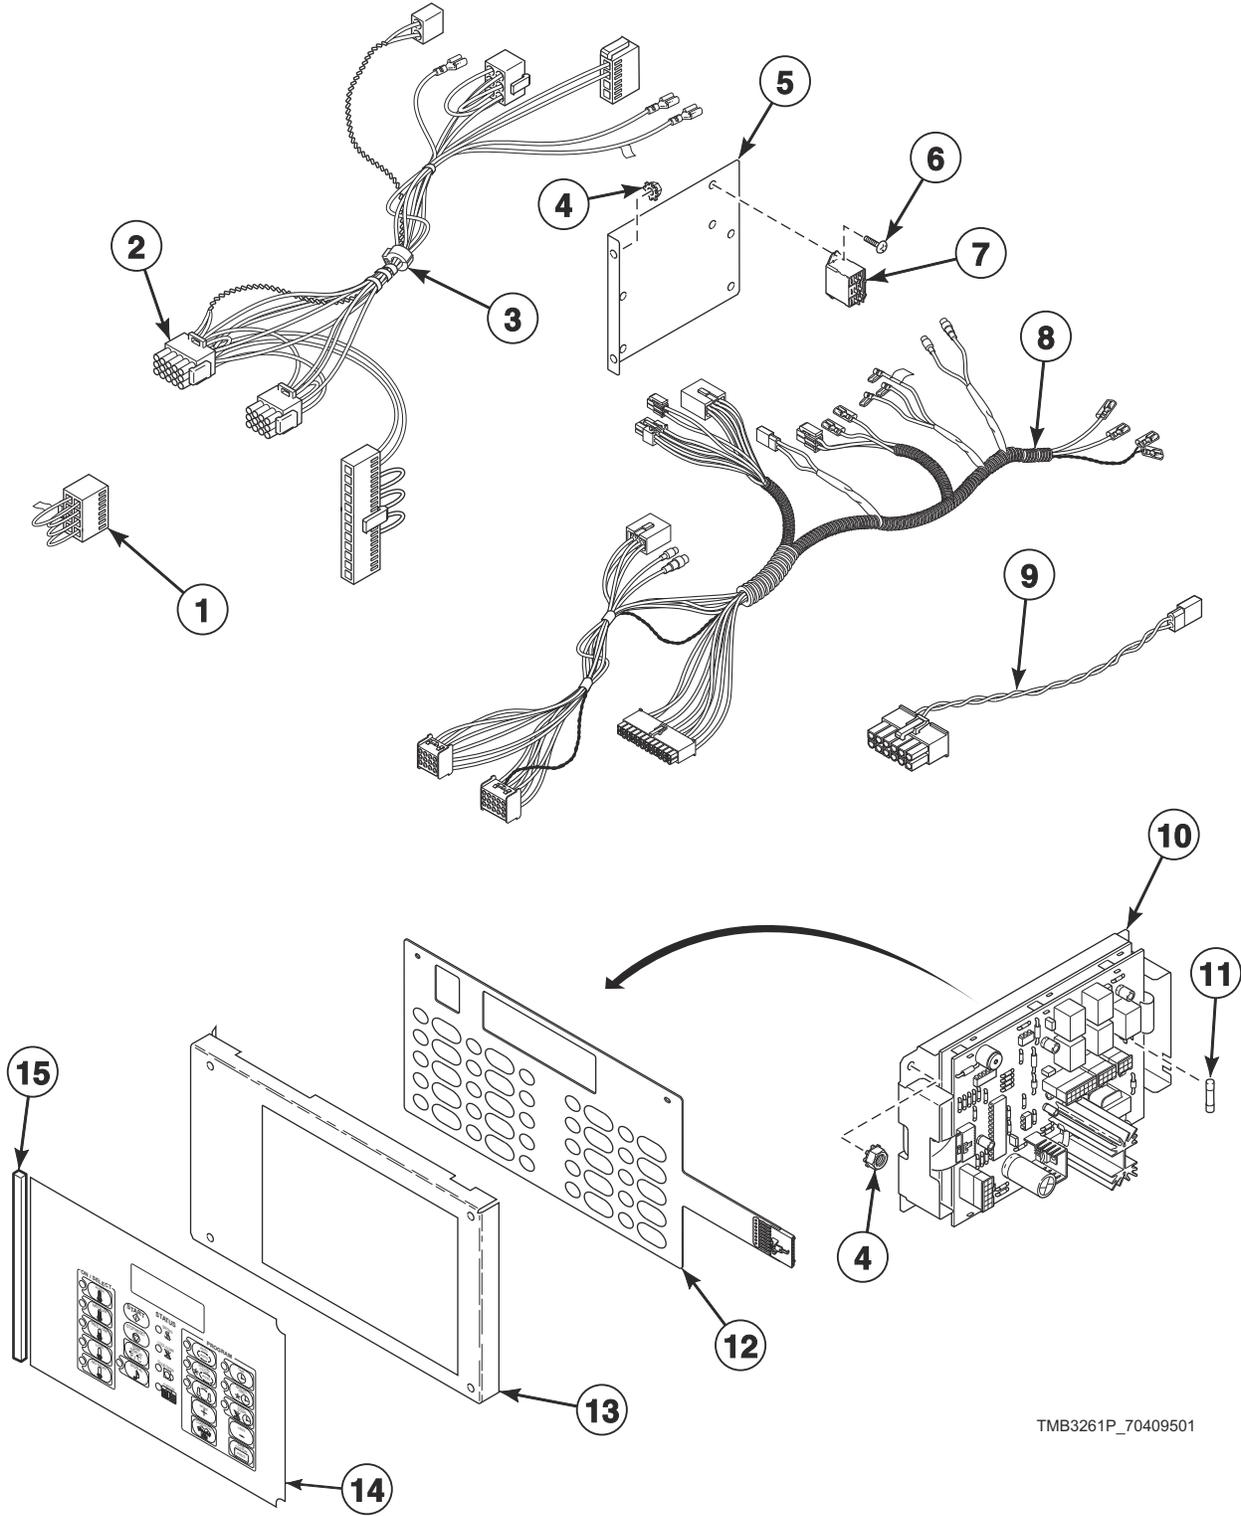


TMB3261P\_70409501

## OPL Microprocessor Controls

REF	PART NO.	DESCRIPTION	COMMENTS
	M4695P3	Electronic OPL Control Kit	CE and Australian models
	M4689P3	Electronic OPL Control Kit	All other models; Dual secondary transformers (M414228 Transformer for 100-240 VAC and M414229 Transformer for 380-480 VAC) must be used with this kit; Does not include overlay or harness
	M4457P3	RC Filter Kit	Includes (2) F330217P RC Filter and instructions
<b>1</b>	70364103	Bypass Harness	Non-CE models
<b>2</b>	70382701P	Control Panel Harness	CE and Australian models
	70335301P	Control Panel Harness	All other models
<b>3</b>	M413930P	Ferrite Core Assembly	
<b>4</b>	70054	Nut	
<b>5</b>	70063501	Mounting Bracket	CE and Australian models; Used with 70382701P Control Panel Harness
<b>6</b>	M402797	Screw	CE and Australian models; 2 required; Used with 70382701P Control Panel Harness
<b>7</b>	M412534	Relay	CE and Australian models; Used with 70382701P Control Panel Harness
<b>8</b>	70467801	Main Harness	Electric models need 55881 Harness Strap; Models through 7/31/11
	70441301	Main Harness	Electric models need 55881 Harness Strap; Models starting 8/1/11 through 1/1/12
<b>9</b>	70084301	Jumper Calibration Assembly	
<b>10</b>	70228401P	Control Kit	
<b>11</b>	70406501	Fuse	1.25 Amp
<b>12</b>	M414368P	Membrane Switch	
<b>13</b>	70175806	Control Plate Assembly	CE and Australian models; Includes studs
	70175805	Control Plate Assembly	All other models; Includes studs
<b>14</b>	70115801	Overlay	A, L, P, S, U and YU models; Icon and English
	70130401	Overlay	A, L, P, S, U and YU models; Icon
	70128701	Overlay	H models; Icon and English
	70130601	Overlay	H models; Icon and English
	44130002	Overlay	G and K models
<b>15</b>	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

# Coin Drop Components for MDC Models

G, H, I, K, L, P and S Models with BB, BC, BK, BL, BW and BX Control Suffixes

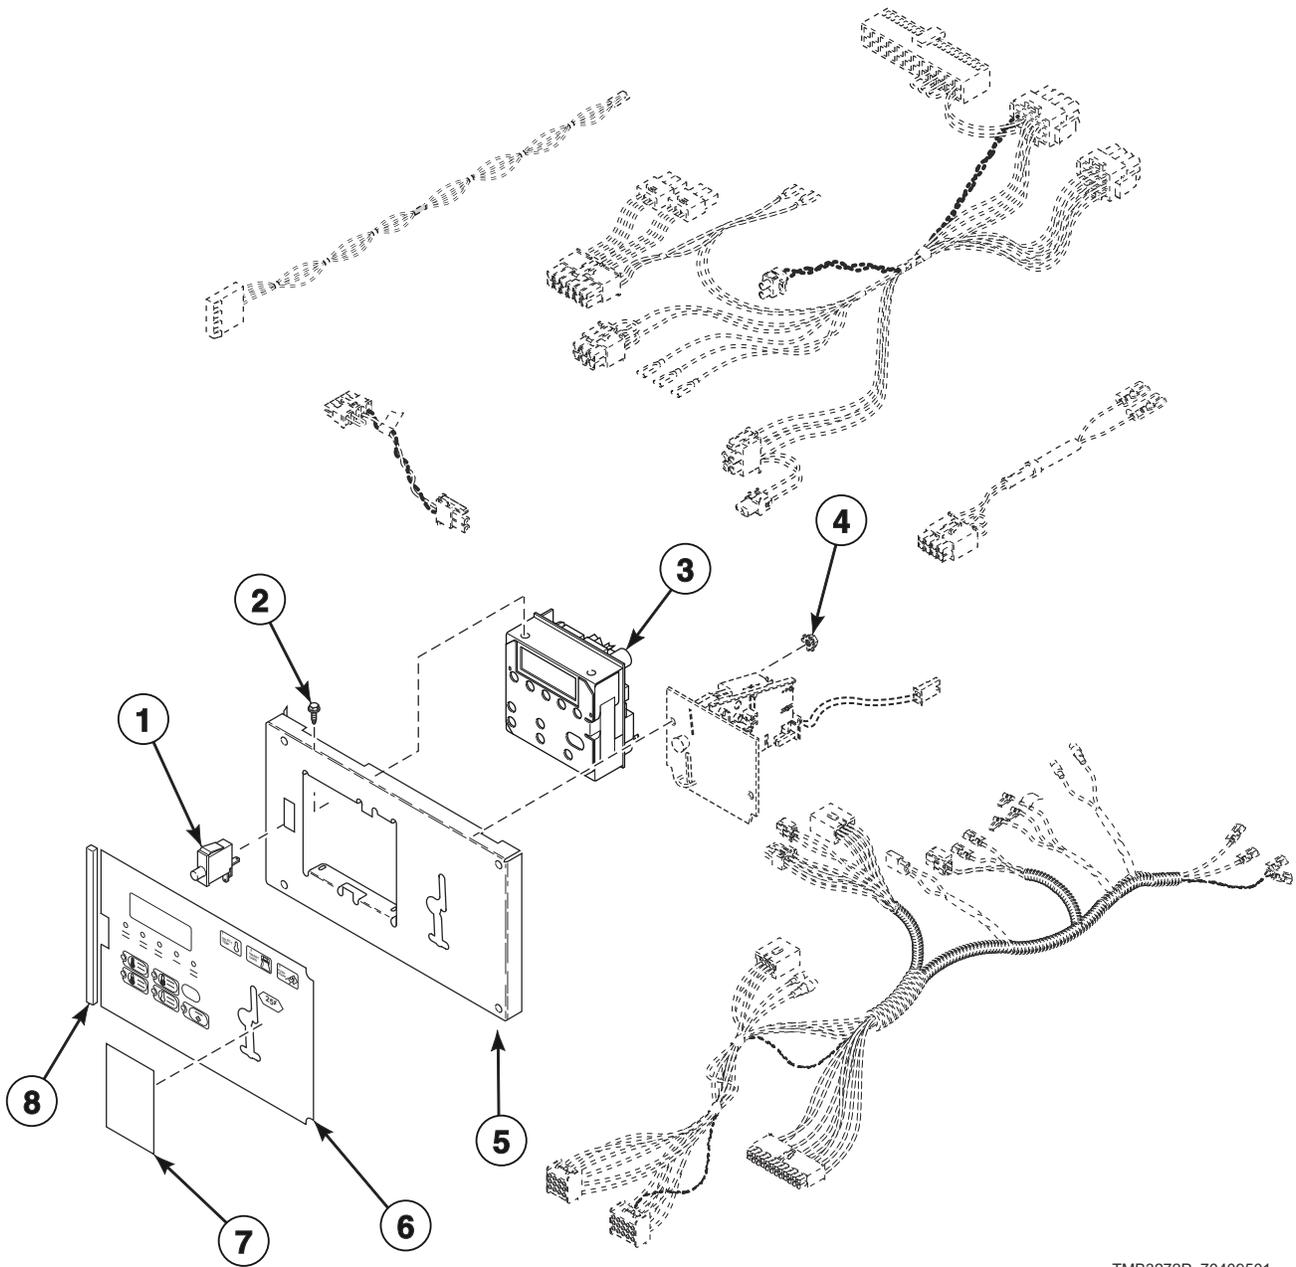

TMB3272P\_70409501

## Coin Drop Components for MDC Models


REF	PART NO.	DESCRIPTION	COMMENTS	
1	70413301	Pushbutton Switch		
2	501524	Screw	4 required for mounting control	
3	514273	Control Assembly	I models; Models starting 7/15/14	
	511867P	Control Assembly	I models through 7/14/14; All other models	
	510036P	Membrane Switch	Order to replace touchpad for 511867P Control Assembly	
4	70054	Nut	3 required	
5	70175807	Control Plate Assembly		
6	70257701	Overlay	L and S models; BC, BK*, BL* and BX control suffixes; Text; Single drop	
	70261001	Overlay	L and S models; BC, BK*, BL* and BX control suffixes; Icon; Single drop	
	70257702	Overlay	L and S models; BC and BX control suffixes; Text; Dual drop	
	70261002	Overlay	L and S models; BC and BX control suffixes; Icon; Dual drop	
	70258001	Overlay	H models; BC, BK*, BL* and BX control suffixes; Text; Single drop	
	70261201	Overlay	H models; BC, BK*, BL* and BX control suffixes; Icon; Single drop	
	70258002	Overlay	H models; BC and BX control suffixes; Text; Dual drop	
	70261202	Overlay	H models; BC and BX control suffixes; Icon; Dual drop	
	70259001	Overlay	P models; Models through 9/30/14; BK* and BL* control suffixes	
	70508701	Overlay	P models; Models starting 10/1/14	
	70258101	Overlay	H models; BC, BK*, BL* and BX control suffixes; Text; Single drop	
	70453001	Overlay	G and K models; Text; Single drop	
	70453002	Overlay	G and K models; Text; Dual drop	
	70491901	Overlay	I models; Models through 7/14/14; BC and BX control suffixes; Single drop	
	70491902	Overlay	I models; Models through 7/14/14; BC and BX control suffixes; Dual drop	
	70505201	Overlay	I models; Models starting 7/15/14; BC and BX control suffixes; Single drop	
	70505202	Overlay	I models; Models starting 7/15/14; BC and BX control suffixes; Dual drop	
	7	39564	Coin Drop Overlay	S models; BK* and BL* control suffixes; Cover
		70246301	Coin Cover Overlay	G, H, I, K and L models; BK* and BL* control suffixes; Cover
		70286701	Overlay	P models through 9/30/14; BK* and BL* control suffixes; Cover
70321001		Overlay	P models through 9/30/14; BC** and BX** control suffixes; Single drop; Right side	
70129501		Overlay	P models through 9/30/14; BC** and BX** control suffixes; Single drop; Left side	
70129601		Overlay	P models through 9/30/14; BC** and BX** control suffixes; Dual drop	
70510501		Overlay	P models starting 10/1/14; Single drop	
70510601		Overlay	P models starting 10/1/14; Dual drop	
70510701		Overlay	P models starting 10/1/14; World drop	
70510801		Overlay	P models starting 10/1/14; BK* and BL* control suffixes	
70510901	Overlay	P models; Blank for central pay		
8	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge	

\* NOTE: BK and BL control suffixes require an overlay and overlay cover specific to model.

\*\* NOTE: P models with BC or BX control suffixes require an overlay and coin drop overlay.

# Coin Drop Components for MDC Models - Wire Harnesses

G, H, I, K, L, P and S Models with BB, BC, BK, BL, BW and BX Control Suffixes

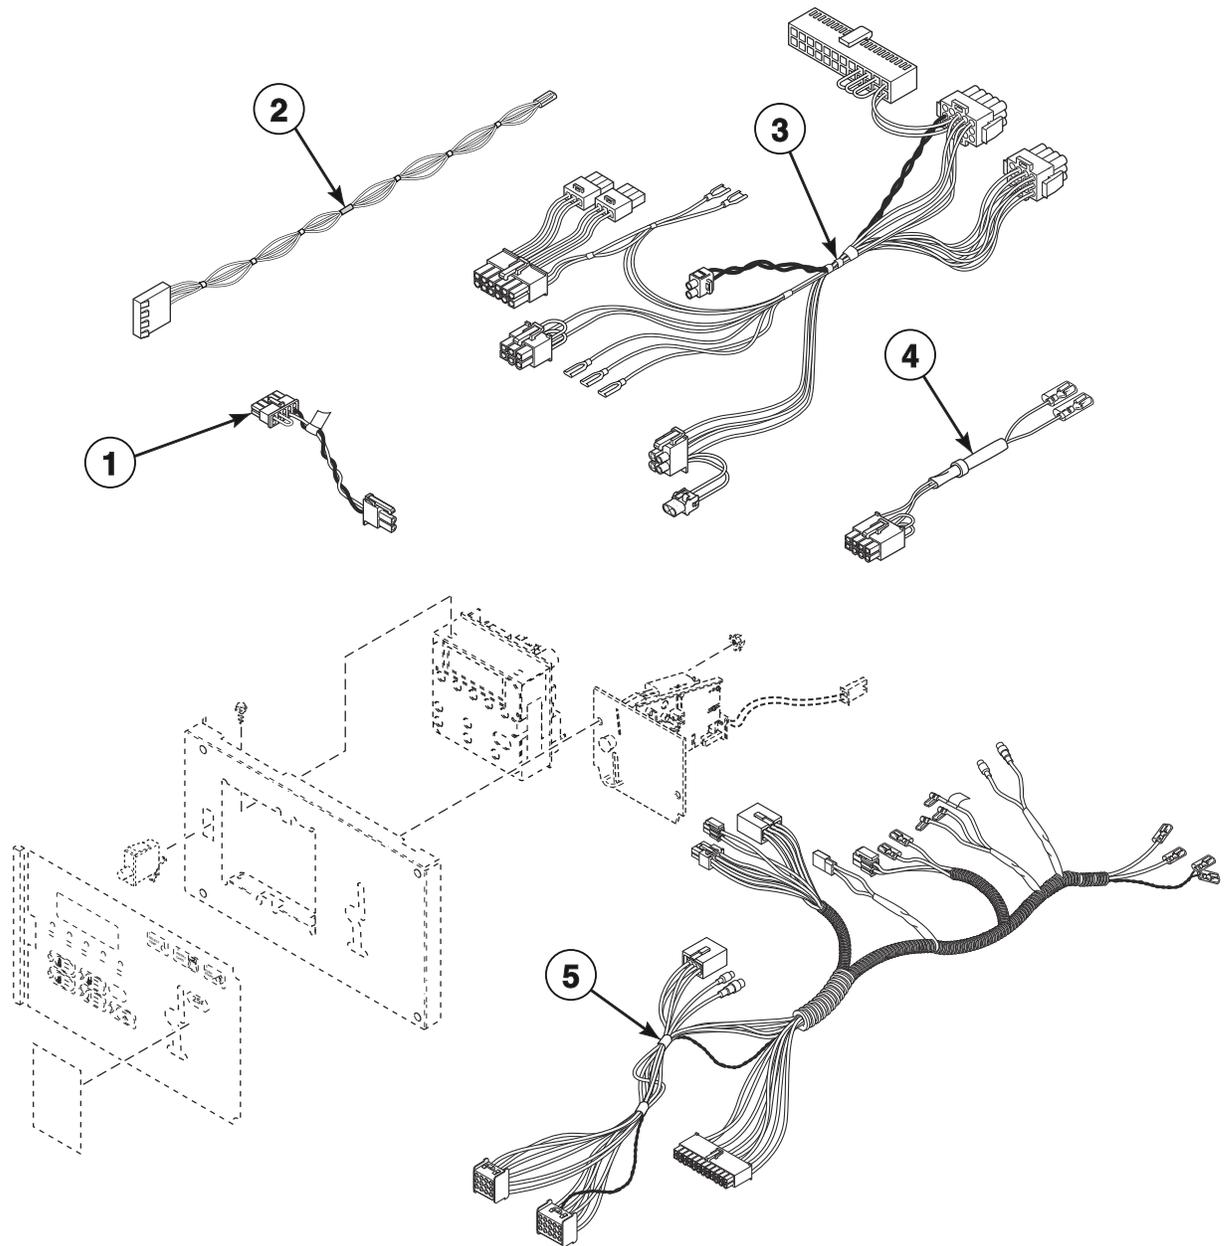


TMB3272PA\_70409501

## Coin Drop Components for MDC Models - Wire Harnesses

REF	PART NO.	DESCRIPTION	COMMENTS
1	70324602	Jumper Calibration Wire	
2	70484601	Central Pay Harness	BK and BL control suffixes
3	70315501P	Control Panel Harness	CE and Australian models; Control panel to main harness
	70368001P	Control Panel Harness	All other models; Control panel to main harness
4	70364104P	Coin Vault Switch Harness	Non-CE models
5	70467801	Main Harness	Electric models need 55881 Harness Strap; Models through 7/31/11 and starting again 7/9/12
	70441301	Main Harness	Electric models need 55881 Harness Strap; Models starting 8/1/11 through 7/8/12

# BY and BZ Control Option for MDC Models

H, I, K, L, P and S Models

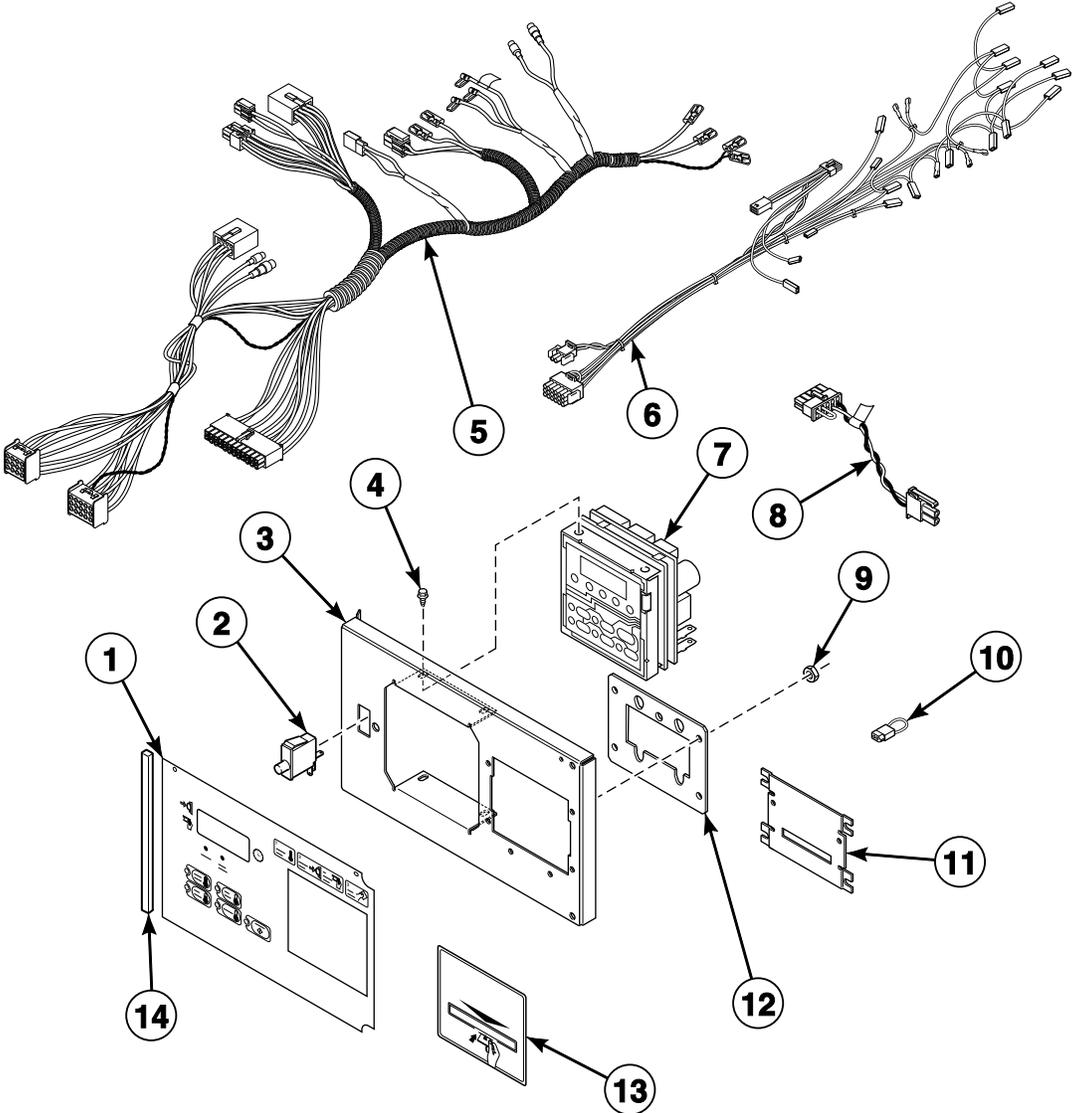


TMB3016P\_70409501

## BY and BZ Control Option for MDC Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70257703	Overlay	L and S models; Text or icon
	70258003	Overlay	H models; Text or icon
	70453101	Overlay	K models
	70491903	Overlay	I models; Models through 7/14/14
	70505203	Overlay	I models; Models starting 7/15/14
	70509701	Overlay	P models
2	70413301	Pushbutton Switch	
3	70348801	Control Plate Assembly	
4	501524	Screw	4 required
5	70467801	Main Harness	Electric models need 55881 Harness Strap; Models through 7/31/11 and starting again 7/9/12
	70441301	Main Harness	Electric models need 55881 Harness Strap; Models starting 8/1/11 through 7/8/12
6	70315501P	Control Panel Harness	CE and Australian models
	70368001P	Control Panel Harness	All other models
7	514273	Control Assembly	I models; Models starting 7/15/14
	511867P	Control Assembly	I models through 7/14/14; All other models
	510036P	Membrane Switch	Order to replace touchpad for 511867P Control Assembly
8	70324602	Jumper Calibration Wire	
9	70054	Nut	
10	70364103	Bypass Harness	Non-CE models
11	44089501	Slot Card Plate Assembly	Included in literature packet
12	70208801	Mounting Plate	
13	70334201	Card Reader Overlay	Black; Included in literature packet
	70334301	Card Reader Overlay	Gray; Included in literature packet
	70511001	Overlay	P models; With card slot
14	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

# Coin Drops

All Models Except U Models

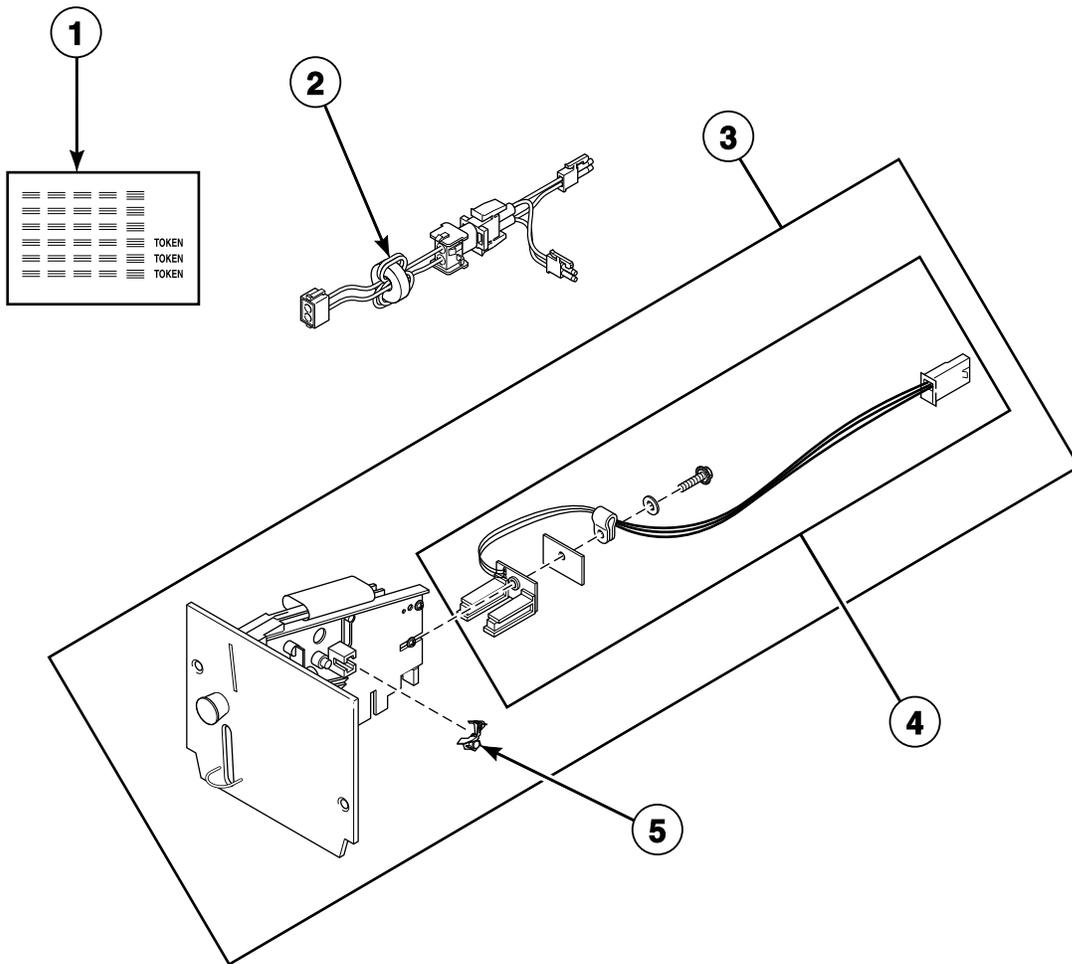

TMB2921P\_70409501




# Coin Drops

REF	PART NO.	DESCRIPTION	COMMENTS
1	38725	Coin Identification Paper	
2	44065801	Electronic Coin Drop Harness	Models through 4/14/09
3	70294103P	Electronic Coin Drop Assembly	United Kingdom (default) and Europe
	70294104	Electronic Coin Drop Assembly	Europe (default), Denmark and Norway
	70294105P	Electronic Coin Drop Assembly	Australia (default), New Zealand, Hong Kong, South Korea and Malaysia
	70294106	Electronic Coin Drop Assembly	Mexico (default), Ecuador and United States
	70294107	Electronic Coin Drop Assembly	Lithuania (default), Latvia and Europe
	70294111	Electronic Coin Drop Assembly	Euro; .10, .20, .50, 1.00 and 2.00
	70294116	Electronic Coin Drop Assembly	Malaysia (default) and China
	70294117	Electronic Coin Drop Assembly	Russia 5.00 and 10.00
	70294119	Electronic Coin Drop Assembly	Thailand 1, 5 and 10 Baht
	70294120	Electronic Coin Drop Assembly	Chile; Chilean peso
	70294121	Electronic Coin Drop Assembly	Singapore
	70441601P	Coin Drop	United States \$.25
	70256402P	Coin Drop	Dual; United States \$.25 and 1.00
	70429001	Coin Drop	D models; United States
	38475	Coin Drop Assembly	Japan 100 yen
	38519	Coin Drop Assembly	Japan 100 and 500 yen
	38467	Coin Drop Assembly	Australia .20 and 1.00
	70447301	Coin Drop Assembly	Australia 1.00 and 2.00
	70482401	Coin Drop Assembly	New Zealand; 1.00 and 2.00
	39748	Coin Drop	CE models; Token; Jeton; Grooves on the face of the token
	210195	Coin Drop Assembly	Euro; .20 and 1.00
	210196	Coin Drop Assembly	Euro; .50 and 1.00
	38462P	Coin Drop Assembly	Token; STD-118-1; .880 diameter x .079 thick; Brass
38463	Coin Drop Assembly	Token; STD-118-5; .990 diameter x .081 thick; Silver	
70471601	Coin Drop Assembly	Token; 7K	
38464P	Coin Drop Assembly	Canada .25	
70441602	Coin Drop Assembly	Canada .25 and 1.00	
38472	Coin Drop Assembly	England 20 pence and 1 pound	
N/A	Coin Drop Assembly	Denmark 1 and 5 DKK; May replace with 70294104P Electronic Coin Drop Assembly	
38521	Coin Drop Assembly	Korea 100 and 500 won	
38963P	Coin Drop	Token STD-118-16 not available; Replacement for 38963P Coin Drop only	
N/A	Coin Drop Assembly	Dual; Taiwan 5 and 10 NT; May replace with CK113 Electronic Coin Drop Kit	
39157	Coin Drop Assembly	Israel shekel	
CK077	Coin Drop Kit	Taiwan 10 NT	
4	200674P	Opto Coupler	
5	201595P	Wire Guard	

**N/A = Part no longer available**

# Coin Drop Kits

All Models Except U Models

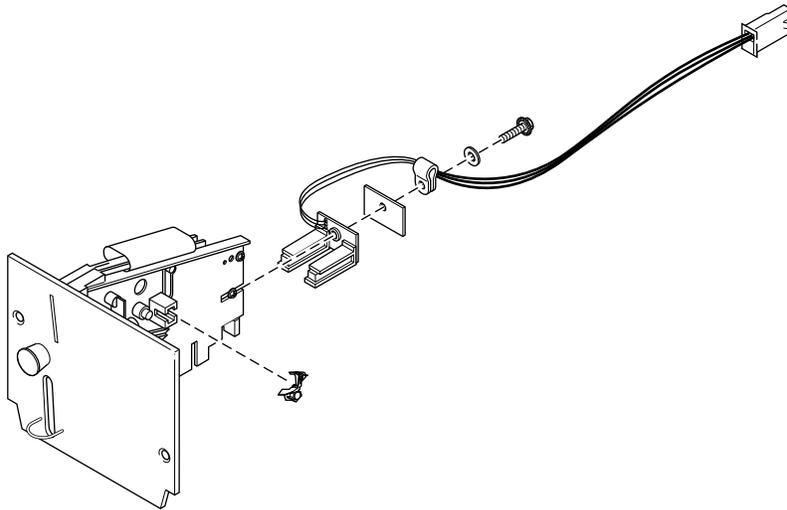


TMB2921PA\_70409501

## Coin Drop Kits

REF	PART NO.	DESCRIPTION	COMMENTS
	CK115	Electronic Coin Drop Kit	United States and Canada
	CK099	Electronic Coin Drop Kit	Australia (default), New Zealand, Hong Kong, South Korea and Malaysia
	CK100	Electronic Coin Drop Kit	United Kingdom (default) and Europe
	CK101	Electronic Coin Drop Kit	Europe (default), Denmark and Norway
	CK103	Electronic Coin Drop Kit	Lithuania (default), Latvia and Europe
	CK108	Electronic Coin Drop Kit	South Africa
	CK109	Electronic Coin Drop Kit	Euro
	CK113	Electronic Coin Drop Kit	Japan and Taiwan
	CK116	Electronic Coin Drop Kit	Malaysia (default) and China
	CK117	Electronic Coin Drop Kit	Russia
	CK118	Electronic Coin Drop Kit	Philippine
	CK119	Electronic Coin Drop Kit	Thailand
	CK120	Electronic Coin Drop Kit	Chile
	CK121	Electronic Coin Drop Kit	Singapore
	CK122	Electronic Coin Drop Kit	New Zealand; 1.00 and 2.00

# Coin Drop Components for NetMaster Models

S Models Through Serial No. 0904002963 with NC, NX, ZC and ZX Control Suffixes

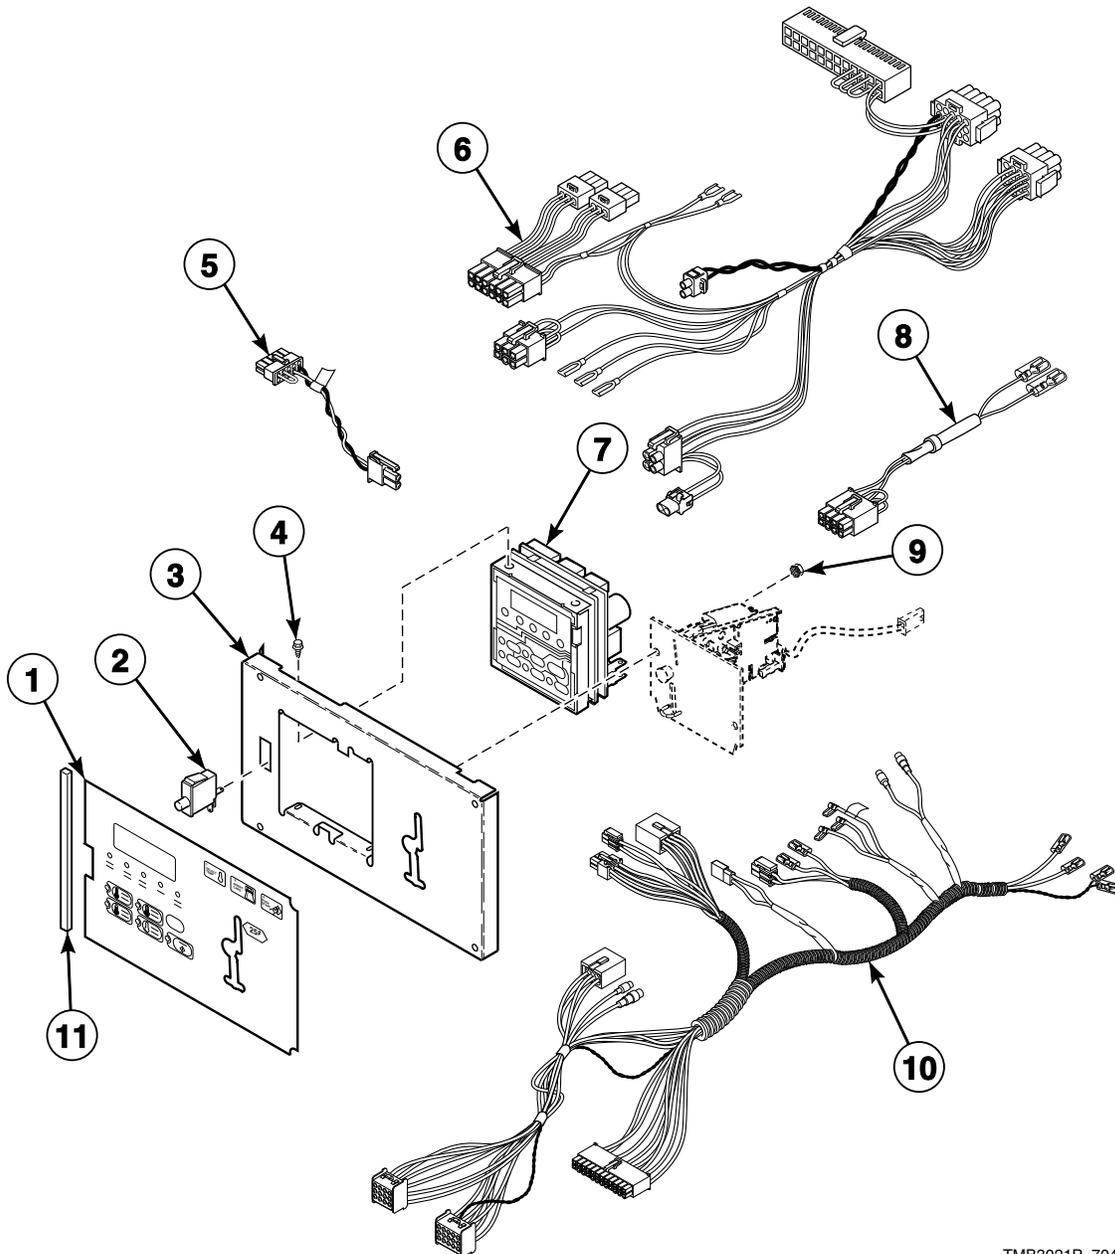


TMB3021P\_70409501

## Coin Drop Components for NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70184301	Overlay	ST models; Single drop
	70184302	Overlay	ST models; Dual drop
2	70413301	Pushbutton Switch	
3	70175807	Control Plate Assembly	
4	501524	Screw	For mounting NetMaster control
5	70324602	Jumper Calibration Wire	
6	70368001P	Control Panel Harness	ST models
	70315501P	Control Panel Harness	SA and SU models
7	505905P	Control Kit	
	510036P	Membrane Switch	Order to replace touchpad for 510034 Control Assembly in 505905P Control Kit
8	70364104P	Coin Vault Switch Harness	Non-CE models
9	70054	Nut	
10	70467801	Main Harness	Electric models need 55881 Harness Strap
11	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

# Card Reader Components for NetMaster Models

S Models Through Serial No. 0904002963 with NR and ZR Control Suffixes

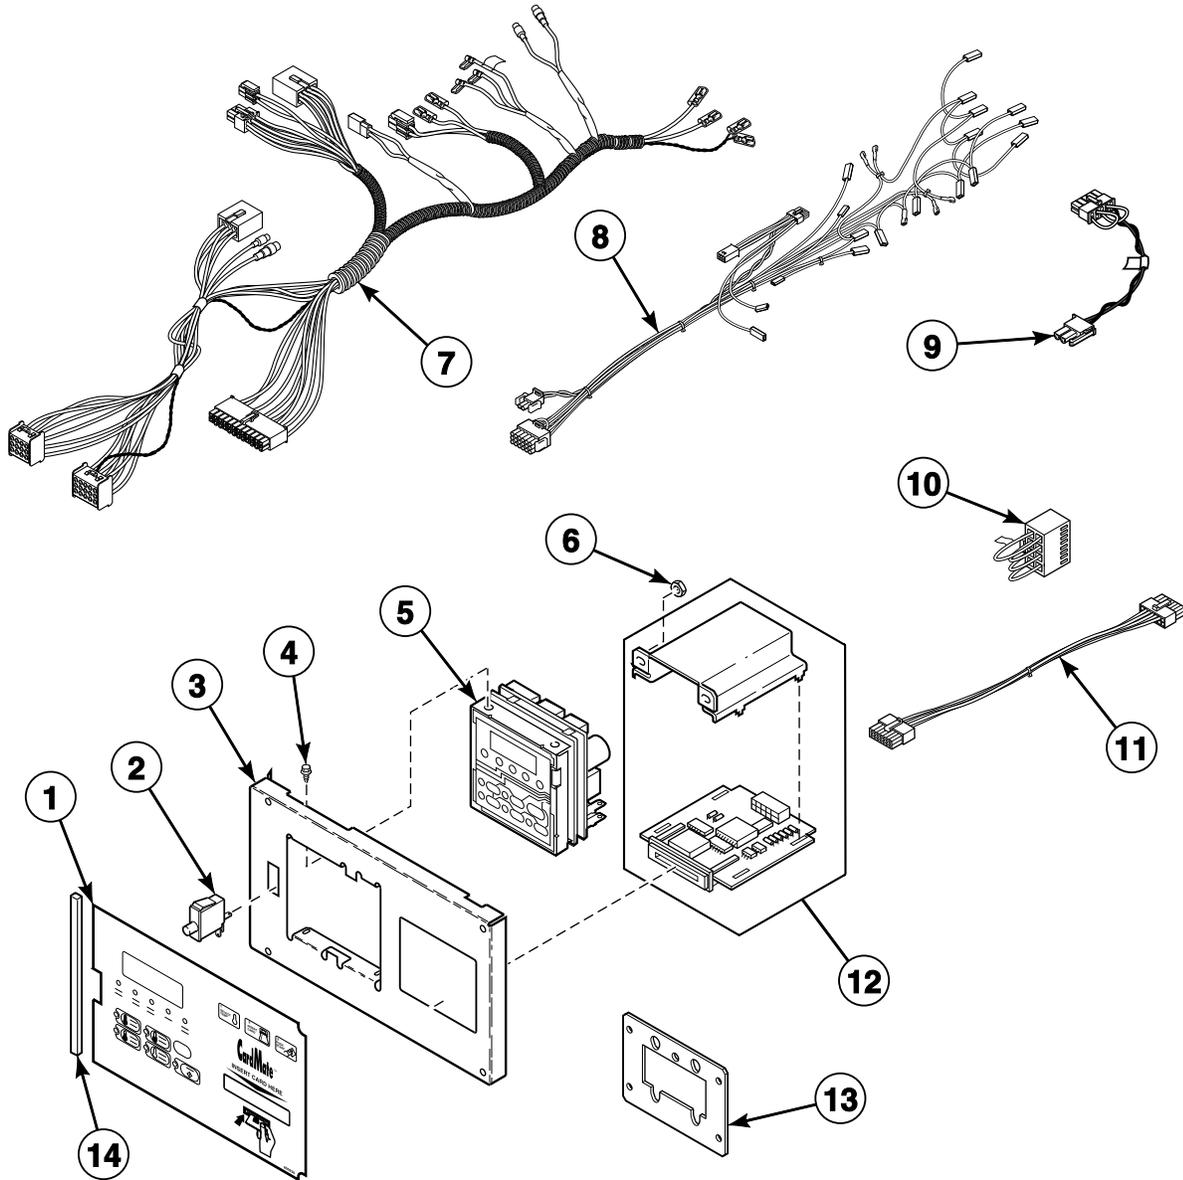

TMB3018P\_70409501


## Card Reader Components for NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	N/A	Overlay	ST models; Card reader ready
	70184401	Overlay	ST models; Card reader
2	70413301	Pushbutton Switch	
3	N/A	Control Plate Assembly	Card reader
	70348801	Control Plate Assembly	Card ready
4	501524	Screw	
5	505905P	Control Kit	
	510036P	Membrane Switch	Order to replace touchpad for 510034 Control Assembly in 505905P Control Kit
6	70054	Nut	
7	70467801	Main Harness	Electric models need 55881 Harness Strap
8	70368001P	Control Panel Harness	ST models
	70315501P	Control Panel Harness	SA and SU models
9	70324602	Jumper Calibration Wire	
10	70364103	Bypass Harness	Non-CE models; NR and ZR control suffixes
11	70206601	Card Reader Network Harness Assembly	Card reader to network board
	70211801	Card Reader Harness Assembly	Card reader to control
12	510068P	Card Reader and Bracket Assembly	
13	70208801	Mounting Plate	Use with 70348801 Control Plate Assembly
14	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

**N/A = Part no longer available**

# Network Board for NetMaster Models

SA and ST Models Through Serial No. 0904002963 with ZC, ZR and ZX Control Suffixes

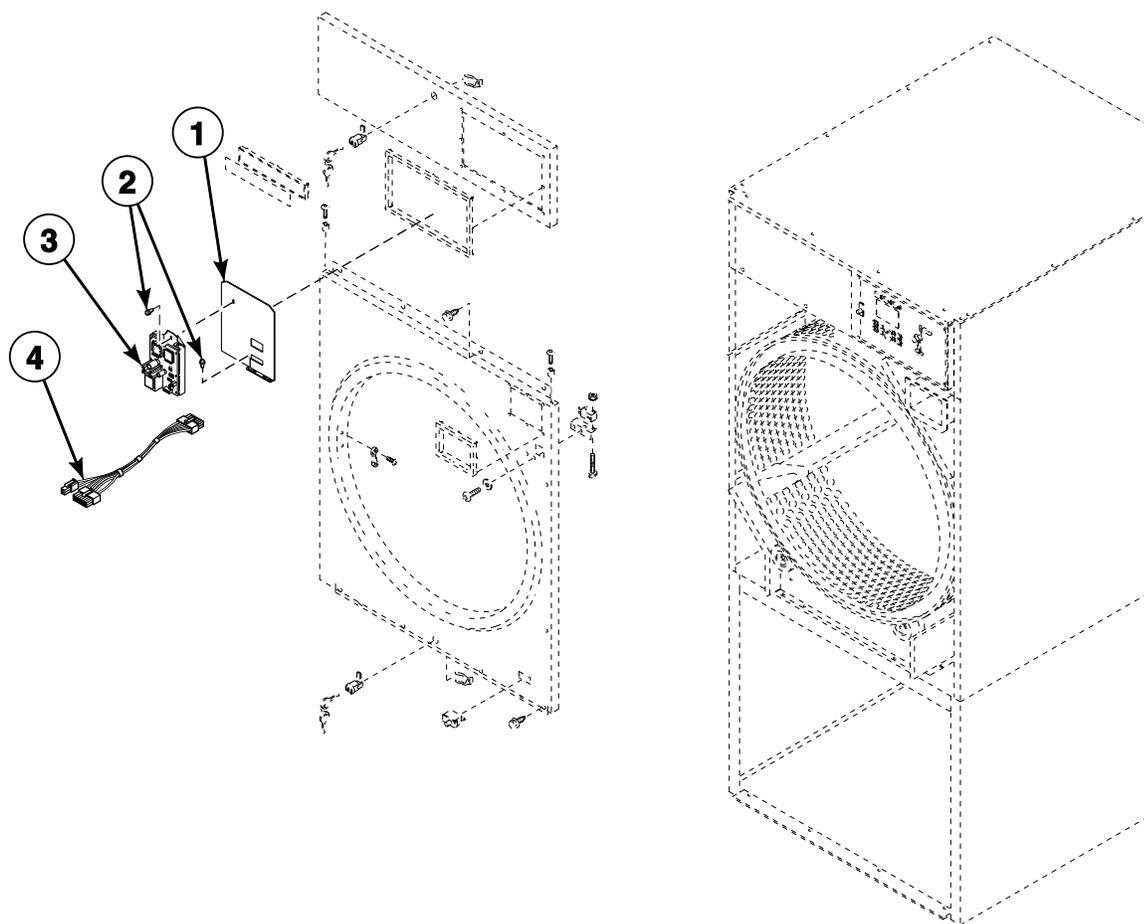


TMB2387P\_70409501

## Network Board for NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
	800246	Communication Wire Harness Assembly	
1	70201401	Network Plug Support	
2	430497	Screw	
3	210016P	Network Board Assembly	
4	800217	Network Wire Harness Assembly	

# Coin Drop Components for Quantum Control

M and S Models with LB, LC, LK, LL, LW, LX, WB, WC, WK, WL, WW and WX Control Suffixes

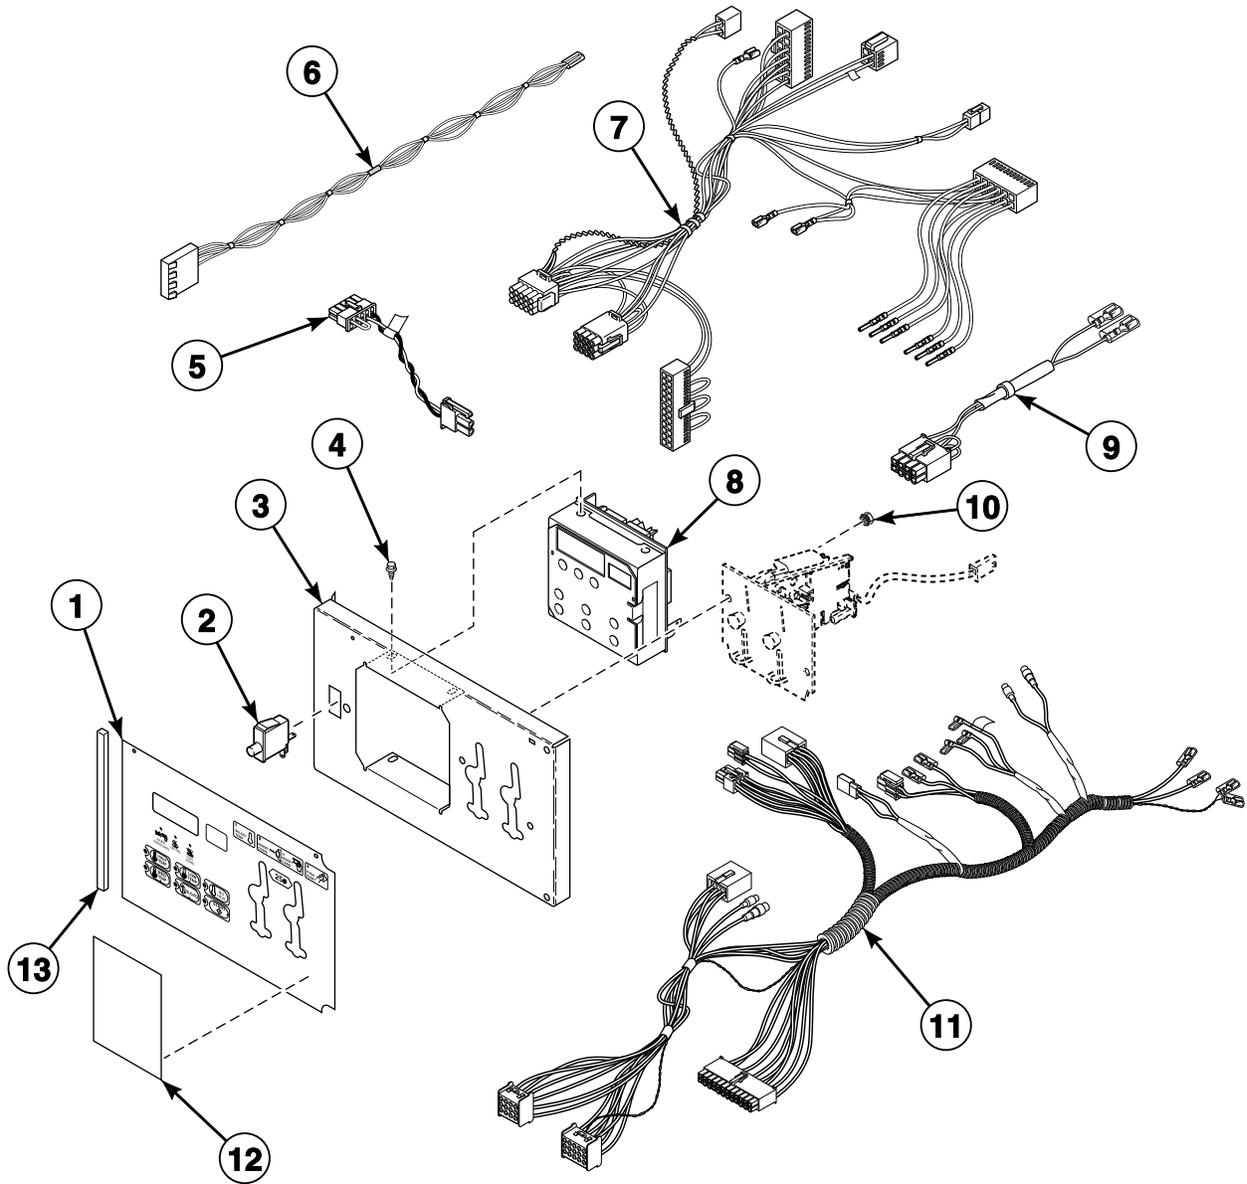


TMB3273P\_70490501

## Coin Drop Components for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	NK206	Network Retrofit Kit	LC and LX control suffixes; Wired
	NK220	Network Controller Kit	LC and LX control suffixes; Wired
	NK301	Wireless Network Kit	LC and LX control suffixes; Wireless
	NK320	Ethernet Gateway Kit	LC and LX control suffixes; Wireless
	NK330	USB Gateway Kit	LC and LX control suffixes; Wireless
	203346	USB IR Interface Kit	
<b>1</b>	70449501	Control Overlay	M models
	70410001	Control Overlay	S models; Single drop
	70410002	Control Overlay	S models; Dual drop
<b>2</b>	70413301	Pushbutton Switch	
<b>3</b>	70291001P	Control Plate Kit	
<b>4</b>	501524	Screw	For mounting item 8
<b>5</b>	70324602	Jumper Calibration Wire	
<b>6</b>	70484601	Central Pay Harness	LK, LL, WK and WL control suffixes
<b>7</b>	70410401P	Control Panel Harness	
<b>8</b>	70450501P	Control Assembly	Nonreversing
	70450503	Control Assembly	Reversing
<b>9</b>	70364104P	Coin Vault Switch Harness	Non-CE models
<b>10</b>	70054	Nut	
<b>11</b>	70467801	Main Harness	Electric models need 55881 Harness Strap; Models through 7/31/11 and starting again 7/9/12
	70441301	Main Harness	Electric models need 55881 Harness Strap; Models starting 8/1/11 through 7/8/12
<b>12</b>	39564	Coin Drop Overlay	LK, LL, WK and WL control suffixes; Cover
<b>13</b>	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

# Card Reader Components for Quantum Control

M and S Models with LY, LZ, WY and WZ Control Suffixes

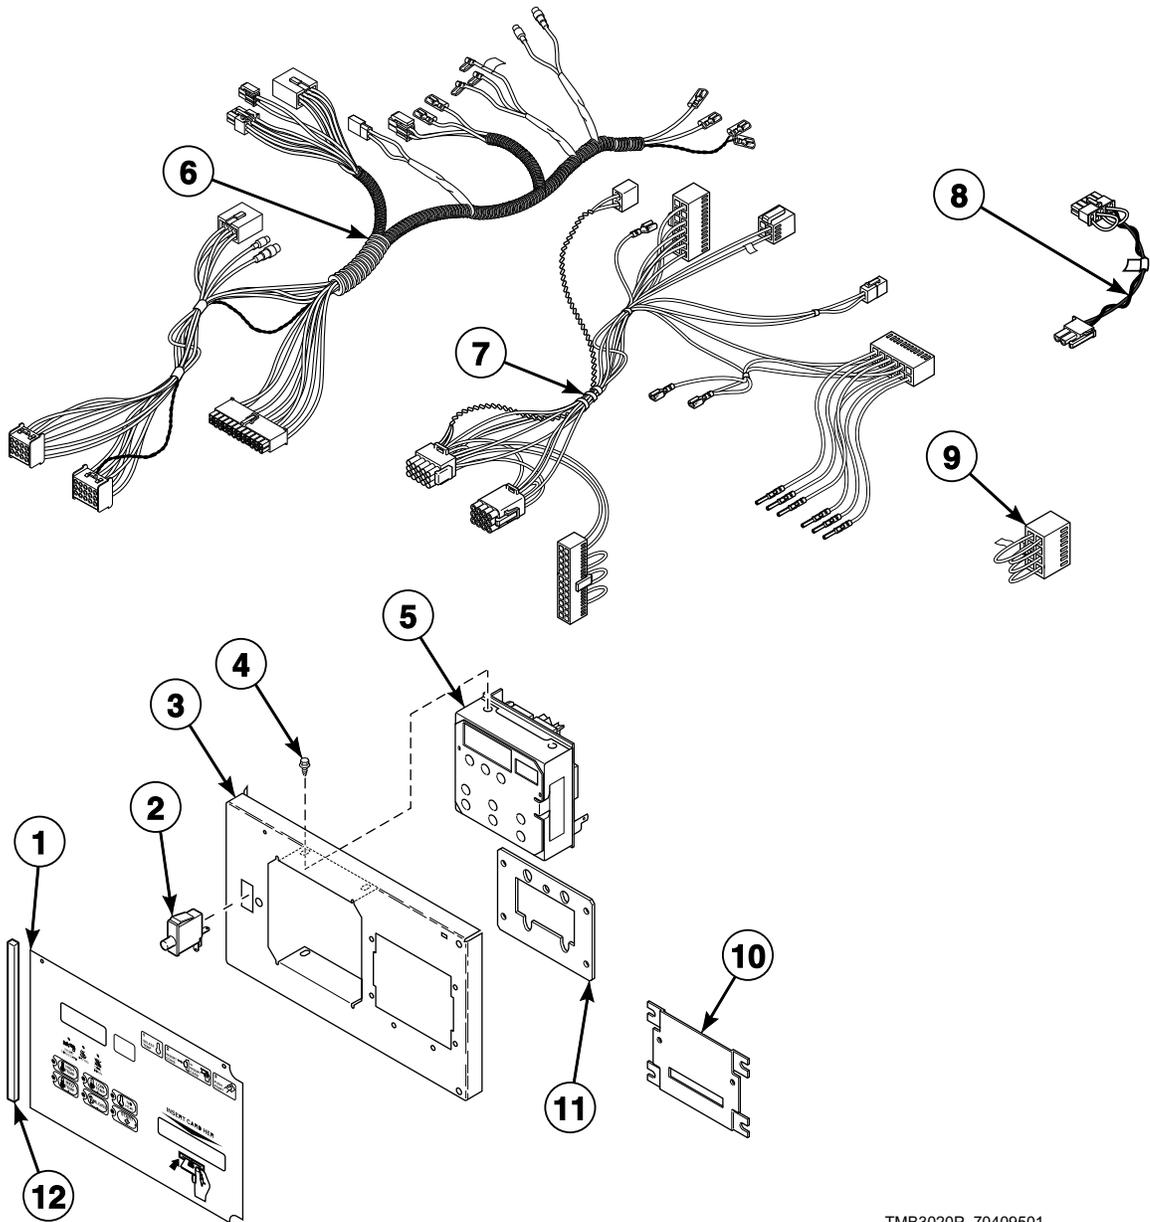


TMB3020P\_70409501

## Card Reader Components for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	NK206	Network Retrofit Kit	LY control suffix; Wired
	NK220	Network Controller Kit	LY control suffix; Wired
	NK301	Wireless Network Kit	LY control suffix; Wireless
	NK320	Ethernet Gateway Kit	LY control suffix; Wireless
	NK330	USB Gateway Kit	LY control suffix; Wireless
	203346	USB IR Interface Kit	
<b>1</b>	70410003	Overlay	
<b>2</b>	70413301	Pushbutton Switch	
<b>3</b>	70348801	Control Plate Assembly	
<b>4</b>	501524	Screw	
<b>5</b>	70450501P	Control Assembly	Nonreversing
	70450503	Control Assembly	Reversing
<b>6</b>	70467801	Main Harness	Electric models need 55881 Harness Strap; Models through 7/31/11 and starting again 7/9/12
	70441301	Main Harness	Electric models need 55881 Harness Strap; Models starting 8/1/11 through 7/8/12
<b>7</b>	70410401P	Control Panel Harness	
<b>8</b>	70324602	Jumper Calibration Wire	
<b>9</b>	70364103	Bypass Harness	Non-CE models
<b>10</b>	44089501	Slot Card Plate Assembly	
<b>11</b>	70208801	Mounting Plate	
<b>12</b>	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

# Network Board for Quantum Control

M and S Models with WB, WC, WW, WX, WY and WZ Control Suffixes

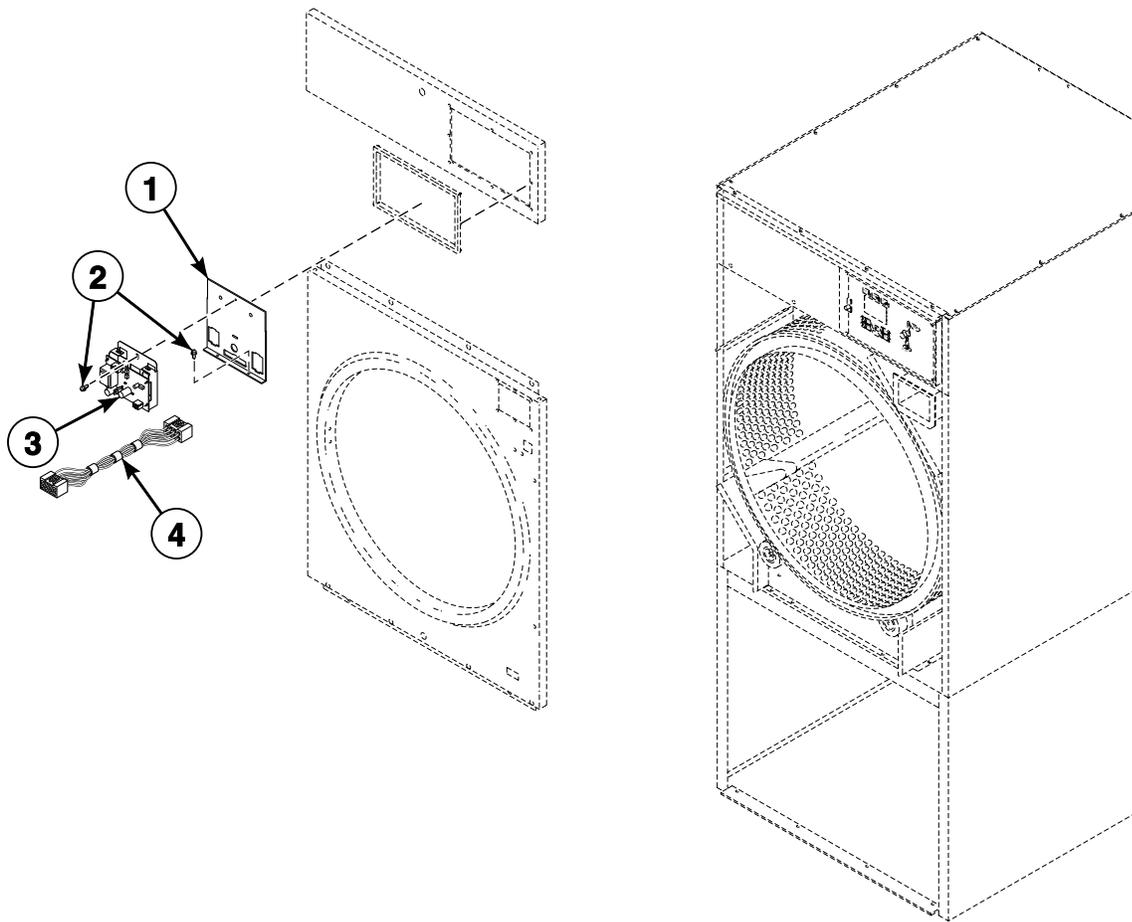


TMB2928P\_70409501

## Network Board for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	800246	Communication Wire Harness Assembly	
1	70307002	Control Housing Cover	
2	430497	Screw	
3	201341	Network Board Assembly	
4	44088501P	Network Wire Harness Assembly	

# Communication Board

S Models Through Serial No. 0904002963 with ZC and ZR Control Suffixes  
M and S Models with WB and WC Control Suffixes

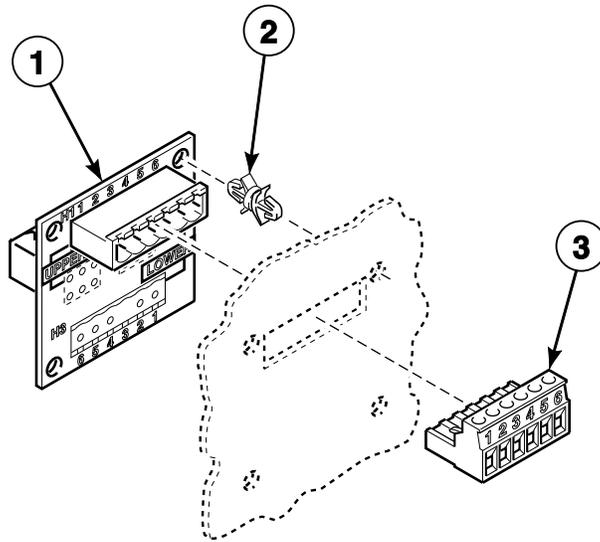


TMB1935P\_70409501

# Communication Board

REF	PART NO.	DESCRIPTION	COMMENTS
1	210095P	Communication Board	
2	210098	PC Board Standoff	4 required
3	210099	Communication Connector	

# Coin Drop Components for Galaxy 600 Control

H Models with KB, KC, KK, KL, KW and KX Control Suffixes

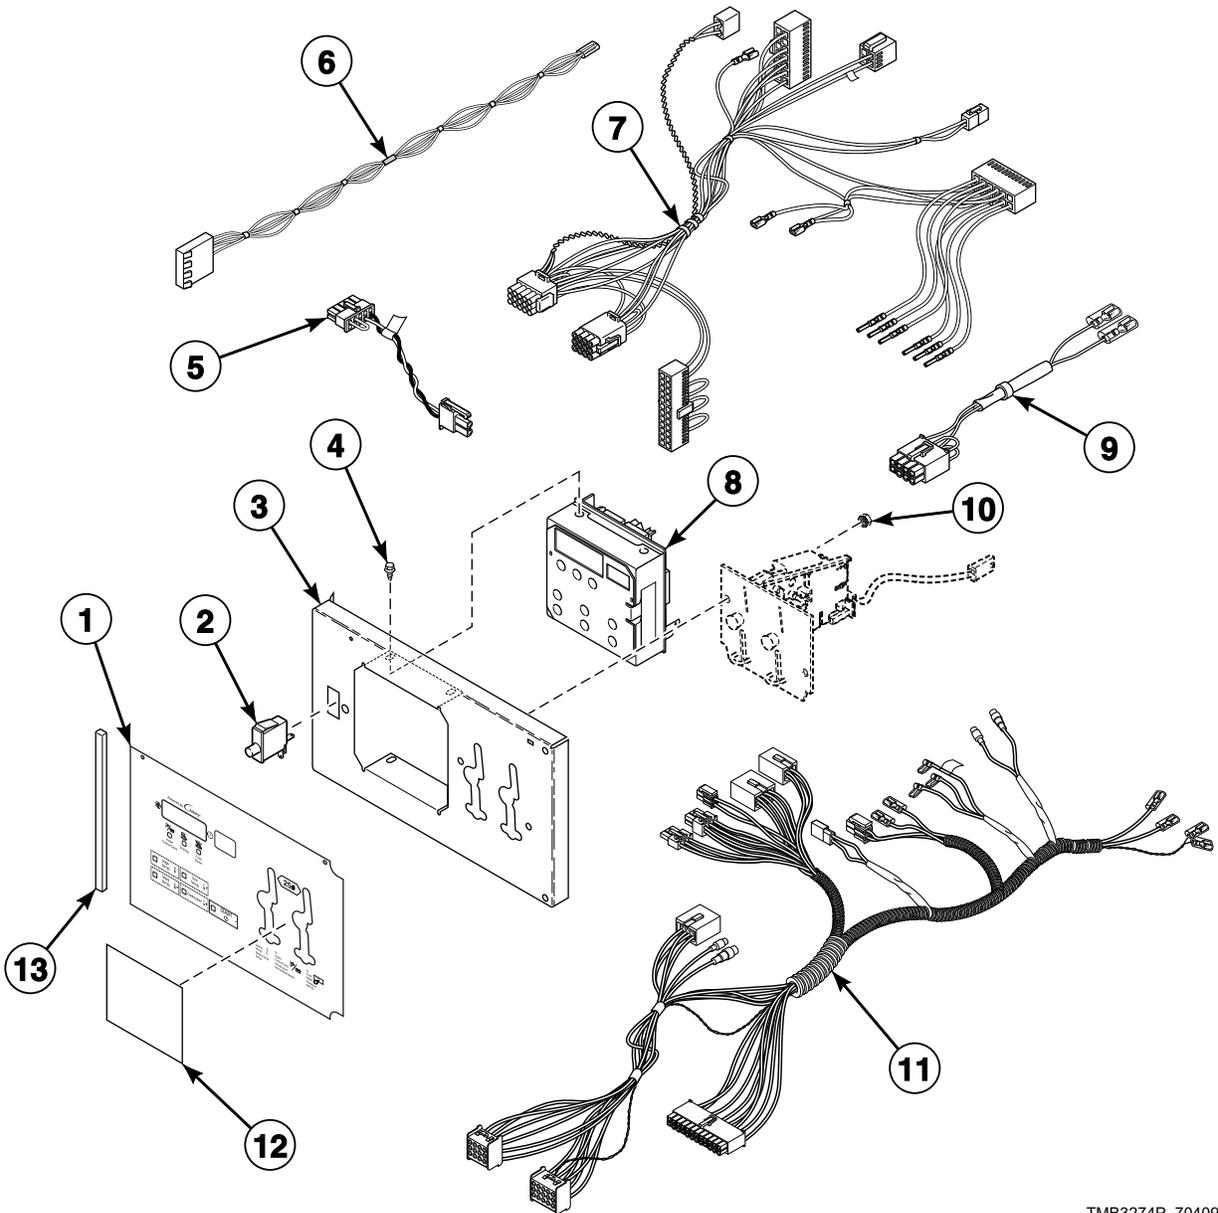


TMB3274P\_70409501

## Coin Drop Components for Galaxy 600 Control

REF	PART NO.	DESCRIPTION	COMMENTS
	203346	USB IR Interface Kit	
1	70473001	Control Overlay	Single drop; Gray
	70473002	Control Overlay	Dual drop; Gray
	70504501	Overlay	Single drop; Gray/green
	70504502	Overlay	Dual drop; Gray/green
	70504601	Overlay	Single drop; Green
	70504602	Overlay	Dual drop; Green
2	70413301	Pushbutton Switch	
3	70291001P	Control Plate Kit	
4	501524	Screw	For mounting item 8
5	70324601	Jumper Calibration Wire	
6	70484601	Central Pay Harness	KK and KL control suffixes
7	70410401P	Control Panel Harness	
8	70450502P	Control Assembly	Nonreversing
	70450504	Control Assembly	Reversing
9	70364104P	Coin Vault Switch Harness	Non-CE models
10	70054	Nut	
11	70467801	Main Harness	
12	70246301	Coin Cover Overlay	KK and KL control suffixes; Cover
13	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

# Card Reader Components for Galaxy 600 Control

H Models with KY and KZ Control Suffixes

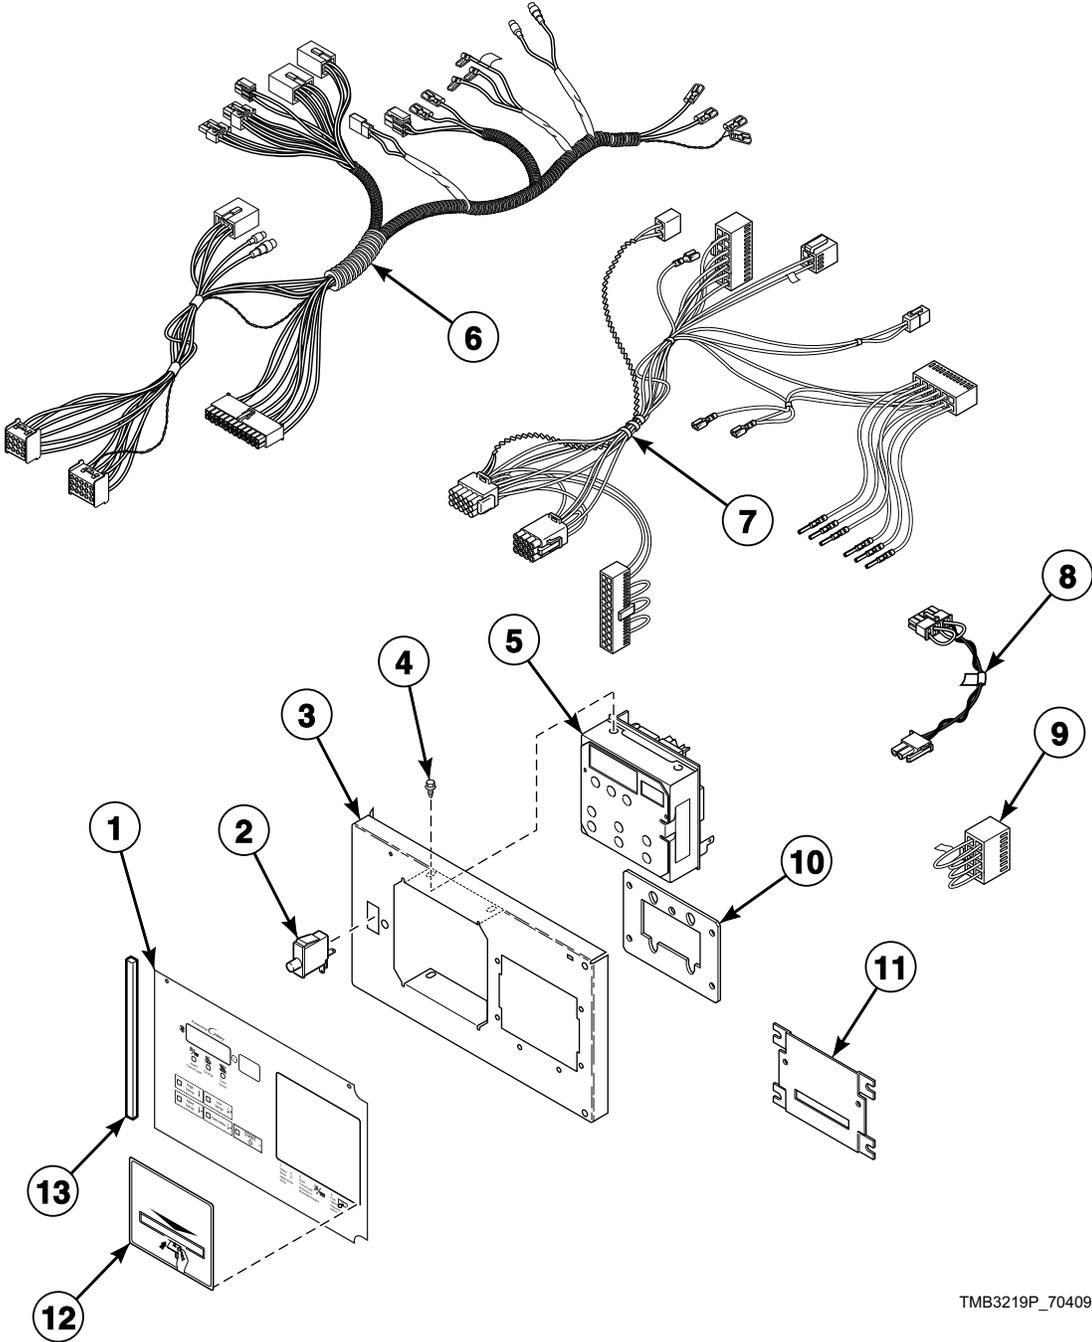


TMB3219P\_70409501

## Card Reader Components for Galaxy 600 Control

REF	PART NO.	DESCRIPTION	COMMENTS
	203346	USB IR Interface Kit	
<b>1</b>	70473003	Control Overlay	Gray
	70504503	Overlay	Gray/green
	70504603	Overlay	Green
<b>2</b>	70413301	Pushbutton Switch	
<b>3</b>	70336501	Control Plate Assembly	
<b>4</b>	501524	Screw	
<b>5</b>	70450502P	Control Assembly	Nonreversing
	70450504	Control Assembly	Reversing
<b>6</b>	70467801	Main Harness	
<b>7</b>	70410401P	Control Panel Harness	
<b>8</b>	70324601	Jumper Calibration Wire	
<b>9</b>	70364103	Bypass Harness	Non-CE models
<b>10</b>	70208801	Mounting Plate	
<b>11</b>	44089501	Slot Card Plate Assembly	
<b>12</b>	70334301	Card Reader Overlay	
<b>13</b>	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

# UniLinc Control

U Models with RU and UO Control Suffixes

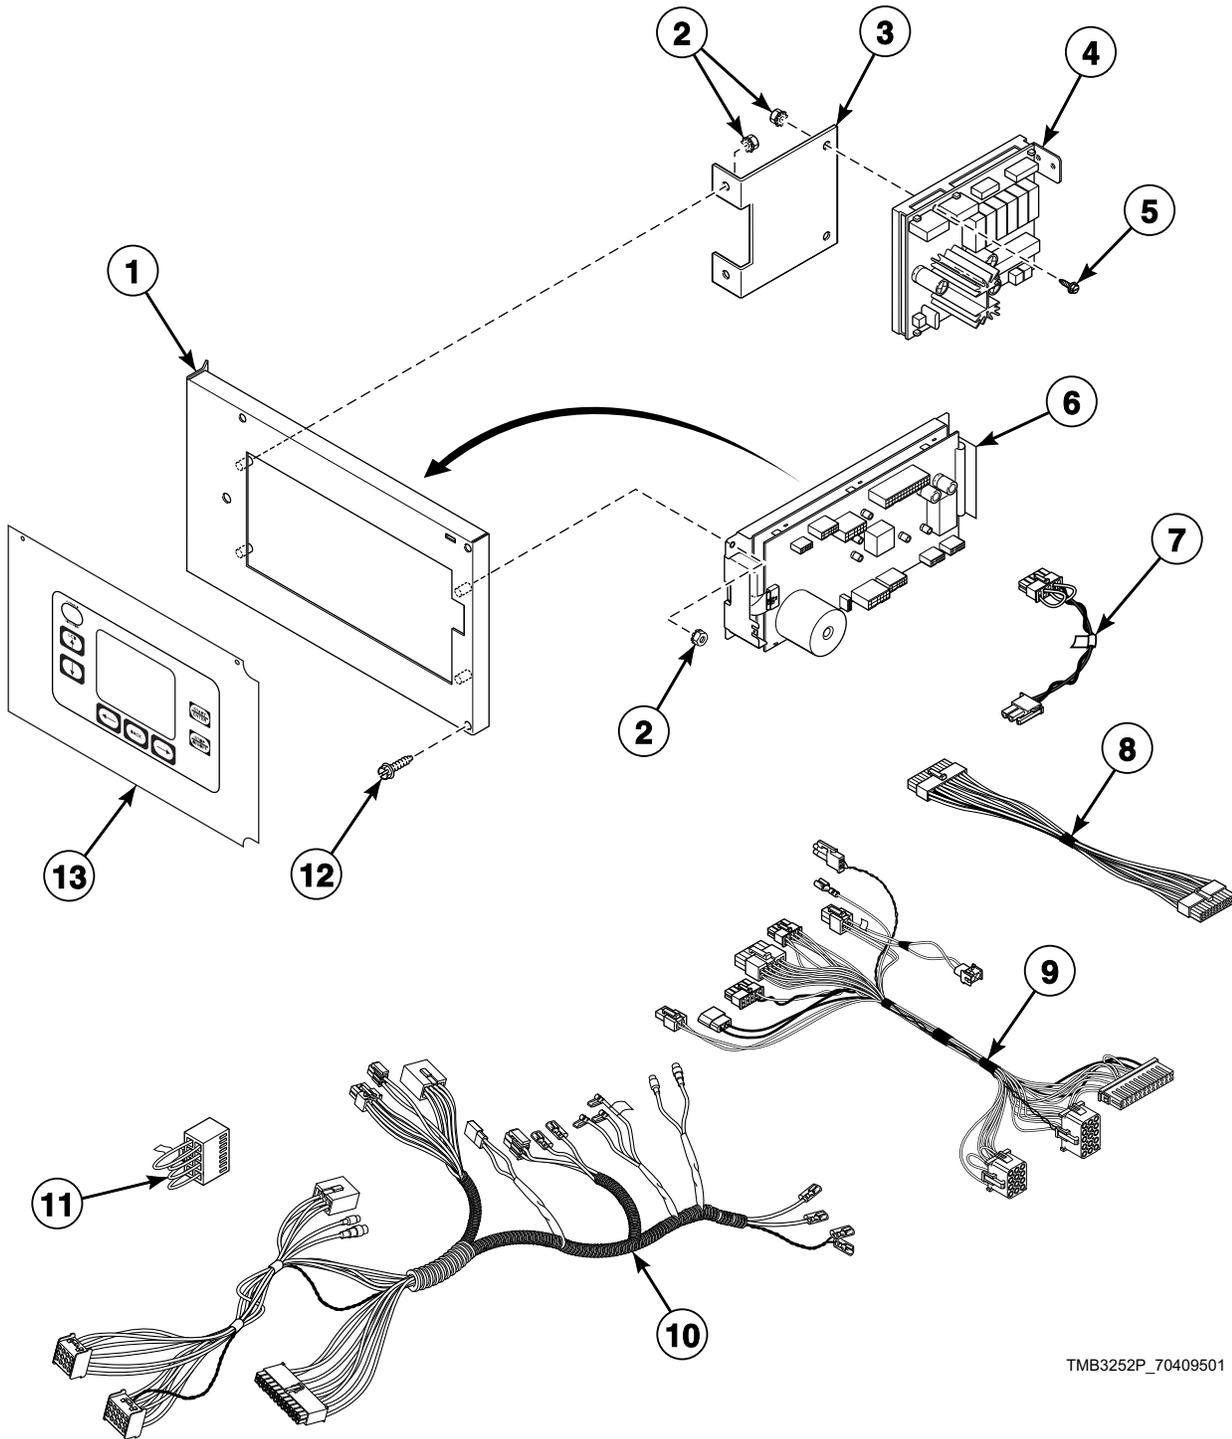


TMB3252P\_70409501

# UniLinc Control

REF	PART NO.	DESCRIPTION	COMMENTS
	NK206	Network Retrofit Kit	Wired
	NK220	Network Controller Kit	Wired
	NK301	Wireless Network Kit	Wireless
	NK320	Ethernet Gateway Kit	Wireless
	NK330	USB Gateway Kit	Wireless
	203346	USB IR Interface Kit	
<b>1</b>	70475601	Control Plate Assembly	
<b>2</b>	70054	Nut	
<b>3</b>	70440601	Output Bracket	
<b>4</b>	70434101P	Control Assembly	
<b>5</b>	501524	Screw	
<b>6</b>	70454001P	Control Assembly	
<b>7</b>	70324602	Jumper Calibration Wire	
<b>8</b>	44186101	Output Harness	Use between item 4 and item 6
<b>9</b>	44240301	Control Panel Harness	Goes from item 6 to main harness
<b>10</b>	70441301	Main Harness	Models through 7/8/12
	70467801	Main Harness	Models starting 7/9/12
<b>11</b>	70364103	Bypass Harness	Non-CE models
<b>12</b>	70069901	Screw	
<b>13</b>	70432201	Overlay	Models through 8/17/14
	70499001	Overlay	Models starting 8/18/14

# LED OPL Control

C, D, H, I, S and U Models  
G, K, L, P and Y Models Starting 1/16/12  
EO and RE Control Suffixes

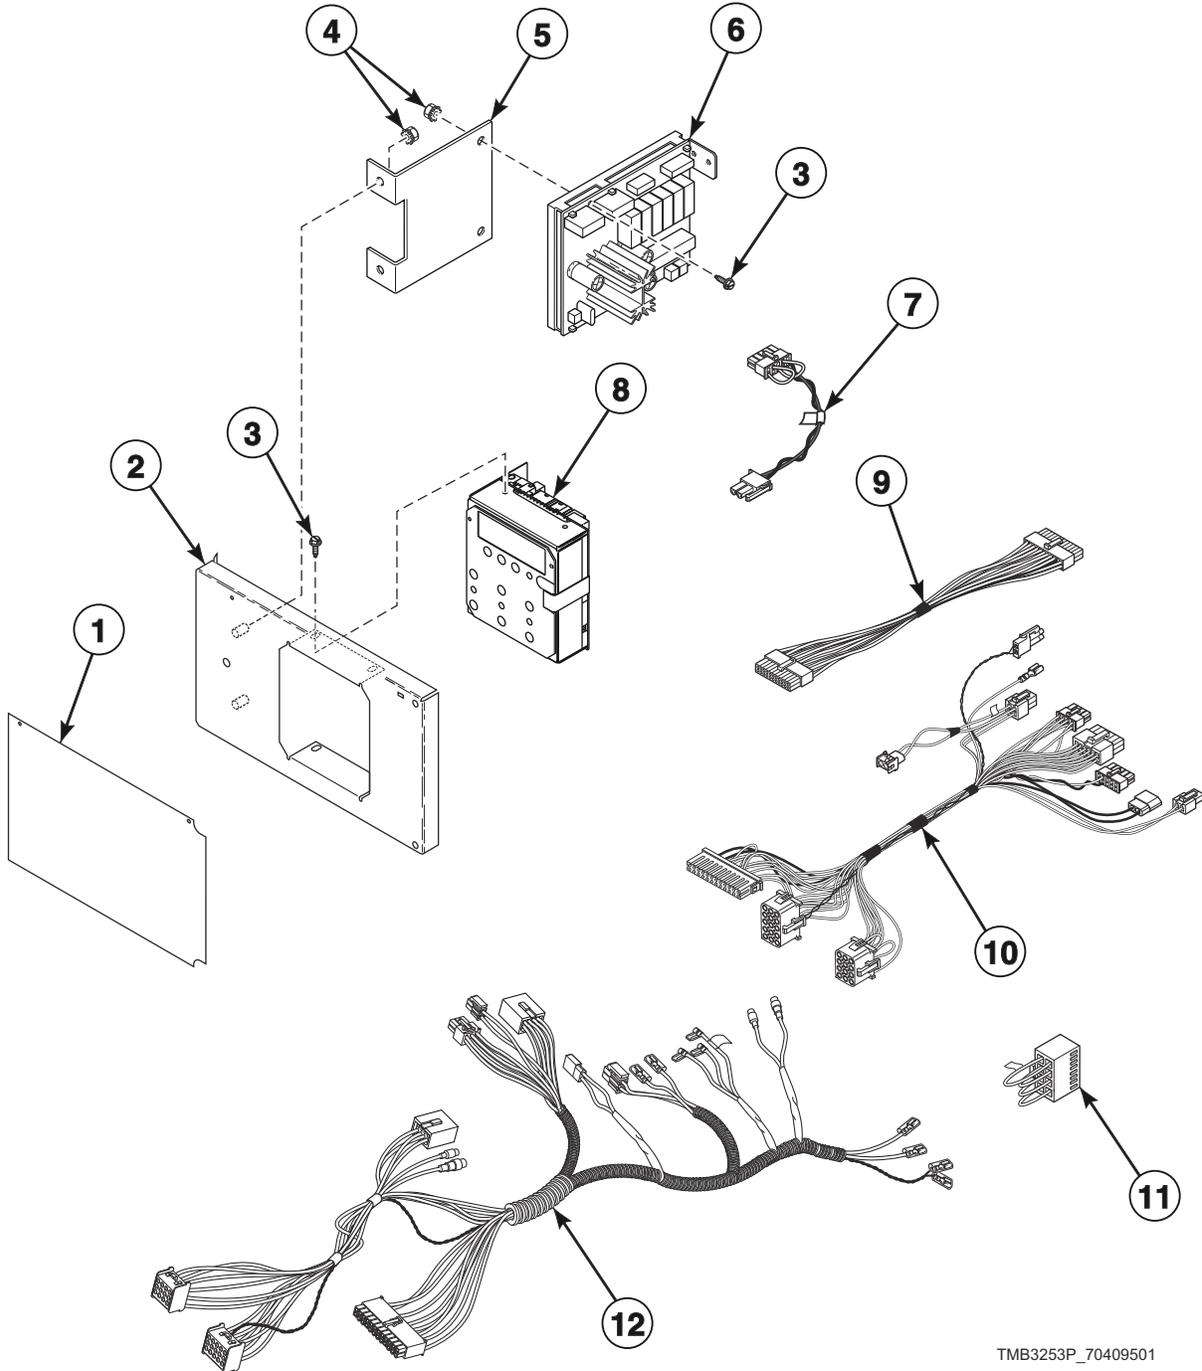


TMB3253P\_70409501

# LED OPL Control

REF	PART NO.	DESCRIPTION	COMMENTS
	203346	USB IR Interface Kit	
<b>1</b>	70445001	Overlay	S models; EO control suffix
	70445002	Overlay	S models; RE control suffix
	70445003	Overlay	H models; EO control suffix
	70445004	Overlay	H models; RE control suffix
	70462402	Overlay	C, D and I models; Models through 7/14/14; EO control suffix
	70462401	Overlay	C, D and I models; Models through 7/14/14; RE control suffix
	70504902	Overlay	C, D and I models; Models starting 7/15/14; EO control suffix
	70504901	Overlay	C, D and I models; Models starting 7/15/14; RE control suffix
	70462702	Overlay	U models; Models through 8/17/14; EO control suffix
	70462701	Overlay	U models; Models through 8/17/14; RE control suffix
	70493702	Overlay	U models; Models starting 8/18/14; EO control suffix
	70493701	Overlay	U models; Models starting 8/18/14; RE control suffix
	70462902	Overlay	G and K models; EO control suffix
	70462901	Overlay	G and K models; RE control suffix
	70472402	Overlay	P models through 9/30/14; EO control suffix
	70472401	Overlay	P models through 9/30/14; RE control suffix
	70508602	Overlay	P models starting 10/1/14 through 5/31/15; L models starting 1/29/15 through 5/31/15; EO control suffix
	70508601	Overlay	P models starting 10/1/14 through 5/31/15; L models starting 1/29/15 through 5/31/15; RE control suffix
	70526002	Overlay	L and P models starting 6/1/15; EO control suffix
	70526001	Overlay	L and P models starting 6/1/15; RE control suffix
70472202	Overlay	Y models; L models through 1/28/15; EO control suffix	
70472201	Overlay	Y models; L models through 1/28/15; RE control suffix	
<b>2</b>	70440901	Control Plate and Studs Assembly	
<b>3</b>	501524	Screw	
<b>4</b>	70054	Nut	
<b>5</b>	44223101	Output Bracket	
<b>6</b>	70434101P	Control Assembly	
<b>7</b>	70324602	Jumper Calibration Wire	
<b>8</b>	70454101P	Control Assembly	H, S and U models; L and P models starting 6/1/15
	70437102P	Control Assembly	C, D and I models; Models through 7/14/14
	70503702	Control Assembly	C, D and I models; Models starting 7/15/14
	70437103P	Control Assembly	P models through 5/31/15; L models starting 1/29/15 through 5/31/15
	70437104P	Control Assembly	G and K models
	70437105P	Control Assembly	Y models; L models through 1/28/15
<b>9</b>	44186101	Output Harness	Use between item 5 and item 7
<b>10</b>	44240301	Control Panel Harness	Goes from item 7 to main harness
<b>11</b>	70364103	Bypass Harness	Non-CE models
<b>12</b>	70441301	Main Harness	Models through 7/8/12
	70467801	Main Harness	Models starting 7/9/12

# Door Assemblies

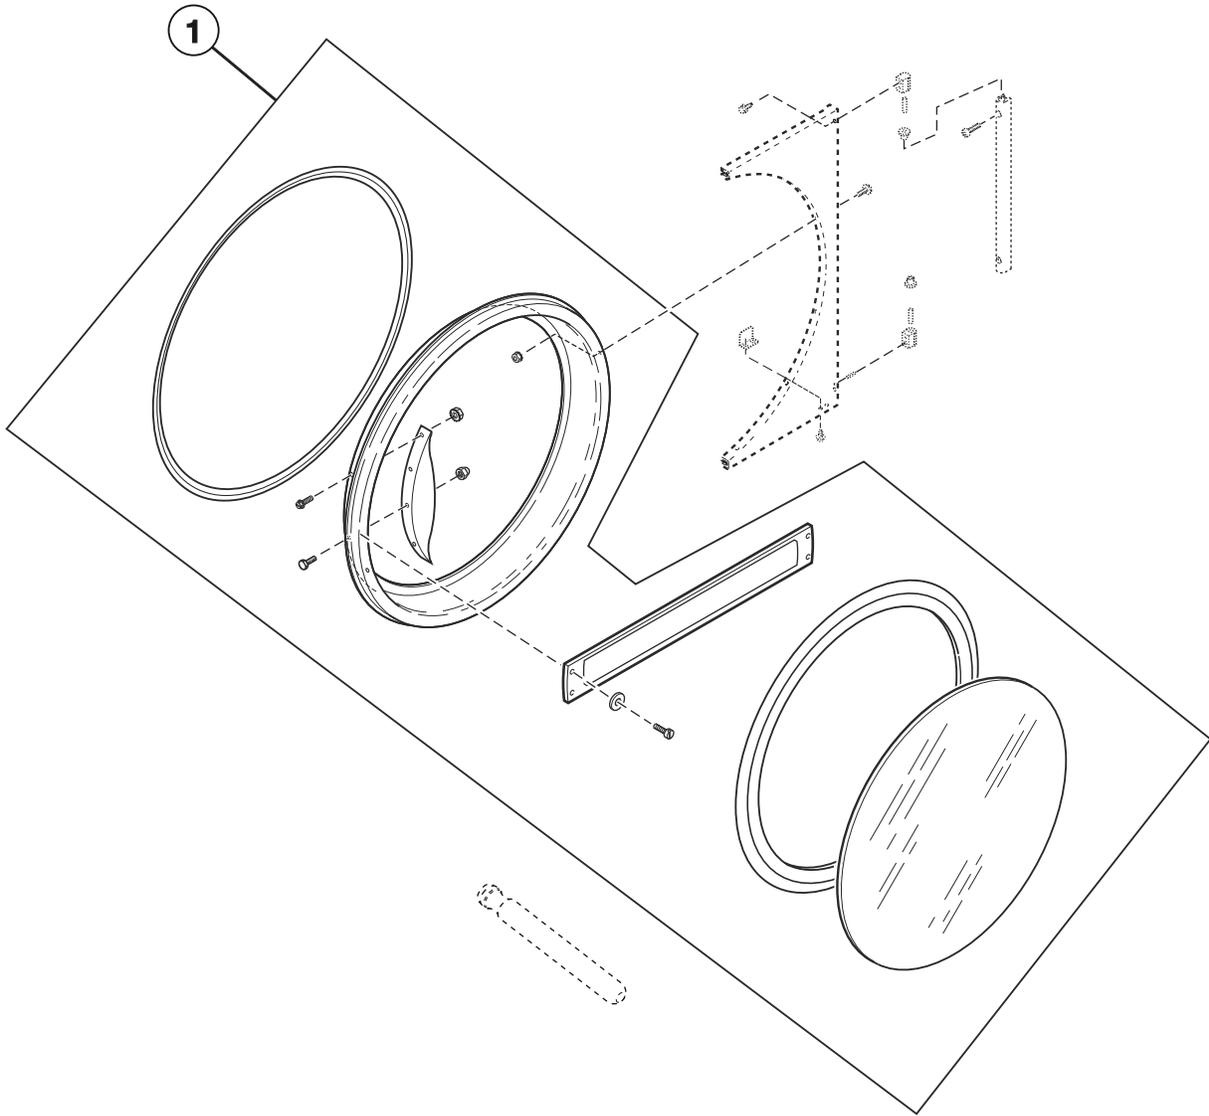


TMB3152P\_70409501

# Door Assemblies

REF	PART NO.	DESCRIPTION	COMMENTS
	M4775P3	Control Panel and Door Hinge Kit	D and I models; To change from old look to new look
	70133501P	Replacement Door Handle Kit	H models
1	70212301	Door Assembly	A, M and S models; U models through 8/17/14; C, D and I models starting 8/1/11; Excludes hinge
	70496501	Door Assembly	U models; Models starting 8/18/14
	44046701	Door Assembly	C, D and I models; Models through 7/31/11; Excludes hinge
	44058001P	Door Assembly	H models; Excludes hinge
	44058004	Door Assembly	H models; Chrome option; Excludes hinge
	70496502	Door Assembly	U models; Chrome option; Excludes hinge
	70212302	Door Assembly	S models; Chrome option; Excludes hinge
	70064100	Door Assembly	L models through 1/28/15
	70212200	Door Assembly	Y models; P models through 9/30/14; Excludes hinge
	44287801LG	Door Assembly	P models starting 10/1/14; L models starting 1/29/15; Excludes hinge
	70408901	Door Assembly	G and K models; Includes handle

# Door Components

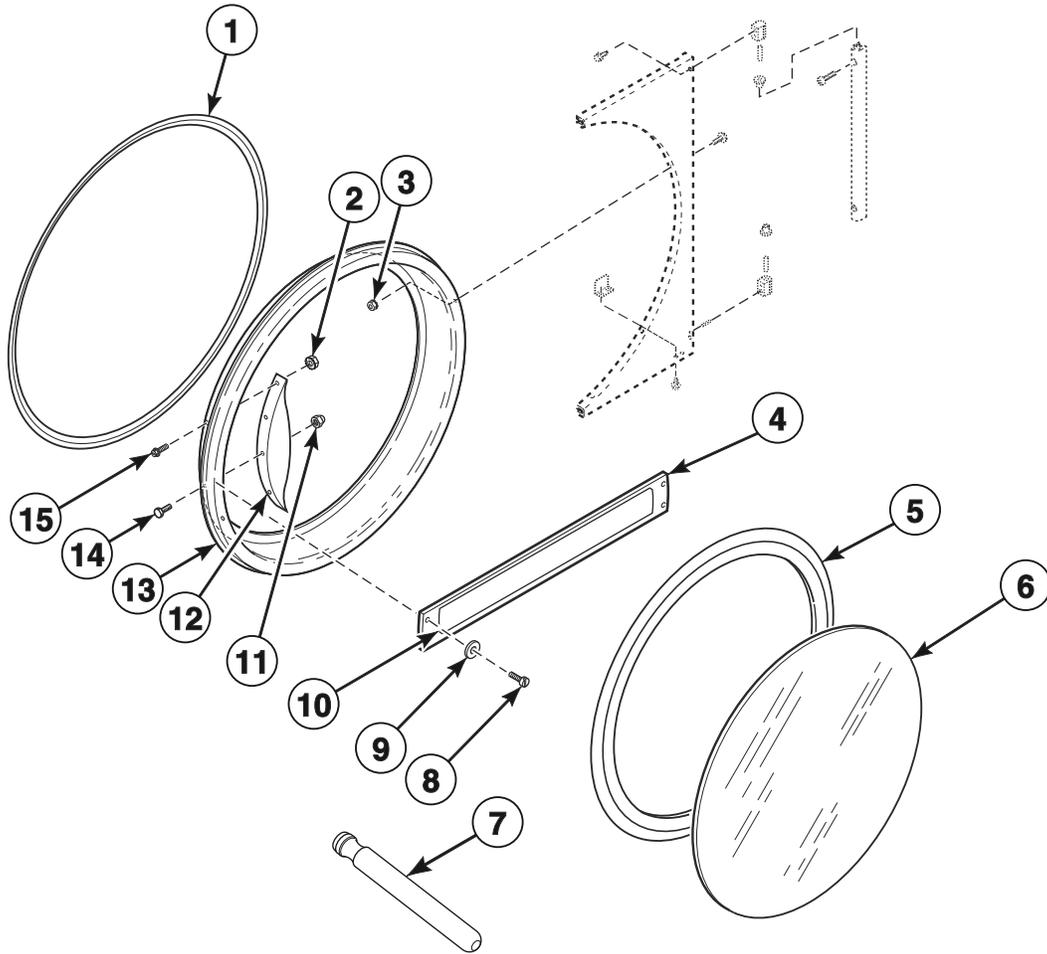


TMB3152PA\_70409401

# Door Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4775P3	Control Panel and Door Hinge Kit	D and I models; To change from old look to new look
	70133501P	Replacement Door Handle Kit	H models
<b>1</b>	70296801	Door Ring Gasket	
<b>2</b>	44071201	Nut	H, M and S models; 4 required
<b>3</b>	70054	Nut	
<b>4</b>	70399502B	Handle Bar	G and K models
<b>5</b>	70211901P	Door Glass Seal Kit	Use Loctite 414 for seal
<b>6</b>	70133601P	Door Glass	H models
	M400784P	Door Glass	All other models
<b>7</b>	M4221P4	Door Glass Installation Tool	
<b>8</b>	70412601	Pop Rivet	G and K models; 4 required
<b>9</b>	70409301	Washer	G and K models
<b>10</b>	70414001	Label	G models; Coin
	44144401	Nameplate Overlay	K models; Coin
<b>11</b>	M414215	Nut	For door strike; Mounts between door strike screw and door handle
<b>12</b>	44007902P	Door Handle	M and S models; U models through 8/17/14; C, D and I models starting 8/1/11
	44263801	Door Handle	U models; Models starting 8/18/14; Use 901620 Screw, 803871 Screw and 44088001 Nut to attach
	44057701	Door Handle	H models
	430117	Door Handle	L models; Models through 1/28/15
	M400133	Door Handle	A and Y models; P models through 9/30/14
	44287601	Handle	P models starting 10/1/14
<b>13</b>	70505709B	Door Ring Assembly	C, D and I models; Models starting 8/1/11
	70496401	Door Ring	U models; Models starting 8/18/14
	44043501	Door Ring and Handle Assembly	C, D and I models through 7/31/11; P models through 9/30/14
	70505712	Door Ring Assembly	H and S models; Chrome option
	70505713	Door Ring Assembly	U models; Chrome option
	70505702	Door Ring Assembly	L models; Models through 1/28/15
	44287701LG	Door Ring and Handle Assembly	P models starting 10/1/14; L models starting 1/29/15
	70399701B	Door Ring	G and K models
	70505701	Door Ring Assembly	M and S models; U models through 8/17/14; Stainless steel
<b>14</b>	M400661	Screw	H, I, M, S and U models; Use with 70024801 and 44057701 Door Handle
	M409385	Screw	A, P and Y models; Use with 70133501P Replacement Door Handle Kit and M400133 Door Handle
	430756	Screw	L models; Use with 430117 Door Handle
<b>15</b>	44024201	Hole Plug	C, D and I models; 4 required
	61199	Screw	

# Hinge Components

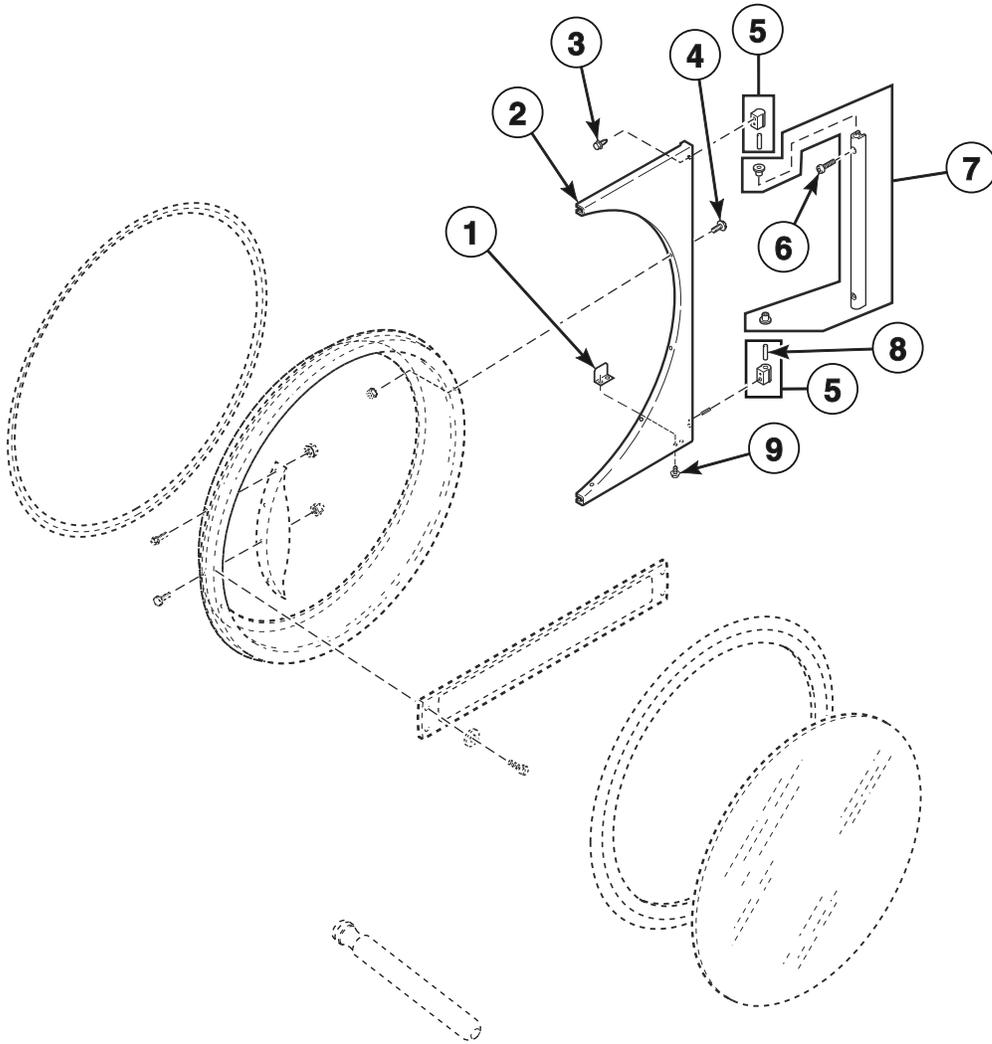


TMB3152PB\_70409401

# Hinge Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4775P3	Control Panel and Door Hinge Kit	D and I models; To change from old look to new look
1	70215001P	Door Switch Actuator Kit	
2	70115903B	Door Hinge	G and K models; D and I models starting 8/1/11
	70115901*	Door Hinge	A, H, M, S, U and Y models; C models starting 8/1/11; P models through 9/30/14; L models through 1/28/15
	70115902	Door Hinge	A, C, H, M, S, U and Y models; D and I models through 7/31/11; P models through 9/30/14; L models through 1/28/15; Stainless steel
	70115903LG	Door Hinge	Light gray; U models; P models starting 10/1/14; L models starting 1/29/15
3	70442101	Screw	
4	501524	Screw	
5	M4773P3	Cam and Hinge Kit	G and K models; D and I models starting 8/1/11
	M4772P3	Cam and Hinge Kit	A, C, H, L, M, P, S, U and Y models; D and I models through 7/31/11
6	70407301	Screw	G and K models; D and I models starting 8/1/11
	70033502	Screw	A, C, H, L, M, P, S, U and Y models; D and I models through 7/31/11
7	44035002	Door Hinge Lug Assembly	Black; G and K models; D and I models starting 8/1/11
	44035001	Door Hinge Lug Assembly	A, C, H, L, M, P, S, U and Y models; D and I models through 7/31/11
8	70071401	Pin	
9	70058501	Pop Rivet	

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

# Control Panels

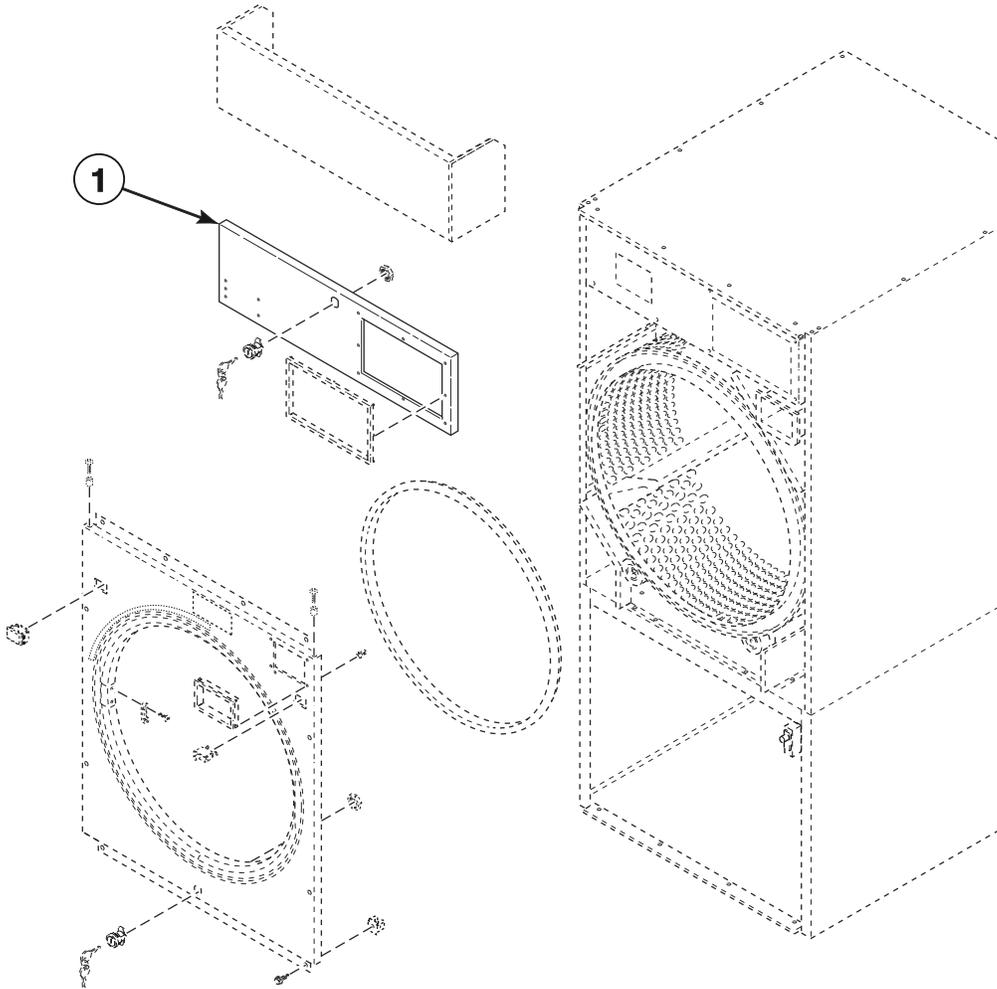


TMB3315P\_70409501

# Control Panels

REF	PART NO.	DESCRIPTION	COMMENTS
	M4775P3	Control Panel and Door Hinge Kit	D and I models; To change from old look to new look
1	70121301*	Control Panel	A, L, M, S and Y models; P models through 9/30/14; U models through 8/17/14
	70121302	Control Panel	A, L, M, S and Y models through 3/31/15; P models through 9/30/14; U models through 8/17/14; Stainless steel
	70121308	Control Panel	L, M, S and Y models; Models starting 4/1/15; Stainless steel
	70273409LG	Control Panel	U models; Light gray
	70273410	Control Panel	U models; Models starting 8/18/14 through 3/31/15; Stainless steel
	70273415	Control Panel	U models; Models starting 4/1/15; Stainless steel
	70273411*	Control Panel	U models; Models starting 8/18/14
	70121307DG	Control Panel	P models starting 10/1/14; L models starting 1/29/15; Dark gray
	70121301B	Control Panel	L models; Models through 1/28/15
	70273405*	Control Panel	G and K models
	70273406	Control Panel	G and K models; Models through 3/31/15; Stainless steel
	70273414	Control Panel	G and K models; Models starting 4/1/15; Stainless steel
	70121305*	Control Panel	H models
	70121306	Control Panel	H models; Models through 3/31/15; Stainless steel
	70121309	Control Panel	H models; Models starting 4/1/15; Stainless steel
	70273401*	Control Panel	C models; D and I models through 7/31/11; Manual
	70273402	Control Panel	C models through 3/31/15; D and I models through 7/31/11; Manual; Stainless steel
	70273403*	Control Panel	C models; D and I models through 7/31/11; Electronic
	70273404	Control Panel	C models; D and I models through 7/31/11; Electronic; Stainless steel
	70273407B	Control Panel	D and I models; Models starting 8/1/11 through 7/8/12
	70273408B	Control Panel	D and I models; Models starting 7/9/12

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

# Front Panel Assemblies

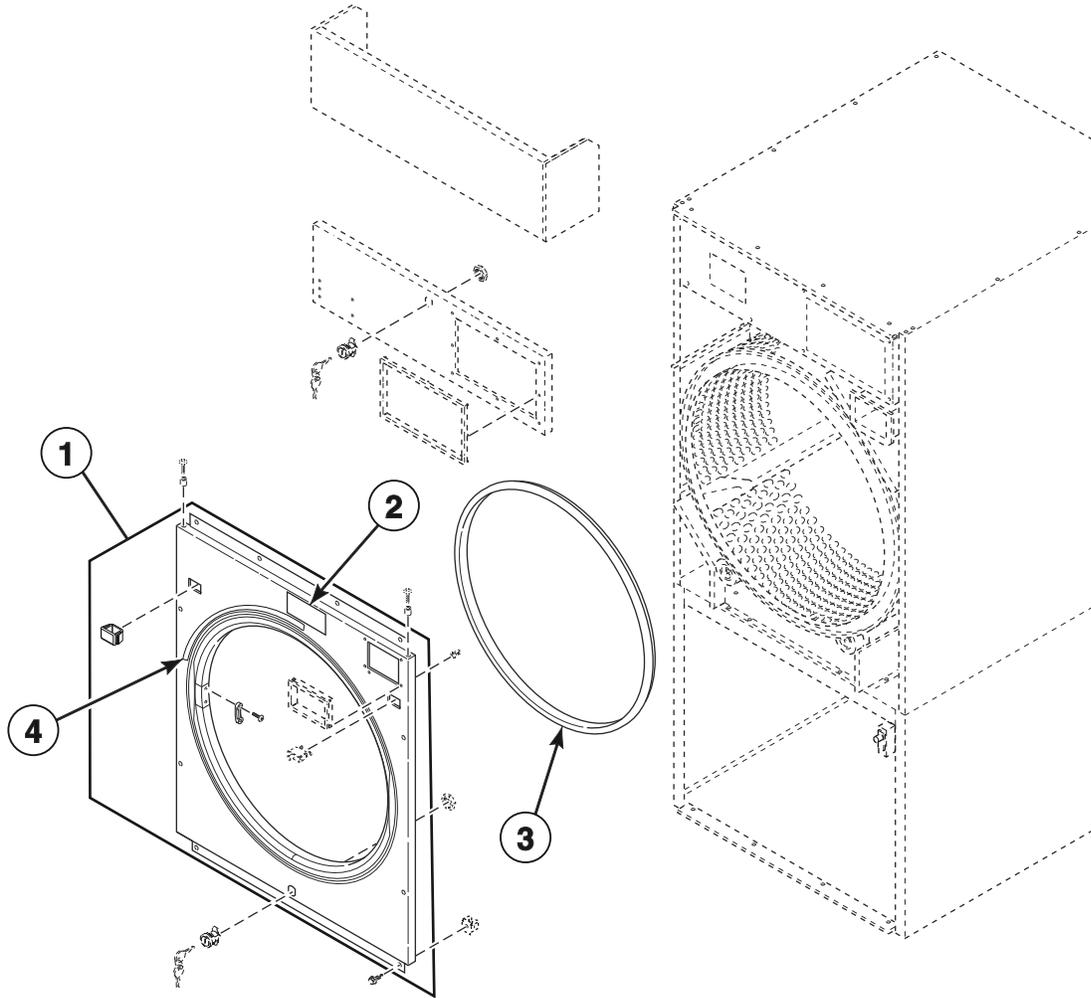

TMB3315PA\_70409501


# Front Panel Assemblies

REF	PART NO.	DESCRIPTION	COMMENTS
1	44116401*P	Front Panel Assembly	C, D, H, I, M and S models; P models through 9/30/14; L models through 1/28/15; ** control suffixes
	44116501P	Front Panel Assembly	C, D, H, I, M and S models through 3/31/15; P models through 9/30/14; L models through 1/28/15; ** control suffixes; Stainless steel
	44116502	Front Panel Assembly	D, H, I, M and S models starting 4/1/15; ** control suffixes; Stainless steel
	70329615B	Front Panel	I models; Coin; Black
	70329616B	Front Panel	I models; Card; Black
	44116601*	Front Panel Assembly	H, M, and S models; P models through 9/30/14; L models through 1/28/15; BL, BY, LY, NR and ZR control suffixes
	44116701P	Front Panel Assembly	H, M, and S models through 3/31/15; P models through 9/30/14; L models through 1/28/15; BL, BY, LY, NR and ZR control suffixes; Stainless steel
	44116702	Front Panel Assembly	H, M, and S models; Models starting 4/1/15; BL, BY and LY control suffixes; Stainless steel
	70521401DG	Front Panel	P models starting 10/1/14; L models starting 1/29/15; Coin; Dark gray
	70329616DG	Front Panel	P models starting 10/1/14; L models starting 1/29/15; Card and central pay; Dark gray
	70329613DG	Front Panel	Non-CE P models starting 10/1/14; Non-CE L models starting 1/29/15; OPL; Dark gray
	70521301DG	Front Panel	CE P models starting 10/1/14; CE L models starting 1/29/15; OPL; Dark gray
	44116801*P	Front Panel Assembly	Non-CE A, C, D, H, I, S, U and Y models; OPL
	70329613LG	Front Panel	Non-CE U models; OPL; Light gray
	44116901	Front Panel Assembly	Non-CE A, C, D, H, I, S, U and Y models; Models through 3/31/15; OPL; Stainless steel
	44116902	Front Panel Assembly	Non-CE D, H, I, S, U and Y models; Models starting 4/1/15; OPL; Stainless steel
	44117001*	Front Panel Assembly	CE C, D, H, S, U and Y models; OPL
	70329614LG	Front Panel	CE U models; OPL; Light gray
	44117101P	Front Panel Assembly	CE C, D, H, S, U and Y models; Models through 3/31/15; OPL; Stainless steel
	44117102	Front Panel Assembly	CE D, H, S, U and Y models; Models starting 4/1/15; OPL; Stainless steel
2	44108201	Label	C, D, H, I, M, S and U models
	44190901	Label	L and P models
	44128901	Fire Suppression System Label	G and K models
3	70173401P	Front Panel Seal	
4	M410892	Warning Label	

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

\*\* NOTE: 3B, 3K, 3L, 3V, 3W, 3X, BB, BC, BW, BX, DV, DX, LC, LK, LL, LX, NC, NX, SD, SX, ZC and ZX

# False Fronts

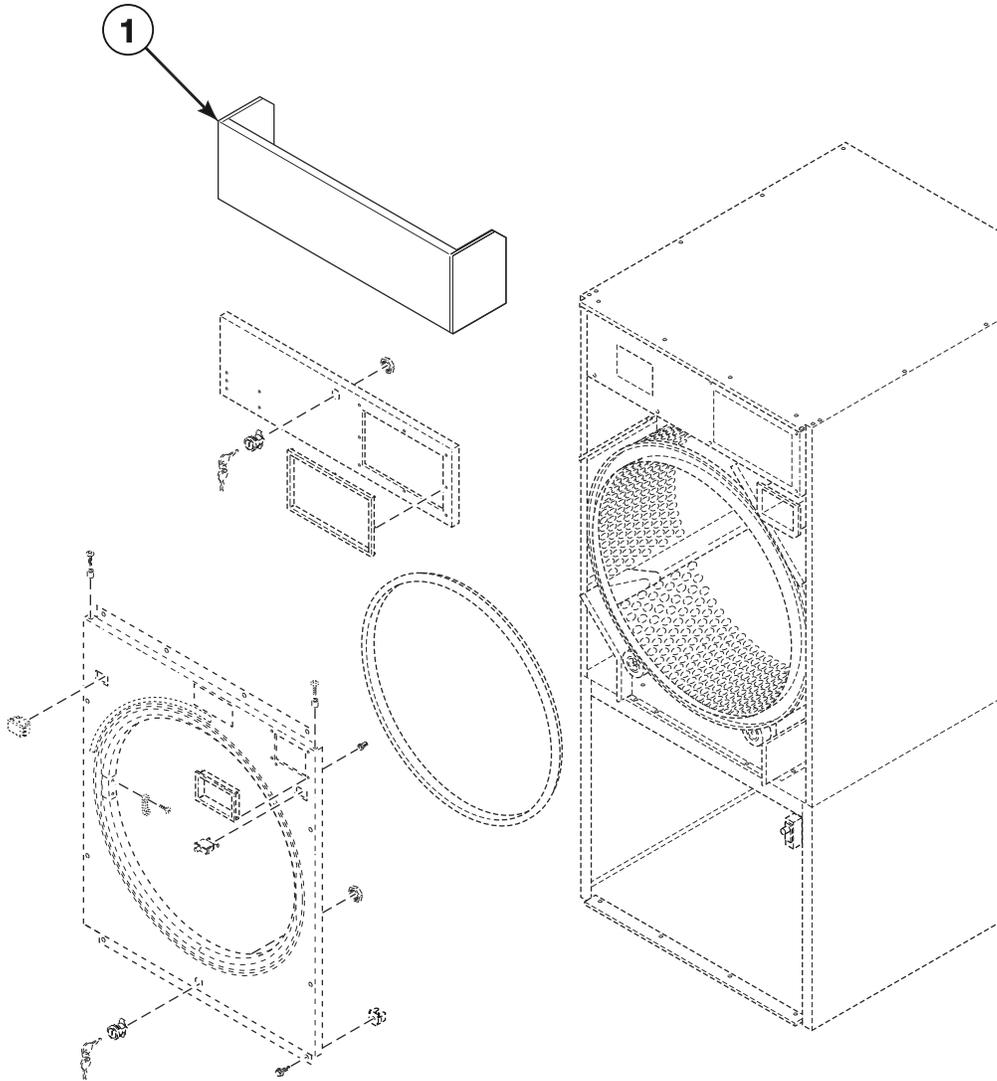


TMB3315PB\_70409501

# False Fronts

REF	PART NO.	DESCRIPTION	COMMENTS
1	70021103DG	False Front	P models; Models starting 10/1/14; 72 inches; Dark gray
	70021101*P	False Front	P models through 9/30/14; All other models except D, I and P models; 72 inches
	70021102P	False Front Assembly	P models through 9/30/14; All other models through 3/31/15; 72 inches; Stainless steel
	70021104	False Front	Models starting 4/1/15; 72 inches; Stainless steel
	70021103LG	False Front	U models; 72 inches; Light gray
	70021103B	False Front	D and I models; 72 inches
	70024003DG	False Front	P models; Models starting 10/1/14; 76 inches; Dark gray
	70024001*P	False Front Assembly	P models through 9/30/14; All other models except D, I and P models; 76 inches
	70024002P	False Front Assembly	P models through 9/30/14; All other models through 3/31/15; 76 inches; Stainless steel
	70024004	False Front	Models starting 4/1/15; 76 inches; Stainless steel
	70024003LG	False Front	U models; 76 inches; Light gray
	70024003B	False Front	D and I models; 76 inches

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

# Cabinet Front Components

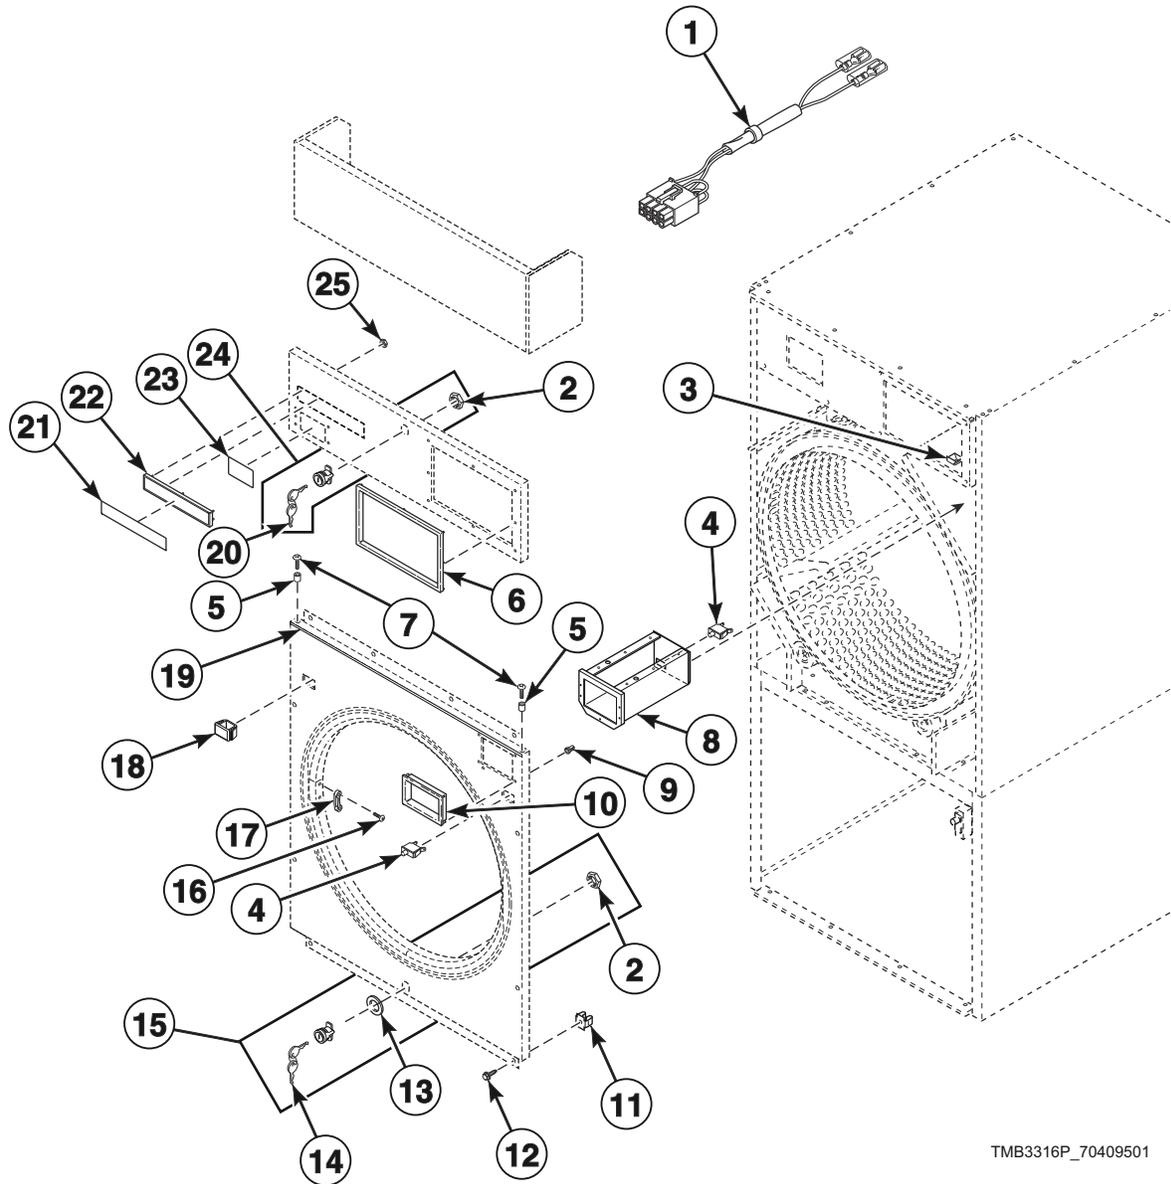


TMB3316P\_70409501

# Cabinet Front Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70364104P	Coin Vault Switch Harness	
2	44088801	Nut	
3	70296401	Coin Chute Assembly	
4	70413301	Pushbutton Switch	
5	56079	Panel Locator	9 required
6	44016301	Control Trim	H models; Gray
	44016401	Control Trim	A, L, M, P, S and Y models; U models through 8/17/14; Black
7	39733	Screw	
8	70180101	Coin Vault Assembly	
	F160673	Coin Box	Optional equipment; Includes lock and key
9	M400972	Shadow Box Clip	
10	70117502	Coin Vault Trim	Black
	70117501	Coin Vault Trim	Gray
11	70030501	Expansion Clip	8 required; Use with item 9, between front panel and cabinet
12	430497	Screw	
13	70342401	Lock Shim	
14	70155602	Key	RL002
15	44089302P	Lock, Key and Nut Kit	RL002
16	44166601	Pop Rivet	
17	M401223	Door Latch	
18	44057801W	Switch Hole Plug	White
	44057801Q	Switch Hole Plug	Bisque
	44057801B	Switch Hole Plug	Black
	44057801G	Switch Hole Plug	U models; L and P models starting 10/24/14; Gray
19	70399401	Access Panel Trim	G and K models
20	70155601	Key	RL001
21	70115601	Nameplate Overlay	S models
	70460801	Nameplate Overlay	U models; Models through 8/17/14
	F8443102	Nameplate	U models; Models starting 8/18/14
	44046801	Nameplate	D and I models; Models through 7/9/12
	B12389801	Nameplate	D and I models; Models starting 7/10/12
	44062901	Nameplate	C models
	70411401	Nameplate Overlay	G models; Coin
	70410201	Nameplate Overlay	G models; OPL
	44144401	Nameplate Overlay	K models; Coin
	44130201	Nameplate Overlay	K models; OPL
	70243901	Nameplate	L models; Models through 3/27/15
	70522001	Nameplate	L models; Models starting 3/28/15
	70380701	Nameplate Overlay	P models; Models through 9/30/14
	70509601	Nameplate	P models; models starting 10/1/14
44104501	Nameplate Overlay	Y models	
22	70117401	Nameplate Bezel	L, P and S models
23	44129903	Nameplate	C models
24	44089301P	Lock, Key and Nut Kit	RL001
25	M400977	Nut	P and S models 6 required; U models starting 8/18/14 5 required

# Emergency Stop Button for CE Models

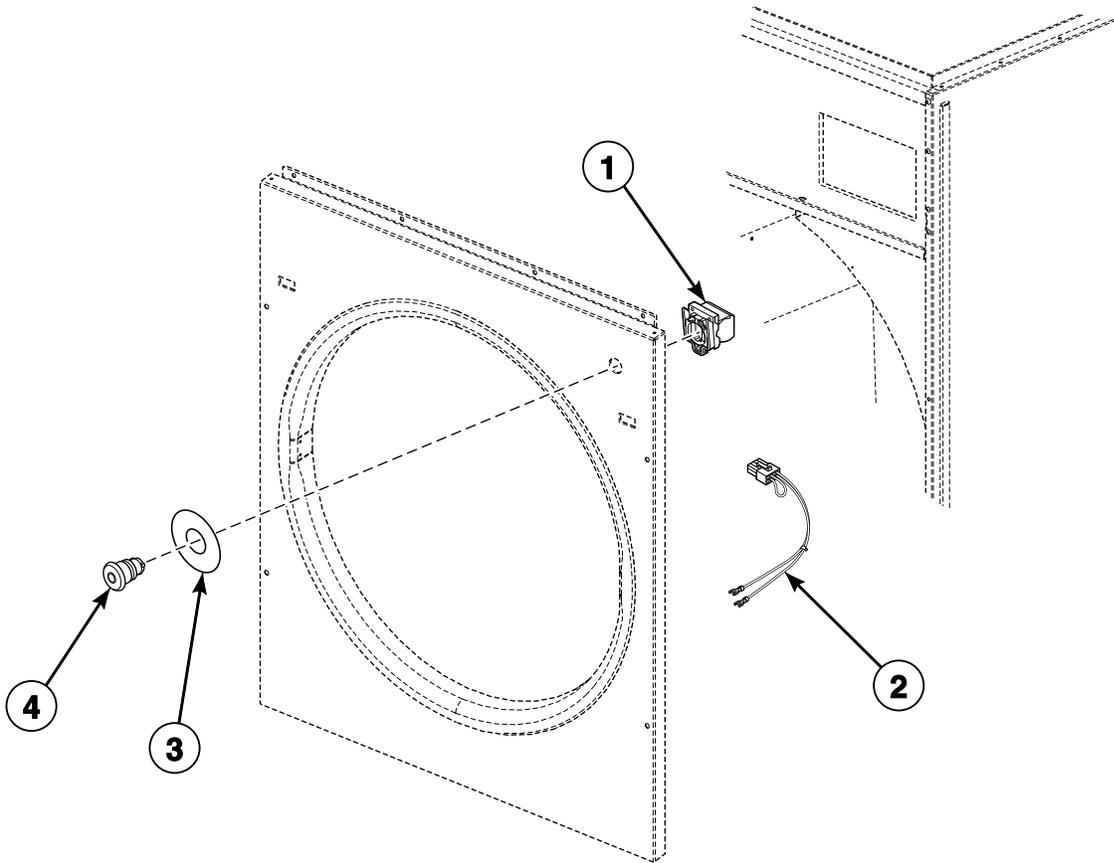


TMB2375P\_70409501

## Emergency Stop Button for CE Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	44018701	Contact Block	Includes base; Models through 9/30/07
	F200233401P	Contact Block Switch	Models starting 10/1/07 through 8/17/14; Includes mounting base
	F8069501	Contact Switch	Models starting 8/18/14
	F8538101	Contact Base	Models starting 8/18/14
2	70364105P	Emergency Stop Contact Harness	1 contact
	70364106P	Emergency Stop Harness	2 contacts
3	M412235	Emergency Stop Label	
4	44018801	Pushbutton	Models through 9/30/07
	F200233500	Emergency Stop Pushbutton	Models starting 10/1/07

# Lower Cabinet Components

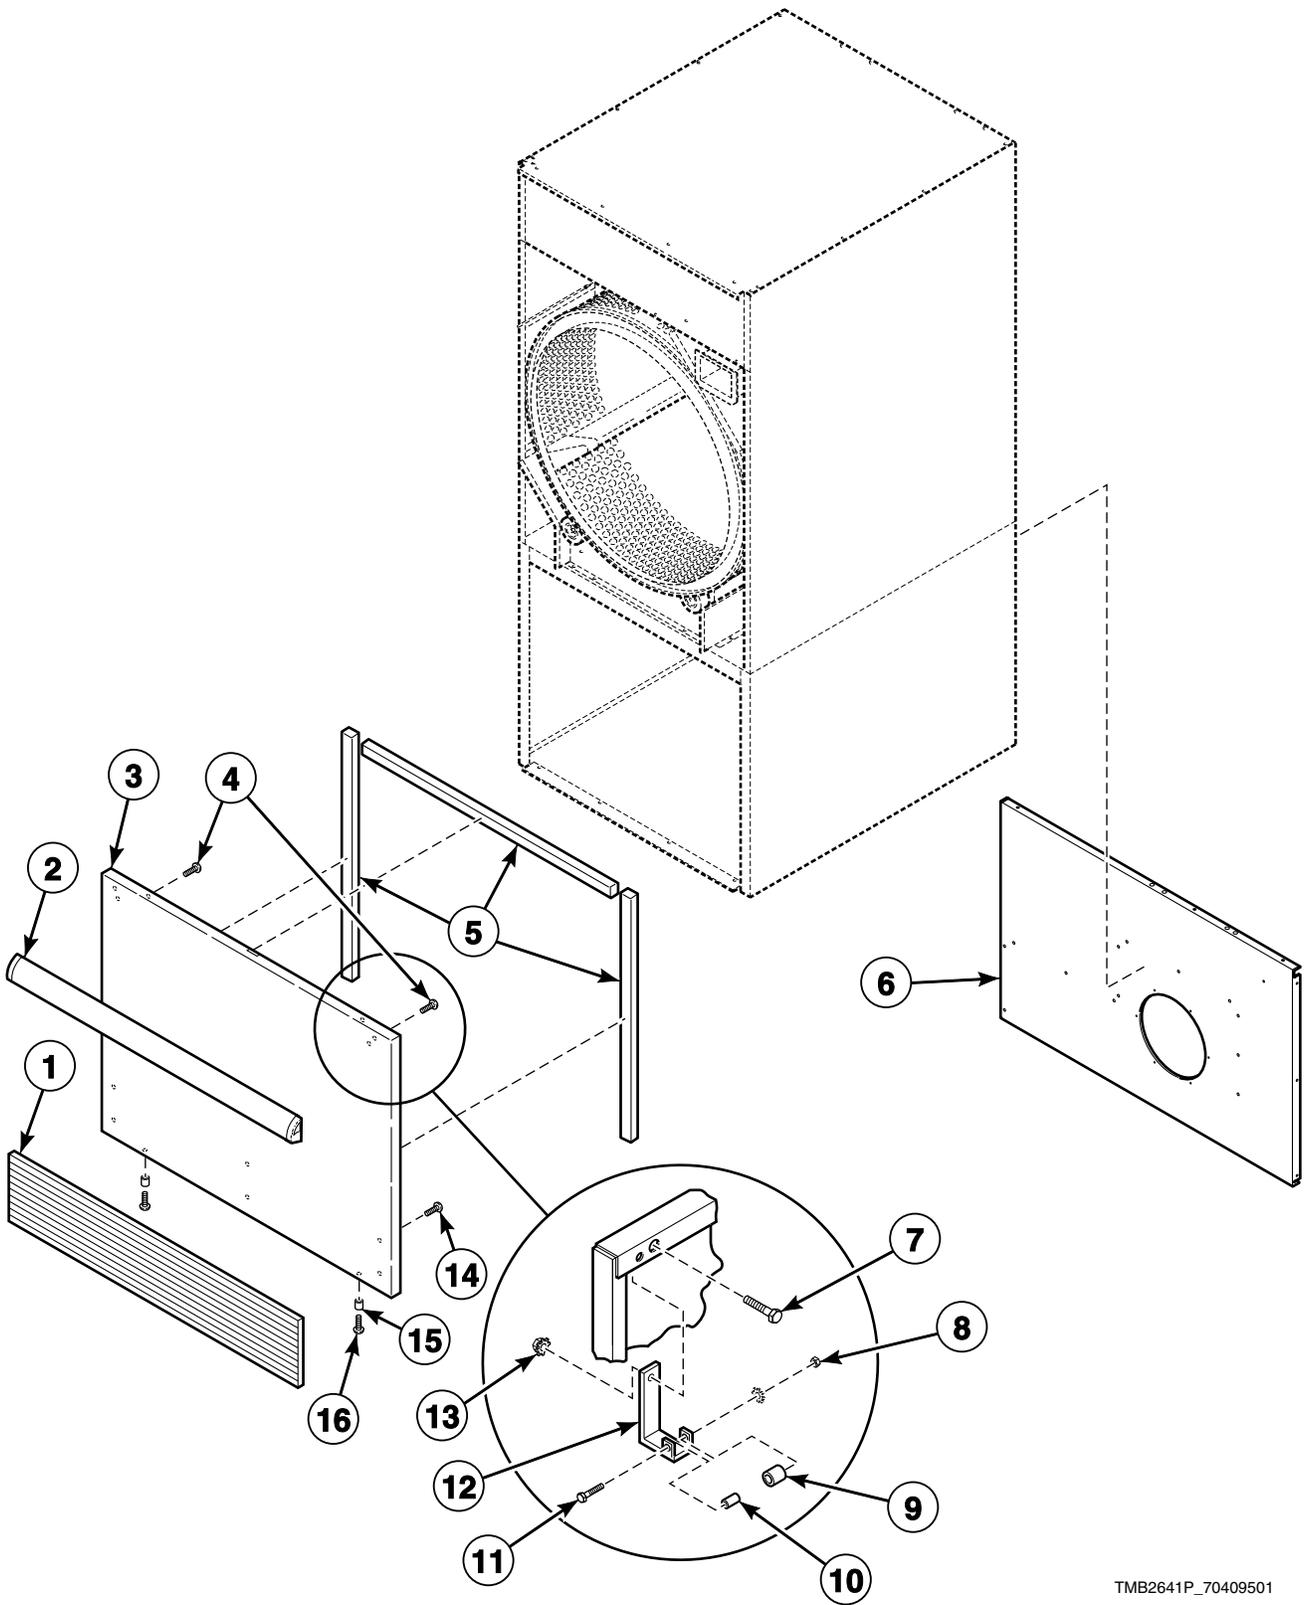


TMB2641P\_70409501

## Lower Cabinet Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70117604	Kickplate	H and U models; Dark gray
	70117603	Kickplate	All models except H; Black
2	70154403	Handle and Caps Assembly	A, C, D, I, M and S models; P models through 9/30/14; U models through 8/17/14; Black
	70407208	Handle Bumper	P models; Models starting 10/1/14
	70154404	Handle and Caps Assembly	H and U models; Dark gray
	70407201	Handle Bumper	G and K models
3	70176705*	Lint Panel Assembly	H models; Does not include handle
	70176706	Lint Panel Assembly	H models; Models through 3/31/15; Stainless steel; Does not include handle
	70176707*	Lint Panel Assembly	H models; Includes handle
	70176708	Lint Panel Assembly	H models; Models through 3/31/15; Stainless steel; Includes handle
	70115004DG	Lint Panel	L models starting 1/29/14; P models starting 10/1/14; No kickplate; Dark gray
	70115005	Lint Panel	L models starting 1/29/15 through 3/31/15; P models starting 10/1/14 through 3/31/15; Stainless steel; No kickplate
	70115007	Lint Panel	L and P models; Models starting 4/1/15; Stainless steel; No kickplate
	70176701*	Lint Panel Assembly	L models through 1/28/15; P models through 9/30/14; All models except H, L and P; Does not include handle
	70176702P	Lint Panel Assembly	L models through 1/28/15; P models through 9/30/14; All models through 3/31/15 except H, L and P; Stainless steel; Does not include handle
	70176703*	Lint Panel Assembly	L models through 1/28/15; P models through 9/30/14; All models except H, L and P; Includes handle
	70115003B	Lint Panel	I models; Black
	70115003LG	Lint Panel	U models; Light gray
	70176704	Lint Panel Assembly	L models through 1/28/15; P models through 9/30/14; All models through 3/31/15 except H, L and P; Stainless steel; Includes handle
	70115006	Lint Panel	All models except G, H, K, L and P; Models starting 4/1/15; Stainless steel
	4	430757	Screw
5	70289101P	Lint Panel Gasket	Sold per foot
6	70249901	Rear Lint Panel	
7	70132301	Screw	Attaching roller catch
8	23951	Nut	
9	70297601	Roller Catch Wheel	
10	70030201	Roller Catch Spacer	
11	70072801	Screw	
12	70030301	Roller Catch Arm	
13	51236	Nut	Attaching roller catch
14	70126301	Pop Rivet	For attaching kickplate; Black; 6 required
	70126401	Pop Rivet	For attaching kickplate; Gray; 6 required
15	56079	Panel Locator	
16	39733	Screw	

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

# Cylinder Components

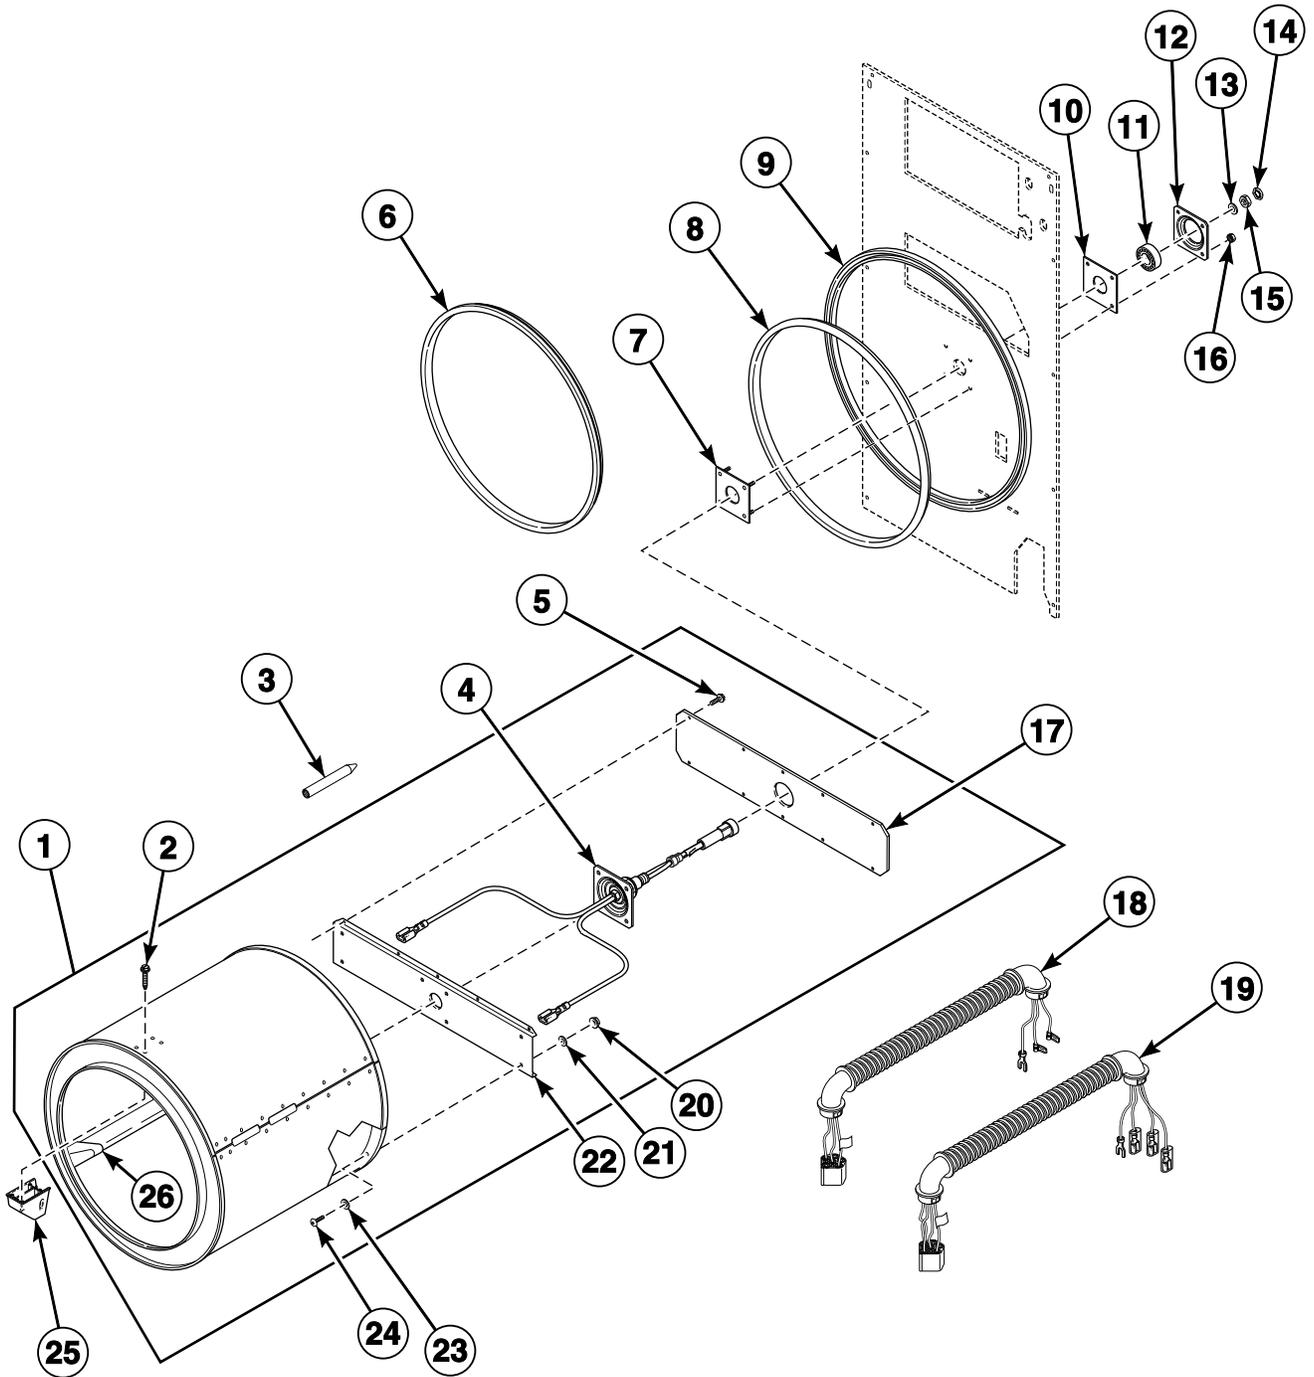


TMB3162P\_70409501

# Cylinder Components

REF	PART NO.	DESCRIPTION	COMMENTS
	511637P	Adhesive	For item 8
	70343101P	Drywall Screw Magnet Kit	
<b>1</b>	70372603	Cylinder Assembly	G and K models; Non-moisture sensing
	70372601P	Cylinder Assembly	All other models; Galvanized; Non-moisture sensing
	70372602P	Cylinder Assembly	All other models; Stainless steel; Non-moisture sensing
	70435203	Cylinder and Trunnion Assembly	G and K models; Moisture sensing
	70435201	Cylinder and Trunnion Assembly	All other models; Galvanized; Moisture sensing
	70435202	Cylinder and Trunnion Assembly	All other models; Stainless steel; Moisture sensing
<b>2</b>	62588	Screw	12 required
<b>3</b>	263P4	Cylinder Guide Tool	
<b>4</b>	M4960P3	Trunnion and Seal Kit	Includes item 8; Also order 511637P Adhesive; Non-moisture sensing
	70454601	Trunnion and Wire Assembly	Moisture sensing; Includes 70244702 Trunnion Assembly
<b>5</b>	430497	Screw	10 required
<b>6</b>	70066003	Center Cylinder Seal Assembly	
<b>7</b>	430352	Cylinder Bearing Stud Plate Assembly	
<b>8</b>	70013701P	Rear Cylinder Seal	Use with 511637P Adhesive
<b>9</b>	70506402	Rear Cylinder Seal Support	
<b>10</b>	70355001	Rear Bearing Shim	
<b>11</b>	70448701	Support Bearing	
<b>12</b>	70013901	Rear Cylinder Bearing Housing	
<b>13</b>	M400991	Washer	
<b>14</b>	M400034	Nut	
<b>15</b>	M400022	Nut	
<b>16</b>	M412986	Nut	4 required
<b>17</b>	70257201	Rear Cylinder Channel Plate	
<b>18</b>	70401001	Cylinder Motor Harness Assembly	Models through 2/28/10; 1 Phase; 3 Phase electric with 240 Volt and below
	70439701	Cylinder Motor Harness Assembly	Models starting 3/1/10; 1 Phase; 3 Phase electric with 240 Volt and below
<b>19</b>	70401101	Cylinder Motor Harness Assembly	Models through 2/28/10; 3 Phase except electric with 240 Volt and below
	70440101	Cylinder Motor Harness Assembly	Models starting 3/1/10; 3 Phase except electric with 240 Volt and below
	70465801	Cylinder Motor Harness Assembly	Reversing
<b>20</b>	44087201	Nut	8 required
<b>21</b>	M400080	Washer	4 required; Models through Serial No. 0708006765
	70411301	Washer	Models starting Serial No. 0708006766
<b>22</b>	70257101	Rear Cylinder Channel	Non-moisture sensing
	70257102	Rear Cylinder Channel	Moisture sensing
<b>23</b>	70411301	Washer	Models starting Serial No. 0708006766
<b>24</b>	70391101	Screw	8 required
<b>25</b>	70070101	End Cap	Non-moisture sensing
	70070102	End Cap	Moisture sensing
<b>26</b>	70433001	Cylinder Rib Assembly	Moisture sensing

# Cabinet Components

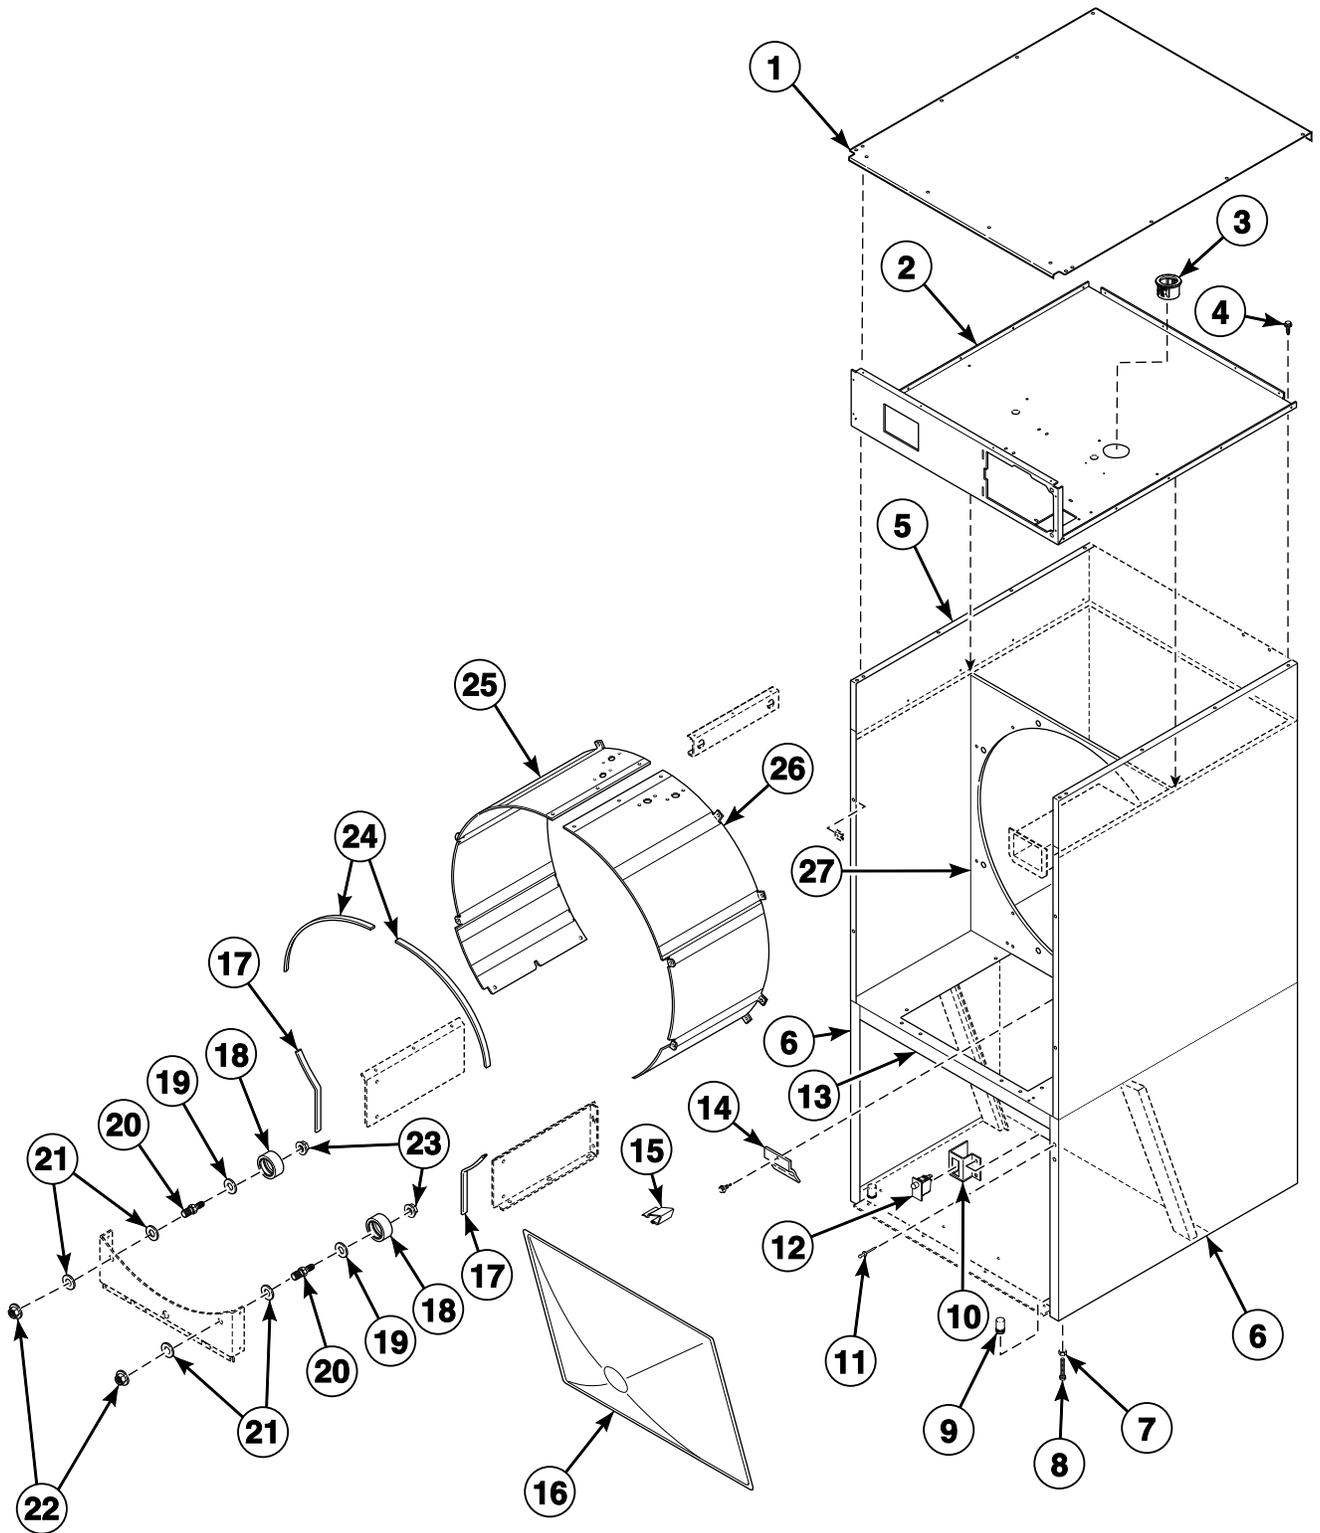

TMB3292P\_70409501


# Cabinet Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4379P4	Tumbler Dolly Kit	
	70364104P	Coin Vault Switch Harness	
	298P4P	Spray Paint	White
	297P4	Spray Paint	Almond
	286P4	Spray Paint	Blue
	122P4P	Porcelain Touch-Up Paint	White
	215P4P	Porcelain Touch-Up Paint	Almond
	370P4P	Porcelain Touch-Up Paint	Bisque
<b>1</b>	70018601	Flat Top	
<b>2</b>	70252801P	Top Pan	
<b>3</b>	70346501	Bushing	
<b>4</b>	430497	Screw	
<b>5</b>	70021502DG	Side Panel	P models; Models starting 10/1/14; Upper; Dark gray
	70021501*P	Side Panel Assembly	P models through 9/30/14; All other models; Upper
	70021502LG	Side Panel	U models; Upper; Light gray
<b>6</b>	70253801DG	Side Panel	P models; Models starting 10/1/14; Lower; Light gray
	70253801*P	Side Panel	P models through 9/30/14; All other models; Lower
	70253801LG	Side Panel	U models; Lower; Light gray
<b>7</b>	21899	Nut	
<b>8</b>	34319	Leveling Leg	
<b>9</b>	70063201	Hole Plug	
<b>10</b>	70277301	Lint Panel Switch Bracket	
<b>11</b>	70058501	Pop Rivet	16 required; Upper side panel
<b>12</b>	70413401	Switch Assembly	
<b>13</b>	70252201	Center Pan	
<b>14</b>	70054501	Lint Screen Clip	
<b>15</b>	35865	Hold-Down Clip	
<b>16</b>	70325601	Lint Screen	
<b>17</b>	70015711	Sheet Metal Edge Gasket	Lower
<b>18</b>	70298701P	Roller Bearing Assembly	
<b>19</b>	70443601	Roller Seal	Models starting 3/1/10
<b>20</b>	70249501	Roller Shaft	
<b>21</b>	70261401	Washer	
<b>22</b>	M404993	Nut	
<b>23</b>	430576	Nut	
<b>24</b>	70015712	Sheet Metal Edge Gasket	Upper
<b>25</b>	70427402	Cylinder Shroud	Left
<b>26</b>	70427401	Cylinder Shroud	Right
<b>27</b>	70252501	Center Partition	

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

# Fire Suppression System Components

C, D, G, H, I, K, L, M, P, S, and U Models

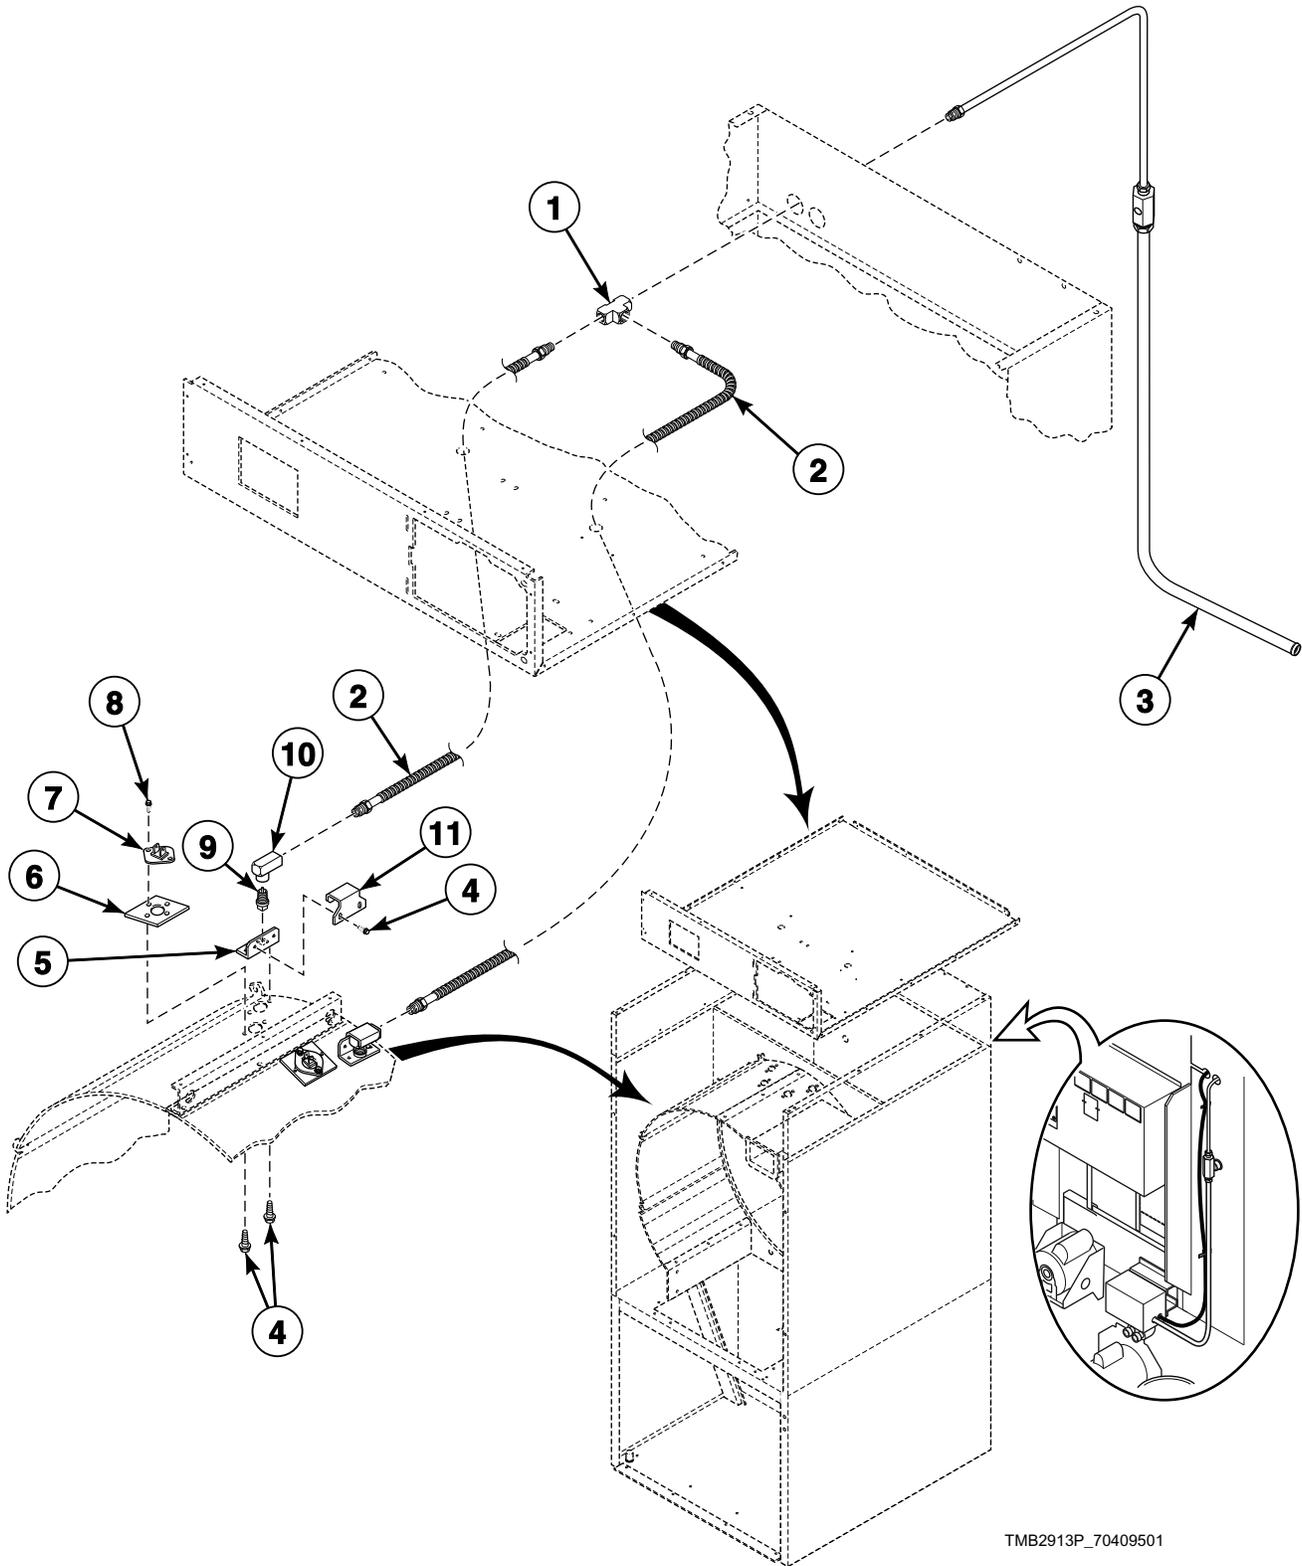


TMB2913P\_70409501

## Fire Suppression System Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70427901	Union Tee	
2	70427701	Spray Nozzle Hose	2 required
3	70427601	Tube Assembly	
4	430497	Screw	12 required
5	70424201	Nozzle Bracket	2 required
6	70424401	Thermistor Plate	2 required
7	44064701	Thermistor	2 required
8	51780	Screw	4 required
9	70427801	Spray Nozzle	2 required
10	70428101	Elbow	2 required
11	70428601	Nozzle Bracket	2 required

# Fire Suppression System Control Box

C, D, G, H, I, K, L, M, P, S, and U Models

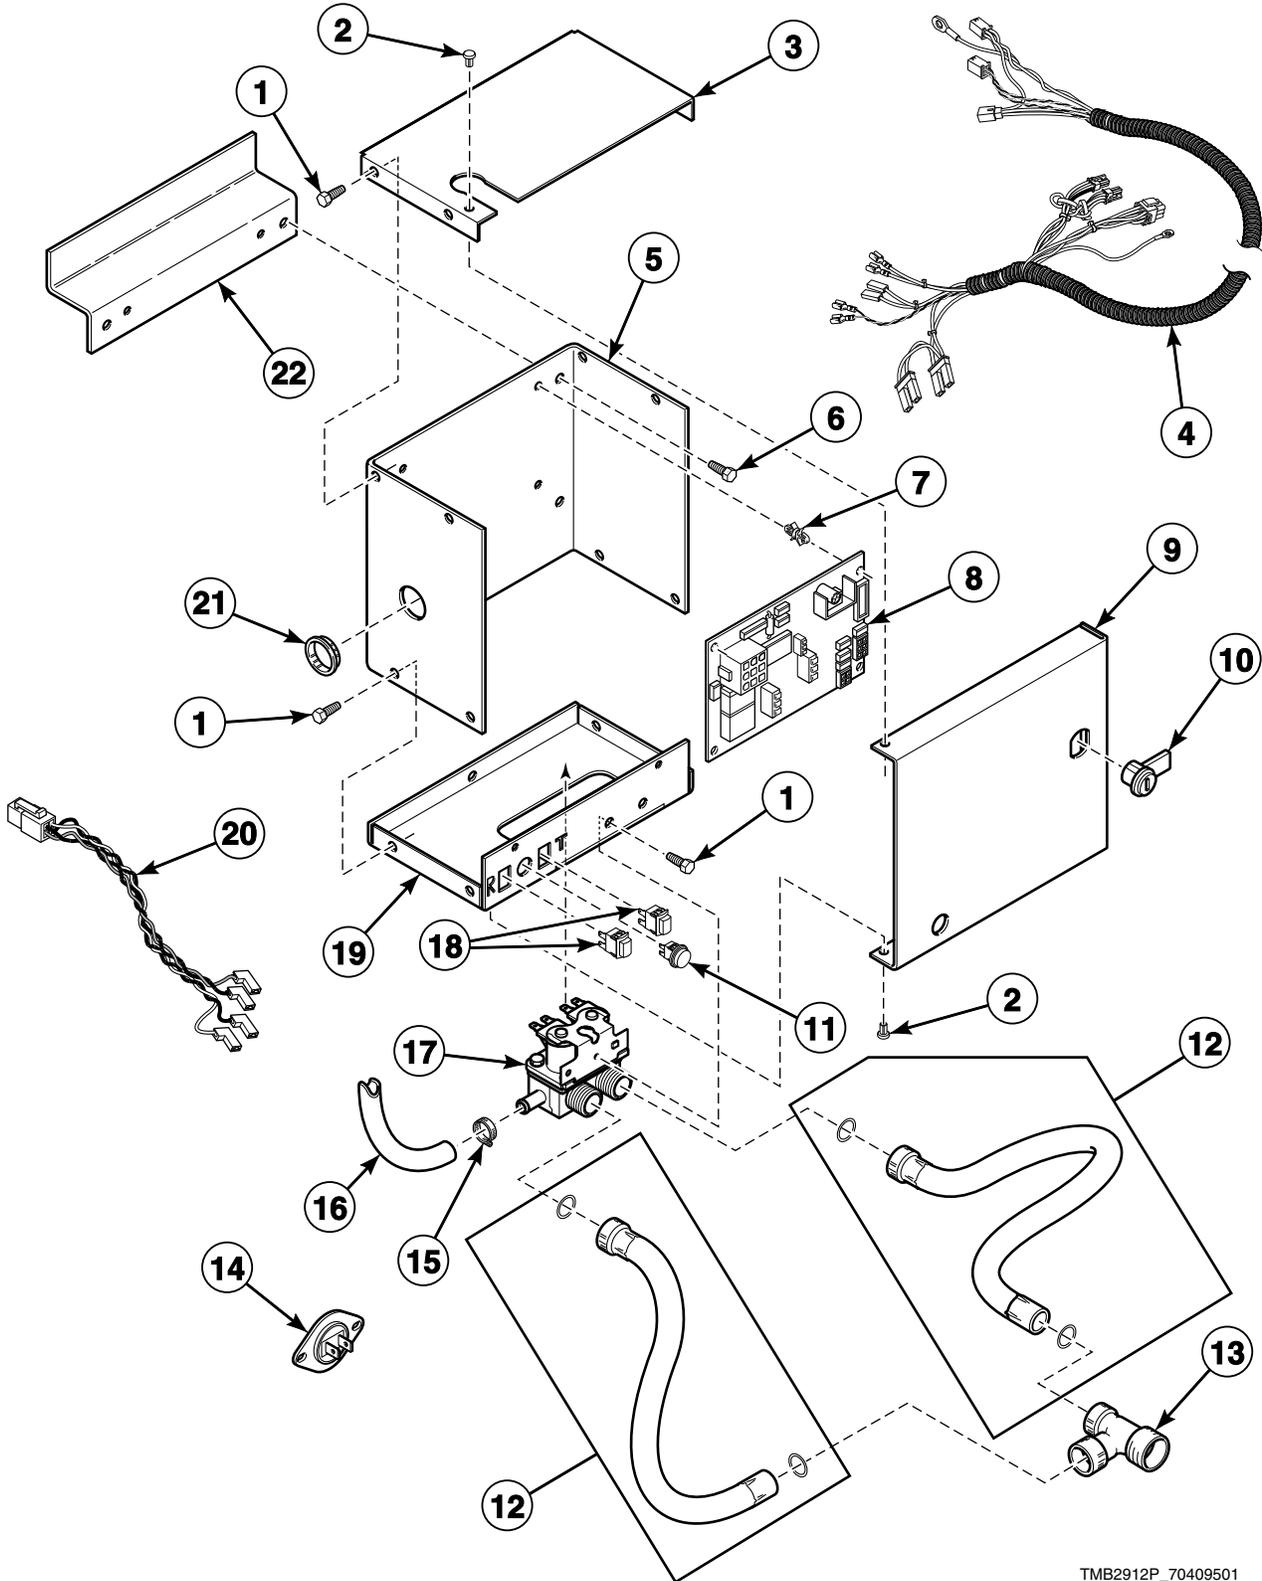


TMB2912P\_70409501

## Fire Suppression System Control Box

REF	PART NO.	DESCRIPTION	COMMENTS
1	430497	Screw	
2	M400713	Drive Rivet	
3	44065401	Control Box Top	
4	70426501P	Control Harness	
5	44065101	Control Box Housing	
6	51780	Screw	
7	501523	Circuit Board Support	4 required
8	44063801P	Control	
9	44065201	Control Box Cover	
10	44089301P	Lock, Key and Nut Kit	RL001 key code; Optional if same key is to be used for control lock
11	801432	Light	
12	F200116	Water Hose	Non-CE and non-Australian models; 2 required
	38349P	Fill Hose Kit	CE and Australian models
13	44069101	Hose Fitting	Non-CE and non-Australian models
14	44064701	Thermistor	2 required
15	36801	Hose Clamp	
16	44073304	Hose	14 inches; Outlet hose
17	36958P	Mixing Valve	
18	801434W	Push-to-Start Switch	2 required
19	44065301	Control Box Base	
20	70426601P	Sensor Harness	
21	70178701	Snap Bushing	
22	44065901	Bracket	

# Drive Motor Components for Nonreversing Models

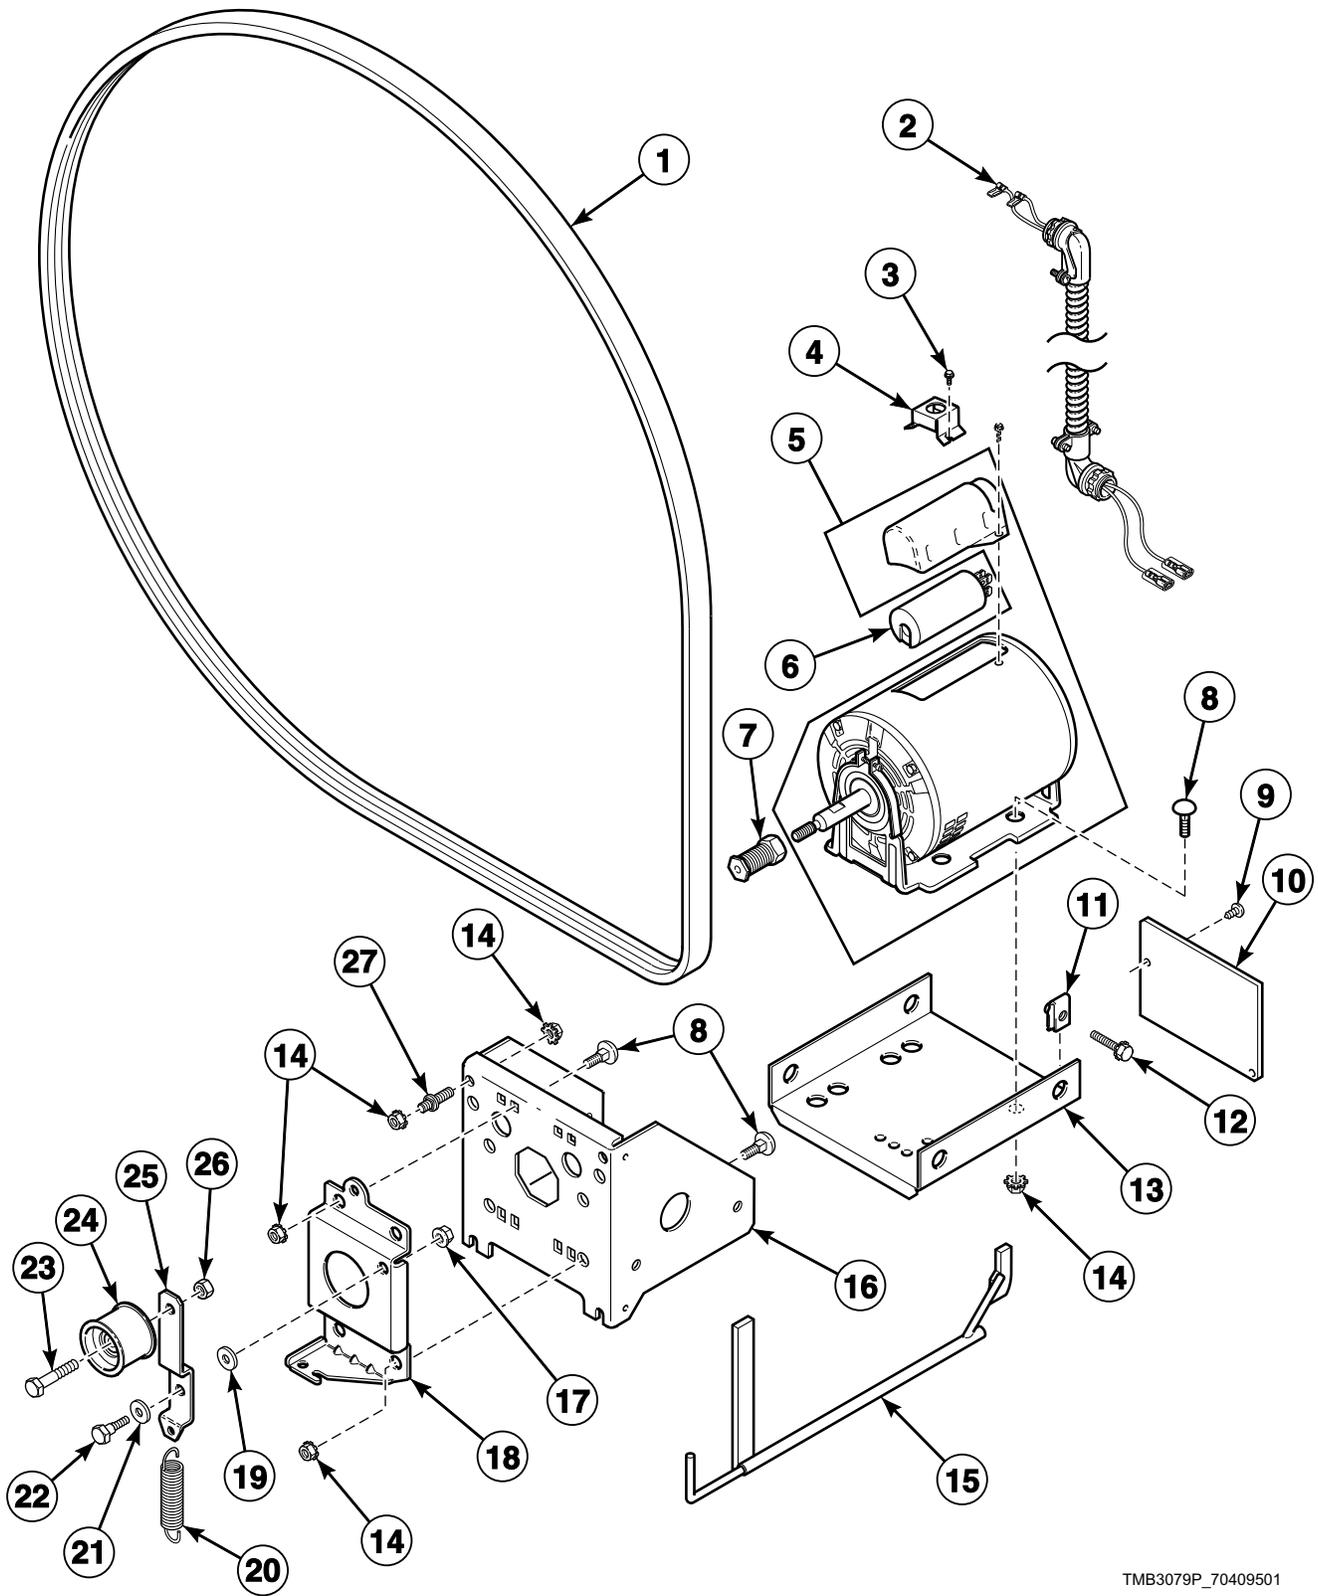


TMB3079P\_70409501

## Drive Motor Components for Nonreversing Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70276201P	Belt	105.5 inches
2	70401001	Cylinder Motor Harness Assembly	Models through 2/28/10; 1 Phase; 3 Phase electric with 240 Volt and below
	70401101	Cylinder Motor Harness Assembly	Models through 2/28/10; 3 Phase except electric with 240 Volt and below
	70439701	Cylinder Motor Harness Assembly	Models starting 3/1/10; 1 Phase; 3 Phase electric with 240 Volt and below
	70440101	Cylinder Motor Harness Assembly	Models starting 3/1/10; 3 Phase except electric with 240 Volt and below
3	23222	Screw	2 required
4	70321701	Motor Conduit Mounting Bracket	
5	70337801P	Drive Motor	100 or 100-200 Volt/50 Hertz/1 Phase and 100 or 100-200 or 120 or 208-240 Volt/60 Hertz/1 Phase; Electric, 200 volt/50 Hertz/1 Phase, 200 or 208 or 240 Volt/60 Hertz/1 Phase, 200 Volt/50 Hertz/3 Phase, 200-208 or 240 Volt/60 Hertz/3 Phase
	70337901P	Drive Motor Kit	120 or 208-240 Volt/60 Hertz/1 Phase; Low Amp
	70338001P	Drive Motor Kit	230 or 230-240 Volt/50 Hertz/1 Phase; Electric, 230 or 230-240 Volt/50 Hertz/3 Phase
	70338101P	Drive Motor	200 or 230, 230-240, 380, 400, 400-415 Volt/50 Hertz/3 Phase; 200-208 or 240, 380, 440, 460-480 Volt/60 Hertz/3 Phase
6	M410296	Motor Capacitor	Start; For 70337801P Drive Motor and 70338001P Drive Motor Kit
	70211502	Motor Capacitor	Start; For 70337901 Drive Motor on 20 Amp
	70211401	Motor Capacitor	Run; For 70337901 Drive Motor on 20 Amp
7	70284201	Motor Pulley	60 Hertz
	70284203	Motor Pulley	50 Hertz
8	70062401	Bolt	
9	430497	Screw	
10	70202501	Drive Access Cover	
11	27222	Nut	4 required
12	M412985	Screw	
13	70127301	Motor Mount Bracket	
14	M412986	Nut	
15	M4853P3	Belt Tension Tool Kit	
16	70261701	Motor Channel	
17	29796	Nut	
18	70443301	Idler Bracket	
19	70270301	Washer	
20	70045301	Drum Idler Spring	With silencer
21	70265901	Washer	
22	M400056	Screw	
23	430648	Screw	
24	70050401P	Idler Wheel Assembly	
25	70259901	Cylinder Idler Arm	
26	56156	Nut	
27	70334701	Double Ended Stud	

# Drive Motor Components for Reversing Models

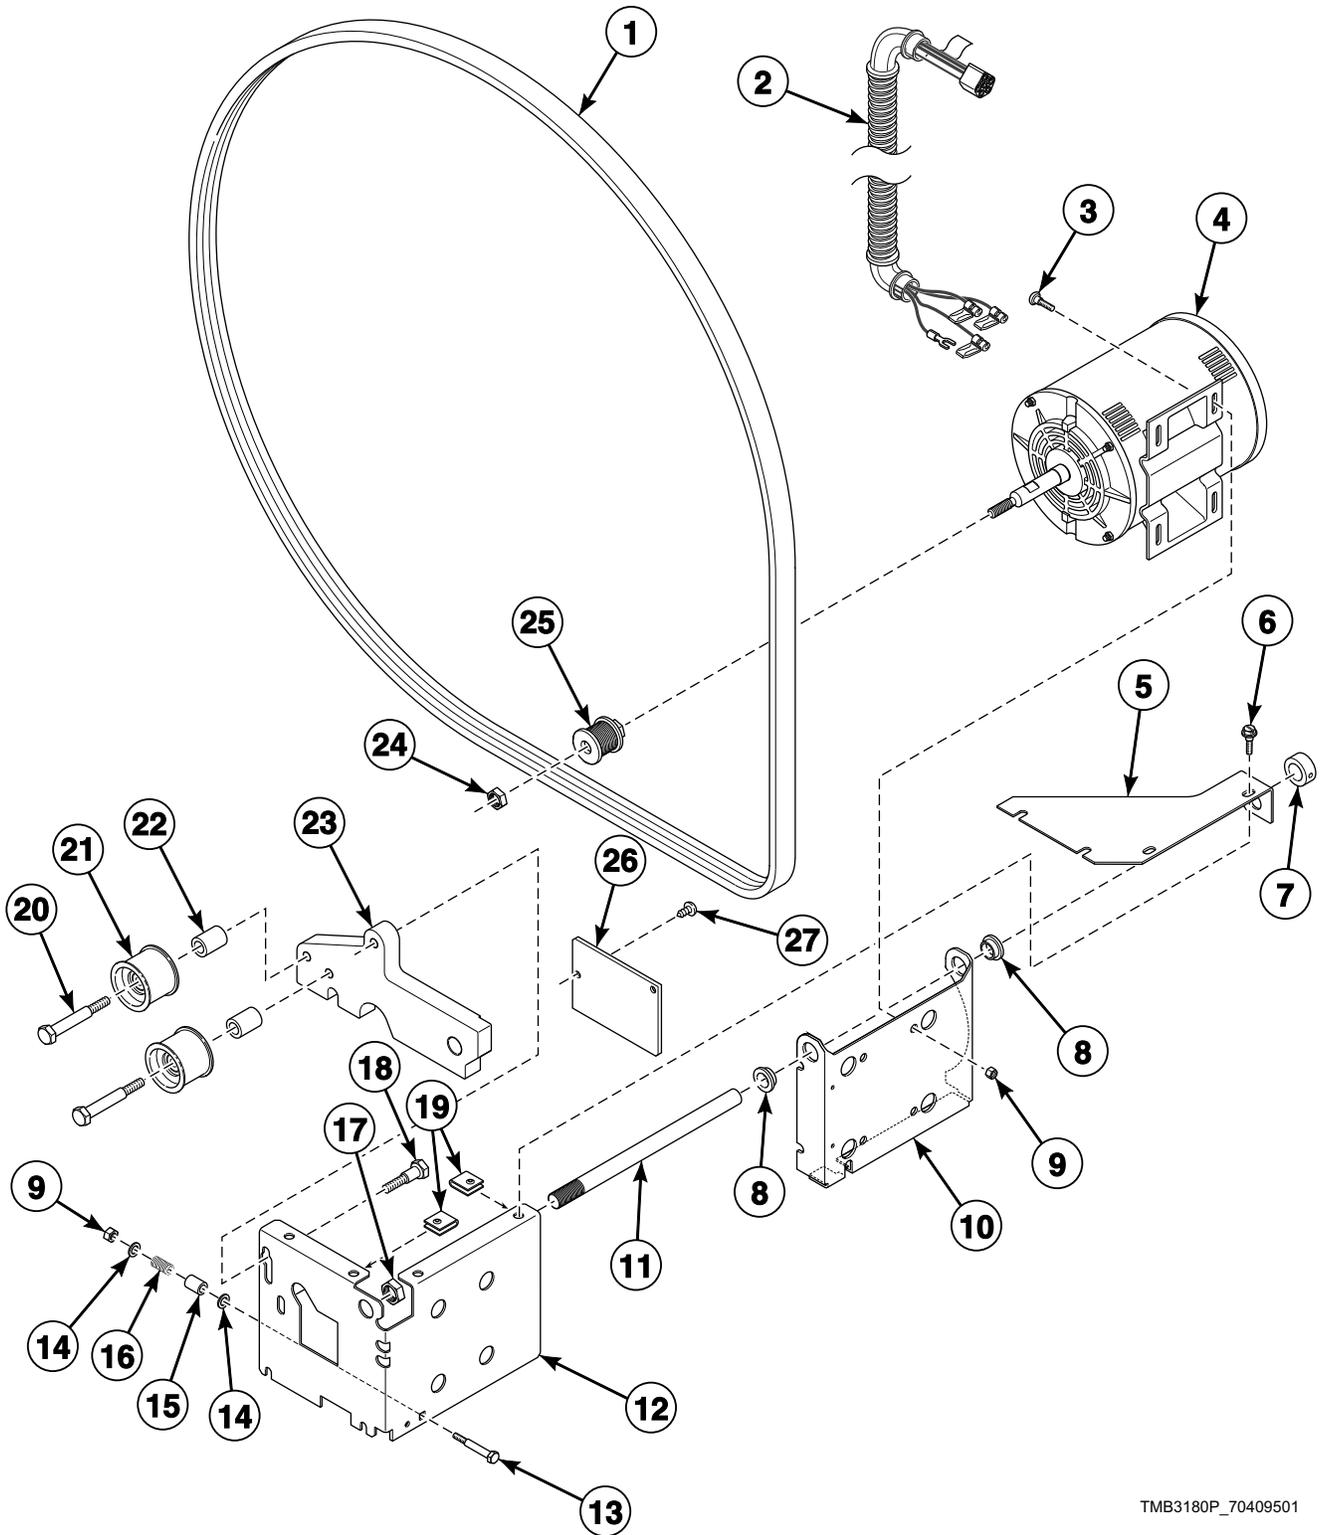


TMB3180P\_70409501

## Drive Motor Components for Reversing Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70276201P	Belt	
2	70465801	Cylinder Motor Harness Assembly	
3	70062401	Bolt	4 required
4	70459001P	Drive Motor	200-208 or 240, 440, 460-480 Volt/60 Hertz/3 Phase and 380, 400-415 Volt/50 Hertz/3 Phase
5	70464201	Motor Plate Cover	2 required
6	M400057	Screw	8 required
7	70467001	Shaft Collar	
8	44239501	Bushing	2 required
9	M412986	Nut	5 required
10	44261401	Drive Motor Plate	
11	70464401	Support Rod	
12	70464101	Motor Bracket	
13	70467501	Bolt	
14	M405535	Washer	2 required
15	70471701	Spacer	
16	70467601	Compression Spring	
17	F431025	Nut	
18	M400043	Screw	4 required
19	27222	Nut	4 required
20	F8368701	Screw	2 required
21	70050401P	Idler Wheel Assembly	2 required
22	70464601	Idler Spacer	2 required
23	70464501	Idler Holder	
24	70466601	Nut	
25	70457401	Motor Pulley	60 Hertz
26	70466001	Belt Access Cover	
27	430497	Screw	

# Blower Components

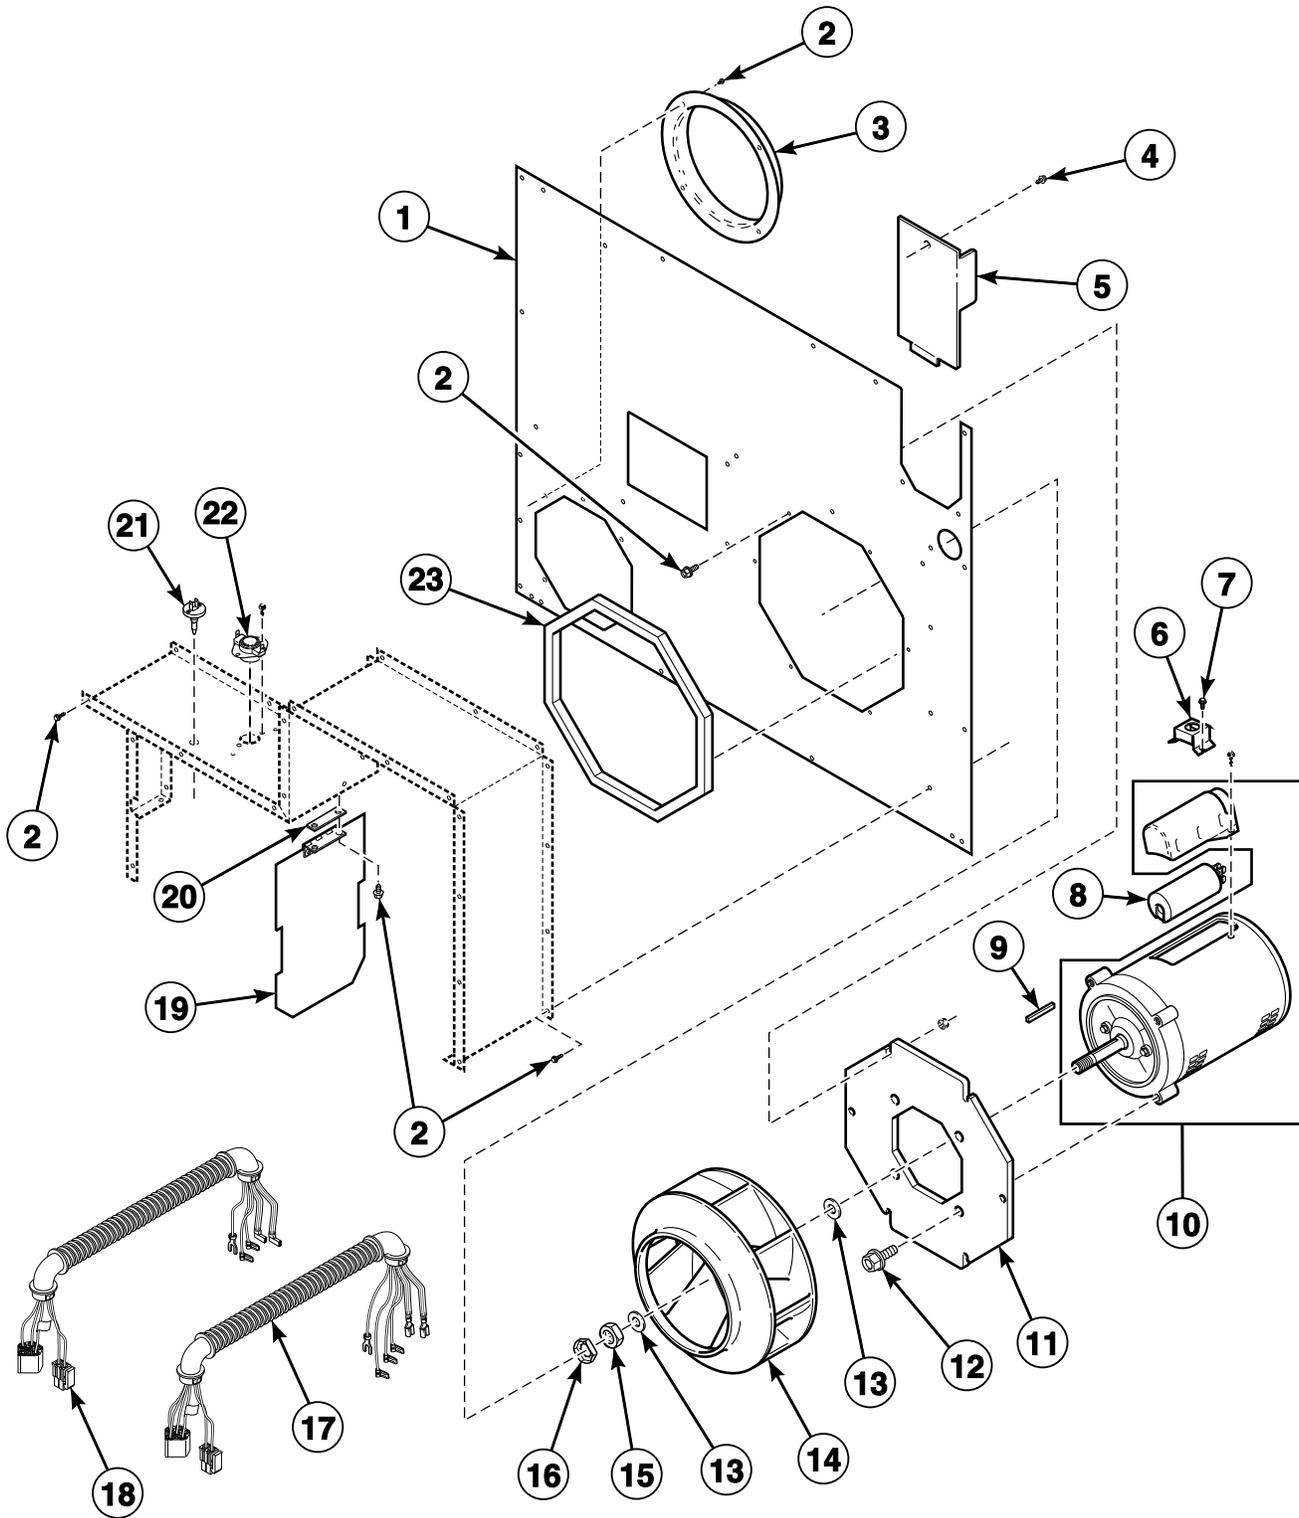


TMB2652P\_70409501

# Blower Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70290201	Lower Rear Panel	
2	430497	Screw	
3	70015601	Exhaust Thimble	Classic models; 8 inches
	70477901	Exhaust Adapter	Eco models; 6 inches
4	M411072	Screw	
5	70196301	Drive Access Cover	
6	70321701	Motor Conduit Mounting Bracket	
7	23222	Screw	2 required
8	70211501	Motor Capacitor	Start; For all blower motors except 70342601P Blower Motor
9	70144101	Key	
10	70337501P	Blower Motor	100 or 100-200 Volt/50 Hertz/1 Phase and 100 or 100-200 or 120 or 208-240 Volt/60 Hertz/1 Phase; Electric, 200 volt/50 Hertz/1 Phase, 200 or 208 or 240 Volt/60 Hertz/1 Phase, 200 Volt/50 Hertz/3 Phase, 200-208 or 240 Volt/60 Hertz/3 Phase
	70337601P	Blower Motor Kit	120 or 208-240 Volt/60 Hertz/1 Phase; Low Amp
	70337701P	Blower Motor Kit	230 or 230-240 Volt/50 Hertz/1 Phase; Electric, 230 or 230-240 Volt/50 Hertz/3 Phase
	70342601P	Blower Motor	200 or 230, 230-240, 380, 400, 400-415 Volt/50 Hertz/3 Phase; 200-208 or 240, 380, 440, 460-480 Volt/60 Hertz/3 Phase
11	70349601	Blower Motor Mounting Plate	
12	70126101	Screw	
13	M400991	Washer	
14	70359801P	Blower Assembly	
15	M400022	Nut	
16	M400034	Nut	
17	70401301	Fan Motor Harness Assembly	Models through 2/28/10; 3 Phase except electric with 240 Volt and below
	70440201	Fan Motor Harness Assembly	Models starting 3/1/10; 3 Phase except electric with 240 Volt and below
18	70401201	Fan Motor Harness Assembly	Models through 2/28/10; 1 Phase; 3 Phase electric with 240 Volt and below
	70439801	Fan Motor Harness Assembly	Models starting 3/1/10; 1 Phase; 3 Phase electric with 240 Volt and below
19	70209501	Damper and Hinge Exhaust Assembly	
20	N/A	Damper Spacer	
21	M414704	Thermistor	
22	M411945	Manual Reset Thermostat	Australian models
	M411307	Limit Thermostat	All other models
23	70392701P	Gasket	For blower housing opening

**N/A = Part no longer available**

# Moisture Sensing Components

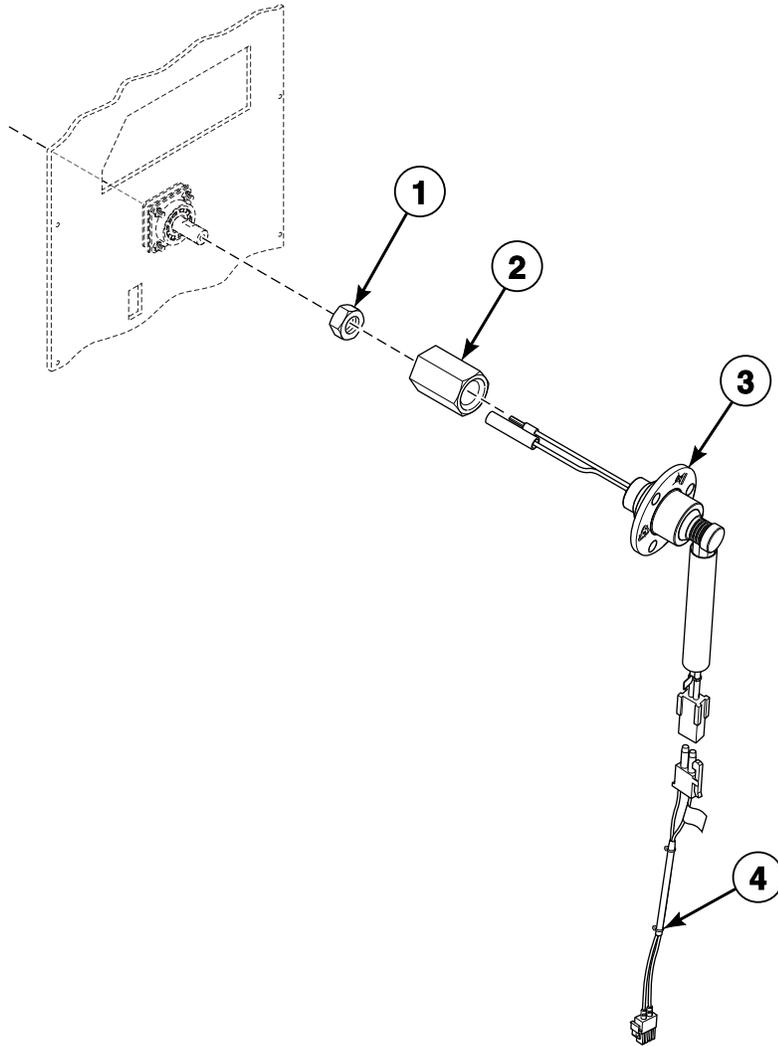


TMB3147P\_70409501

# Moisture Sensing Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70468901	Moisture Sensor Test Wires	Use to troubleshoot the moisture sensor circuit
1	M400035	Nut	
2	44224401	Slip Ring Holder	
3	44222701	Slip Ring Assembly	
4	70448901	Moisture Sensor Harness Assembly	

# Rotation Sensor

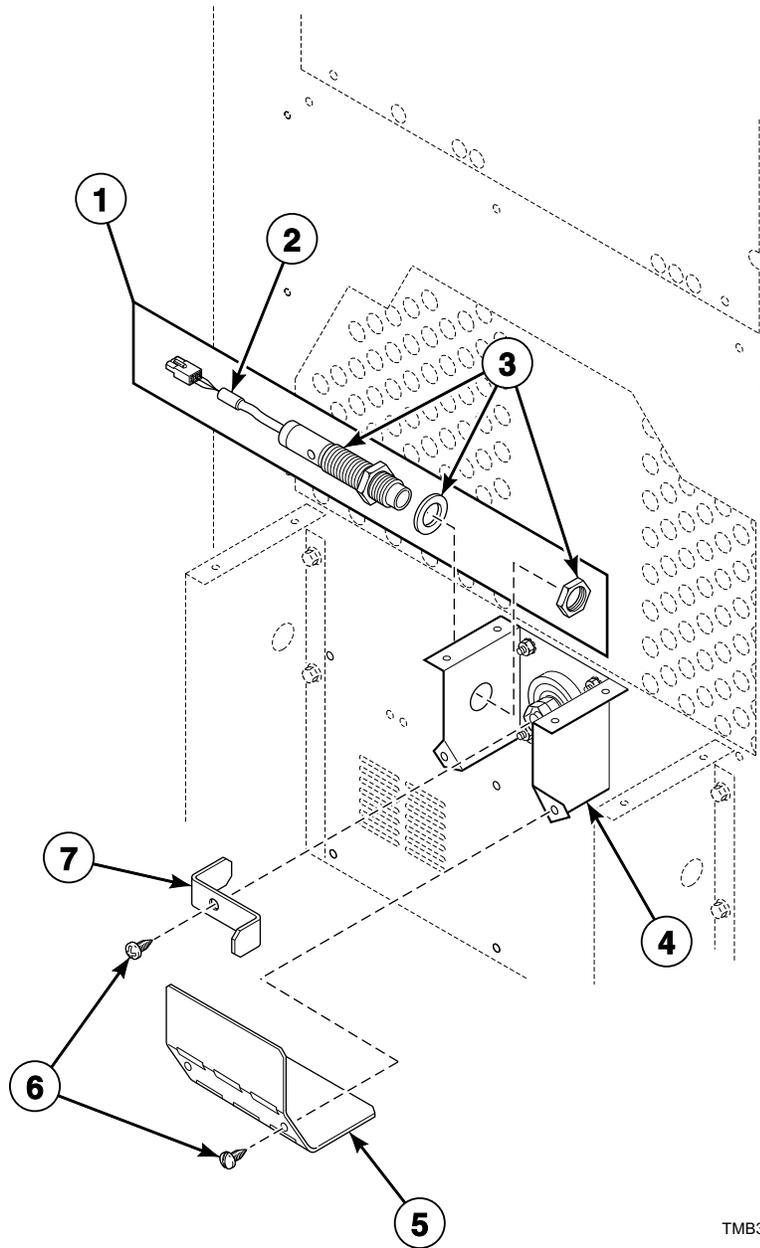


TMB3172P\_70409501

# Rotation Sensor

REF	PART NO.	DESCRIPTION	COMMENTS
1	7009P	Rotation Sensor Kit	Includes items 2, 3 and 7; 3B, 3K, 3L, 3O, 3V, 3W, 3X, DO, DV, DX and R3 control suffixes
2	70476101	Rotation Sensor Harness	3B, 3K, 3L, 3O, 3V, 3W, 3X, DO, DV, DX and R3 control suffixes
	F8066401	Rotation Sensor Harness	EO, RE, RU and UO control suffixes
3	F8066201	Rotation Sensor	
4	70021401	Bearing Housing Bracket	
5	44044301	Rotation Sensor Cover	
6	70153301	Screw	
7	44044401	Rotation Sensor Bracket	

# Airflow Switch

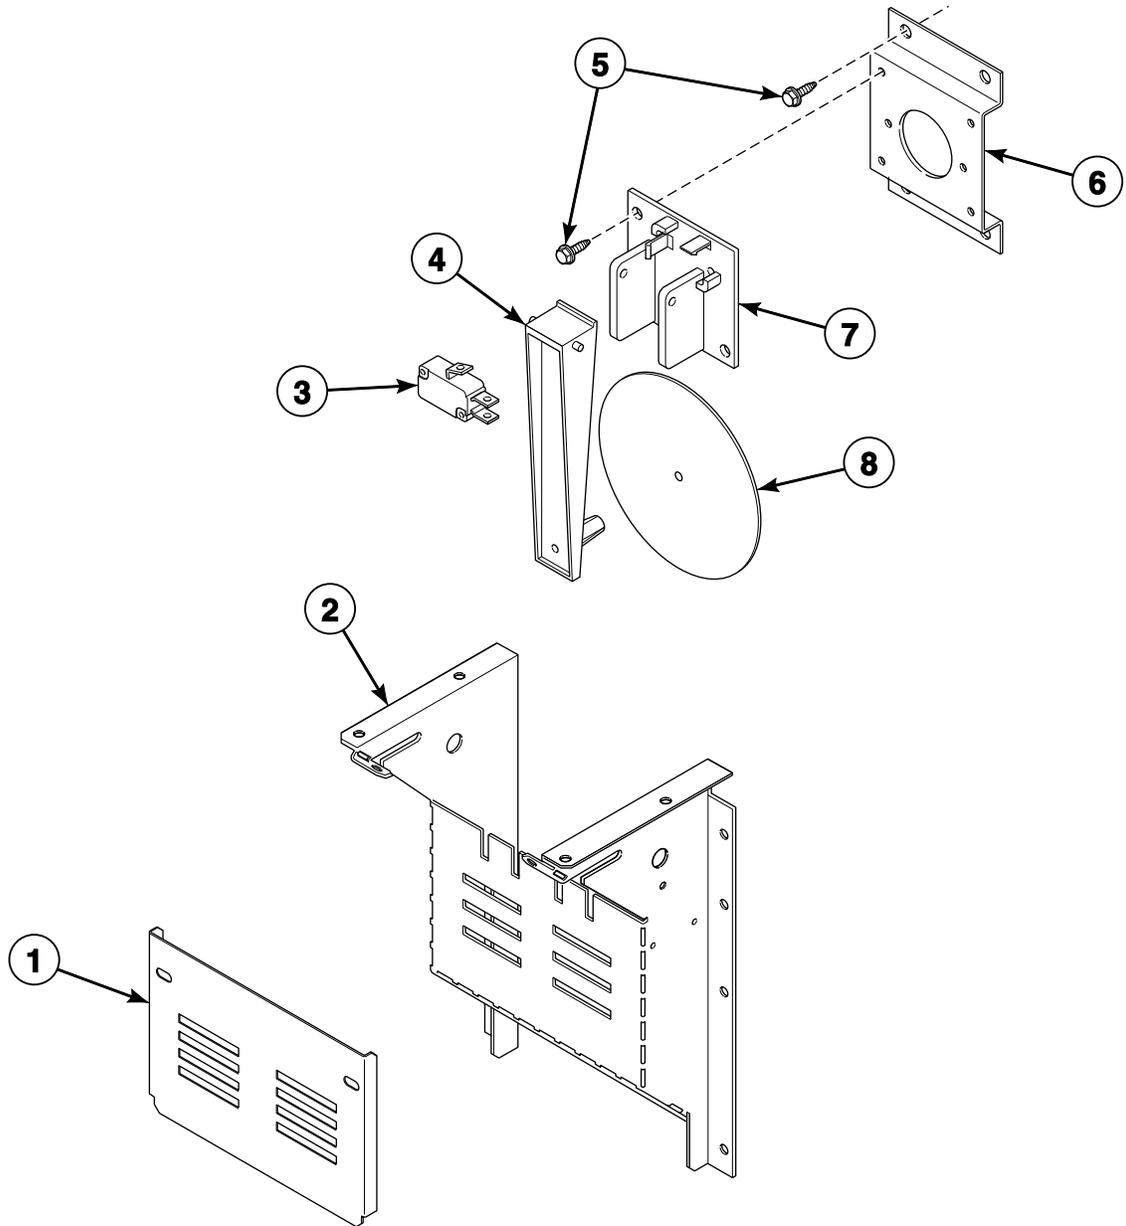


TMB3126P\_70409501

# Airflow Switch

REF	PART NO.	DESCRIPTION	COMMENTS
1	70356601	Airflow Switch Cover	Non-moisture sensing
	70465701	Airflow Switch Cover	Moisture sensing
2	70356101	Airflow Switch Wrapper	
3	70411901	Switch	
4	70319401	Airflow Switch Arm	
5	430497	Screw	
6	70356301	Switch Bracket	Classic models and Eco gas models
7	70319601	Airflow Switch and Arm Bracket	
8	70319201	Airflow Switch Vane	

# Gas Burner Housing and Secondary Stove Limit

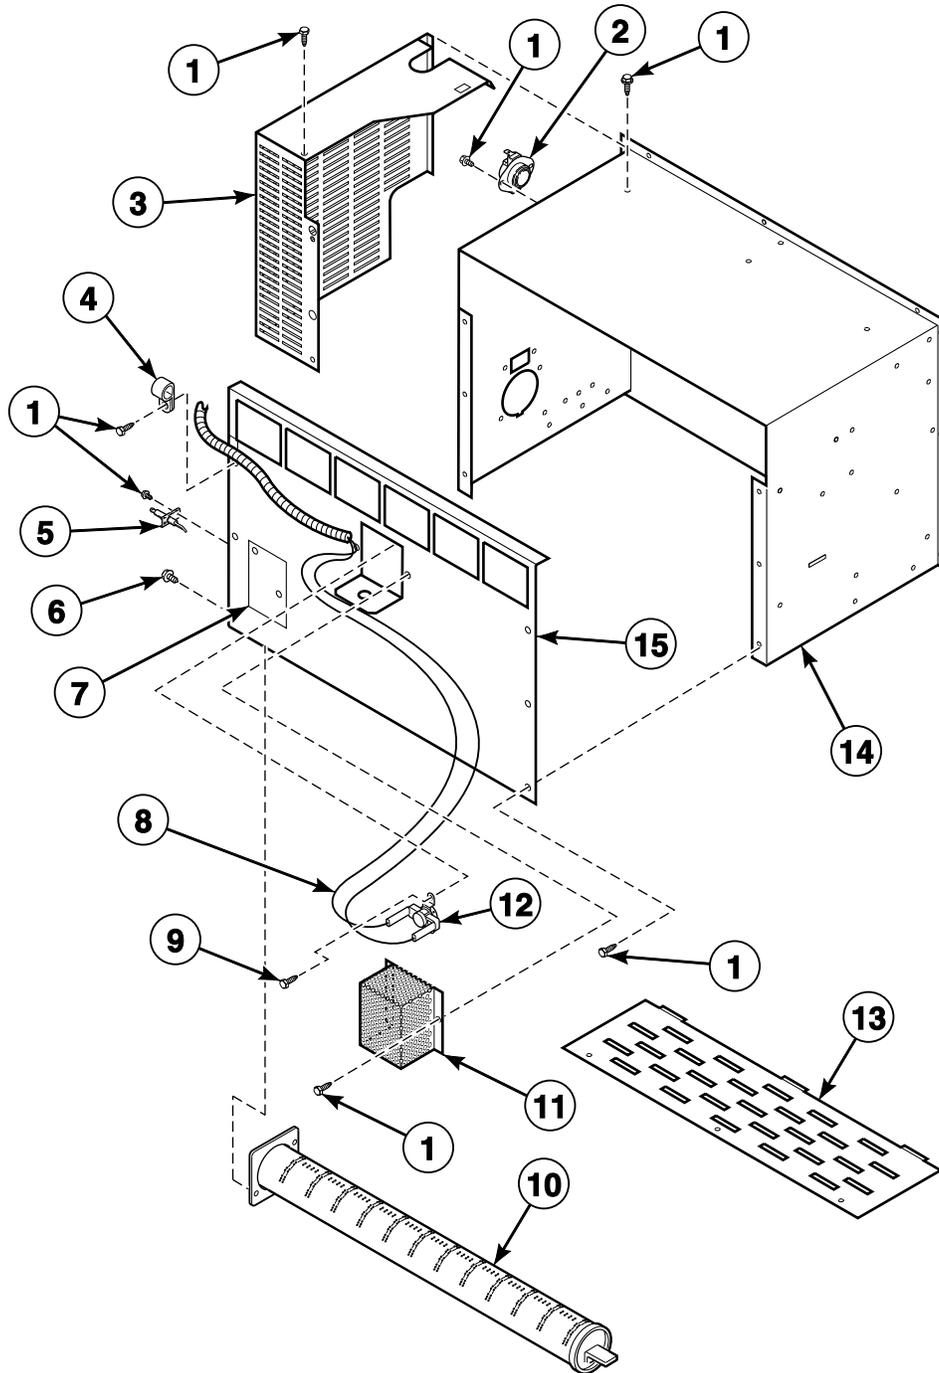


TMB2367P\_70409501

## Gas Burner Housing and Secondary Stove Limit

REF	PART NO.	DESCRIPTION	COMMENTS
	M4902P3	Stove Limit Kit	Australian models; Models through Serial No. 0311000078; In addition, order 70299101 Secondary Stove Limit Kit
<b>1</b>	430497	Screw	
<b>2</b>	70186301	Manual Reset Thermostat	Australian and Korean models
	M410542	Limit Thermostat	All other models
<b>3</b>	70381001	Gas Valve Cover	CE and Australian models; Models through 12/31/13
	70429901	Gas Valve Cover	CE and Australian models; Models through 12/31/13
<b>4</b>	70203701	Pipe Clip	
<b>5</b>	70032801P	Spark Electrode	Models through 9/16/12
	70466501P	Spark Electrode	Models starting 9/17/12
<b>6</b>	05161	Screw	
<b>7</b>	70159601	Igniter Cover	
<b>8</b>	70316501	Stove Limit Harness	
<b>9</b>	M405188	Screw	2 required
<b>10</b>	70229801P	Gas Burner	
<b>11</b>	M414477	Thermostat Cover	
<b>12</b>	510701	Limit Thermostat	Secondary
<b>13</b>	70188801	Burner Grill	
<b>14</b>	70333401	Stove Top and Sides	
<b>15</b>	70297401	Stove Back	

# Gas Valve Assembly - Non-CE and Non-Australian Gas Models

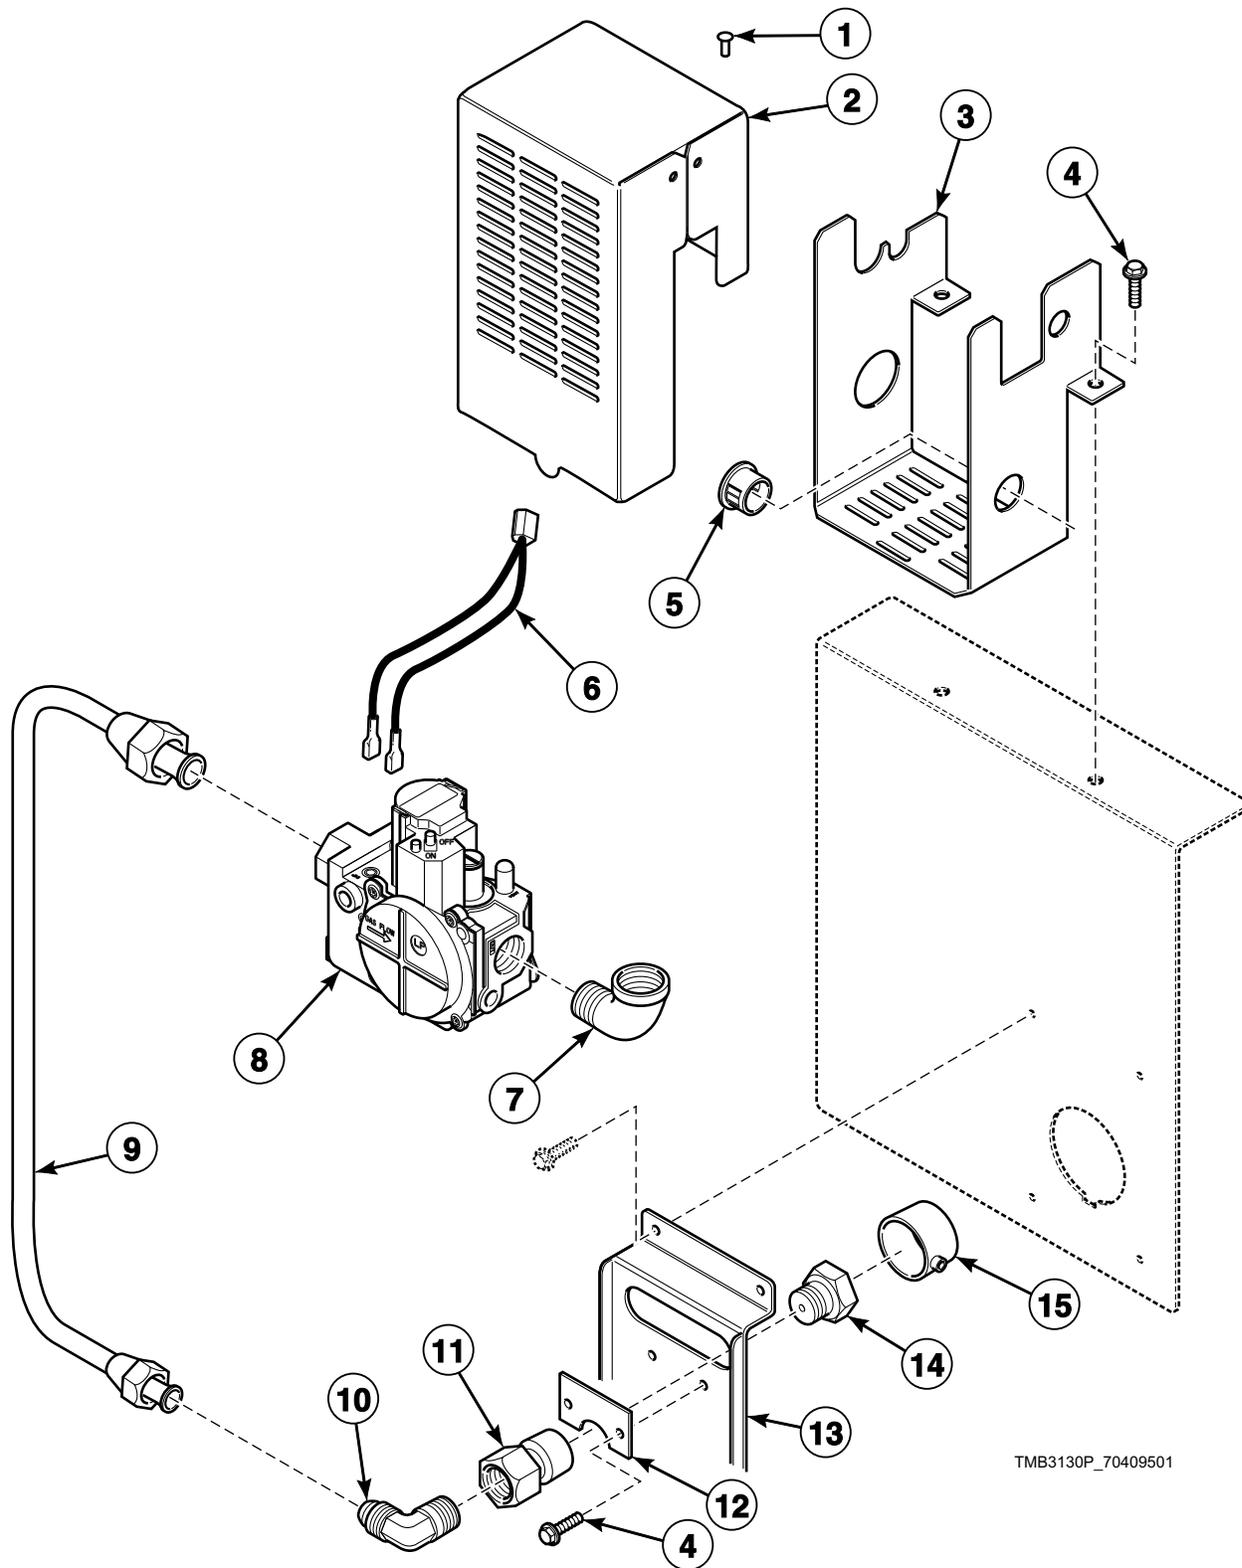


TMB3130P\_70409501

# Gas Valve Assembly - Non-CE and Non-Australian Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M4711P3	L.P. Conversion Kit	Natural Gas (N.G.) models; 0-2,000 feet; 90,000 Btu input
	M4969P3	Replacement Gas Valve Kit	N.G. models; Use to replace old valve before 2/1/10 with new valve
	M4971P3	Replacement Gas Valve Kit	Liquid Petroleum Gas (L.P.) models; Use to replace old valve before 2/1/10 with new valve
1	M405750	Pop Rivet	4 required
2	70429901	Gas Valve Cover	
3	70429801	Gas Valve Bracket	
4	430497	Screw	10 required
5	M400770	Snap Bushing	
6	M412997	Harness Assembly	
7	H86070034	Street Elbow	
8	44154501P	Gas Valve	N.G. models
	44154502P	Gas Valve	L.P. models
9	70271201	Gas Line Assembly	
10	70208701	Elbow	2 required
11	70379301	Orifice Adapter	
12	70249001	Orifice Keeper Bracket	
13	70248901	Orifice Holder Bracket	
14	M411375	Burner Orifice	Classic L.P. models; Drill no. 36 (2.7 mm); 0-2,000 feet
	M411376	Burner Orifice	Classic L.P. models; Drill no. 38 (2.6 mm); 2,001-4,000 feet
	M401007	Burner Orifice	Classic L.P. models; Drill no. 39 (2.5 mm); 4,001-6,000 feet
	M401015	Burner Orifice	Classic L.P. models; Drill no. 41 (2.4 mm); 6,001-8,000 feet
	M403017	Burner Orifice	Classic L.P. models; Drill no. 42 (2.4 mm); 8,001-10,000 feet
	M411511	Burner Orifice	Classic N.G. models; Drill no. 15 (4.6 mm); 0-2,000 feet
	M411373	Burner Orifice	Classic N.G. models; Drill no. 16 (4.5 mm); 2,001-4,000 feet
	M402988	Burner Orifice	Classic N.G. models; Drill no. 18 (4.3 mm); 4,001-6,000 feet
	M402995	Burner Orifice	Classic N.G. models; Drill no. 19 (4.2 mm); 6,001-8,000 feet
	M401002	Burner Orifice	Classic N.G. models; Drill no. 20 (4.1 mm); 8,001-10,000 feet
	M401014	Burner Orifice	Eco N.G. models; 50 Hertz; Drill no. 28 (3.6 mm); 0-2,000 feet
	M400997	Burner Orifice	Eco N.G. models; 50 Hertz; Drill no 29; 2,001-4,000 feet
	44254001	Burner Orifice	Eco N.G. models; 50 Hertz; 3.4 mm; 4,001-6,000 feet
	M401021	Burner Orifice	Eco N.G. models; 50 Hertz; Drill no. 30; 6,001-8,000 feet
	70070903	Burner Orifice	Eco N.G. models; 50 Hertz; 3.1 mm; 8,001-10,000 feet
	M402997	Burner Orifice	Eco N.G. models; 60 Hertz; Drill no. 25 (3.8 mm); 0-2,000 feet
	M401014	Burner Orifice	Eco N.G. models; 60 Hertz; Drill no. 28 (3.6 mm); 2,001-4,000 feet
	70476601	Burner Orifice	Eco N.G. models; 60 Hertz; 3.5 mm; 4,001-6,000 feet
	44254001	Burner Orifice	Eco N.G. models; 60 Hertz; 3.4 mm; 6,001-8,000 feet
	M402489	Burner Orifice	Eco N.G. models; 60 Hertz; Drill no. 1/8 (3.2 mm); 8,001-10,000 feet
15	70239801	Primary Air Adjustment Sleeve	

# Gas Valve and Piping - CE and Australian Gas Models

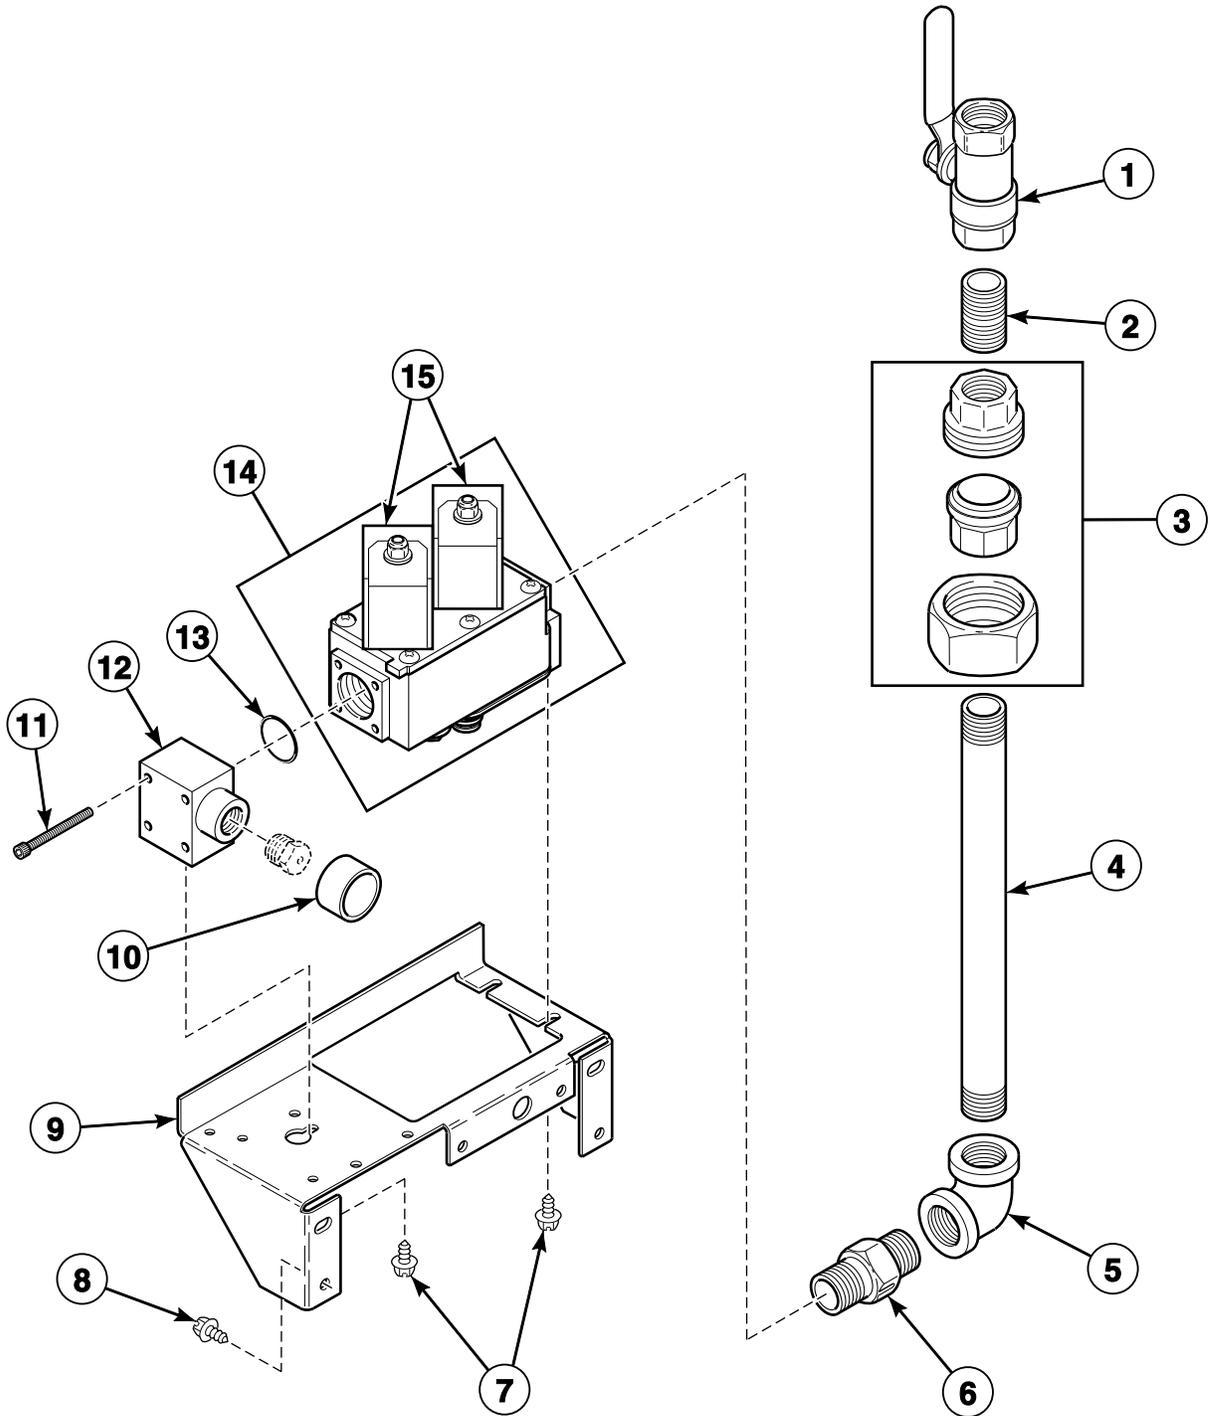


TMB3122P\_70409501

## Gas Valve and Piping - CE and Australian Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M405434P	L.P. Valve Conversion Kit	Must also order orifice, refer to Installation Manual
	70184001	Gas Valve Harness	CE models; Use with item 14
	M413650	Gas Valve Harness Assembly	Australian models; Use with item 14
<b>1</b>	M412562P	Gas Shut-Off Valve	Models through 1/31/10
<b>2</b>	901403	Pipe Nipple	1/2 NPT; Models through 1/31/10
<b>3</b>	H86000031	Union	Models through 1/31/10
<b>4</b>	70139601	Pipe Nipple	
<b>5</b>	70079601	Elbow	
<b>6</b>	70131901	Adapter	BPT/NPT
<b>7</b>	23222	Screw	
<b>8</b>	430497	Screw	
<b>9</b>	70233301	Gas Valve Bracket	
<b>10</b>	70239801	Primary Air Adjustment Sleeve	
<b>11</b>	431484	Screw	
<b>12</b>	70223501	Spud Adapter	
<b>13</b>	431482	O-Ring	
<b>14</b>	70457301P	N.G. Valve	Regulated; Models through 12/31/13
	44154503	N.G. Valve	Regulated; Models starting 1/1/14
	70457302P	L.P. Valve	Unregulated; Models through 12/31/13
	44154504	L.P. Valve	Unregulated; Models starting 1/1/14
<b>15</b>	70260101	Gas Valve Coil	24 Volt

**NOTE: For CE gas and orifice information, refer to Installation Manual.**

# Electric Heater Components

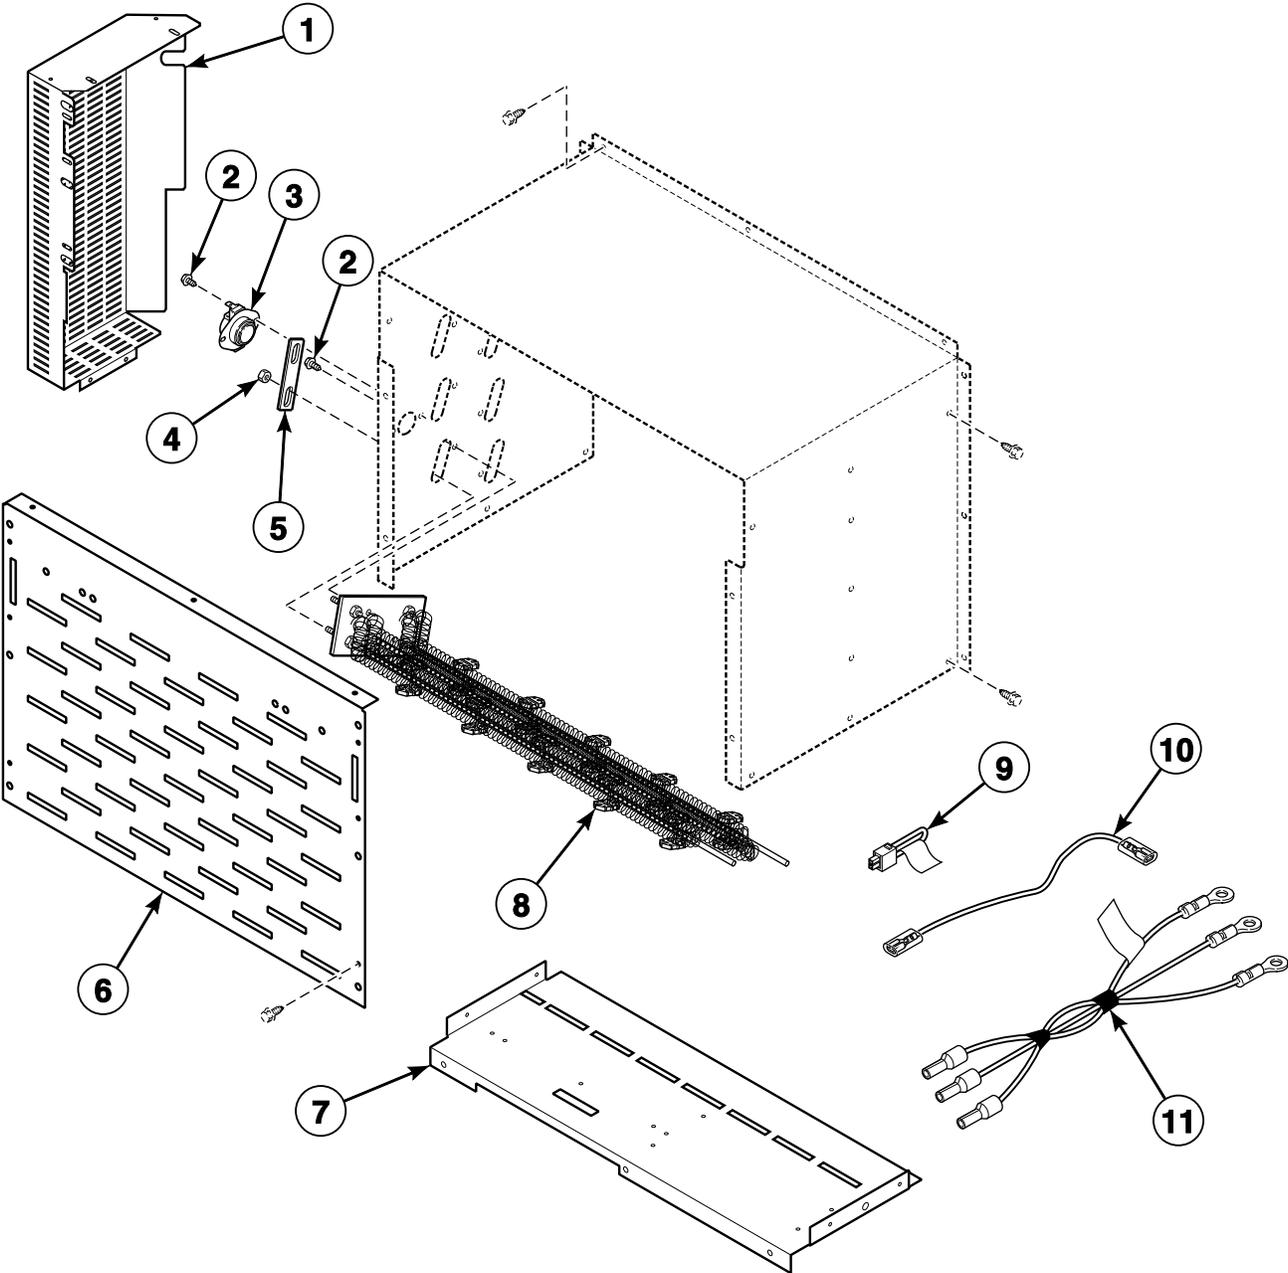


TMB3148P\_70409501

## Electric Heater Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70365201	Stove Connectors Cover	
2	430497	Screw	
3	M409433	Limit Thermostat	
4	70054	Nut	
5	70066501	Jumper Bar	2 required on 380, 400, 400-415 and 460-480 Volt
	M400869	Jumper Strip	3 required for 460-480 Volt; 6 required for all other voltages
6	70214901	Stove Grill	
7	70357201	Stove Partition	
8	70034404P	Heater Element	Classic non-CE and non-Australian models; 3 required; 8 kW; 208 Volt heater element for 200-208 Volt/1 or 3 Phase
	70034405P	Heater Element	Classic models; 3 required; 8 kW; 220 Volt heater element for 380 and 440 Volt/3 Phase
	70034406P	Heater Element	Classic models; 3 required; 8 kW; 240 Volt heater element for 230-240 Volt/1 or 3 Phase and 400-415 and 460-480 Volt/3 Phase
	70034412P	Heater Element	Classic CE models; 3 required; 6 kW; 240 Volt heater element for 400-415 Volt/3 Phase; Low wattage
	70034414P	Heater Element	Eco models; 3 required; 4 kW; 220 Volt heater element for 380 and 440 Volt/3 Phase
	70034416P	Heater Element	Eco models; 3 required; 4 kW; 240 Volt heater element for 400-415 Volt/50 Hertz or 240 and 460-480 Volt/60 Hertz
	70034415P	Heater Element	Eco models; 3 required; 4 kW; 208 Volt heater element for 200-208 Volt/3 Phase
9	70316601	Stove Limit Bypass Harness	
10	70066601	Jumper Wire	1 required for 460-480 Volt
11	70371301P	Cable Set Heater Assembly	H1-H3
	70371401P	Cable Set Heater Assembly	H4-H6; 240 Volt or less

# Steam Heater Components

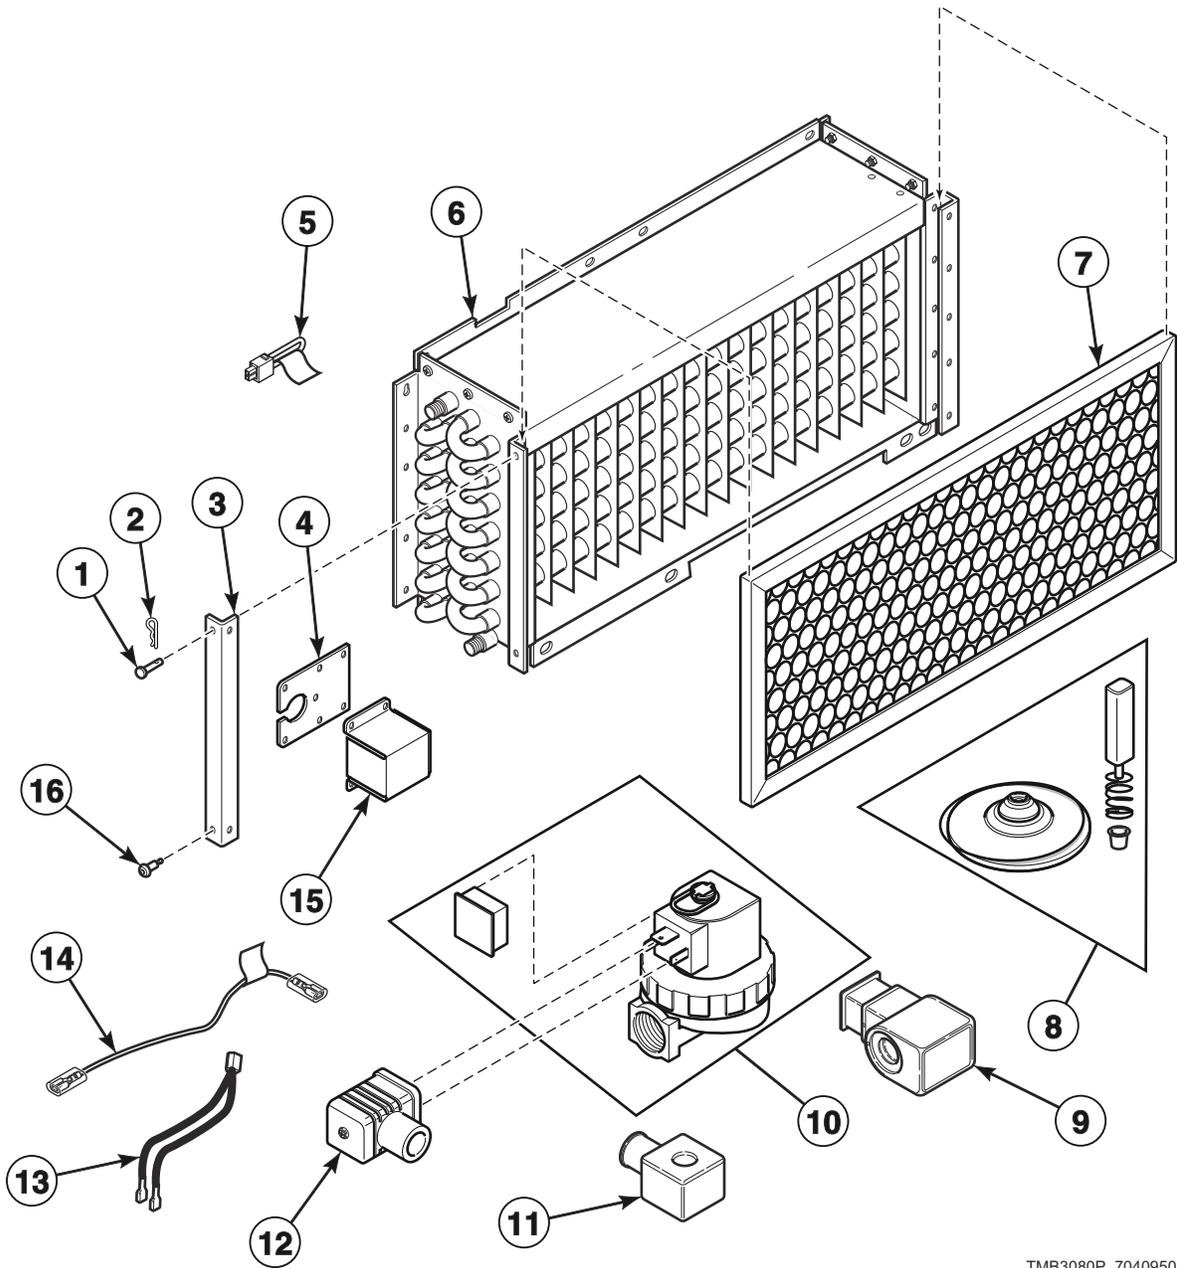


TMB3080P\_70409501

## Steam Heater Components

REF	PART NO.	DESCRIPTION	COMMENTS
	F8382301	DIN Valve Adapter Kit	Use with F8322902 Steam Valves
	F8514801	Valve Coil	Use with F8322902 Steam Valves
<b>1</b>	70389201	Clevis Pin	To secure 70369301 Steam Filter Holder
<b>2</b>	70389301	Hairpin Cotter	To secure 70369301 Steam Filter Holder
<b>3</b>	70369301	Steam Filter Holder	
<b>4</b>	70369401	Steam Valve Harness Bracket	
<b>5</b>	70316601	Stove Limit Bypass Harness	
<b>6</b>	70369101P	Steam Coil	4 rows
<b>7</b>	70429401	Filter	CE models
	70036001	Air Filter	All other models
<b>8</b>	70351021P	Steam Valve Rebuild Kit	Parker; Use with 70351001P and 70351002P Steam Valves
	F8379502	Valve Rebuild Kit	Asco; Use with F8322902 and F8322903 Steam Valves
<b>9</b>	70351012	Steam Solenoid	24 Volt/50 Hertz
<b>10</b>	F8521701	DIN Valve Kit	Parker; To replace 70351001 Steam Valve
	F8322903	Steam Valve	50 Hertz
	F8322902	Steam Valve	60 Hertz; Asco
<b>11</b>	70351011P	Steam Solenoid	24 Volt/60 Hertz
<b>12</b>	70370301P	Solenoid Valve DIN Connector	
<b>13</b>	M412997	Harness Assembly	
<b>14</b>	70389901	Steam Stove Limit Bypass Harness	
<b>15</b>	70369501	Steam Valve Wiring Cover	
<b>16</b>	70058501	Pop Rivet	To secure 70369301 Steam Filter Holder

# Control Tray Harnesses for Gas Models

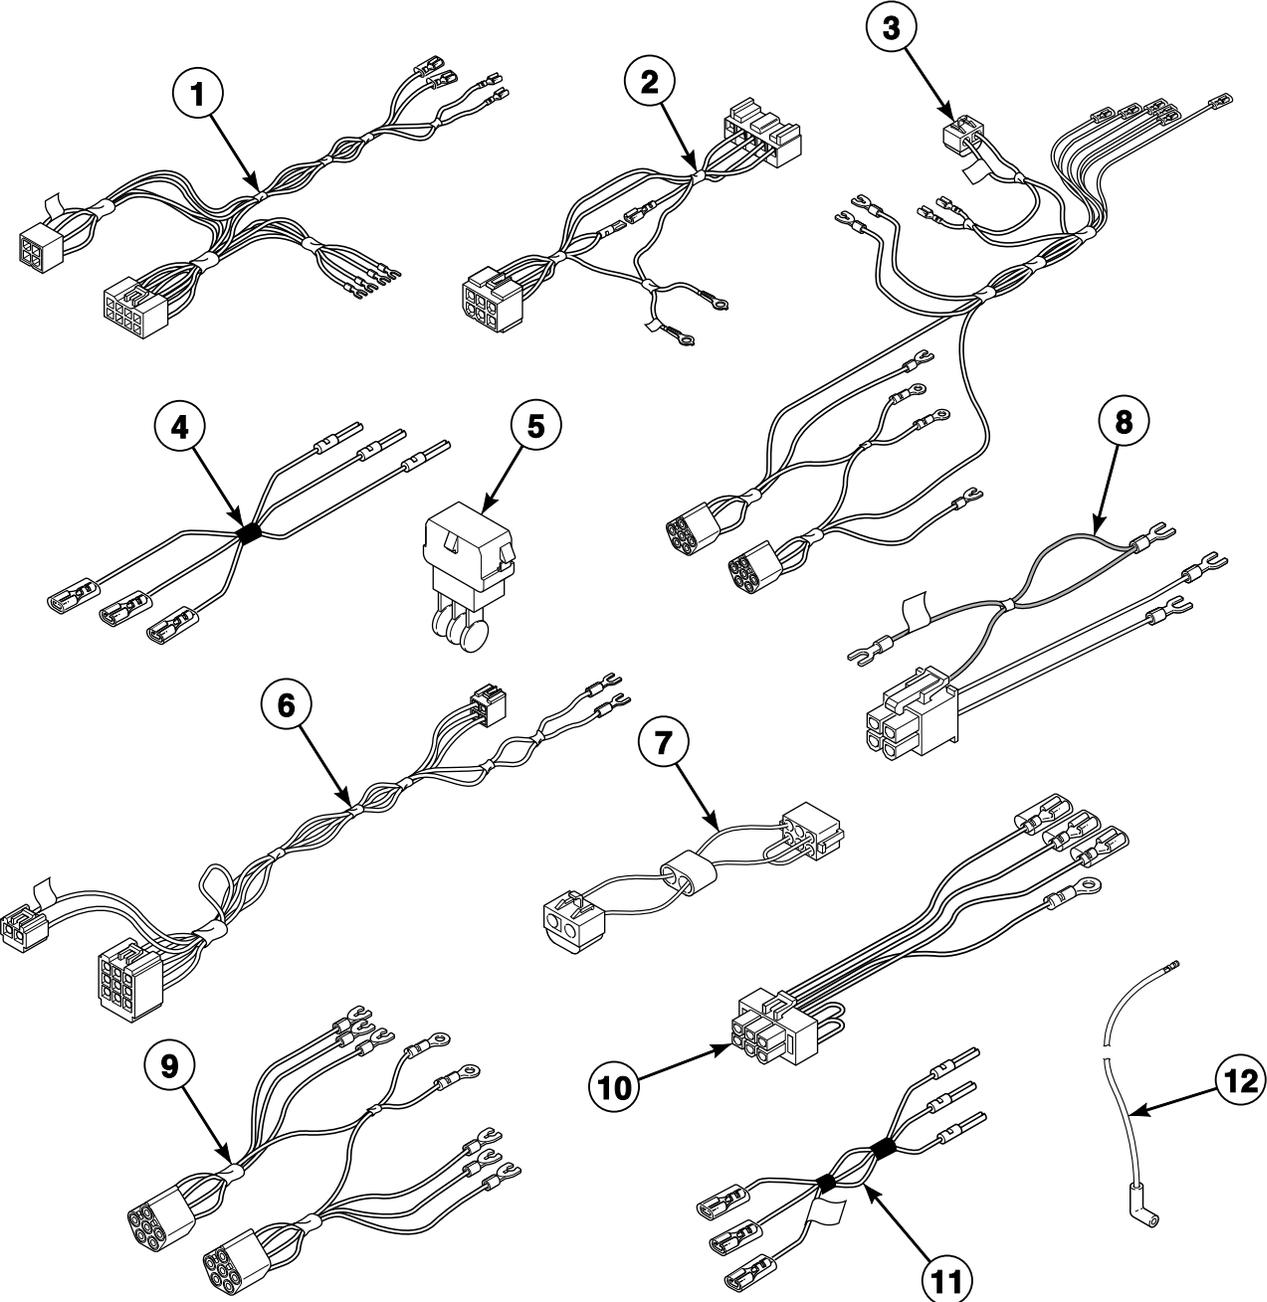


TMB3173P\_70409501

## Control Tray Harnesses for Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70315801	Junction Box Harness	Models through 7/8/12
	70464701	Control Tray Harness	Models starting 7/9/12
2	70316401	Ignition Control Harness	CE and Australian models
	70316301	Ignition Control Harness	All other models
3	70316101P	Power Harness	CE and Australian models; Models through 2/28/10; 3 Phase with less than 380 Volts
	70347701P	Power Harness	Models through 2/28/10; Contactor; 1 Phase
	70332201	Power Harness	Models through 2/28/10; 3 Phase with 380 Volts or higher
	70439001	Power Harness	CE and Australian models; Models starting 3/1/10 through 7/8/12; 3 Phase with less than 380 Volts
	70445501	Power Harness	Models starting 3/1/10 through 7/8/12; Contactor; 1 Phase
	70438901	Power Harness	Models starting 3/1/10 through 7/8/12; 3 Phase with 380 Volts or higher
	70464901	Power Harness	CE and Australian models; Models starting 7/9/12; 3 Phase with less than 380 Volts
	70469701	Power Harness	Models starting 7/9/12; Contactor; 1 Phase
	70465001	Power Harness	Models starting 7/9/12; 3 Phase with 380 Volts or higher
4	70120901	Jumper Disconnect Assembly	CE and Australian models
5	M413863	Network Capacitor Assembly	3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
6	70471901	Reversing Control Board Harness	3B, 3K, 3W, BB, BK, BW and BZ control suffixes
7	M413504	Jumper Harness Assembly	100 Volt
	M413505	Jumper Harness Assembly	120 Volt
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	M413508	Jumper Harness Assembly	380 Volt
	M413510	Jumper Configuration Assembly	480 Volt
8	70465301	Reversing Contactor Harness	Reversing
9	70320201	Motor Contactor Harness	Models through 2/28/10; 3 Phase
	44142601P	Motor Contactor Harness	Models starting 3/1/10 through 7/8/12; 3 Phase
	70469301	Motor Contactor Harness	Models starting 7/9/12; 3 Phase
10	M413878	Network Capacitor Harness Assembly	Models through 7/8/12; 3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
	44143401P	Network Capacitor Harness Assembly	Models starting 7/9/12; Also order 00177 Male Tab Terminal; 3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
11	70342101	Gas Disconnect Harness	CE and Australian models; Models through 2/28/10
	70440501	Gas Disconnect Harness	CE and Australian models; Models starting 3/1/10
12	70006201	High Voltage Lead	Models through 9/16/12; Use with 70367301P or 70367401P Ignition Control
	44239702	High Voltage Suppression Cable	Models starting 9/17/12; Use with 70458601, 70458701 or 70483201 Ignition Control


# Control Tray for Non-CE and Non-Australian Gas Models

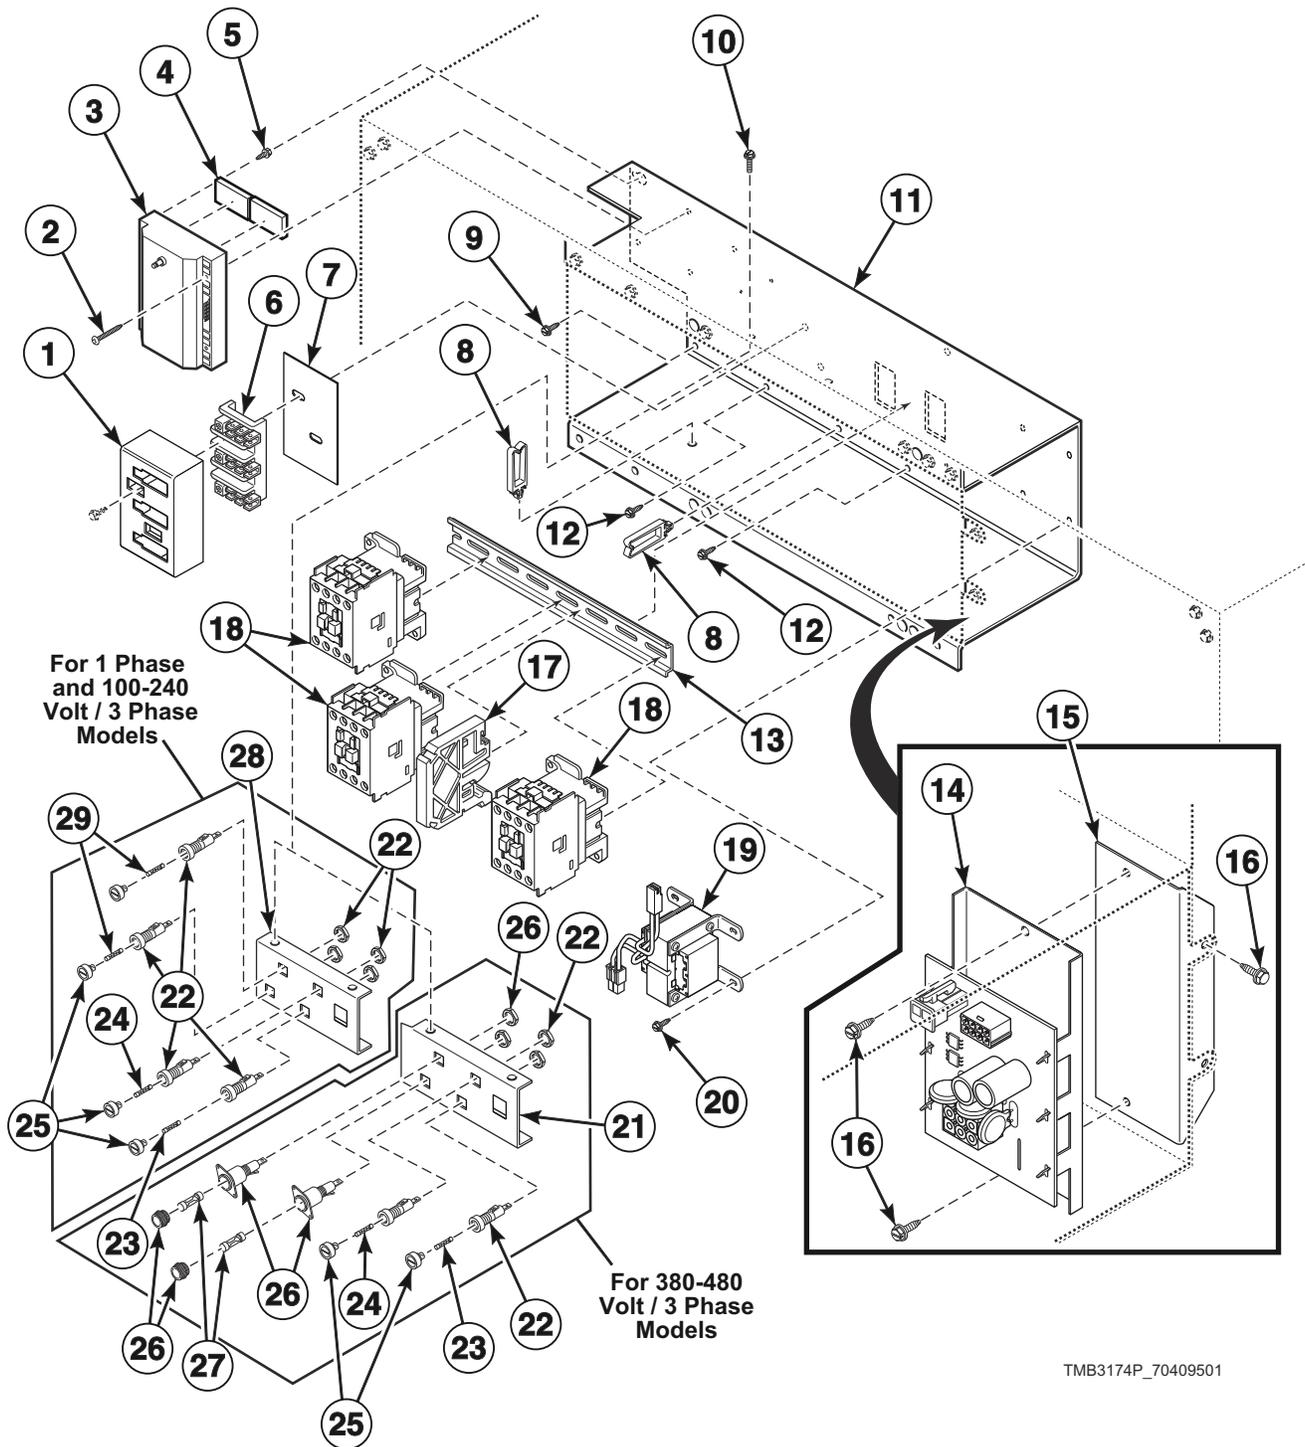

## Control Tray for Non-CE and Non-Australian Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
	70030501	Expansion Clip	4 required; Used on item 19
	M403047	Secure Ground Label	
	44127701	Warning Label	Extended tumble; On control tray cover
<b>1</b>	70333001	Terminal Block Shield	
<b>2</b>	44083001	Screw	2 required; Models through 9/16/12
	51783	Screw	2 required; Models starting 9/17/12
<b>3</b>	70492701	Ignition Control Kit	Models through 9/16/12; Use with 44239702 High Voltage Suppression Lead
	70458601P	Ignition Control	24 Volt; Models starting 9/17/12; Use with 44239702 High Voltage Suppression Lead
<b>4</b>	56128	Bumper Pad	2 required
<b>5</b>	38272	Screw	
<b>6</b>	430642	Terminal Block	
<b>7</b>	M413862	Insulator	
<b>8</b>	70366201	Wire Clip	
<b>9</b>	430497	Screw	3 required
<b>10</b>	51780	Screw	2 required
<b>11</b>	70469201	Control Tray	
<b>12</b>	M402917	Screw	4 required
<b>13</b>	M412693	Din Rail	
<b>14</b>	70469901	Reversing Control Assembly	3B, 3K, 3W, BB, BW and BZ control suffixes
<b>15</b>	70472601	Bracket	3B, 3K, 3W, BB, BW and BZ control suffixes
<b>16</b>	F8206901	Screw	4 required
<b>17</b>	F330186P	Interlock Contactor	Reversing
<b>18</b>	70323701P	Contactor	1 required for nonreversing; 3 required for reversing
<b>19</b>	M414312P	Transformer	120 Volt; Dual secondary
	M414230P	Transformer	120 Volt; Primary/secondary
	M414228P	Transformer	100-240 Volt
	M414229P	Transformer	380-480 Volt
<b>20</b>	M411072	Screw	4 required
<b>21</b>	70313601	Fuse Bracket	380-480 Volt; Models through 2/28/10
	70313602	Fuse Bracket	380-480 Volt; Models starting 3/1/10
<b>22</b>	70329401P	Fuse Holder Body	Includes nuts; 3 required for 1 Phase; 4 required for 3 Phase
<b>23</b>	70406601	Fuse	3.5 Amp
<b>24</b>	70406501	Fuse	1.25 Amp
<b>25</b>	70329501	Fuse Holder Cap	3 required for 1 Phase and 380-480 Volt/3 Phase; 4 required for 100-240 Volt/3 Phase
<b>26</b>	M413544P	Fuse Holder	Includes nuts; 2 required for 380-480 Volt; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 380-480 Volt; Models starting 3/1/10
<b>27</b>	M413621	Fuse	2 required for 380-480 Volt; 0.5 Amp
<b>28</b>	70306901	Fuse Bracket	100-240 Volt
<b>29</b>	70406701	Fuse	2 Amp; 100-240 Volt

# Control Tray Components for CE and Australian Gas Models (Drawing 1 of 2)

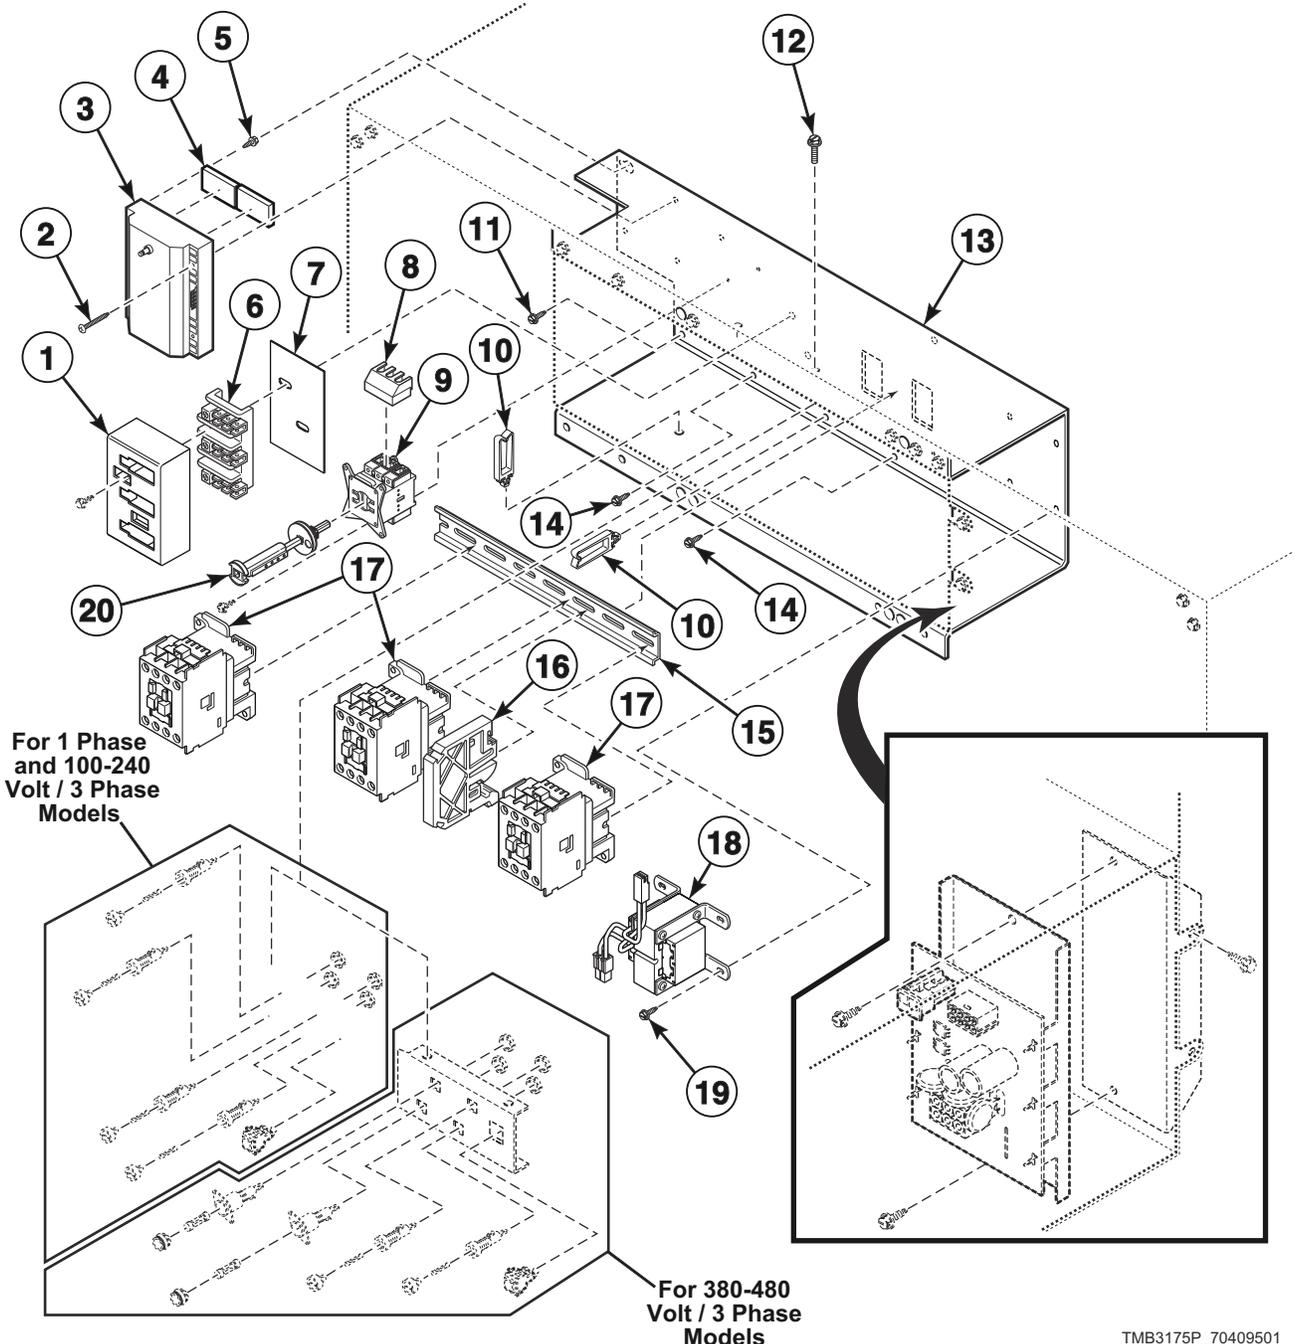


TMB3175P\_70409501

## Control Tray Components for CE and Australian Gas Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	70030501	Expansion Clip	4 required
	M403047	Secure Ground Label	
	M412096	Earth Terminal Sticker	
	51782	Screw	2 required
	70411001	ICM Reset Label	
	44127701	Warning Label	Extended tumble; On control tray cover
<b>1</b>	70333001	Terminal Block Shield	
<b>2</b>	44083001	Screw	2 required; Models through 9/16/12
	51783	Screw	2 required; Models starting 9/17/12
<b>3</b>	70492801	Ignition Control Kit	CE models through 1/16/13; Australian models through 1/16/13 and starting again 4/1/13 through 7/31/13; 24 Volt; Use with 44239702 High Voltage Suppression Lead
	70483201P	Ignition Control	CE models starting 1/17/13; Australian models starting 1/17/13 through 3/31/13 and starting again 8/1/13; 24 Volt; Use with 44239702 High Voltage Suppression Cable
<b>4</b>	56128	Bumper Pad	2 required
<b>5</b>	38272	Screw	
<b>6</b>	430642	Terminal Block	
<b>7</b>	M413862	Insulator	
<b>8</b>	M412366	Finger Guard	Models through 7/31/11
<b>9</b>	M412187P	Mounting Switch Base	Models through 7/31/11
<b>10</b>	70366201	Wire Clip	
<b>11</b>	430497	Screw	
<b>12</b>	51780	Screw	2 required
<b>13</b>	70469201	Control Tray	
<b>14</b>	M402917	Screw	
<b>15</b>	M412693	Din Rail	
<b>16</b>	F330186P	Interlock Contactor	Reversing
<b>17</b>	70323701P	Contactor	1 required for nonreversing; 3 required for reversing
<b>18</b>	M414229P	Transformer	380-480 Volt
	M414228P	Transformer	100-240 Volt
<b>19</b>	M411072	Screw	4 required
<b>20</b>	70342501P	Extension Handle	Models through 7/31/11


# Control Tray Components for CE and Australian Gas Models (Drawing 2 of 2)

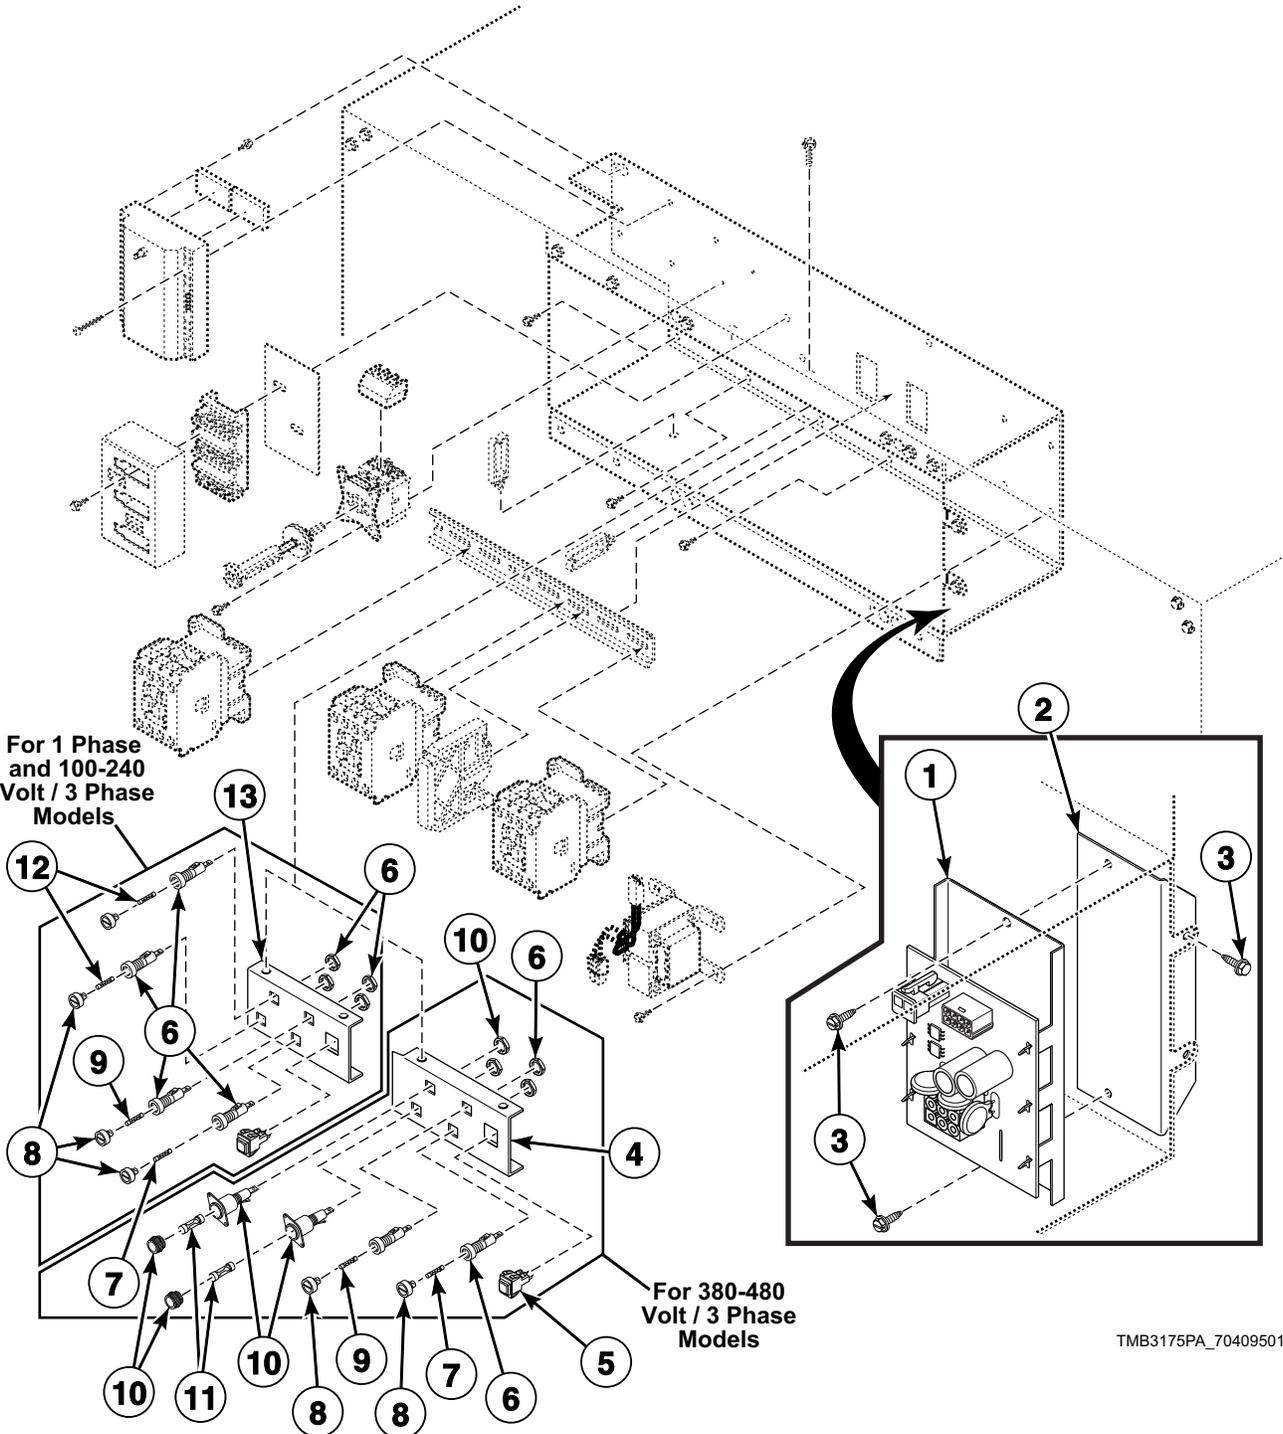

## Control Tray Components for CE and Australian Gas Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	70030501	Expansion Clip	4 required
	M403047	Secure Ground Label	
	M412096	Earth Terminal Sticker	
	51782	Screw	2 required
	501086	Screw	4 required for item 10
	70411001	ICM Reset Label	
	44127701	Warning Label	Extended tumble; On control tray cover
<b>1</b>	70469901	Reversing Control Assembly	3B, 3K, 3W, BB, BW and BZ control suffixes
<b>2</b>	70472601	Bracket	3B, 3K, 3W, BB, BW and BZ control suffixes
<b>3</b>	F8206901	Screw	4 required
<b>4</b>	70313601	Fuse Bracket	380-480 Volt; Models through 2/28/10
	70313602	Fuse Bracket	380-480 Volt; Models starting 3/1/10
<b>5</b>	M413431	Pushbutton Switch	
<b>6</b>	70329401P	Fuse Holder Body	Includes nuts; 3 required for 1 Phase; 4 required for 3 Phase with less than 380 Volts; 2 required for 3 Phase with 380 Volts or higher
<b>7</b>	70406601	Fuse	3.5 Amp
<b>8</b>	70329501	Fuse Holder Cap	3 required for 1 Phase; 4 required for 3 Phase with less than 380 Volts; 2 required for 3 Phase with 380 Volts or higher
<b>9</b>	70406501	Fuse	1.25 Amp
<b>10</b>	M413544P	Fuse Holder	Includes nuts; 2 required for 380-480 Volt; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 380-480 Volt; Models starting 3/1/10
<b>11</b>	M413621	Fuse	2 required for 380-415 Volt; 0.5 Amp
<b>12</b>	70406701	Fuse	1 required for 1 Phase; 2 required for 3 Phase; 2 Amp
<b>13</b>	70306901	Fuse Bracket	100-240 Volt

# Control Tray Harnesses for Steam Models

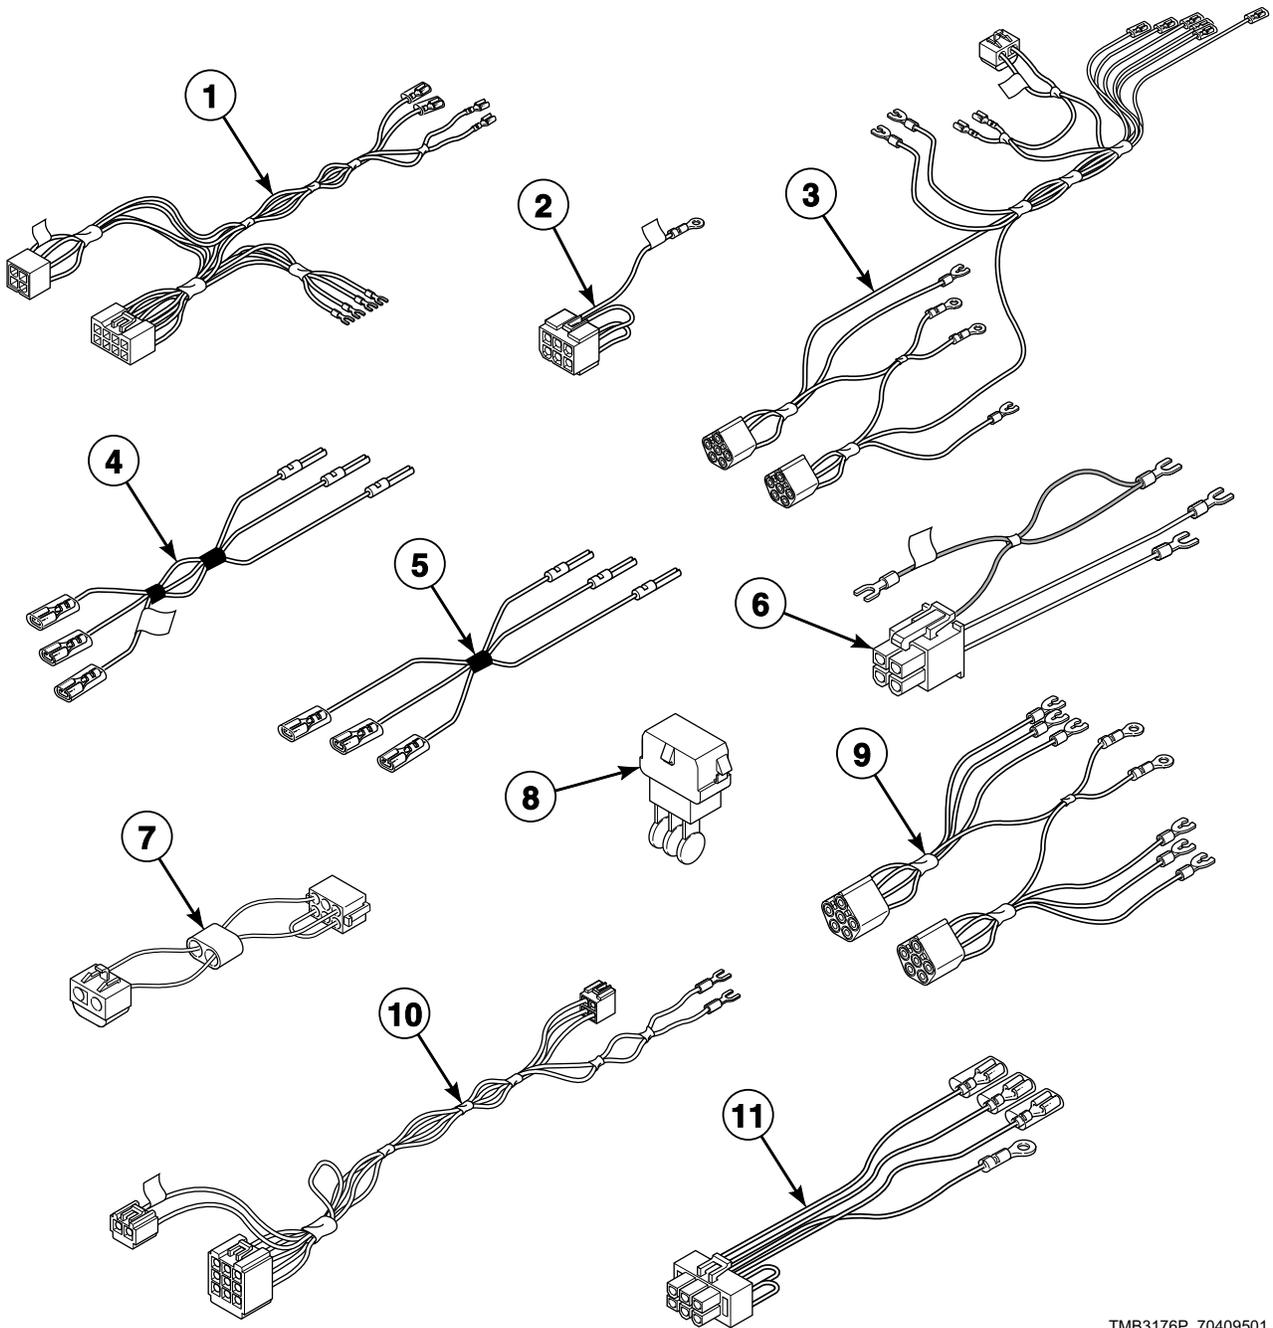


TMB3176P\_70409501

## Control Tray Harnesses for Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70315801	Junction Box Harness	Models through 7/8/12
	70464701	Control Tray Harness	Models starting 7/9/12
2	70322401P	Steam Configuration Harness	
3	70347701P	Power Harness	Models through 2/28/10; Contactor; 1 Phase
	70316101P	Power Harness	Models through 2/28/10; 3 Phase with less than 380 Volts
	70332201	Power Harness	Models through 2/28/10; 3 Phase with 380 Volts or higher
	70445501	Power Harness	Models starting 3/1/10 through 7/8/12; Contactor; 1 Phase
	70439001	Power Harness	Models starting 3/1/10 through 7/8/12; 3 Phase with less than 380 Volts
	70438901	Power Harness	Models starting 3/1/10 through 7/8/12; 3 Phase with 380 Volts or higher
	70469701	Power Harness	Models starting 7/9/12; Contactor; 1 Phase
	70464901	Power Harness	Models starting 7/9/12; 3 Phase with less than 380 Volts
	70465001	Power Harness	Models starting 7/9/12; 3 Phase with 380 Volts or higher
	4	70342101	Gas Disconnect Harness
70440501		Gas Disconnect Harness	CE models; Models starting 3/1/10
5	70120901	Jumper Disconnect Assembly	CE models
6	70465301	Reversing Contactor Harness	Reversing
7	M413504	Jumper Harness Assembly	100 Volt
	M413505	Jumper Harness Assembly	120 Volt
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	M413508	Jumper Harness Assembly	380 Volt
	M413510	Jumper Configuration Assembly	480 Volt
8	M413863	Network Capacitor Assembly	3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
9	70320201	Motor Contactor Harness	Models through 2/28/10; 3 Phase
	44142601P	Motor Contactor Harness	Models starting 3/1/10 through 7/8/12; 3 Phase
	70469301	Motor Contactor Harness	Models starting 7/9/12; 3 Phase with 380 Volts or higher
10	70471901	Reversing Control Board Harness	3B, 3K, 3W, BB, BW and BZ control suffixes
11	M413878	Network Capacitor Harness Assembly	Models through 7/8/12; 3O, 3V, 3X, DO, DV, DX and OM control suffixes
	44143401P	Network Capacitor Harness Assembly	Models starting 7/9/12; Also order 00177 Male Tab Terminal; 3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes


# Control Tray for Non-CE Steam Models

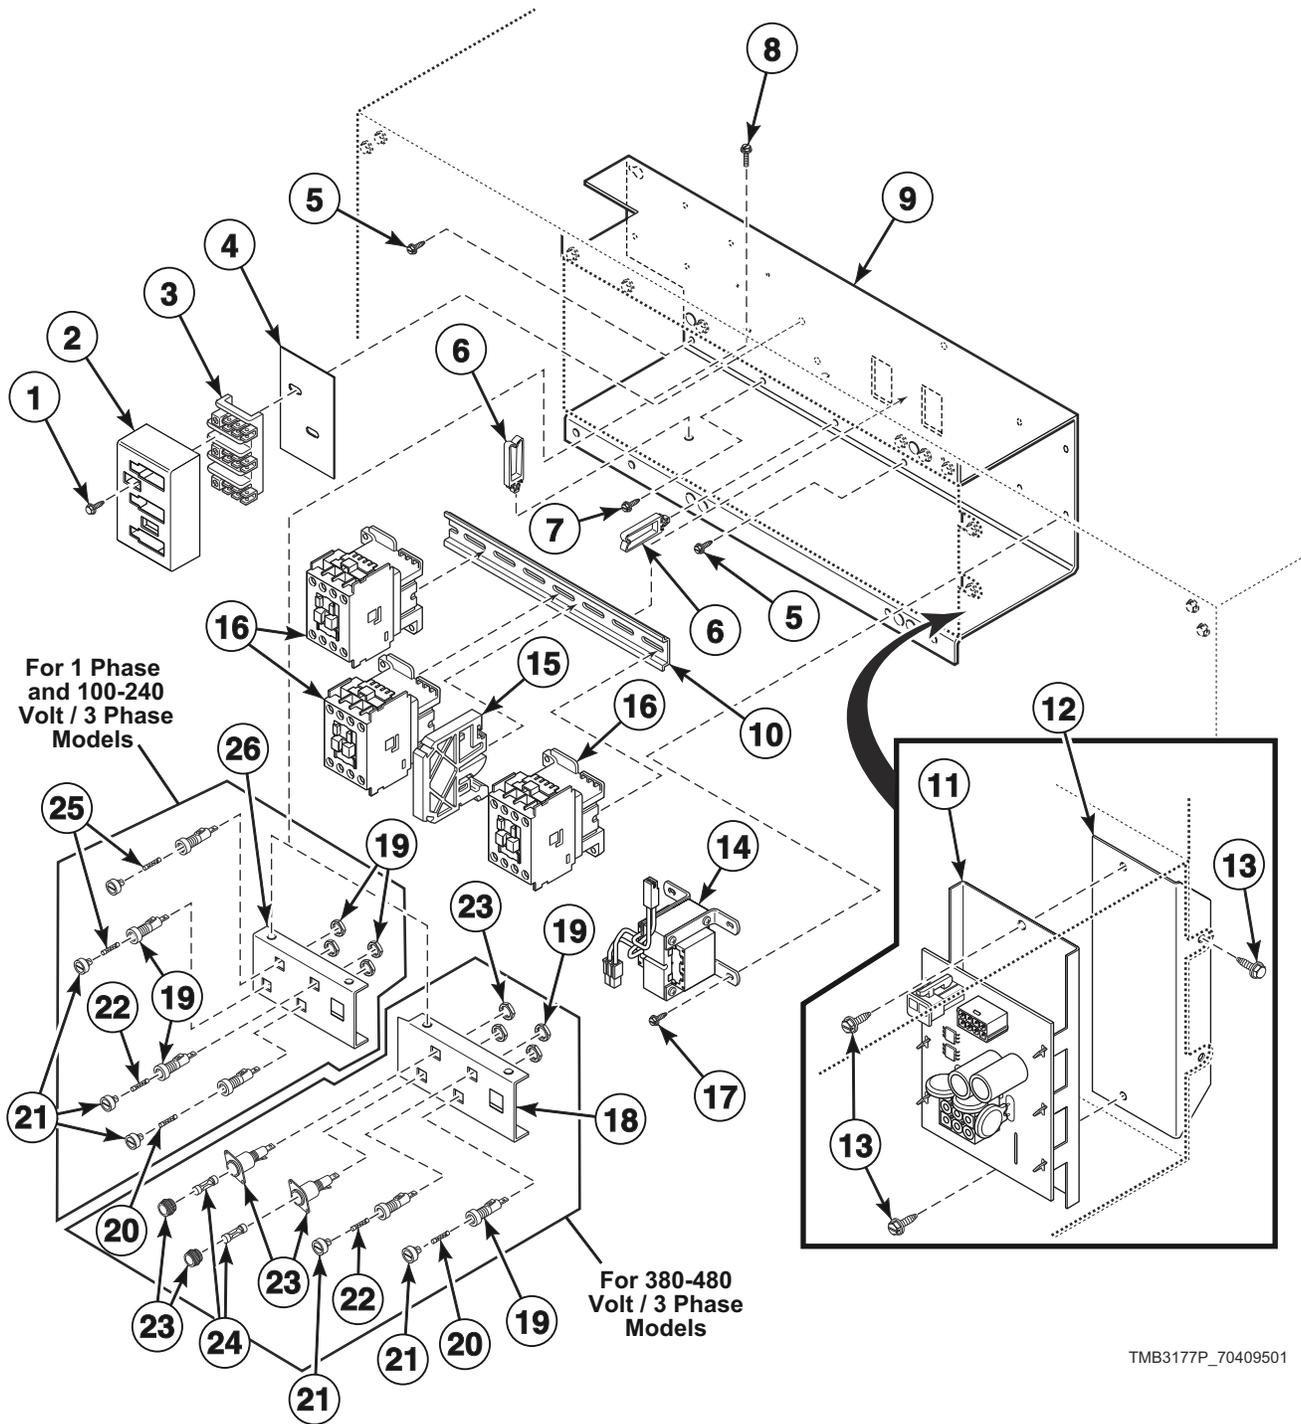

## Control Tray for Non-CE Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
	501086	Screw	4 required
	70030501	Expansion Clip	4 required
	M403047	Secure Ground Label	
1	51783	Screw	2 required
2	70333001	Terminal Block Shield	
3	430642	Terminal Block	
4	M413862	Insulator	
5	430497	Screw	
6	70366201	Wire Clip	
7	M402917	Screw	
8	51780	Screw	2 required
9	70469201	Control Tray	
10	M412693	Din Rail	
11	70469901	Reversing Control Assembly	3B, 3K, 3W, BB, BW and BZ control suffixes
12	70472601	Bracket	3B, 3K, 3W, BB, BW and BZ control suffixes
13	F8206901	Screw	4 required
14	M414312P	Transformer	120 Volt; Dual secondary
	M414230P	Transformer	120 Volt; Primary/secondary
	M414228P	Transformer	100-240 Volt
	M414229P	Transformer	380-480 Volt
	44074401	Transformer	440 Volt; Dual secondary
15	F330186P	Interlock Contactor	Reversing
16	70323701P	Contactora	1 required for nonreversing; 3 required for reversing
17	M411072	Screw	4 required
18	70313601	Fuse Bracket	380-480 Volt; Models through 2/28/10
	70313602	Fuse Bracket	380-480 Volt; Models starting 3/1/10
19	70329401P	Fuse Holder Body	Includes nuts; 3 required for 1 Phase; 4 required for 3 Phase with less than 380 Volts; 2 required for 3 Phase with 380 Volts or higher
20	70406601	Fuse	3.5 Amp
21	70329501	Fuse Holder Cap	3 required for 1 Phase; 4 required for 3 Phase with less than 380 Volts; 2 required for 3 Phase with 380 Volts or higher
22	70406501	Fuse	1.25 Amp
23	M413544P	Fuse Holder	Includes nuts; 2 required for 380-480 Volt; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 380-480 Volt; Models starting 3/1/10
24	M413621	Fuse	2 required for 380-480 Volt/3 Phase; 0.5 Amp
25	70406701	Fuse	2 required for 100-240 Volt/3 Phase
26	70306901	Fuse Bracket	100-240 Volt


# Control Tray for CE Steam Models

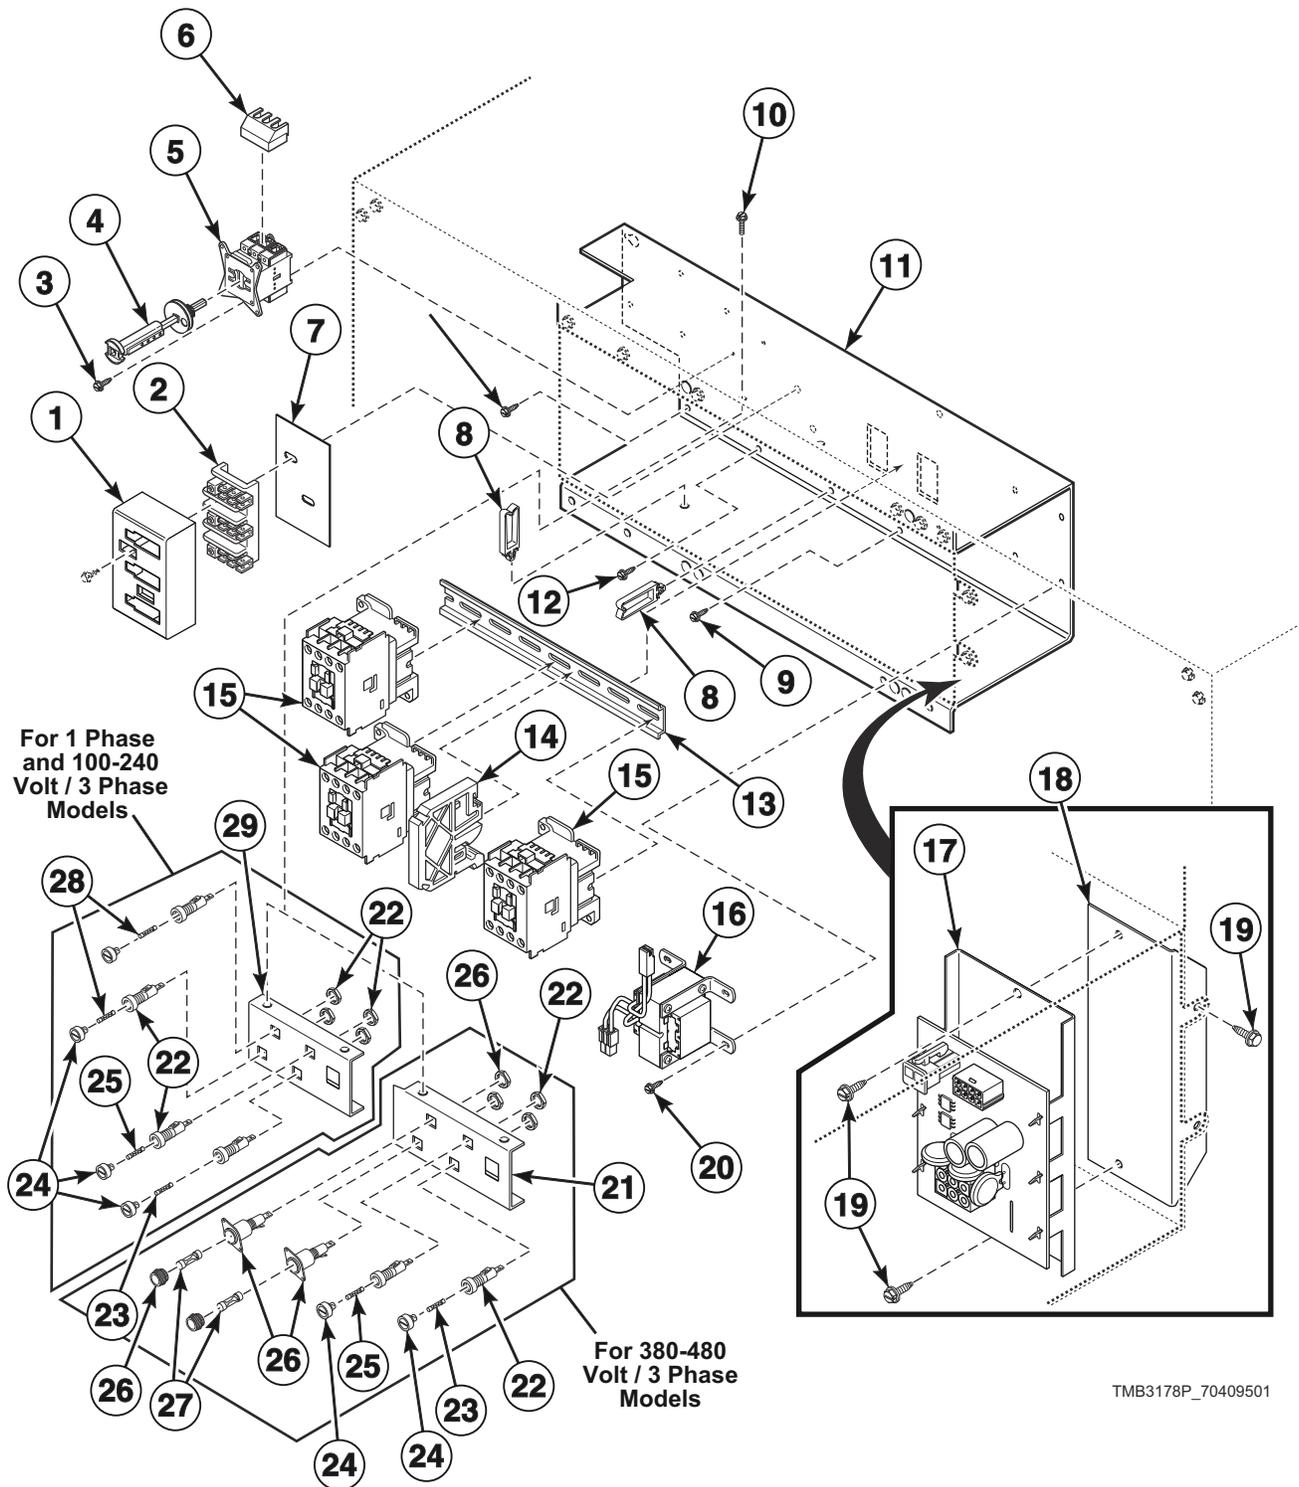

## Control Tray for CE Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
	70030501	Expansion Clip	4 required
	M403047	Secure Ground Label	
	M412096	Earth Terminal Sticker	
	501086	Screw	4 required
1	70333001	Terminal Block Shield	
2	430642	Terminal Block	
3	51782	Screw	2 required
4	70342501P	Extension Handle	Models through 7/31/11
5	M412187P	Mounting Switch Base	Models through 7/31/11
6	M412366	Finger Guard	Models through 7/31/11
7	M413862	Insulator	
8	70366201	Wire Clip	
9	430497	Screw	
10	51780	Screw	2 required
11	70469201	Control Tray	
12	M402917	Screw	
13	M412693	Din Rail	
14	F330186P	Interlock Contactor	Reversing
15	70323701P	Contactor	1 required for nonreversing; 3 required for reversing
16	M414228P	Transformer	100-240 Volt
	M414229P	Transformer	380-480 Volt
	44074401	Transformer	440 Volt; Dual secondary
17	70469901	Reversing Control Assembly	3B, 3W, BB, BW and BZ control suffixes
18	70472601	Bracket	3B, 3W, BB, BW and BZ control suffixes
19	F8206901	Screw	4 required
20	M411072	Screw	4 required
21	70313601	Fuse Bracket	380-480 Volt; Models through 2/28/10
	70313602	Fuse Bracket	380-480 Volt; Models starting 3/1/10
22	70329401P	Fuse Holder Body	Includes nuts; 4 required for 1 Phase; 4 required for 3 Phase with less than 380 Volts; 2 required for 3 Phase with 380 Volts or higher
23	70406601	Fuse	3.5 Amp
24	70329501	Fuse Holder Cap	4 required for 1 Phase; 4 required for 3 Phase with less than 380 Volts; 2 required for 3 Phase with 380 Volts or higher
25	70406501	Fuse	1.25 Amp
26	M413544P	Fuse Holder	Includes nuts; 2 required for 380-480 Volt; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 380-480 Volt; Models starting 3/1/10
27	M413621	Fuse	2 required for 380-480 Volt/3 Phase; 0.5 Amp
28	70406701	Fuse	1 required for 1 Phase; 2 required for 100-240 Volt/3 Phase; 2 Amp
29	70306901	Fuse Bracket	100-240 Volt

# Control Tray Harnesses for Electric Models

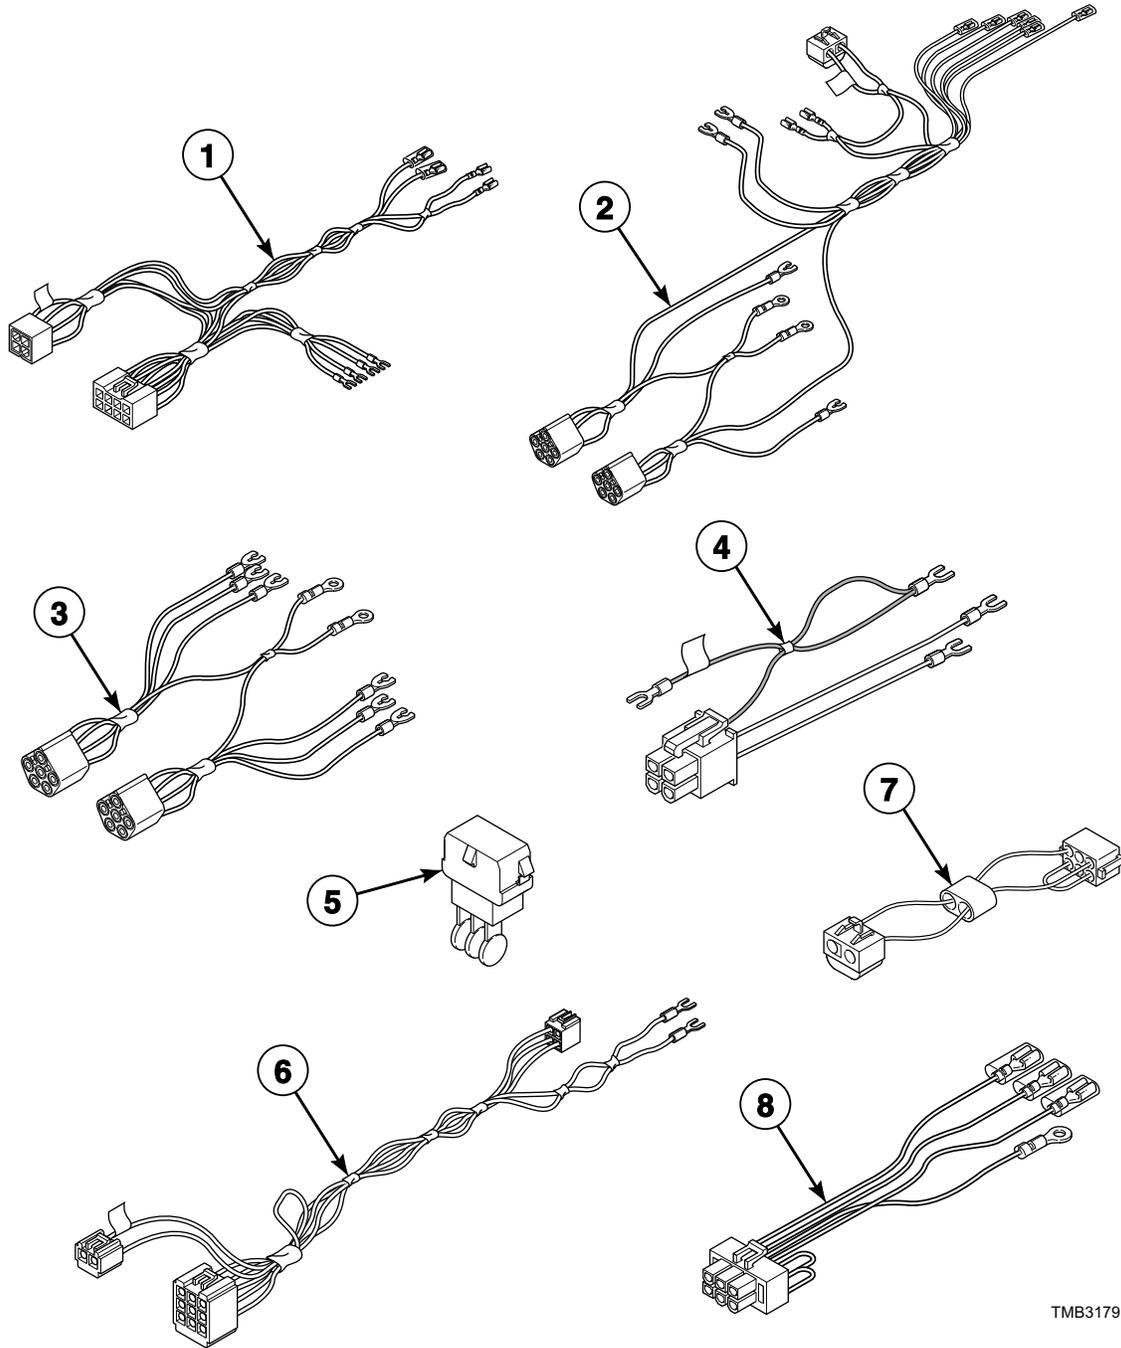


TMB3179P\_70409501

## Control Tray Harnesses for Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70315801	Junction Box Harness	Dual secondary; Models through 7/8/12
	70464701	Control Tray Harness	Models starting 7/9/12
2	70347701P	Power Harness	Models through 2/28/10; 1 Phase; Contactor
	70316101P	Power Harness	Models through 2/28/10; 3 Phase with less than 380 Volts
	70332201	Power Harness	Models through 2/28/10; 3 Phase with 380 Volts or higher
	70445501	Power Harness	Models starting 3/1/10 through 7/8/12; 1 Phase; Contactor
	70439001	Power Harness	Models starting 3/1/10 through 7/8/12; 3 Phase with less than 380 Volts
	70438901	Power Harness	Models starting 3/1/10 through 7/8/12; 3 Phase with 380 Volts or higher
	70469701	Power Harness	Models starting 7/9/12; Contactor; 1 Phase
	70464901	Power Harness	Models starting 7/9/12; 3 Phase with less than 380 Volts
	70465001	Power Harness	Models starting 7/9/12; 3 Phase with 380 Volts or higher
	3	70320201	Motor Contactor Harness
44142601P		Motor Contactor Harness	Models starting 3/1/10 through 7/8/12; 3 Phase
70469301		Motor Contactor Harness	Models starting 7/9/12; 3 Phase
4	70465301	Reversing Contactor Harness	Reversing
5	M413863	Network Capacitor Assembly	3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
6	70471901	Reversing Control Board Harness	3B, 3K, 3W, BB, BW and BZ control suffixes
7	M413505	Jumper Harness Assembly	120 Volt
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	M413508	Jumper Harness Assembly	380 Volt
	M413509	Jumper Harness Assembly	415 Volt
	M413510	Jumper Configuration Assembly	480 Volt
8	M413878	Network Capacitor Harness Assembly	Models through 7/8/12; 3O, 3V, 3X, DO, DV, DX and OM control suffixes
	44143401P	Network Capacitor Harness Assembly	Models starting 7/9/12; Also order 00177 Male Tab Terminal; 3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes

# Control Tray for Electric Models

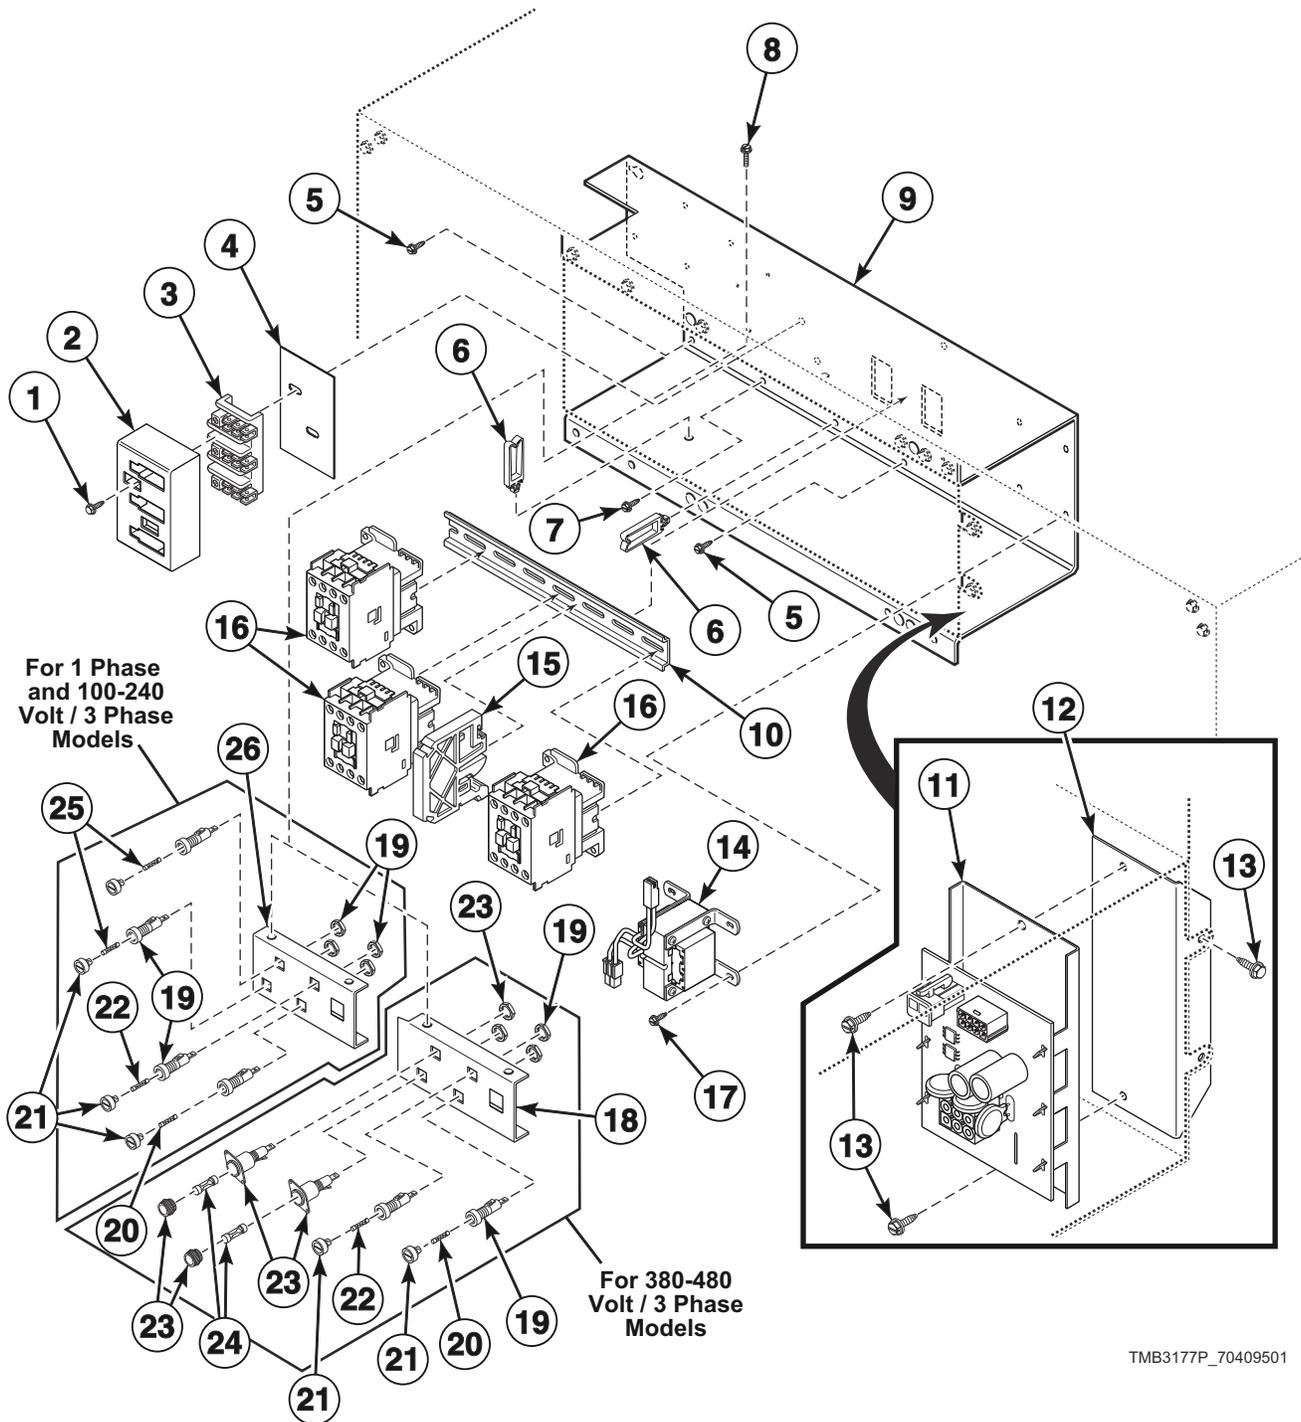


TMB3177P\_70409501

## Control Tray for Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
	70030501	Expansion Clip	4 required
	501086	Screw	4 required for item 23
	M412096	Earth Terminal Sticker	
	44127701	Warning Label	Extended tumble; On control tray cover
<b>1</b>	51783	Screw	2 required
<b>2</b>	70333001	Terminal Block Shield	
<b>3</b>	430642	Terminal Block	
<b>4</b>	M413862	Insulator	
<b>5</b>	430497	Screw	
<b>6</b>	70366201	Wire Clip	
<b>7</b>	51780	Screw	2 required
<b>8</b>	70469201	Control Tray	
<b>9</b>	70469201	Control Tray	
<b>10</b>	M412693	Din Rail	
<b>11</b>	70469901	Reversing Control Assembly	3B, 3K, 3W, BB, BW and BZ control suffixes
<b>12</b>	70472601	Bracket	3B, 3K, 3W, BB, BW and BZ control suffixes
<b>13</b>	F8206901	Screw	4 required
<b>14</b>	M414228P	Transformer	100-240 Volt
	M414229P	Transformer	380-480 Volt
	M414230P	Transformer	120 Volt; Primary/secondary
	M414312P	Transformer	120 Volt; Dual secondary
	44074401	Transformer	440 Volt; Dual secondary
<b>15</b>	F330186P	Interlock Contactor	Reversing
<b>16</b>	70323701P	Contactor	1 required for nonreversing; 3 required for reversing
<b>17</b>	M411072	Screw	4 required
<b>18</b>	70313601	Fuse Bracket	380-480 Volt; Models through 2/28/10
	70313602	Fuse Bracket	380-480 Volt; Models starting 3/1/10
<b>19</b>	70329401P	Fuse Holder Body	Includes nuts; 3 required for 1 Phase; 4 required for 3 Phase with less than 380 Volts; 2 required for 3 Phase with 380 Volts or higher
<b>20</b>	70406601	Fuse	3.5 Amp
<b>21</b>	70329501	Fuse Holder Cap	3 required for 1 Phase; 4 required for 3 Phase with less than 380 Volts; 2 required for 3 Phase with 380 Volts or higher
<b>22</b>	70406501	Fuse	1.25 Amp
<b>23</b>	M413544P	Fuse Holder	Includes nuts; 2 required for 380-480 Volt; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 380-480 Volt; Models starting 3/1/10
<b>24</b>	M413621	Fuse	2 required for 380-480 Volt/3 Phase; 0.5 Amp
<b>25</b>	70406701	Fuse	1 required for 1 Phase; 2 required for 100-240 Volt/3 Phase; 2 Amp
<b>26</b>	70306901	Fuse Bracket	

# Accessory Box Harnesses for Electric Models

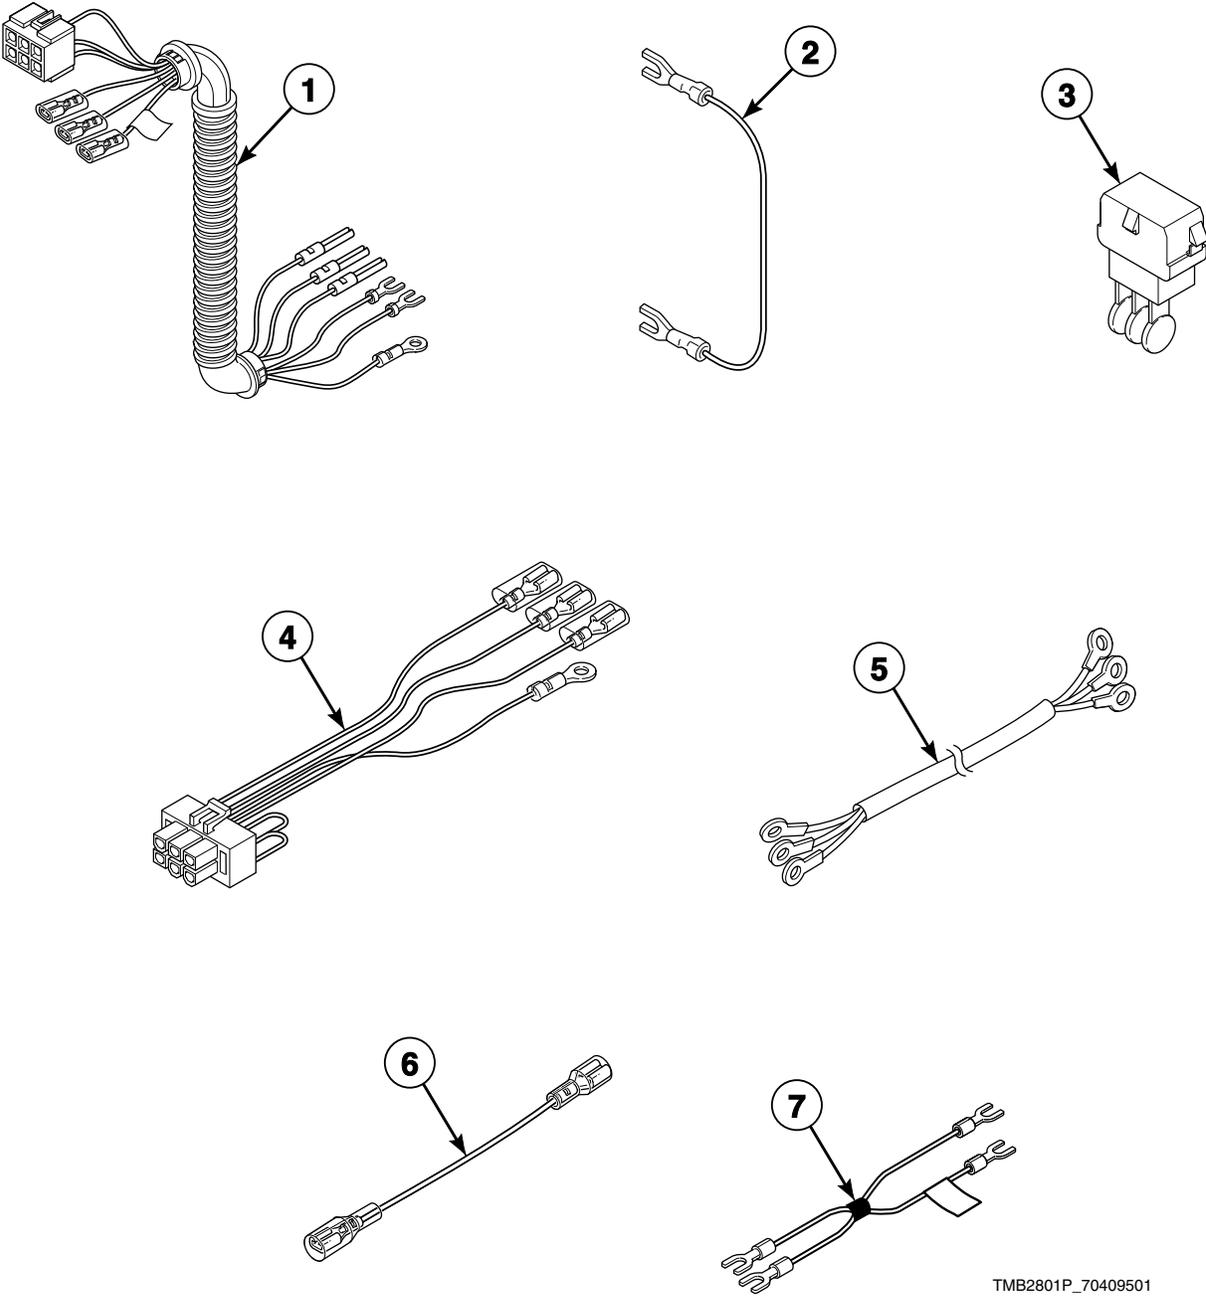


TMB2801P\_70409501

## Accessory Box Harnesses for Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70335501P	Electric Power Buss Harness	Models through 2/28/10
	70439601	Electric Power Buss Harness	Models starting 3/1/10
2	M413933	Jumper Cable Assembly	Non-CE models; 8 gauge; 7.5 inches; 2 required for 1 Phase; 3 required for 3 Phase
	M413934	Jumper Cable Assembly	8 gauge; 8 inches; 1 required for 1 Phase; 3 required for 3 Phase
	M414121	Jumper Cable Assembly	CE models; 8 gauge; 6.75 inches; 6 required for 3 Phase with less than 380 Volts
3	M413863	Network Capacitor Assembly	3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
4	70286501	Network Capacitor Harness Assembly	Models through 7/8/12; 3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
	44152001	Network Capacitor Harness Assembly	Models starting 7/9/12; 3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
5	70371301P	Cable Set Heater Assembly	H1-H3
	70371401P	Cable Set Heater Assembly	H4-H6; Required for less than 380 Volts
6	70139001	Jumper Assembly	Non-CE models; 8 gauge; 10 inches; 2 required for 1 Phase; 3 required for 3 Phase with less than 380 Volts
	70139101	Jumper Assembly	Non-CE models; 8 gauge; 11 inches; 1 Phase
	70138801	Jumper Assembly	CE models; 6 gauge; 8 inches; 3 required for 3 Phase
	70138901	Jumper Assembly	CE models; 2 gauge; 7.5 inches; 2 required for 1 Phase
	44014601	Jumper Wire	CE models; 8 gauge; 6.25 inches; 3 required for 3 Phase with less than 380 Volts
	44014701	Jumper Wire	CE models; 8 gauge; 10.5 inches; 2 required for 1 Phase; 3 required for 3 Phase with less than 380 Volts
	44014801	Jumper Wire	CE models; 8 gauge; 13 inches; 3 required for 1 Phase and 3 Phase with 380 Volts or more
7	70355801P	Electric Contactor Jumper Set Harness	Required for less than 380 Volts

# Accessory Box for Non-CE Electric Models

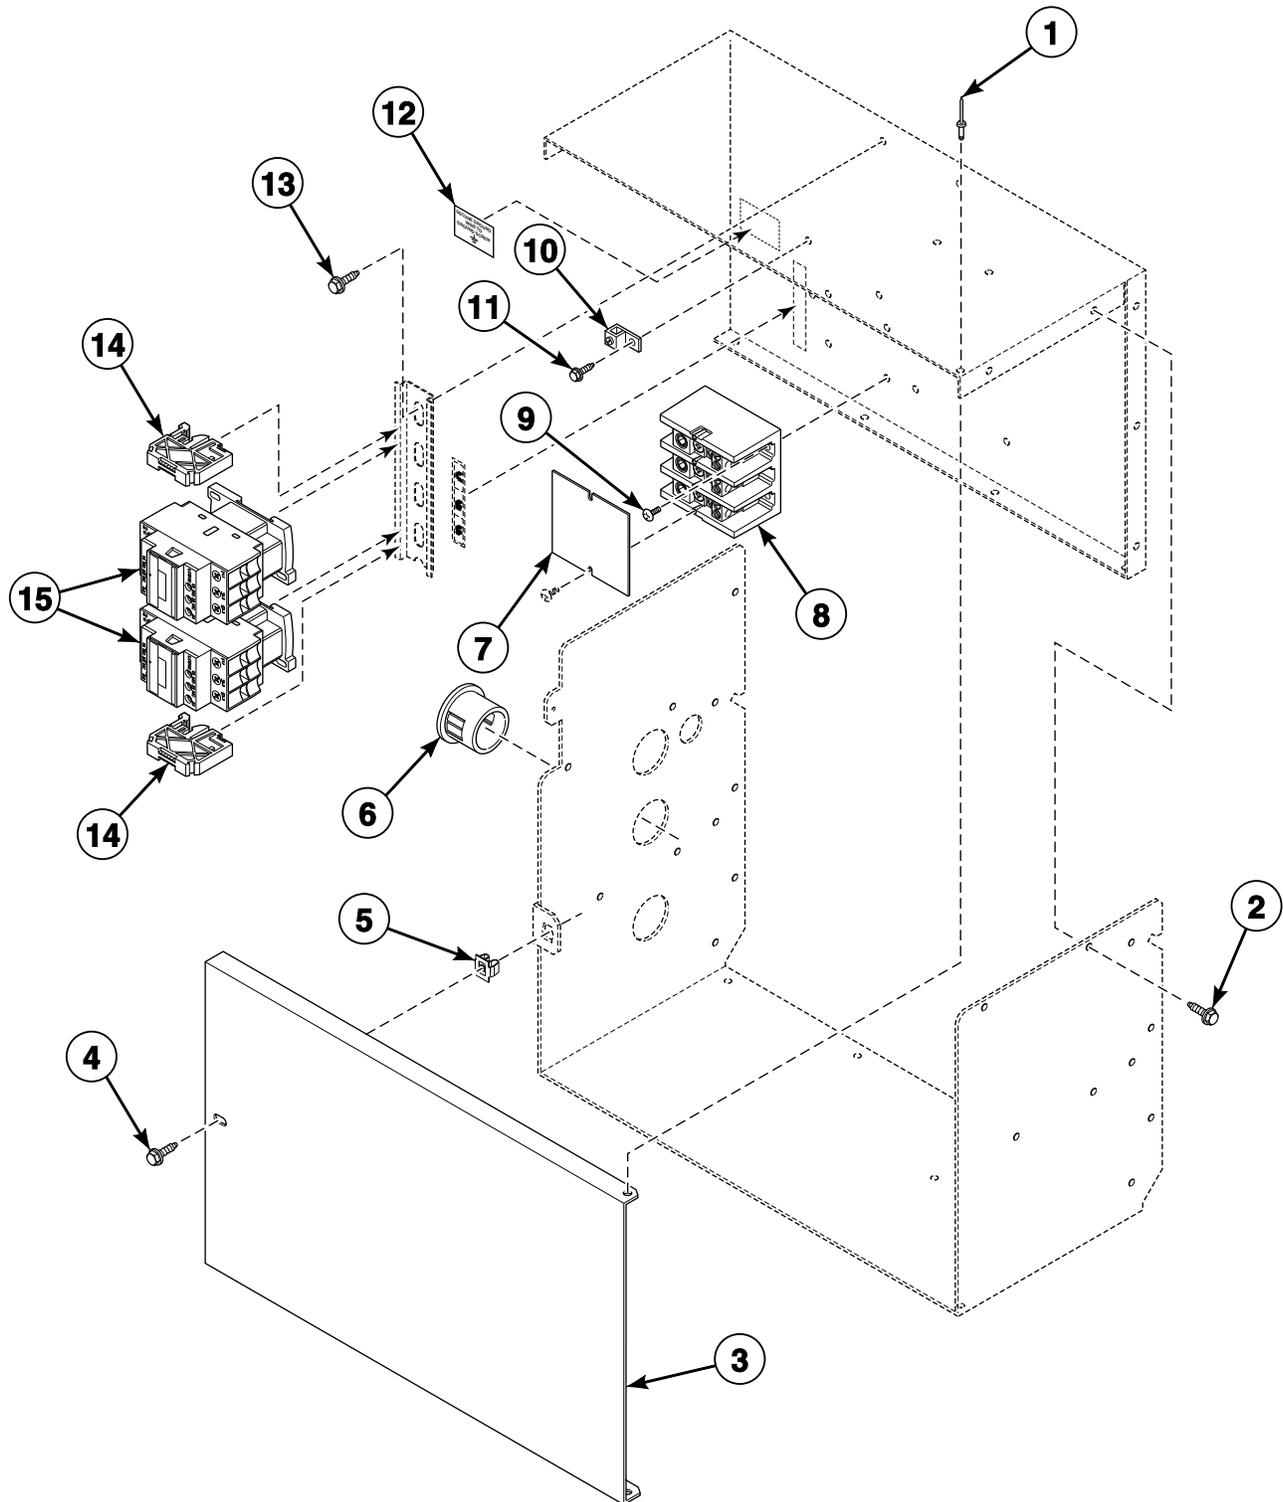


TMB2538P\_70409501

## Accessory Box for Non-CE Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M413930P	Ferrite Core Assembly	3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
	44127701	Warning Label	Extended tumble; Use on accessory box cover
<b>1</b>	70058502	Pop Rivet	2 required
<b>2</b>	430497	Screw	11 required
<b>3</b>	70358401	Accessory Box Cover	
<b>4</b>	33562	Screw	
<b>5</b>	70030501	Expansion Clip	
<b>6</b>	M402542	Snap Bushing	2 required
<b>7</b>	44014901P	Power Distribution Block Cover	
<b>8</b>	M413865	Terminal Block	3 pole
<b>9</b>	39733	Screw	6 required
<b>10</b>	M411283	Ground Lug Connector	
<b>11</b>	M402917	Screw	
<b>12</b>	M403047	Secure Ground Label	
<b>13</b>	51780	Screw	6 required
<b>14</b>	70121001	End Stop	2 required
<b>15</b>	70343301P	Contactora	2 required for less than 380 Volts; 1 required for 380 Volts or more

# Accessory Box for CE Electric Models

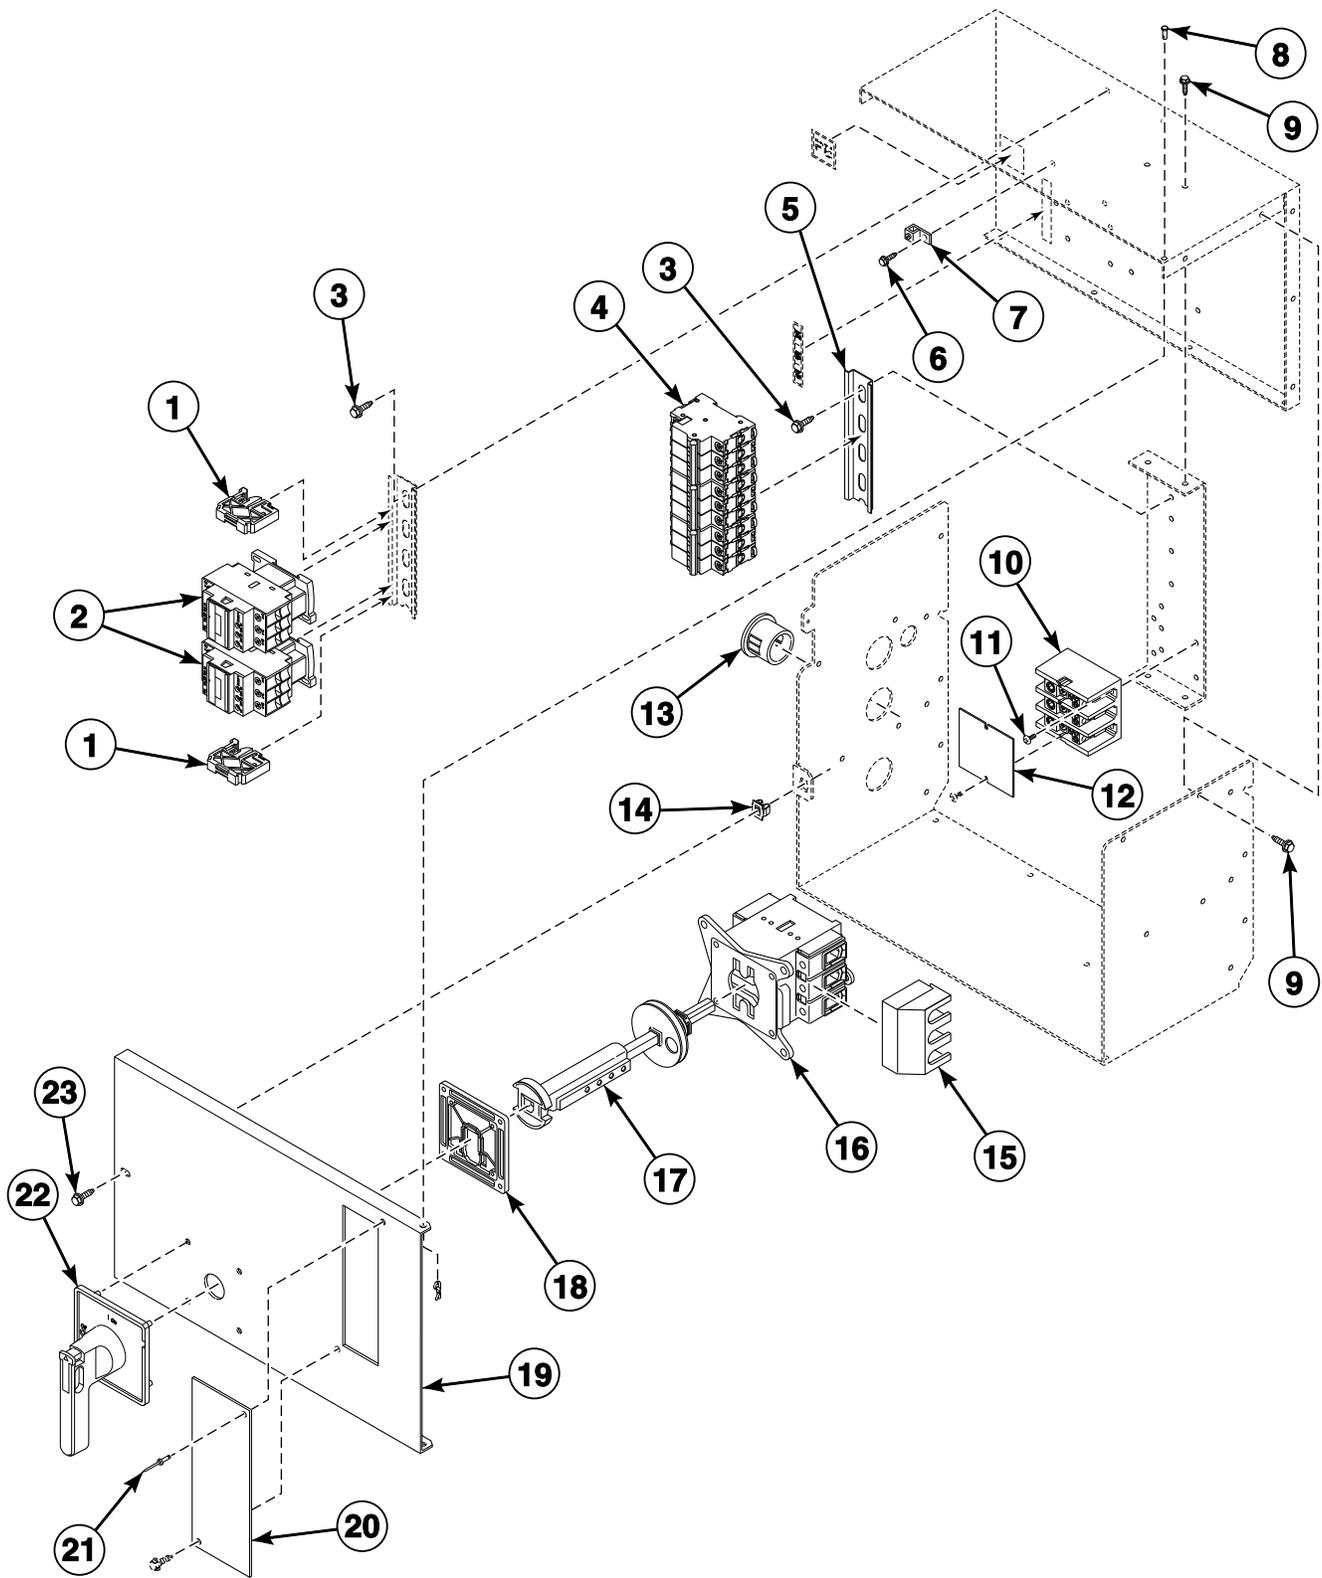

TMB2539P\_70409501

## Accessory Box for CE Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M413930P	Ferrite Core Assembly	3L, 3O, 3V, 3X, DO, DV, DX and OM control suffixes
	44127701	Warning Label	Extended tumble; Use on access cover
<b>1</b>	70121001	End Stop	2 required
<b>2</b>	70343301P	Contactor	2 required
<b>3</b>	51780	Screw	14 required
<b>4</b>	M412401	Circuit Breaker	1 Phase
	M412407P	Circuit Breaker	3 Phase
	M412408P	Circuit Breaker	1 required for 1 Phase; 2 required for 3 Phase
<b>5</b>	M412693	Din Rail	
<b>6</b>	M402917	Screw	
<b>7</b>	M411283	Ground Lug Connector	
<b>8</b>	70058502	Pop Rivet	2 required
<b>9</b>	430497	Screw	11 required
<b>10</b>	M413865	Terminal Block	3 pole
<b>11</b>	39733	Screw	4 required
<b>12</b>	44014901P	Power Distribution Block Cover	
<b>13</b>	M402542	Snap Bushing	2 required
<b>14</b>	70030501	Expansion Clip	
<b>15</b>	M412367	Finger Guard	Models through 7/31/11
<b>16</b>	M412186	Mounting Switch Base	Models through 7/31/11
<b>17</b>	M412371P	Extension Handle	Models through 7/31/11
<b>18</b>	M412369	Door Interlock	Models through 7/31/11
<b>19</b>	70358402	Accessory Box Cover	
<b>20</b>	70133901	Electrical Box Access Cover	
<b>21</b>	70058501	Pop Rivet	2 required
<b>22</b>	70268001	Handle	Models through 7/31/11
<b>23</b>	33562	Screw	3 required



# Parts Index

## A

Access Panel Trim	
70399401 .....	69
Accessory Box Cover	
70358401 .....	125
70358402 .....	127
Adapter	
70131901 .....	99
Adhesive	
511637P .....	75
Adjustable Buzzer	
505447 .....	21
Air Filter	
70036001 .....	103
Airflow Switch and Arm Bracket	
70319601 .....	93
Airflow Switch Arm	
70319401 .....	93
Airflow Switch Cover	
70356601 .....	93
70465701 .....	93
Airflow Switch Vane	
70319201 .....	93
Airflow Switch Wrapper	
70356101 .....	93

## B

Bearing Housing Bracket	
70021401 .....	91
Belt	
70276201P .....	83, 85
Belt Access Cover	
70466001 .....	85
Belt Tension Tool Kit	
M4853P3 .....	83
Blower Assembly	
70359801P .....	87
Blower Motor	
70337501P .....	87
70342601P .....	87
Blower Motor Kit	
70337601P .....	87
70337701P .....	87
Blower Motor Mounting Plate	
70349601 .....	87
Bolt	
70062401 .....	83, 85
70467501 .....	85
Bracket	
44065901 .....	81
44263501 .....	19
70472601 .....	107, 111, 115, 117, 121
Bumper Pad	
56128 .....	107, 109
Burner Grill	
70188801 .....	95

Burner Orifice	
M400997 .....	97
M401002 .....	97
M401007 .....	97
M401014 .....	97
M401015 .....	97
M401021 .....	97
M402489 .....	97
M402988 .....	97
M402995 .....	97
M402997 .....	97
M403017 .....	97
M411373 .....	97
M411375 .....	97
M411376 .....	97
M411511 .....	97
44254001 .....	97
70070903 .....	97
70476601 .....	97

Bushing	
44239501 .....	85
70346501 .....	77

Buzzer Kit	
M4860P3 .....	17

Bypass Harness	
70364103 .....	17, 19, 23, 29, 37, 43, 51, 53, 55

## C

Cable Set Heater Assembly	
70371301P .....	101, 123
70371401P .....	101, 123

Cam and Hinge Kit	
M4772P3 .....	61
M4773P3 .....	61

Card Reader and Bracket Assembly	
510068P .....	37

Card Reader Harness Assembly	
70211801 .....	37

Card Reader Network Harness Assembly	
70206601 .....	37

Card Reader Overlay	
70334201 .....	29
70334301 .....	29, 51

Center Cylinder Seal Assembly	
70066003 .....	75

Center Pan	
70252201 .....	77

Center Partition	
70252501 .....	77

Central Pay Harness	
70484601 .....	27, 41, 49
70491501 .....	19

Central Pay Interface Control Assembly	
209/00471/75 .....	19

Circuit Board Support	
501523 .....	81

Circuit Breaker	
M412401 .....	127
M412407P .....	127
M412408P .....	127

N/A items do not appear in index.



70273401*	63
70273402	63
70273403*	63
70273404	63
70273405*	63
70273406	63
70273407B	63
70273408B	63
70273409LG	63
70273410	63
70273411*	63
70273414	63
70273415	63
Control Panel and Door Hinge Kit	
M4775P3	57, 59, 61, 63
Control Panel Harness	
44240301	53, 55
70315501P	27, 29, 35, 37
70335301P	23
70367001P	17
70368001P	29, 35, 37
70369001	15
70382701P	23
70398401	15
70410401P	41, 43, 49, 51
70485301	19
70489901	19
Control Panel Harness Assembly	
70368001P	27
Control Plate and Studs Assembly	
70440901	55
Control Plate Assembly	
44040901	21
44041001	21
70175805	23
70175806	23
70175807	25, 35
70336501	51
70348801	29, 37, 43
70360601	17
70475601	53
Control Plate Kit	
44050701P	19
70291001P	41, 49
Control Set	
70370001	15
70370101P	15
70370201P	17
Control Tray	
70469201	107, 109, 115, 117, 121
Control Tray Harness	
70464701	105, 113, 119
Control Trim	
44016301	69
44016401	69
Cylinder and Trunnion Assembly	
70435201	75
70435202	75
70435203	75
Cylinder Assembly	
70372601P	75
70372602P	75
70372603	75
Cylinder Bearing Stud Plate Assembly	
430352	75

Cylinder Guide Tool	
263P4	75
Cylinder Idler Arm	
70259901	83
Cylinder Motor Harness Assembly	
70401001	75, 83
70401101	75, 83
70439701	75, 83
70440101	75, 83
70465801	75, 85
Cylinder Rib Assembly	
70433001	75
Cylinder Shroud	
70427401	77
70427402	77

## D

Damper and Hinge Exhaust Assembly	
70209501	87
Din Rail	
M412693	107, 109, 115, 117, 121, 127
DIN Valve Adapter Kit	
F8382301	103
DIN Valve Kit	
F8521701	103
Display Assembly	
512218P	17
Door Assembly	
44046701	57
44058001P	57
44058004	57
44287801LG	57
70064100	57
70212200	57
70212301	57
70212302	57
70408901	57
70496501	57
70496502	57
Door Glass	
M400784P	59
70133601P	59
Door Glass Installation Tool	
M4221P4	59
Door Glass Seal Kit	
70211901P	59
Door Handle	
M400133	59
430117	59
44007902P	59
44057701	59
44263801	59
Door Hinge	
70115901*	61
70115902	61
70115903B	61
70115903LG	61
Door Hinge Lug Assembly	
44035001	61
44035002	61
Door Interlock	
M412369	127

N/A items do not appear in index.

Door Latch	70294120	31
M401223	70294121	31
Door Ring	Electronic Coin Drop Harness	31
70399701B	44065801	31
70496401	Electronic Coin Drop Kit	
Door Ring and Handle Assembly	CK099	33
44043501	CK100	33
Door Ring Assembly	CK101	33
44287701LG	CK103	33
70505701	CK108	33
70505702	CK109	33
70505709B	CK113	33
70505712	CK115	33
70505713	CK116	33
Door Ring Gasket	CK117	33
70296801	CK118	33
Door Switch Actuator Kit	CK119	33
70215001P	CK120	33
Double Ended Stud	CK121	33
70334701	CK122	33
Drive Access Cover	Electronic Control	
70196301	44037801P	21
70202501	Electronic OPL Control Kit	
Drive Motor	M4689P3	23
70337801P	M4695P3	23
70338101P	Emergency Stop Contact Harness	
70459001P	70364105P	71
Drive Motor Kit	Emergency Stop Harness	
70337901P	70364106P	71
70338001P	Emergency Stop Label	
Drive Motor Plate	M412235	71
44261401	Emergency Stop Pushbutton	
Drive Rivet	F200233500	71
M400713	End Cap	
Drum Idler Spring	70070101	75
70045301	70070102	75
Drywall Screw Magnet Kit	End Stop	
70343101P	70121001	125, 127
	Ethernet Gateway Kit	
	NK320	41, 43, 53
	Exhaust Adapter	
	70477901	87
	Exhaust Thimble	
	70015601	87
	Expansion Clip	
	70030501	69, 107, 109, 111, 115, 117, 121, 125, 127
	Extension Handle	
	M412371P	127
	70342501P	109, 117
	<b>F</b>	
	False Front	
	70021101*P	67
	70021103B	67
	70021103DG	67
	70021103LG	67
	70021104	67
	70024003B	67
	70024003DG	67
	70024003LG	67
	70024004	67

N/A items do not appear in index.

False Front Assembly	
70021102P .....	67
70024001*P .....	67
70024002P .....	67
Fan Motor Harness Assembly	
70401201 .....	87
70401301 .....	87
70439801 .....	87
70440201 .....	87
Ferrite Core Assembly	
M413930P .....	23, 125, 127
Fill Hose Kit	
38349P .....	81
Filter	
70429401 .....	103
Finger Guard	
M412366 .....	109, 117
M412367 .....	127
Fire Suppression System Label	
44128901 .....	65
Flat Top	
70018601 .....	77
Foam Gasket	
70414101 .....	15, 17, 19, 21, 23, 25, 29, 35, 37, 41, 43, 49, 51
Front Panel	
70329613DG .....	65
70329613LG .....	65
70329614LG .....	65
70329615B .....	65
70329616B .....	65
70329616DG .....	65
70521301DG .....	65
70521401DG .....	65
Front Panel Assembly	
44116401*P .....	65
44116501P .....	65
44116502 .....	65
44116601* .....	65
44116701P .....	65
44116702 .....	65
44116801*P .....	65
44116901 .....	65
44116902 .....	65
44117001* .....	65
44117101P .....	65
44117102 .....	65
Front Panel Seal	
70173401P .....	65
Fuse	
M413621 .....	107, 111, 115, 117, 121
70406501 .....	23, 107, 111, 115, 117, 121
70406601 .....	107, 111, 115, 117, 121
70406701 .....	107, 111, 115, 117, 121
Fuse Bracket	
70306901 .....	107, 111, 115, 117, 121
70313601 .....	107, 111, 115, 117, 121
70313602 .....	107, 111, 115, 117, 121
Fuse Holder	
M413544P .....	107, 111, 115, 117, 121
44155601P .....	107, 111, 115, 117, 121
Fuse Holder Body	
70329401P .....	107, 111, 115, 117, 121
Fuse Holder Cap	
70329501 .....	107, 111, 115, 117, 121

## G

Gas Burner	
70229801P .....	95
Gas Disconnect Harness	
70342101 .....	105, 113
70440501 .....	105, 113
Gas Line Assembly	
70271201 .....	97
Gas Shut-Off Valve	
M412562P .....	99
Gas Valve	
44154501P .....	97
44154502P .....	97
Gas Valve Bracket	
70233301 .....	99
70429801 .....	97
Gas Valve Coil	
70260101 .....	99
Gas Valve Cover	
70381001 .....	95
70429901 .....	95, 97
Gas Valve Harness	
70184001 .....	99
Gas Valve Harness Assembly	
M413650 .....	99
Gasket	
70392701P .....	87
Graphic Overlay	
44050401 .....	19
44050501 .....	19
44050502 .....	19
44239401 .....	19
44239402 .....	19
44239403 .....	19
44240501 .....	19
Ground Lug Connector	
M411283 .....	125, 127

## H

Hairpin Cotter	
70389301 .....	103
Handle	
44287601 .....	59
70268001 .....	127
Handle and Caps Assembly	
70154403 .....	73
70154404 .....	73
Handle Bar	
70399502B .....	59
Handle Bumper	
70407201 .....	73
70407208 .....	73
Harness Assembly	
M412997 .....	97, 103
Heater Element	
70034404P .....	101
70034405P .....	101
70034406P .....	101
70034412P .....	101
70034414P .....	101
70034415P .....	101

N/A items do not appear in index.

70034416P.....	101
High Voltage Lead 70006201 .....	105
High Voltage Suppression Cable 44239702 .....	105
Hold-Down Clip 35865 .....	77
Hole Plug 44024201 .....	59
70063201 .....	77
Hose 44073304 .....	81
Hose Clamp 36801 .....	81
Hose Fitting 44069101 .....	81

## I

ICM Reset Label 70411001 .....	109, 111
Idler Bracket 70443301 .....	83
Idler Holder 70464501 .....	85
Idler Spacer 70464601 .....	85
Idler Wheel Assembly 70050401P .....	83, 85
Igniter Cover 70159601 .....	95
Ignition Control 70458601P .....	107
70483201 .....	109
Ignition Control Harness 70316301 .....	105
70316401 .....	105
Ignition Control Kit 70492701 .....	107
70492801 .....	109
Insulator M413862 .....	107, 109, 115, 117, 121
Interlock Contactor F330186P .....	107, 109, 115, 117, 121

## J

Jumper Assembly 70138801 .....	123
70138901 .....	123
70139001 .....	123
70139101 .....	123
Jumper Bar 70066501 .....	101
Jumper Cable Assembly M413933 .....	123
M413934 .....	123
M414121 .....	123
Jumper Calibration Assembly 70084301 .....	23
Jumper Calibration Wire 70324601 .....	49, 51

70324602 .....	15, 17, 27, 29, 35, 37, 41, 43, 53, 55
Jumper Configuration Assembly M413507 .....	105, 113, 119
M413510 .....	105, 113, 119
Jumper Disconnect Assembly 70120901 .....	105, 113
Jumper Harness Assembly M413504 .....	105, 113
M413505 .....	105, 113, 119
M413506 .....	105, 113, 119
M413508 .....	105, 113, 119
M413509 .....	119
Jumper Strip M400869 .....	101
Jumper Wire 44014601 .....	123
44014701 .....	123
44014801 .....	123
70066601 .....	101
Junction Box Harness 70315801 .....	105, 113, 119

## K

Key 70144101 .....	87
70155601 .....	69
70155602 .....	69
Kickplate 70117603 .....	73
70117604 .....	73

## L

Label 44108201 .....	65
44190901 .....	65
70414001 .....	59
Leveling Leg 34319 .....	77
Light 801431 .....	15
801432 .....	81
Limit Thermostat M409433 .....	101
M410542 .....	95
M411307 .....	87
510701 .....	95
Lint Panel 70115003B .....	73
70115003LG .....	73
70115004DG .....	73
70115005 .....	73
70115006 .....	73
70115007 .....	73
Lint Panel Assembly 70176701* .....	73
70176702P .....	73
70176703* .....	73
70176704 .....	73
70176705* .....	73
70176706 .....	73
70176707* .....	73

N/A items do not appear in index.

70176708 .....	73
Lint Panel Gasket 70289101P .....	73
Lint Panel Switch Bracket 70277301 .....	77
Lint Screen 70325601 .....	77
Lint Screen Clip 70054501 .....	77
Lock Shim 70342401 .....	69
Lock, Key and Nut Kit 44089301P .....	69, 81
44089302P .....	69
Lower Rear Panel 70290201 .....	87
L.P. Conversion Kit M4711P3 .....	97
L.P. Valve 44154504 .....	99
70457302P .....	99
L.P. Valve Conversion Kit M405434P .....	99

## M

Main Harness 70441301 .....	17, 23, 27, 29, 41, 43, 53, 55
70467801 .....	15, 17, 23, 27, 29, 35,
.....	37, 41, 43, 49, 51, 53, 55
Male Tab Terminal 00177 .....	15, 17, 21
Manual Reset Thermostat M411945 .....	87
70186301 .....	95
Membrane Switch M414368P .....	23
44037901P .....	21
44039402P .....	21
510036P .....	25, 29, 35, 37
Mixing Valve 36958P .....	81
Moisture Sensor Harness Assembly 70448901 .....	89
Moisture Sensor Test Wires 70468901 .....	89
Motor Bracket 70464101 .....	85
Motor Capacitor M410296 .....	83
70211401 .....	83
70211501 .....	87
70211502 .....	83
Motor Channel 70261701 .....	83
Motor Conduit Mounting Bracket 70321701 .....	83, 87
Motor Contactor Harness 44142601P .....	105, 113, 119
70320201 .....	105, 113, 119
70469301 .....	105, 113, 119
Motor Mount Bracket 70127301 .....	83

Motor Plate Cover 70464201 .....	85
Motor Pulley 70284201 .....	83
70284203 .....	83
70457401 .....	85
Mounting Bracket 70063501 .....	23
Mounting Plate 70208801 .....	29, 37, 43, 51
Mounting Switch Base M412186 .....	127
M412187P .....	109, 117

## N

Nameplate B12389801 .....	69
F8443102 .....	69
44046801 .....	69
44062901 .....	69
44129903 .....	69
70243901 .....	69
70509601 .....	69
70522001 .....	69
Nameplate Overlay 44104501 .....	69
44130201 .....	69
44144401 .....	59, 69
70115601 .....	69
70380701 .....	69
70410201 .....	69
70411401 .....	69
70460801 .....	69
Network Board Assembly 201341 .....	45
210016P .....	39
Network Capacitor Assembly M413863 .....	105, 113, 119, 123
Network Capacitor Harness Assembly M413878 .....	105, 113, 119
44143401P .....	105, 113, 119
44152001 .....	123
70286501 .....	123
Network Controller Kit NK220 .....	41, 43, 53
Network Plug Support 70201401 .....	39
Network Retrofit Kit NK206 .....	41, 43, 53
Network Wire Harness Assembly 44088501P .....	45
800217 .....	39
Nozzle Bracket 70424201 .....	79
70428601 .....	79
Nut F431025 .....	85
M400022 .....	75, 87
M400034 .....	75, 87
M400035 .....	89
M400977 .....	69
M404993 .....	77
M412986 .....	75, 83, 85
M414215 .....	59

N/A items do not appear in index.

21899	77
23951	73
24205	15, 17
27222	83, 85
29786	15
29787	17, 19, 21
29796	83
430576	77
44071201	59
44087201	75
44088801	69
51236	73
56156	83
70054	15, 17, 23, 25, 29, 35, 37, 41, 49, 53, 55, 59, 101
70466601	85
N.G. Valve	
44154503	99
70457301P	99

## O

Opto Coupler	
200674P	31
Orifice Adapter	
70379301	97
Orifice Holder Bracket	
70248901	97
Orifice Keeper Bracket	
70249001	97
O-Ring	
431482	99
Output Bracket	
70440601	53
Output Harness	
44186101	53, 55
Overlay	
44130002	23
70115801	23
70128701	23
70129501	25
70129601	25
70130401	23
70130601	23
70184301	35
70184302	35
70184401	37
70257701	25
70257702	25
70257703	29
70258001	25
70258002	25
70258003	29
70258101	25
70259001	25
70261001	25
70261002	25
70261201	25
70261202	25
70286701	25
70321001	25
70362201	17
70362202	17
70362401	17
70362402	17
70362501	17

70362502	17
70362901	15
70363001	15
70410003	43
70432201	53
70445001	55
70445002	55
70445003	55
70445004	55
70453001	25
70453002	25
70453101	29
70462401	55
70462402	55
70462701	55
70462702	55
70462901	55
70462902	55
70472201	55
70472202	55
70472401	55
70472402	55
70491901	25
70491902	25
70491903	29
70493701	55
70493702	55
70494001	17
70494002	17
70499001	53
70504501	49
70504502	49
70504503	51
70504601	49
70504602	49
70504603	51
70504701	17
70504702	17
70504901	55
70504902	55
70505201	25
70505202	25
70505203	29
70508601	55
70508602	55
70508701	25
70509701	29
70510501	25
70510601	25
70510701	25
70510801	25
70510901	25
70511001	29
70526001	55
70526002	55

## P

Panel Locator	
56079	17, 69, 73
PC Board Standoff	
210098	47
Pin	
70071401	61
Pipe Clip	
70203701	95

N/A items do not appear in index.

Pipe Nipple	
70139601 .....	99
901403 .....	99
Pop Rivet	
M405750 .....	97
44166601 .....	69
70058501 .....	61, 77, 103, 127
70058502 .....	125, 127
70126301 .....	73
70126401 .....	73
70412601 .....	59
Porcelain Touch-Up Paint	
122P4P .....	77
215P4P .....	77
370P4P .....	77
Power Distribution Block Cover	
44014901P .....	125, 127
Power Harness	
70316101P .....	105, 113, 119
70332201 .....	105, 113, 119
70347701P .....	105, 113, 119
70438901 .....	105, 113, 119
70439001 .....	105, 113, 119
70445501 .....	105, 113, 119
70464901 .....	105, 113, 119
70465001 .....	105, 113, 119
70469701 .....	105, 113, 119
Primary Air Adjustment Sleeve	
70239801 .....	97, 99
Pushbutton	
44018801 .....	71
Pushbutton Switch	
M413431 .....	111
70413301 .....	25, 29, 35, 37, 41, 43, 49, 51, 69
Push-to-Start Switch	
801434W .....	81

## R

RC Filter Kit	
M4457P3 .....	23
Rear Bearing Shim	
70355001 .....	75
Rear Cylinder Bearing Housing	
70013901 .....	75
Rear Cylinder Channel	
70257101 .....	75
70257102 .....	75
Rear Cylinder Channel Plate	
70257201 .....	75
Rear Cylinder Seal	
70013701P .....	75
Rear Cylinder Seal Support	
70506402 .....	75
Rear Lint Panel	
70249901 .....	73
Relay	
M412534 .....	21, 23
Relay/Buzzer Bracket	
44041701 .....	21
Replacement Door Handle Kit	
70133501P .....	57, 59
Replacement Gas Valve Kit	
M4969P3 .....	97

M4971P3 .....	97
Reversing Contactor Harness	
70465301 .....	105, 113, 119
Reversing Control Assembly	
70469901 .....	107, 111, 115, 117, 121
Reversing Control Board Harness	
70471901 .....	105, 113, 119
Rivet	
70412601 .....	59
Rocker Switch	
70455101 .....	15, 17
70461301 .....	17
Roller Bearing Assembly	
70298701P .....	77
Roller Catch Arm	
70030301 .....	73
Roller Catch Spacer	
70030201 .....	73
Roller Catch Wheel	
70297601 .....	73
Roller Seal	
70443601 .....	77
Roller Shaft	
70249501 .....	77
Rotation Sensor	
F8066201 .....	91
Rotation Sensor Bracket	
44044401 .....	91
Rotation Sensor Cover	
44044301 .....	91
Rotation Sensor Harness	
F8066401 .....	91
70476101 .....	91
Rotation Sensor Kit	
7009P .....	91

## S

Screw	
F8206901 .....	107, 111, 115, 117, 121
F8368701 .....	85
M400043 .....	85
M400056 .....	83
M400057 .....	85
M400661 .....	59
M402797 .....	21, 23
M402917 .....	107, 109, 115, 117, 125, 127
M405188 .....	95
M409385 .....	59
M411072 .....	87, 107, 109, 115, 117, 121
M412985 .....	83
05161 .....	95
23222 .....	83, 87, 99
33562 .....	125, 127
38272 .....	107, 109
39733 .....	69, 73, 125, 127
430497 .....	39, 45, 69, 75, 77, 79, 81, 83, 85, 87, 93, 95, 97, 99, 101, 107, 109, 115, 117, 121, 125, 127
430648 .....	83
430756 .....	59
430757 .....	73
431484 .....	99
44083001 .....	107, 109

N/A items do not appear in index.

501086 .....	111, 115, 117, 121	Standoff	
501524 .....	15, 17, 25, 29, 35, 37, 41, 43,	211/00119/00 .....	19
	49, 51, 53, 55, 61	Steam Coil	
51780 .....	79, 81, 107, 109, 115, 117, 121, 125, 127	70369101P .....	103
51782 .....	109, 111, 117	Steam Configuration Harness	
51783 .....	107, 109, 115, 121	70322401P .....	113
61199 .....	59	Steam Filter Holder	
62588 .....	75	70369301 .....	103
70033502 .....	61	Steam Solenoid	
70069901 .....	15, 17, 53	70351011P .....	103
70072801 .....	73	70351012 .....	103
70126101 .....	87	Steam Stove Limit Bypass Harness	
70132301 .....	73	70389901 .....	103
70153301 .....	91	Steam Valve	
70391101 .....	75	F8322902 .....	103
70407301 .....	61	F8322903 .....	103
70442101 .....	61	Steam Valve Harness Bracket	
Secure Ground Label		70369401 .....	103
M403047 .....	107, 109, 111, 115, 117, 125	Steam Valve Rebuild Kit	
Sensor Harness		70351021P .....	103
70426601P .....	81	Steam Valve Wiring Cover	
Shadow Box Clip		70369501 .....	103
M400972 .....	69	Stove Back	
Shaft Collar		70297401 .....	95
70467001 .....	85	Stove Connectors Cover	
Sheet Metal Edge Gasket		70365201 .....	101
70015711 .....	77	Stove Grill	
70015712 .....	77	70214901 .....	101
Side Panel		Stove Limit Bypass Harness	
70021502DG .....	77	70316601 .....	101, 103
70021502LG .....	77	Stove Limit Harness	
70253801DG .....	77	70316501 .....	95
70253801LG .....	77	Stove Limit Kit	
70253801*P .....	77	M4902P3 .....	95
Side Panel Assembly		Stove Partition	
70021501*P .....	77	70357201 .....	101
Sleeve		Stove Top and Sides	
44050601 .....	19	70333401 .....	95
Slip Ring Assembly		Street Elbow	
44222701 .....	89	H86070034 .....	97
Slip Ring Holder		Support Bearing	
44224401 .....	89	70448701 .....	75
Slot Card Plate Assembly		Support Rod	
44089501 .....	29, 43, 51	70464401 .....	85
Snap Bushing		Switch	
M400770 .....	97	70411901 .....	93
M402542 .....	125, 127	Switch Assembly	
70178701 .....	81	70413401 .....	77
Solenoid Valve DIN Connector		Switch Bracket	
70370301P .....	103	70356301 .....	93
Spacer		Switch Hole Plug	
70471701 .....	85	44057801B .....	69
Spark Electrode		44057801G .....	69
70032801P .....	95	44057801Q .....	69
70466501P .....	95	44057801W .....	69
Spray Nozzle			
70427801 .....	79		
Spray Nozzle Hose			
70427701 .....	79		
Spray Paint			
286P4 .....	77		
297P4 .....	77		
298P4P .....	77		
Spud Adapter			
70223501 .....	99		

## T

Temperature Knob	
44104601 .....	15, 17
Temperature Selector Bracket	
70350201 .....	15

N/A items do not appear in index.

Temperature Selector Switch 511711 .....	15, 17	70265901 .....	83
Temperature Selector Switch Bracket 70391701 .....	17	70270301 .....	83
Terminal Block M413865 .....	125, 127	70409301 .....	59
430642 .....	107, 109, 115, 117, 121	70411301 .....	75
Terminal Block Shield 70333001 .....	107, 109, 115, 117, 121	Water Hose F200116 .....	81
Thermistor M414704 .....	87	Wire Clip 70366201 .....	107, 109, 115, 117, 121
44064701 .....	79, 81	Wire Guard 201595P .....	31
Thermistor Plate 70424401 .....	79	Wireless Network Kit NK301 .....	41, 43, 53
Thermostat Cover M414477 .....	95		
Top Pan 70252801P .....	77		
Transformer M414228P .....	107, 109, 115, 117, 121		
M414229P .....	107, 109, 115, 117, 121		
M414230P .....	107, 115, 121		
M414312P .....	107, 115, 121		
44074401 .....	115, 117, 121		
Trunnion and Seal Kit M4960P3 .....	75		
Trunnion and Wire Assembly 70454601 .....	75		
Tube Assembly 70427601 .....	79		
Tumbler Dolly Kit M4379P4 .....	77		

## U

Union H86000031 .....	99
Union Tee 70427901 .....	79
USB Gateway Kit NK330 .....	41, 43, 53
USB IR Interface Kit 203346 .....	41, 43, 49, 51, 53, 55

## V

Valve Coil F8514801 .....	103
Valve Rebuild Kit F8379502 .....	103

## W

Warning Label M410892 .....	65
44127701 .....	107, 109, 111, 121, 125, 127
Washer M400080 .....	75
M400991 .....	75, 87
M405535 .....	15, 85
70261401 .....	77

N/A items do not appear in index.

