


# Drying Tumblers

Stacked 30 and 45 Pound Capacities

Models Starting Serial No. 0602004144

Refer to Page 5 for Model Numbers

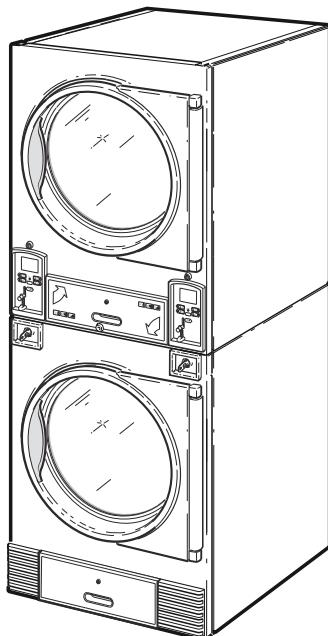

T477C\_70304801



# Table of Contents

Title	Page
Parts Ordering Information.....	3
Serial Plate Location .....	3
Model Identification .....	5
Product Overview - Heat Source and Voltage .....	6
Product Overview - Control Suffixes (Drawing 1 of 3).....	8
Product Overview - Control Suffixes (Drawing 2 of 3).....	10
Product Overview - Control Suffixes (Drawing 3 of 3).....	12
Single Drop Control Components .....	14
Dual Digital Timer Components .....	16
DX4 Control Components .....	18
Coin Drop Components for MDC Models.....	20
Card Reader Components for MDC Models .....	22
Coin Drops .....	24
Coin Drop Kits .....	26
Electronic Coin Drop Components.....	28
Card Reader Components for Micro Models.....	30
Coin Drop Components for NetMaster Models .....	32
Card Reader Components for NetMaster Models.....	34
Network Board for NetMaster Models .....	36
Coin Drop Components for Quantum Models .....	38
Card Reader Components for Quantum Models .....	40
Network Board for Quantum Models.....	42
Communication Board .....	44
Coin Drop Components for Galaxy 600 Models .....	46
Card Reader Components for Galaxy 600 Models .....	48
LED OPL Control .....	50
Door Assemblies.....	52
Door Ring and Handle .....	54
Door Components .....	56
Door Hinge Components .....	58
Upper Front Panel Assemblies and False Fronts .....	60
Lower Front Panel Assemblies .....	62
Upper Cabinet Front Components .....	64
Lower Cabinet Front Components .....	66
Emergency Stop Button for CE Models .....	68
Lint Drawer Components .....	70
Lint Drawer Overlays .....	72
Cylinder and Trunnion Components .....	74
Bearing Components .....	76
Cabinet Components .....	78
Touch-Up Paint .....	80

© Copyright 2015, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Drive Motor Components .....	82
Drive Motors and Motor Capacitors .....	84
Exhaust Components.....	86
Blower Components.....	88
Moisture Sensing Components .....	90
Gas Burner Housing and Secondary Stove Limit .....	92
Airflow Switch.....	94
Gas Valve and Piping - Non-CE and Non-Australian Gas Models.....	96
Burner Orifices - Non-CE and Non-Australian Gas Models .....	98
Gas Valve and Piping - T30 CE and Australian Gas Models .....	100
Gas Valve and Piping - T45 CE and Australian Gas Models .....	102
Electric Heater Components .....	104
Steam Heater Components .....	106
Control Tray Harness - Gas Models .....	108
Control Tray Components - Non-CE and Non-Australian Gas Models (Drawing 1 of 2) .....	110
Control Tray Components - Non-CE and Non-Australian Gas Models (Drawing 2 of 2) .....	112
Control Tray Components - CE and Australian Gas Models (Drawing 1 of 2).....	114
Control Tray Components - CE and Australian Gas Models (Drawing 2 of 2).....	116
Control Tray Harnesses - Steam Models .....	118
Control Tray Components - Non-CE Steam Models .....	120
Control Tray Components - CE Steam Models.....	122
Accessory Box Harnesses - Electric Models.....	124
Accessory Box Components - Non-CE Electric Models.....	126
Accessory Box Components - CE Electric Models .....	128
Parts Index .....	131

## Parts Ordering Information

If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.


For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin

+32 56 41 20 54 Wevelgem, Belgium

## Serial Plate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on serial plate(s) as shown.

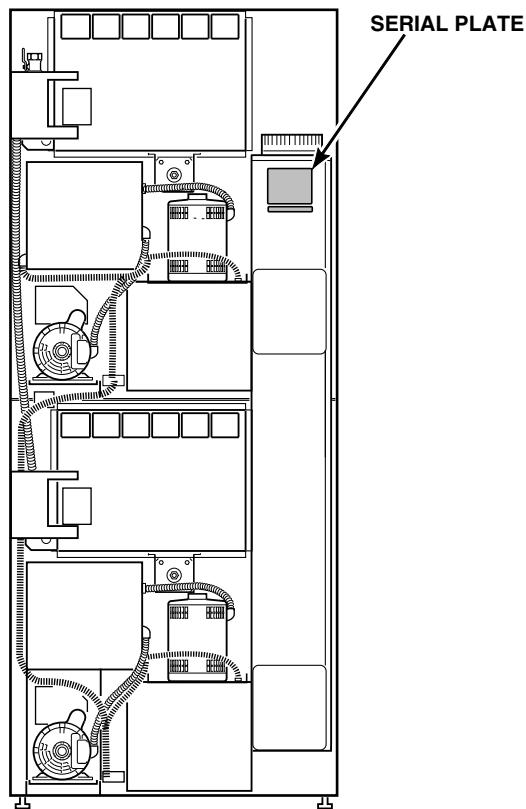

TMB1974N\_70304801


## Notes

## Model Identification

Information in this manual is applicable to these tumbler models:

CHD30STE2-CTT30E	GAT30L	IPD30STE2	MTT30E	SUT30E
CHD30STE2-CUT30E	GAT30N	IPD30STG2	MTT30F	SUT30F
CHD30STG2-CAT30L	GAT45L	IPD30STS2	MTT30L	SUT30L
CHD30STG2-CAT30N	GAT45N	IPD45STG2	MTT30N	SUT30N
CHD30STG2-CTT30L	GKT30N	ITT30E	MTT30R	SUT30R
CHD30STG2-CTT30N	GKT45N	ITT30F	MTT30S	SUT30S
CHD30STG2-CUT30L	GTT30E	ITT30L	MTT45L	SUT45L
CHD30STG2-CUT30N	GTT30L	ITT30N	MTT45N	SUT45N
CHD30STS2-CTT30S	GTT30N	ITT30R	MTT45R	SUT45R
CHD30STS2-CUT30S	GTT30S	ITT30S	NTT30N	UAT30L
CKT30N	GTT45L	ITT45L	NTT45N	UAT30N
CKT45N	GTT45N	ITT45N	PAT30L	UAT45L
CTT45L	GUT30E	ITT45R	PAT30N	UAT45N
CTT45N	GUT30L	KAT30L	PAT45L	UKT30N
DR335	GUT30N	KAT30N	PAT45N	UKT30R
DR335E2-BTT30F	GUT30S	KAT45L	PKT30N	UKT45N
DR335E2-BUT30F	GUT45L	KAT45N	PKT45N	UKT45R
DR335G2-BKT30N	GUT45N	KKT30N	PTT30E	UTT30E
DR335G2-BKT30R	HAT30L	KKT45N	PTT30L	UTT30F
DR335G2-BTT30R	HAT30N	KTT30E	PTT30N	UTT30L
DR335G2-BUT30R	HAT45L	KTT30L	PTT30S	UTT30N
DR445G2-BAT45L	HAT45N	KTT30N	PTT45L	UTT30R
DR445G2-BAT45N	HKT30N	KTT30S	PTT45N	UTT30S
DR445G2-BKT45N	HKT30R	KTT45L	PUT30E	UTT45L
DR445G2-BKT45R	HKT45N	KTT45N	PUT30L	UTT45N
DR445G2-BTT45D	HKT45R	KUT30E	PUT30N	UTT45R
DR445G2-BTT45L	HTT30D	KUT30L	PUT30S	UUT30E
DR445G2-BTT45N	HTT30E	KUT30N	PUT45L	UUT30F
DR445G2-BTT45R	HTT30F	KUT30S	PUT45N	UUT30L
DR445G2-BUT45L	HTT30L	KUT45L	SAT30L	UUT30N
DR445G2-BUT45N	HTT30N	KUT45N	SAT30N	UUT30R
DR445G2-BUT45R	HTT30R	LAT30L	SAT45L	UUT30S
DRST30E2-BTT30E	HTT30S	LAT30N	SAT45N	UUT45L
DRST30E2-BUT30E	HTT45D	LAT45L	SKT30N	UUT45N
DRST30G2-BAT30L	HTT45L	LAT45N	SKT30R	UUT45R
DRST30G2-BAT30N	HTT45N	LKT30N	SKT45N	
DRST30G2-BTT30D	HTT45R	LKT45N	SKT45R	
DRST30G2-BTT30L	HUT30E	LTT30E	STT30D	
DRST30G2-BTT30N	HUT30F	LTT30L	STT30E	
DRST30G2-BUT30L	HUT30L	LTT30N	STT30F	
DRST30G2-BUT30N	HUT30N	LTT30S	STT30L	
DRST30S2-BTT30S	HUT30R	LTT45L	STT30N	
DRST30S2-BUT30S	HUT30S	LTT45N	STT30R	
DRST45G2-BAT45L	HUT45L	LUT30E	STT30S	
DRST45G2-BAT45N	HUT45N	LUT30L	STT45D	
DRST45G2-BTT45D	HUT45R	LUT30N	STT45L	
DRST45G2-BTT45L		LUT30S	STT45N	
DRST45G2-BTT45N		LUT45L	STT45R	
DRST45G2-BUT45L		LUT45N		
DRST45G2-BUT45N				

## Product Overview - Heat Source and Voltage


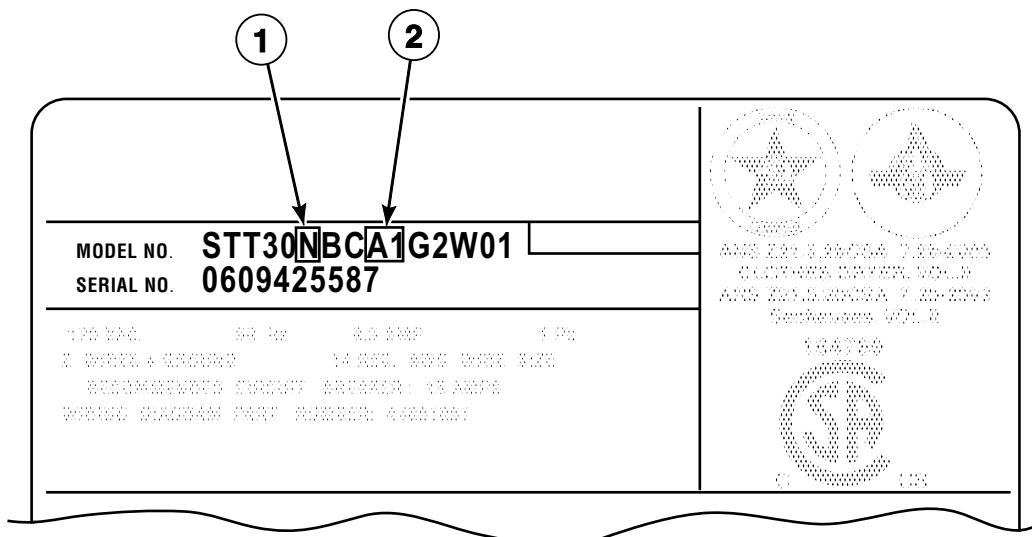


TMB2736P\_70304801

## Product Overview - Heat Source and Voltage

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Heat Source	D: Liquid Petroleum Gas (L.P) E: Electric F: Reduced Electric (Eco Line) L: Liquid Petroleum Gas (L.P.) N: Natural Gas (N.G.) R: Reduced Gas, Natural Gas (Eco Line) S: Steam
2	-	Voltage	A1: 100, 200 Volt/50 Hertz/1 Phase A2: 100, 200-220 Volt/60Hertz/1 Phase B2: 120, 208-240 Volt/60 Hertz/1 Phase F1: 200 Volt/50 Hertz/1 Phase F2: 200 Volt/60 Hertz/1 Phase F4: 200 Volt/50 Hertz/3 Phase F5: 200-208 Volt/60 Hertz/3 Phase F6: 200-208, 240 Volt/60 Hertz/3 Phase G1: 208 Volt/60 Hertz/1 Phase G2: 208-240 Volt/60 Hertz/1 Phase J1: 230 Volt/50 Hertz/1 Phase J2: 230-240 Volt/50 Hertz/1 Phase J4: 240 Volt/60 Hertz/1 Phase J5: 230 Volt/50 Hertz/3 Phase J6: 230-240 Volt/50 Hertz/3 Phase J8: 240 Volt/60 Hertz/3 Phase M1: 380 Volt/50 Hertz/3 Phase M2: 380, 400-415 Volt/50 Hertz/3 Phase M3: 380 Volt/60 Hertz/3 Phase N1: 400-415 Volt/50 Hertz/3 Phase P1: 440 Volt/60 Hertz/3 Phase Q1: 460-480 Volt/60 Hertz/3 Phase

# Product Overview - Control Suffixes (Drawing 1 of 3)

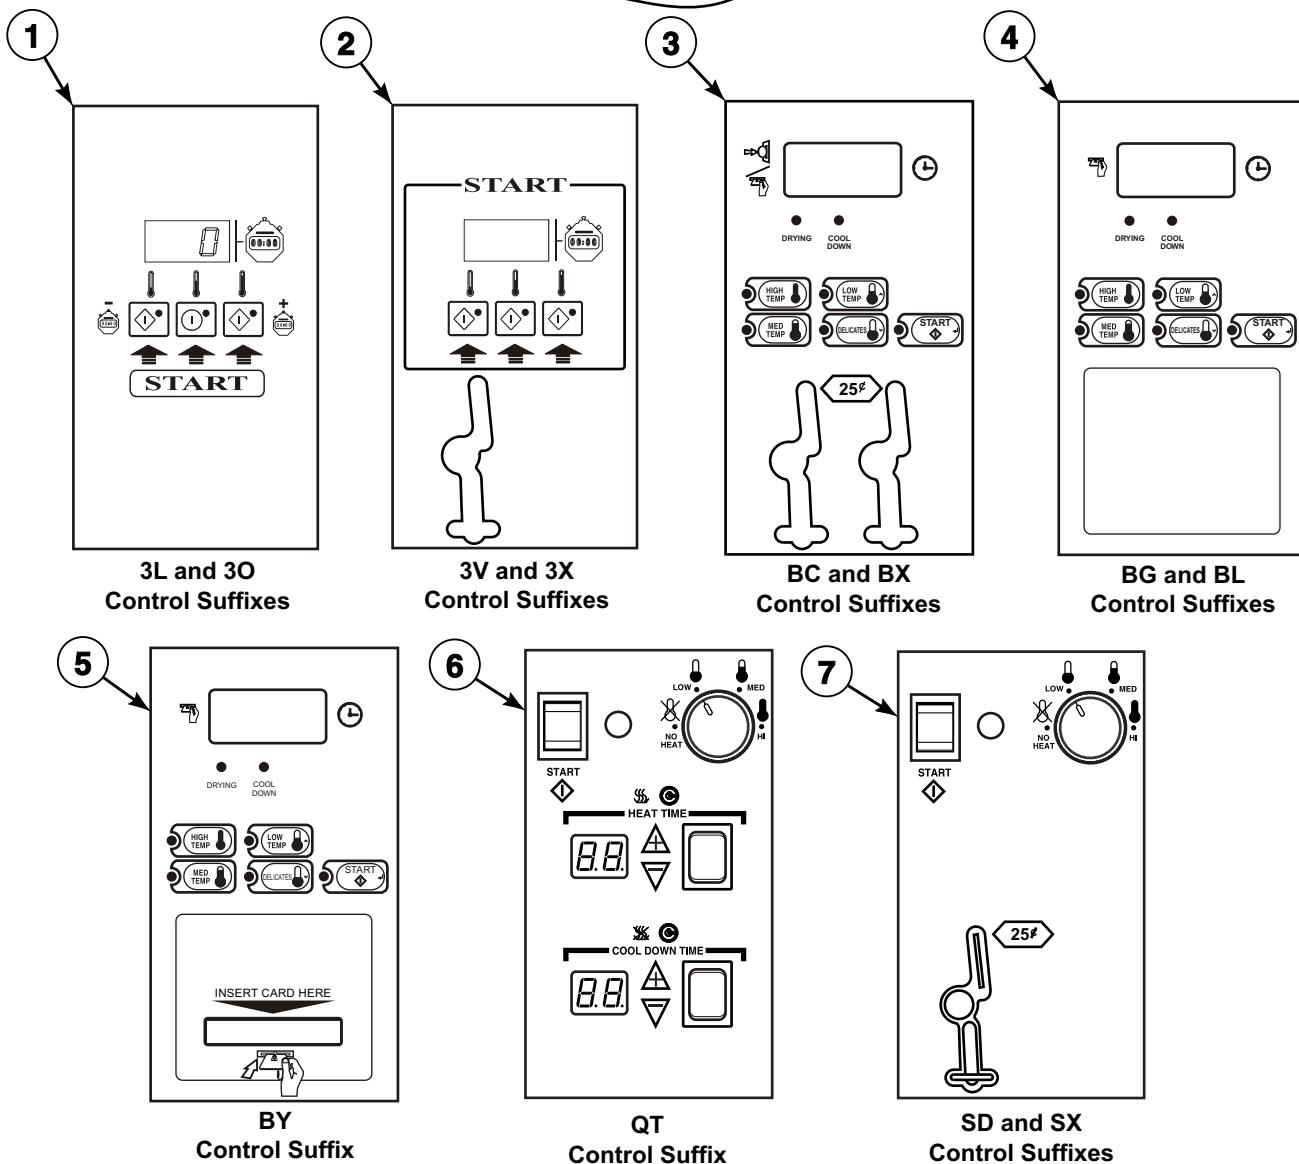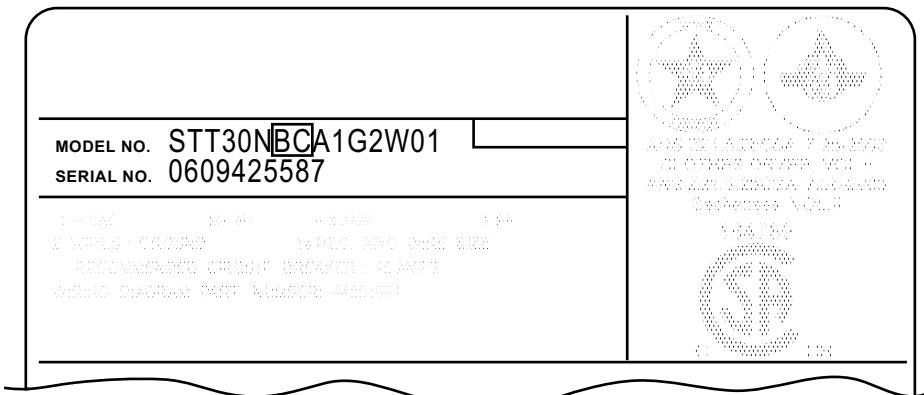

TMB3279P\_70304801

## Product Overview - Control Suffixes (Drawing 1 of 3)




REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	3L: DX4 prep for central pay 3O: DX4 OPL
2	-	Control - Nonreversing	3V: DX4 vended 3X: DX4 prep for coin
3	-	Control - Nonreversing	BC: basic electronic, coin BX: basic electronic, prep for coin
4	-	Control - Nonreversing	BG: basic electronic, OPL BL: basic electronic, central pay
5	-	Control - Nonreversing	BY: basic electronic, prep for card
6	-	Control - Nonreversing	QT: dual digital timer
7	-	Control - Nonreversing	SD: single drop SX: single drop, prep for coin

**NOTE: Coin models have the following control suffixes: 3V, 3X, BC, BX, SD and SX**

**NOTE: OPL models have the following control suffixes: 3L, 3O, BG, BL, BY and QT**

# Product Overview - Control Suffixes (Drawing 2 of 3)

All Models Except L Models

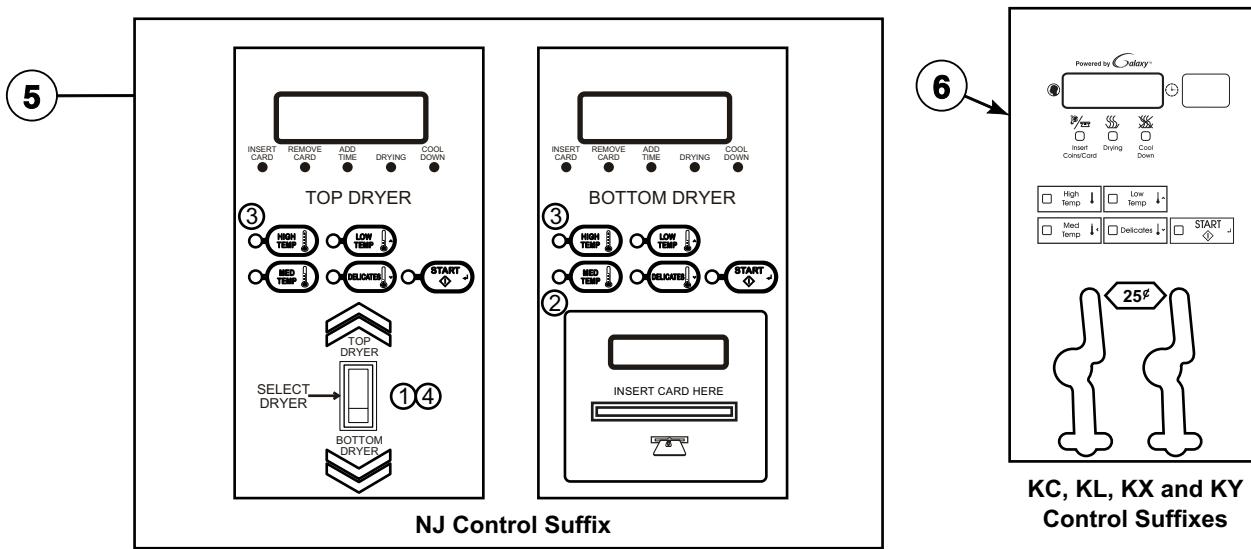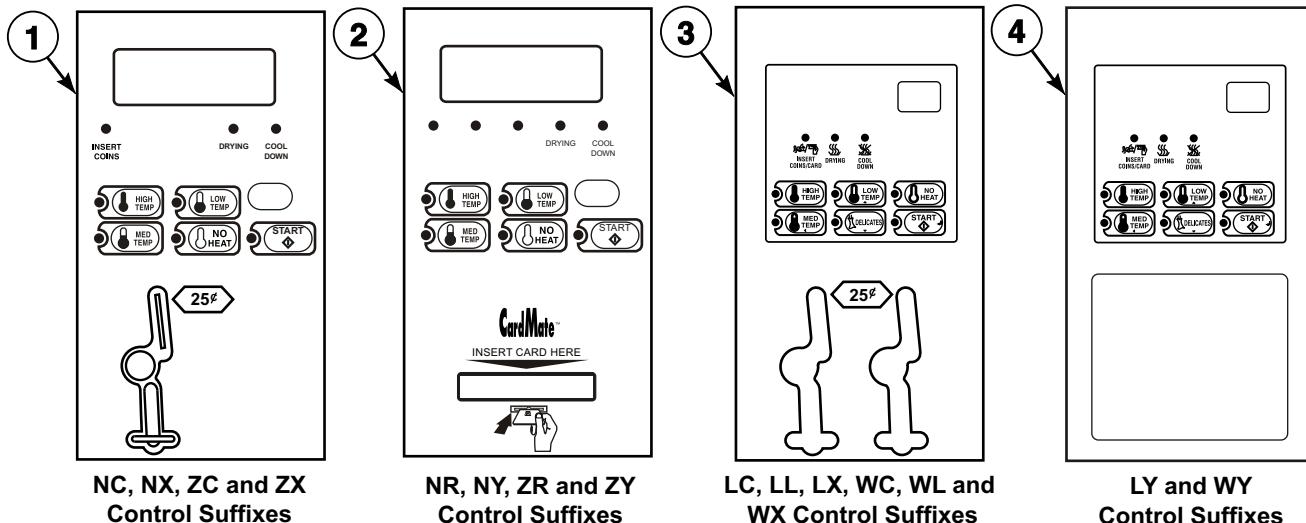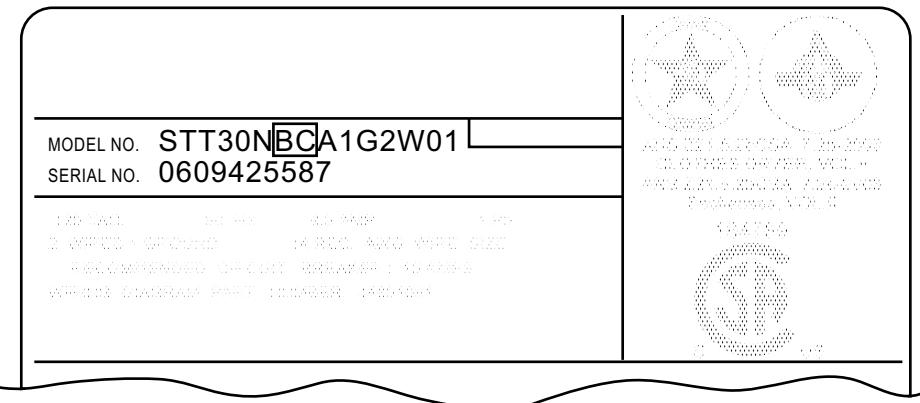

TMB3280P\_70304801


## Product Overview - Control Suffixes (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	NC: NetMaster coin NX: NetMaster, prep for coin ZC: NetMaster network coin ZX: NetMaster network, prep for coin
2	-	Control - Nonreversing	NR: NetMaster card NY: NetMaster, prep for card ZR: NetMaster network card ZY: NetMaster network, prep for card
3	-	Control - Nonreversing	LC: network adaptable coin LL: network adaptable, prep for central pay LX: network adaptable, prep for coin WC: network ready coin WL: network ready, prep for central pay WX: network ready, prep for coin
4	-	Control - Nonreversing	LY: network adaptable, prep for card WY: network ready, prep for card
5	-	Control - Nonreversing	NJ: micro, prep single card reader
6	-	Control - Nonreversing	KC: single coin KL: prep for central pay KX: prep for coin KY: prep for card

**NOTE: Coin models have the following control suffixes: KC, KL, KX, KY, LC, LL, LX, LY, NC, NX, WC, WL, WX, WY, ZC and ZX**

**NOTE: OPL models have the following control suffixes: NJ, NR, NY, ZR and ZY**

# Product Overview - Control Suffixes (Drawing 3 of 3)

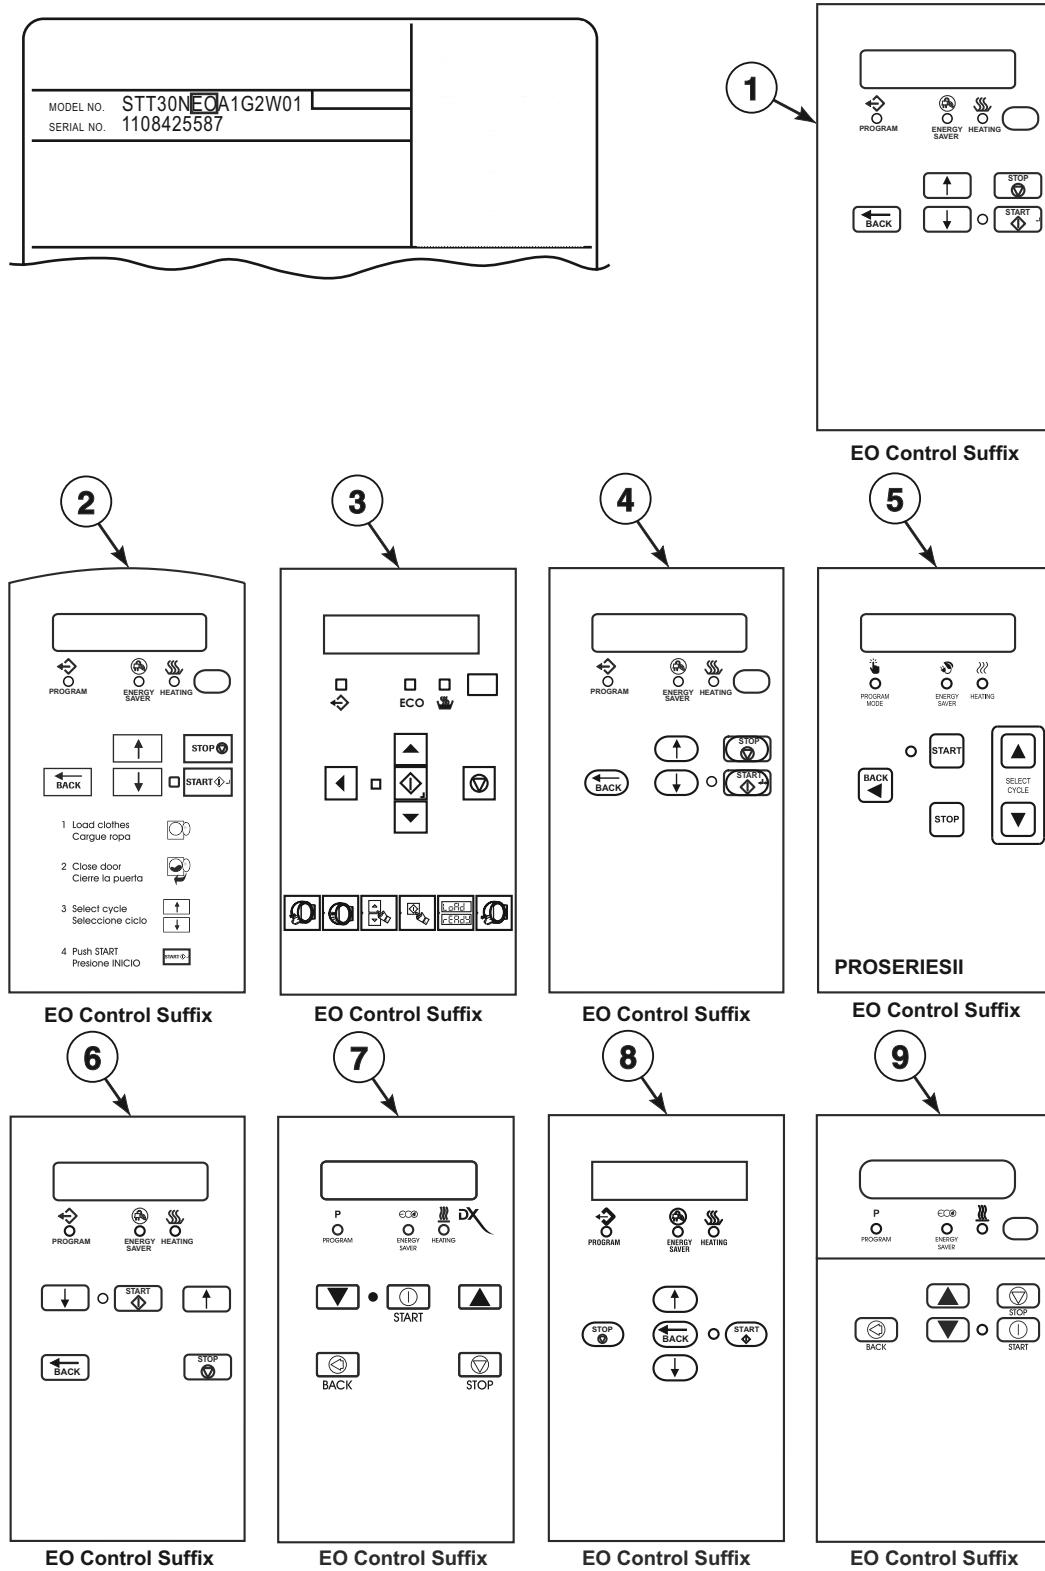

TMB3348P\_70304801


## Product Overview - Control Suffixes (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	S models; EO: LED OPL
2	-	Control - Nonreversing	H models; EO: LED OPL
3	-	Control - Nonreversing	C, D and I models; EO: LED OPL
4	-	Control - Nonreversing	U models; EO: LED OPL
5	-	Control - Nonreversing	G and K models; EO: LED OPL
6	-	Control - Nonreversing	P models; Models through 9/30/14; EO: LED OPL
7	-	Control - Nonreversing	P models; Models starting 10/1/14 through 5/31/15; EO: LED OPL
8	-	Control - Nonreversing	L models through 5/31/15; EO: LED OPL
9	-	Control - Nonreversing	L and P models starting 6/1/15; EO: LED OPL

NOTE: OPL models have the following control suffixes: EO

# Single Drop Control Components

T30 C, H, I and S Models Through 3/31/10 with SD and SX Control Suffixes

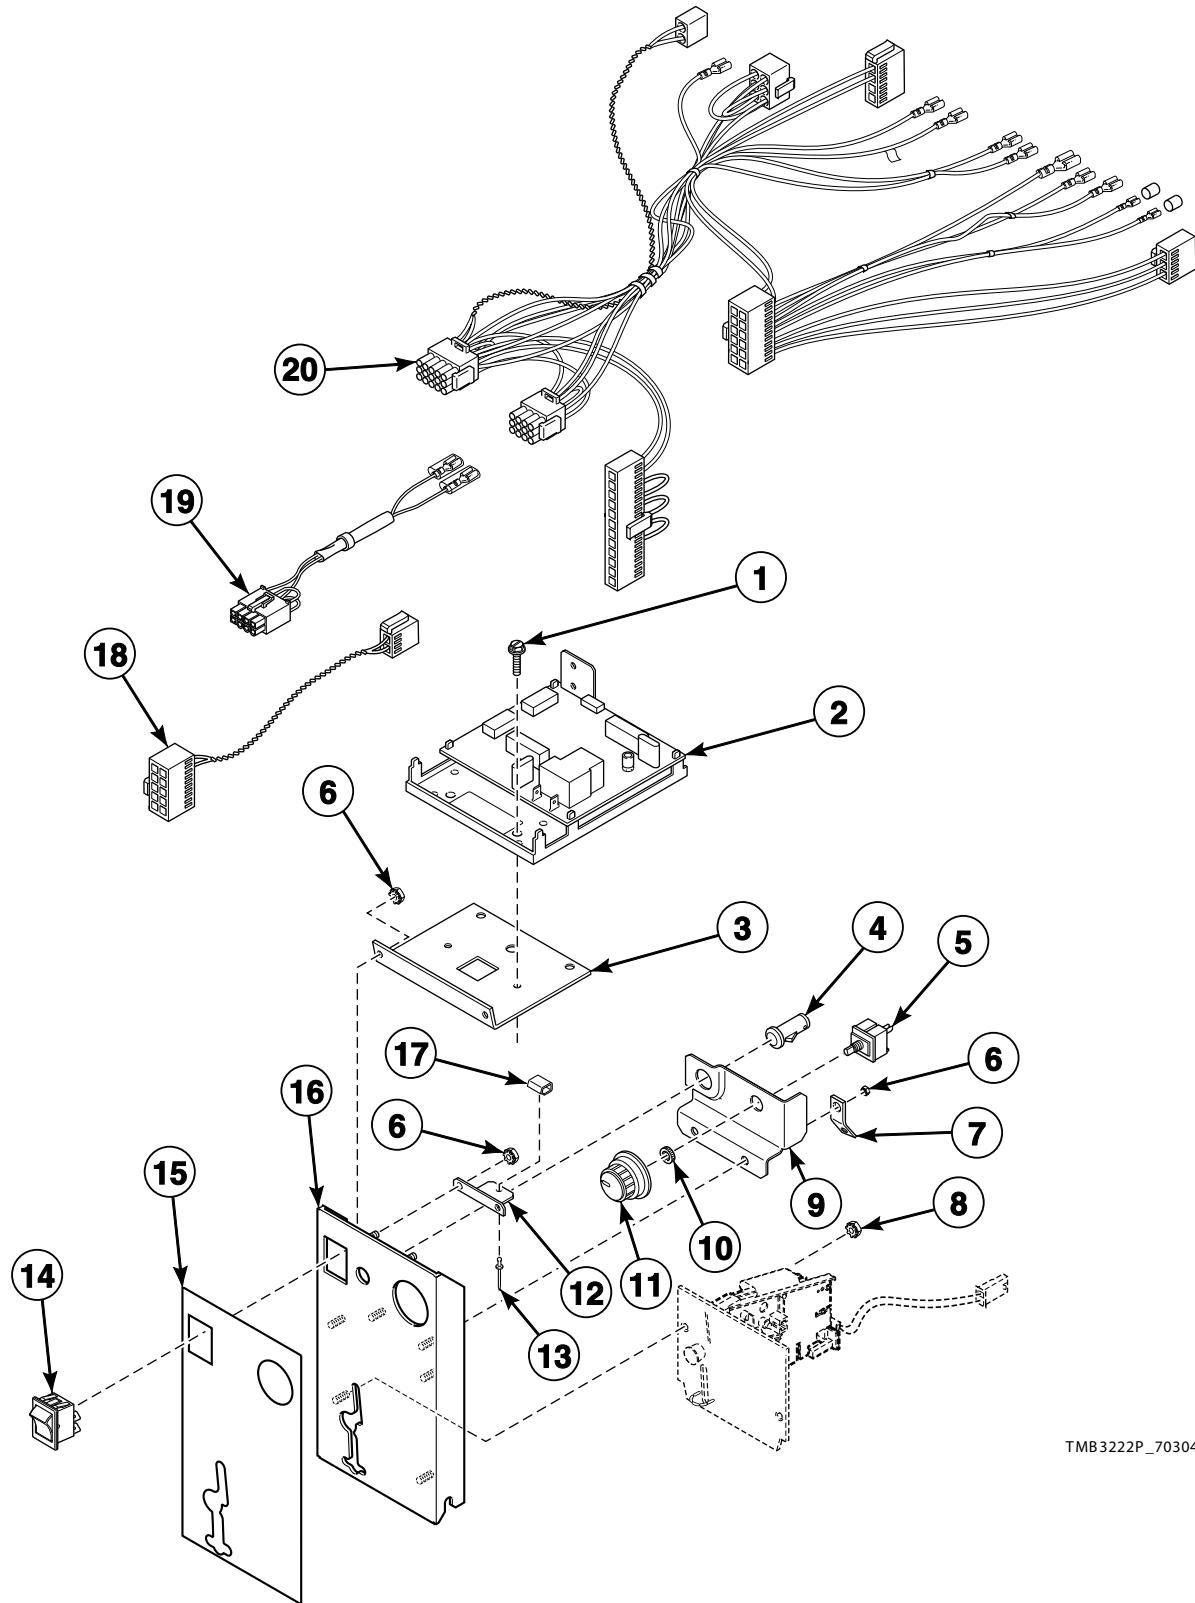


TMB3222P\_70304801

## Single Drop Control Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70346001P	Main Harness	Electric models need 55881 Harness Strap
1	501524	Screw	
2	513139P	Control Assembly	
3	70357902	Control Chassis Mounting Bracket	
4	801431	Light	
5	511711	Temperature Selector Switch	
6	70054	Nut	
7	00177	Male Tab Terminal	
8	29786	Nut	
9	70350201	Temperature Selector Bracket	
10	24205	Nut	
11	44104601	Temperature Knob	
12	70119801	Latch Mounting Bracket	
13	M400003	Pop Rivet	
14	70455101	Rocker Switch	Start
15	70362001	Overlay	H models
	70361901	Overlay	All other models
16	70365801	Control Door Assembly	H models; Includes studs
	70365101	Control Door Assembly	All other models
17	431318	Control Door Latch	
18	70324603	Jumper Calibration Wire	SD control suffix
19	70364104P	Coin Vault Switch Harness	Non-CE models
20	70369001	Control Panel Harness	C, H, I and S non-CE and non-Australian models with SD control suffix
	70367101	Control Panel Harness	C, H and S Australian and CE models with SD control suffix

# Dual Digital Timer Components

C, H, I, L, P, S and U Models  
G and K Models Starting 1/16/12  
Models with QT Control Suffix

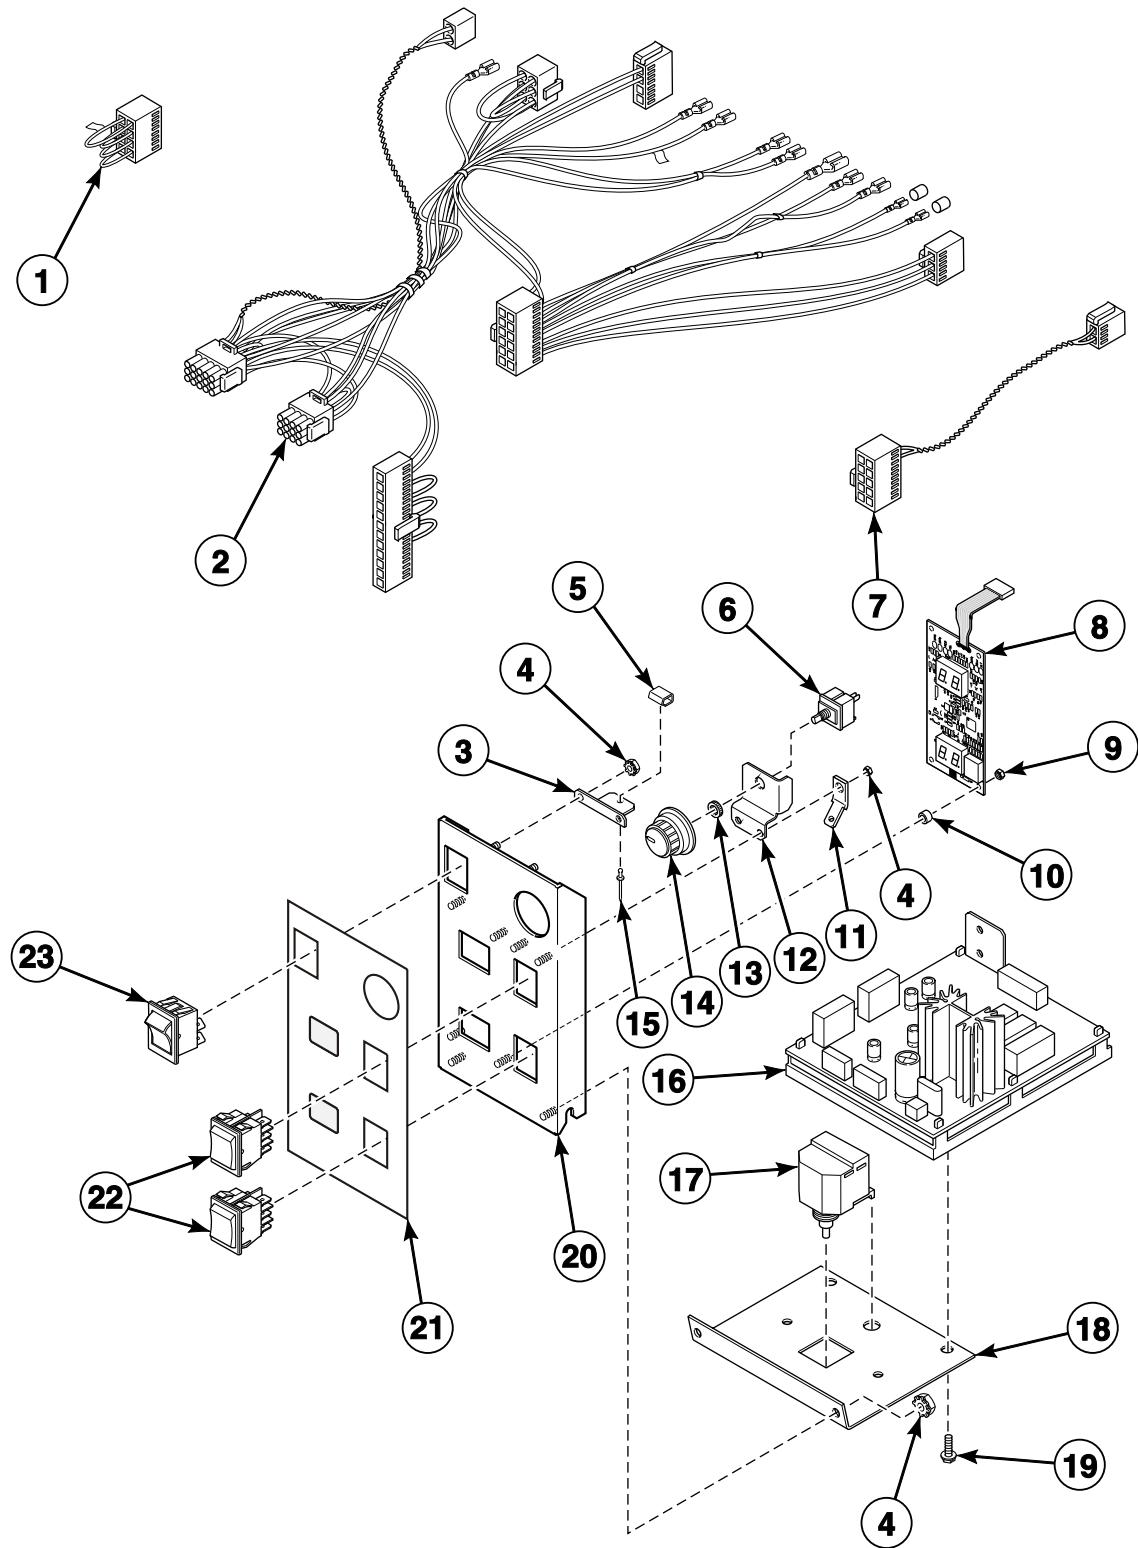


TMB2397P\_70304801

## Dual Digital Timer Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70346001P	Main Harness	Electric models need 55881 Harness Strap; Models through 1/15/12
	70441401	Main Harness	Electric models need 55881 Harness Strap; Models starting 1/16/12
1	70364103	Bypass Harness	Non-CE models
2	70367001P	Control Panel Harness	
3	70119801	Latch Mounting Bracket	
4	70054	Nut	
5	431318	Control Door Latch	
6	511711	Temperature Selector Switch	
7	70324603	Jumper Calibration Wire	
8	512218P	Display Assembly	
9	29787	Nut	4 required
10	56079	Panel Locator	4 required
11	00177	Male Tab Terminal	
12	70391701	Temperature Selector Switch Bracket	
13	24205	Nut	
14	44104601	Temperature Knob	
15	M400003	Pop Rivet	
16	70503101P	Control Assembly	C and I models starting 7/15/14
	512202P	Control Assembly	C and I models through 7/14/14; All other models
17	M4860P3	Buzzer Kit	Includes harness
18	70357901	Control Chassis Mounting Bracket	
19	501524	Screw	
20	70365601	Control Plate Assembly	H models; Includes studs
	70361201	Control Door Assembly	All other models; Includes studs
21	70361401	Overlay	H models
	70493901	Overlay	U models starting 8/18/14
	70361301	Overlay	U models through 8/17/14; C and I models through 7/14/14; All other models
	70504801	Overlay	C and I models starting 7/15/14
22	70461301	Rocker Switch	Black button
23	70455101	Rocker Switch	Green button; Start

# DX4 Control Components

C, D and I Models with 3L, 3O, 3V and 3X Control Suffixes

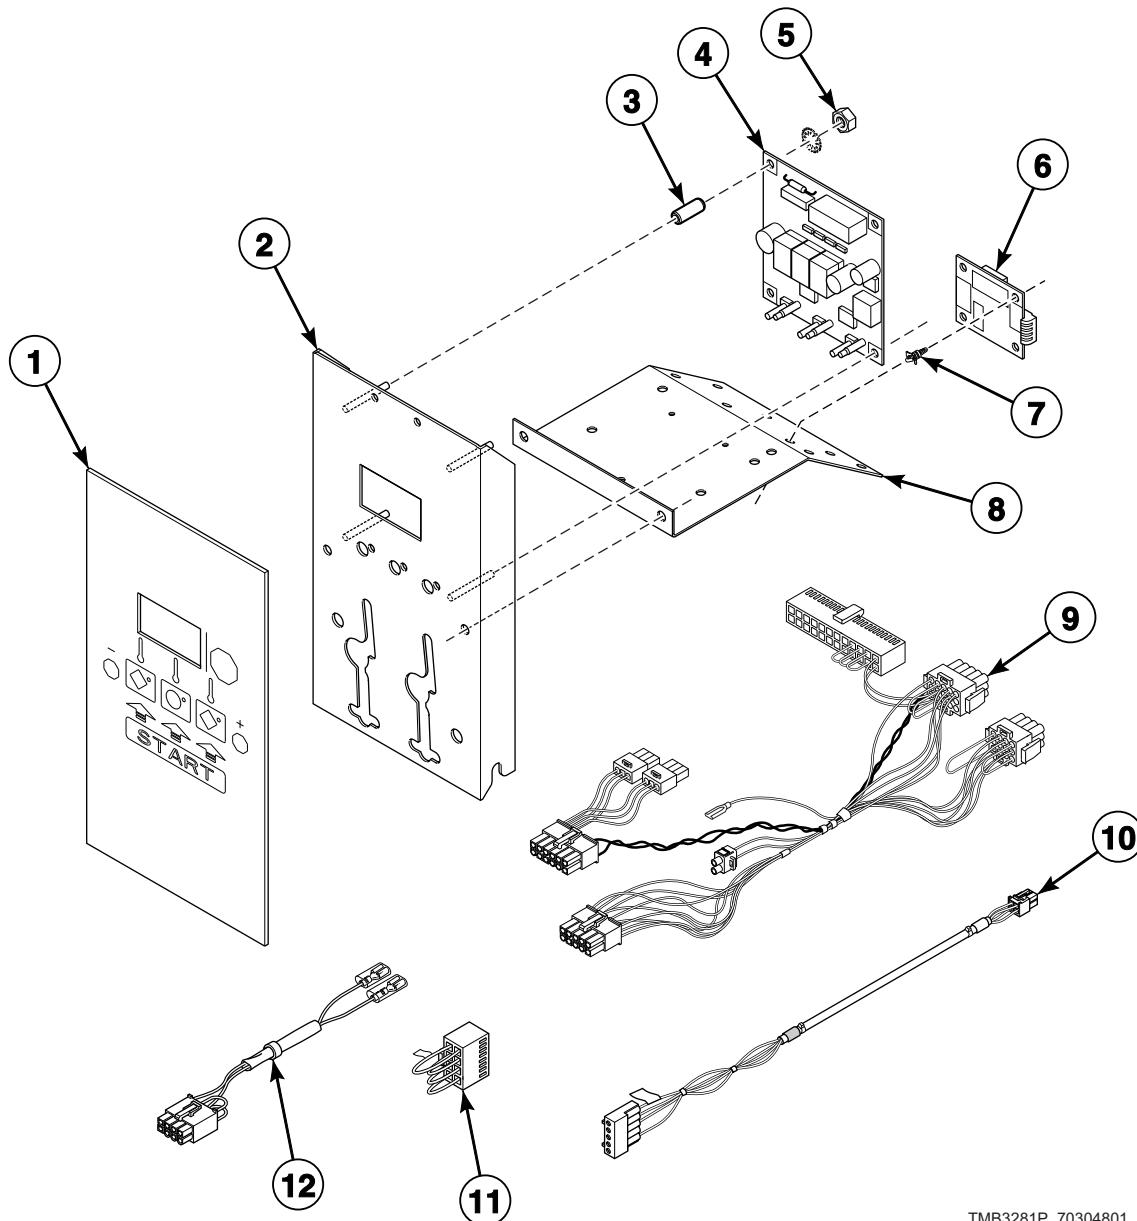


TMB3281P\_70304801

## DX4 Control Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70441401	Main Harness	Models starting 1/16/12
1	70279101	Graphic Overlay	OPL; Models through 7/31/11
	70468201	Graphic Overlay	OPL; Models starting 8/1/11
	70279201	Graphic Overlay	Coin; Single drop; Models through 7/31/11
	70462601	Graphic Overlay	Coin; Single drop; Models starting 8/1/11
	70279202	Graphic Overlay	Coin; Dual drop; Models through 7/31/11
	70462602	Graphic Overlay	Coin; Dual drop; Models starting 8/1/11
	70462603	Graphic Overlay	Prep for central pay
2	70279301P	Control Plate Kit	
3	44050601	Sleeve	4 required
4	70462303P	Control Assembly	Non-CE and non-Australian models; 3O control suffix
	70462304P	Control Assembly	CE and Australian models; 3O control suffix
	70462367P	Control Assembly	Non-CE and non-Australian models; 3V and 3X control suffixes
	70462368P	Control Assembly	CE and Australian models; 3V and 3X control suffixes
	70462370	Control Assembly	Non-CE and non-Australian models; 3L control suffix
	70462371	Control Assembly	CE and Australian models; 3L control suffix
5	29787	Nut	
6	209/00471/75	Central Pay Interface Control Assembly	3L control suffix
7	211/00119/00	Standoff	3L control suffix; 4 required
8	70179001	Mounting Bracket	CE models; All other models with 3L control suffix
9	70485301	Control Panel Harness	Non-CE and non-Australian models; Models through 12/31/13
	70485301	Control Panel Harness	Non-CE and non-Australian models; Models starting 1/1/14
	70489901	Control Panel Harness	CE and Australian models
10	70491501	Central Pay Harness	Lower; 3L control suffix
	70491502	Central Pay Harness	Upper; 3L control suffix
11	70364103	Bypass Harness	Non-CE models; 3O, 3W, 3X and R3 control suffixes
12	70364104P	Coin Vault Switch Harness	Non-CE models; 3V and 3B control suffixes

# Coin Drop Components for MDC Models

G T30, H, I, K, L, P and S Models with BC and BX Control Suffixes

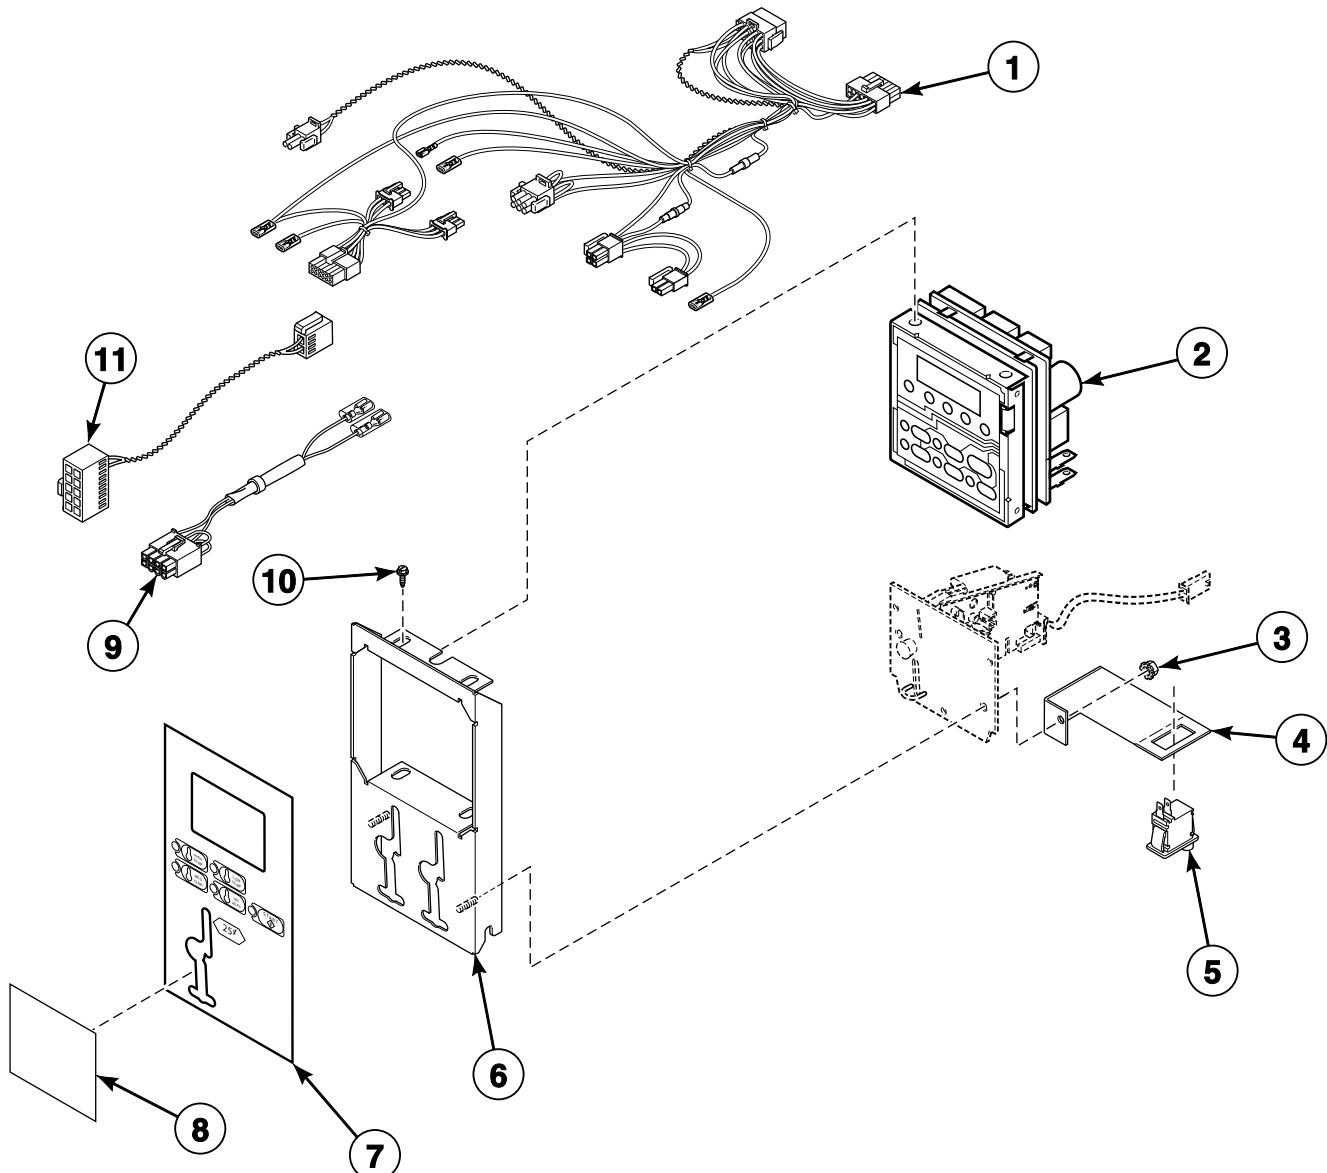


TMB3255P\_70304801

# Coin Drop Components for MDC Models

REF	PART NO.	DESCRIPTION	COMMENTS
	70346001P	Main Harness	Electric models need 55881 Harness Strap; Models through 1/15/12
	70441401	Main Harness	Electric models need 55881 Harness Strap; Models starting 1/16/12
1	70315501P	Control Panel Harness	Control panel to main harness
2	514273	Control Assembly	I models; Models starting 7/15/14
	511867P	Control Assembly	I models through 7/14/14; All other models
	510036P	Membrane Switch	Order to replace touchpad for 511867P Control Assembly
3	29786	Nut	3 required
4	70183901	Audit Switch Bracket	
5	70413301	Pushbutton Switch	Coin vault switch
6	70291201P	Control Plate Kit	H models
	70291101P	Control Plate Kit	All other models
7	70257801	Overlay	S models; L models through 1/28/15; Single drop; Text
	70257802	Overlay	S models; Dual drop; Text
	70261101	Overlay	S models; L models through 1/28/15; Single drop; Icon
	70261102	Overlay	S models; Dual drop; Icon
	70258101	Overlay	H models; Single drop
	70258102	Overlay	H models; Dual drop
	70261301	Overlay	H models; Single drop; Icon
	70452601	Overlay	G and K models; Upper; Single drop; Text
	70452602	Overlay	G and K models; Upper; Dual drop; Text
	70452701	Overlay	G and K models; Lower; Single drop; Text
	70452702	Overlay	G and K models; Lower; Dual drop; Text
	70492001	Overlay	I models; Models through 7/14/14; Single drop
	70505301	Overlay	I models; Models starting 7/15/14; Single drop
	70492002	Overlay	I models; Models through 7/14/14; Dual drop
	70505302	Overlay	I models; Models starting 7/15/14; Dual drop
	70283301	Overlay	P models through 9/30/14; Upper
	70283401	Overlay	P models through 9/30/14; Lower
	70508901	Overlay	P models starting 10/1/14; L models starting 1/29/15
8	70321001	Overlay	P models; Models through 9/30/14; Upper; World drop
	70129501	Overlay	P models; Models through 9/30/14; Upper; Single drop
	70129601	Overlay	P models; Models through 9/30/14; Upper; Dual drop
	70129701	Overlay	P models; Models through 9/30/14; Lower; Single drop
	70129801	Overlay	P models; Models through 9/30/14; Lower; Dual drop
	70509901	Overlay	P models starting 10/1/14; L models starting 1/29/15; Upper; Single drop
	70510001	Overlay	P models starting 10/1/14; L models starting 1/29/15; Upper; Dual drop
	70510101	Overlay	P models starting 10/1/14; L models starting 1/29/15; Upper; World drop
	70510201	Overlay	P models starting 10/1/14; L models starting 1/29/15; Lower; Single drop
	70510301	Overlay	P models starting 10/1/14; L models starting 1/29/15; Lower; Dual drop
	70510401	Overlay	P models starting 10/1/14; L models starting 1/29/15; Lower; World drop
	70511301	Overlay	P models starting 10/1/14; Upper/Lower; Central pay
9	70364104P	Coin Vault Switch Harness	Non-CE models
10	501524	Screw	4 required for mounting control
11	70324603	Jumper Calibration Wire	

## Card Reader Components for MDC Models

G, H, I, K, L, MTT30N, MTT45N, N, P and S Models with BG, BL and BY Control Suffixes

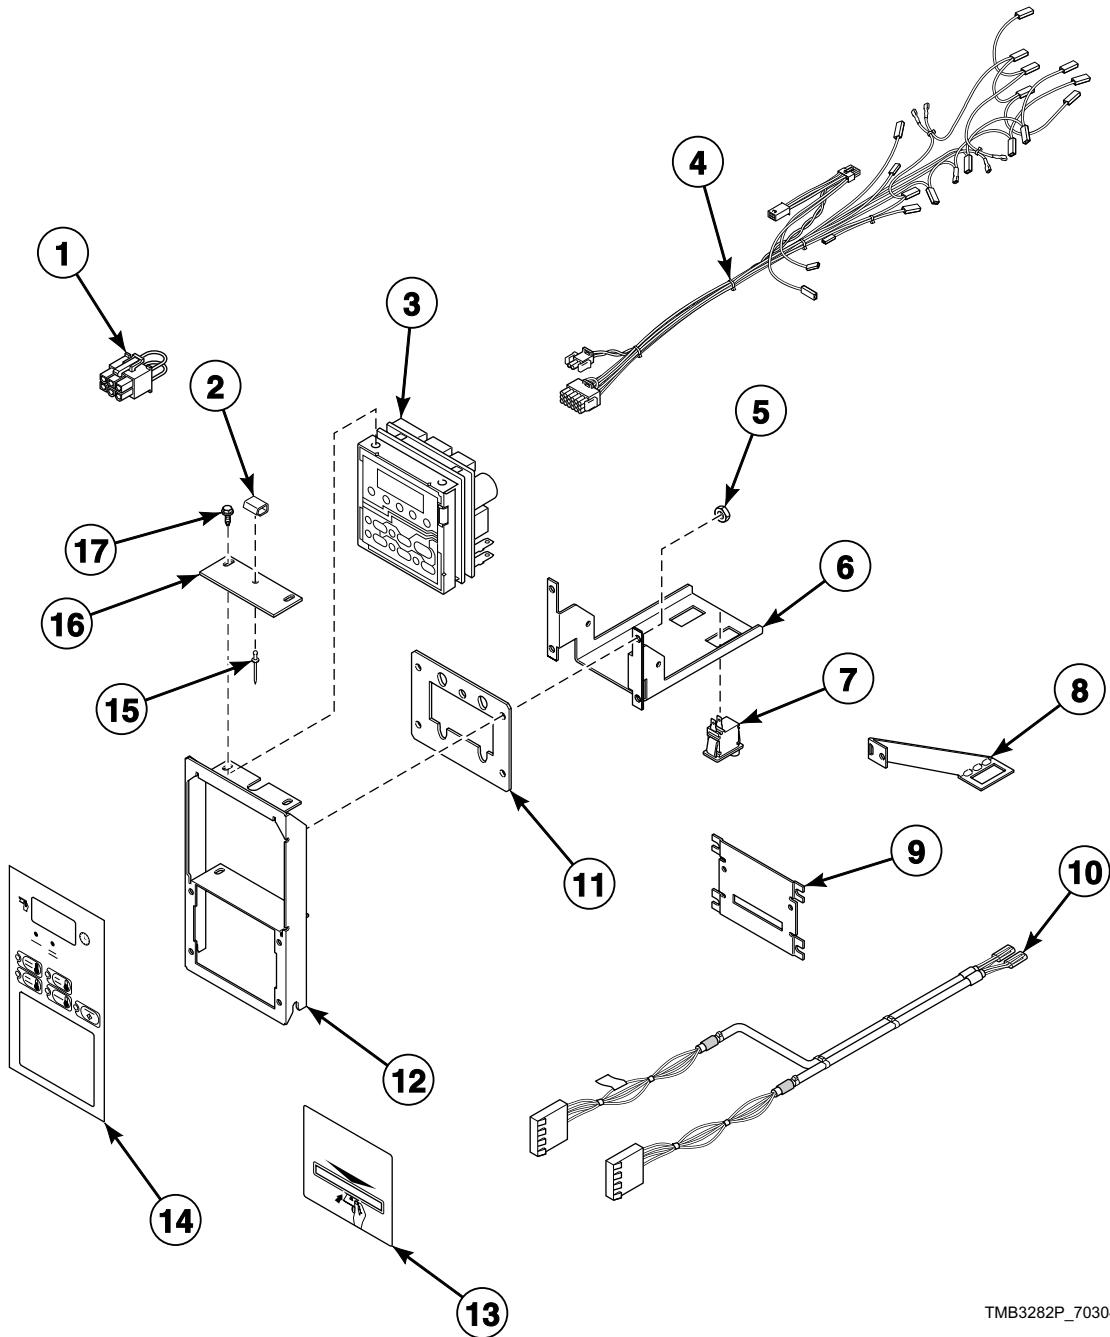


TMB3282P\_70304801

## Card Reader Components for MDC Models

REF	PART NO.	DESCRIPTION	COMMENTS
	70346001P	Main Harness	Electric models need 55881 Harness Strap; Models through 1/15/12
	70441401	Main Harness	Electric models need 55881 Harness Strap; Models starting 1/16/12
1	70364103	Bypass Harness	Non-CE models
2	431318	Control Door Latch	
3	514273	Control Assembly	I models; Models starting 7/15/14
	511867P	Control Assembly	I models through 7/14/14; All other models
	510036P	Membrane Switch	Order to replace touchpad for 511867P Control Assembly
4	70368001P	Control Panel Harness	Non-CE and non-Australian models
	70315501P	Control Panel Harness	CE and Australian models
5	70054	Nut	
6	70119001	Chassis Mounting Bracket	Use with item 1
7	70413301	Pushbutton Switch	Coin vault switch
8	70183901	Audit Switch Bracket	Use with item 7
9	44089501	Slot Card Plate Assembly	
10	70484501	Central Pay Harness	BL control suffix
11	70208801	Mounting Plate	
12	70348901	Control Plate Assembly	G, I, K, L, M, P and S models
	70349001	Control Plate Assembly	H and N models
13	70334201	Card Reader Overlay	S models; Black; Included in literature packet
	70334301	Card Reader Overlay	H models; Gray; Included in literature packet
	70275401	Overlay	H models; Models with BL control suffix
	70286701	Overlay	P models; Models through 9/30/14; Models with BL control suffix; Upper
	70286801	Overlay	P models; Models through 9/30/14; Models with BL control suffix; Lower
	70511101	Overlay	P models starting 10/1/14; L models starting 1/29/15; Models with BY control suffix; Upper
	70511201	Overlay	P models starting 10/1/14; L models starting 1/29/15; Models with BY control suffix; Lower
	70511401	Overlay	P models starting 10/1/14; L models starting 1/29/15; Convert card models to central pay; Upper/Lower
	70246301	Coin Cover Overlay	I models; Models with BL control suffix
14	70335801	Overlay	S models; P models through 9/30/14; L models through 1/28/15; Text and icon
	70509801	Overlay	P models starting 10/1/14; L models starting 1/29/15
	70336001	Overlay	H models; Text and icon
	70492001	Overlay	I models; Models through 7/14/14
	70506801	Overlay	I models; Models starting 7/15/14
	70351501	Overlay	M models
	70304201	Overlay	N models; Text and icon
	70452801	Overlay	G and K models; Upper; BG and BL control suffixes
	70452901	Overlay	G and K models; Lower; BG and BL control suffixes
15	M400003	Pop Rivet	
16	70184501	Latch Mounting Bracket	
17	501524	Screw	4 required

# Coin Drops

All Models Except U Models

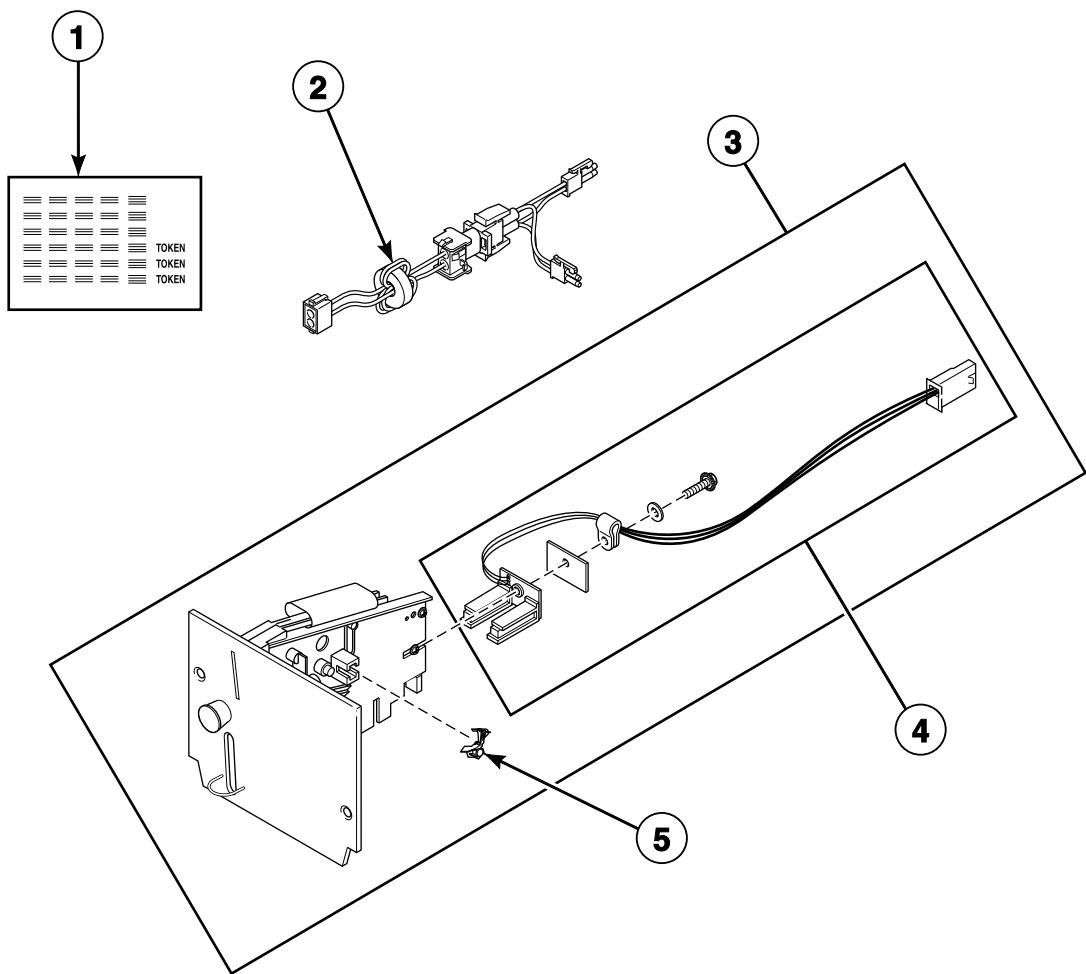

TMB2921P\_70304801


# Coin Drops

REF	PART NO.	DESCRIPTION	COMMENTS
1	38725	Coin Identification Paper	
2	44065801	Electronic Coin Drop Harness	Models through 4/14/09
3	70294103P	Electronic Coin Drop Assembly	United Kingdom (default) and Europe
	70294104	Electronic Coin Drop Assembly	Europe (default), Denmark and Norway
	70294105P	Electronic Coin Drop Assembly	Australia (default), New Zealand, Hong Kong, South Korea and Malaysia
	70294106	Electronic Coin Drop Assembly	Mexico (default), Ecuador and United States
	70294107	Electronic Coin Drop Assembly	Lithuania (default), Latvia and Europe
	70294116	Electronic Coin Drop Assembly	Malaysia (default) and China
	70294117	Electronic Coin Drop Assembly	Russia; 5.00 and 10.00
	70294119	Electronic Coin Drop Assembly	Thailand; 1, 5 and 10 Baht
	70294120	Electronic Coin Drop Assembly	Chile; Chilean peso
	70294121	Electronic Coin Drop Assembly	Singapore
	70294111	Electronic Coin Drop Assembly	Euro; .10 - 2.00
	70441601P	Coin Drop	USA; \$.25
	70256402P	Coin Drop	USA; Dual; \$.25 and \$1.00
	70429001	Coin Drop	D models; USA
	38475	Coin Drop Assembly	Japan; 100 yen
	38519	Coin Drop Assembly	Japan; 100 and 500 yen
	38467	Coin Drop Assembly	Australia; .20 and 1.00
	70447301	Coin Drop Assembly	Australia; 1.00 and 2.00
	70482401	Coin Drop Assembly	New Zealand; 1.00 and 2.00
	39748	Coin Drop	HU, PU and SU models; Token; Jeton; Grooves on the face of the token
	210195	Coin Drop Assembly	Euro; .20 and 1.00
	210196	Coin Drop Assembly	Euro; .50 and 1.00
	38462P	Coin Drop Assembly	Token; STD-118-1; .880 diameter x .079 thick; Brass
	38463	Coin Drop Assembly	Token; STD-118-5; .990 diameter x .081 thick; Silver
	70471601	Coin Drop Assembly	Token; 7K
	38464P	Coin Drop Assembly	Canada; .25
	70441602	Coin Drop Assembly	Canada; .25 and 1.00
	38472	Coin Drop Assembly	England; 20 pence and 1 pound
	N/A	Coin Drop Assembly	Denmark; 1 and 5 DKK; May replace with 70294104 Electronic Coin Drop Assembly
	38521	Coin Drop Assembly	Korea; 100 and 500 won
	38963P	Coin Drop	Token STD-118-16 not available; Replacement for 38963P Coin Drop only
	N/A	Coin Drop Assembly	Taiwan; Dual; 5 and 10 NT; May replace with CK113 Electronic Coin Drop Kit
	39157	Coin Drop Assembly	Israel; Shekel
	CK077	Coin Drop Kit	Taiwan; 10 NT
4	200674P	Opto Coupler	
5	201595P	Wire Guard	

N/A = Part no longer available

# Coin Drop Kits

All Models Except U Models

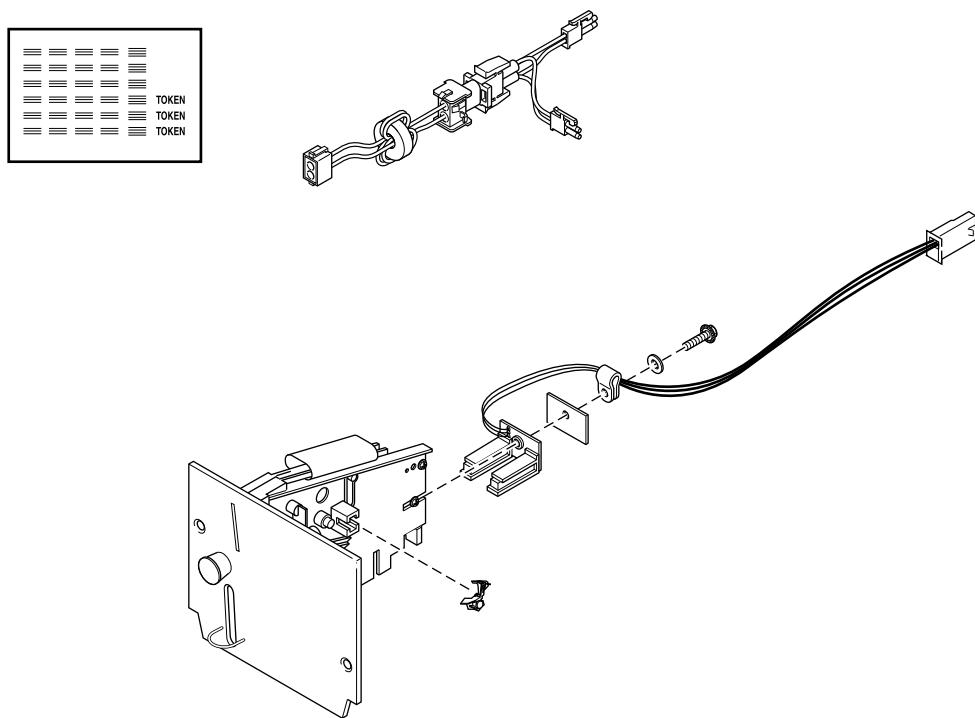


TMB2921PA\_70304801

## Coin Drop Kits

REF	PART NO.	DESCRIPTION	COMMENTS
CK115	Electronic Coin Drop Kit		United States and Canada
CK113	Electronic Coin Drop Kit		Japan and Taiwan
CK099	Electronic Coin Drop Kit		Australia (default), New Zealand, Hong Kong, South Korea and Malaysia
CK100	Electronic Coin Drop Kit		United Kingdom (default) and Europe
CK101	Electronic Coin Drop Kit		Europe (default), Denmark and Norway
CK103	Electronic Coin Drop Kit		Lithuania (default), Latvia and Europe
CK108	Electronic Coin Drop Kit		South Africa
CK109	Electronic Coin Drop Kit		Euro
CK116	Electronic Coin Drop Kit		Malaysia (default) and China
CK117	Electronic Coin Drop Kit		Russia
CK118	Electronic Coin Drop Kit		Philippine
CK119	Electronic Coin Drop Kit		Thailand
CK120	Electronic Coin Drop Kit		Chile
CK121	Electronic Coin Drop Kit		Singapore
CK122	Electronic Coin Drop Kit		New Zealand; 1.00 and 2.00

## Electronic Coin Drop Components

C, D, G, H, I, K, L, P and S Models with 3V, BC, KC, LC, NC, WC and ZC Control Suffixes

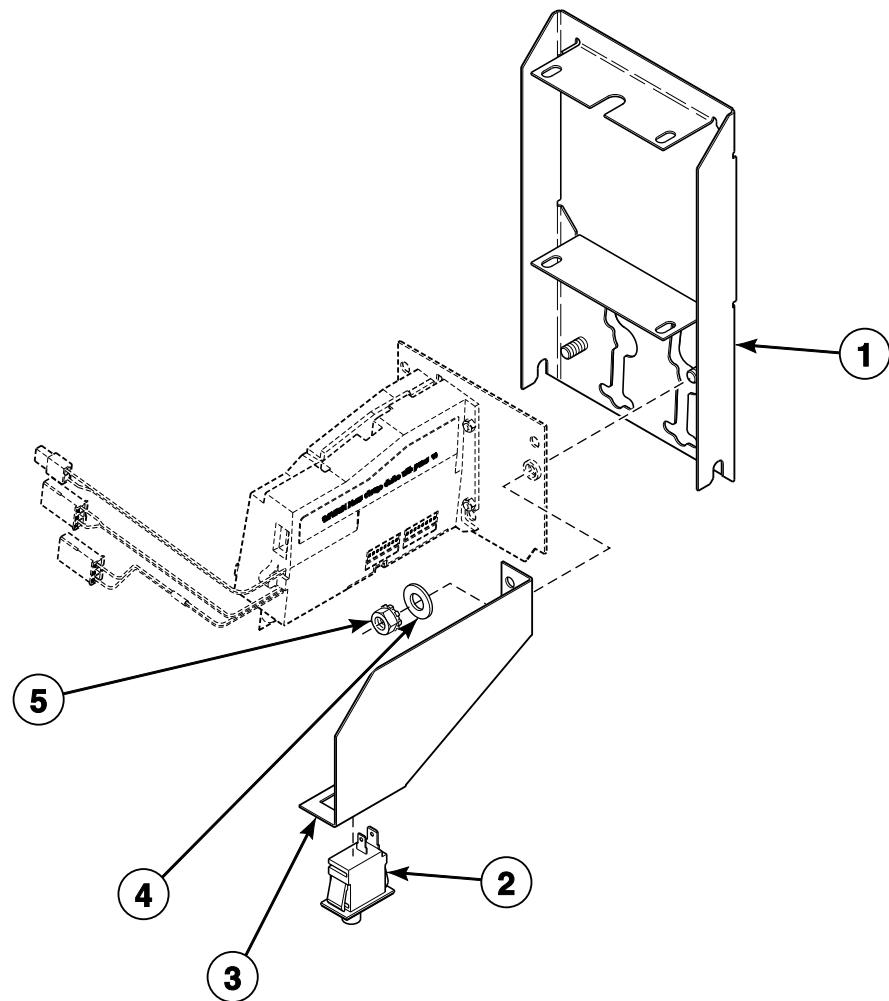


TMB1984K\_70304801

## Electronic Coin Drop Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70291201P	Control Plate Kit	H models
	70291101P	Control Plate Kit	All other models
2	70413301	Pushbutton Switch	Coin vault switch
3	70292601	Audit Switch Bracket	
4	70292801	Washer	2 required
5	29786	Nut	2 required

# Card Reader Components for Micro Models

K Models Through Serial No. 1101018349 with NJ Control Suffix

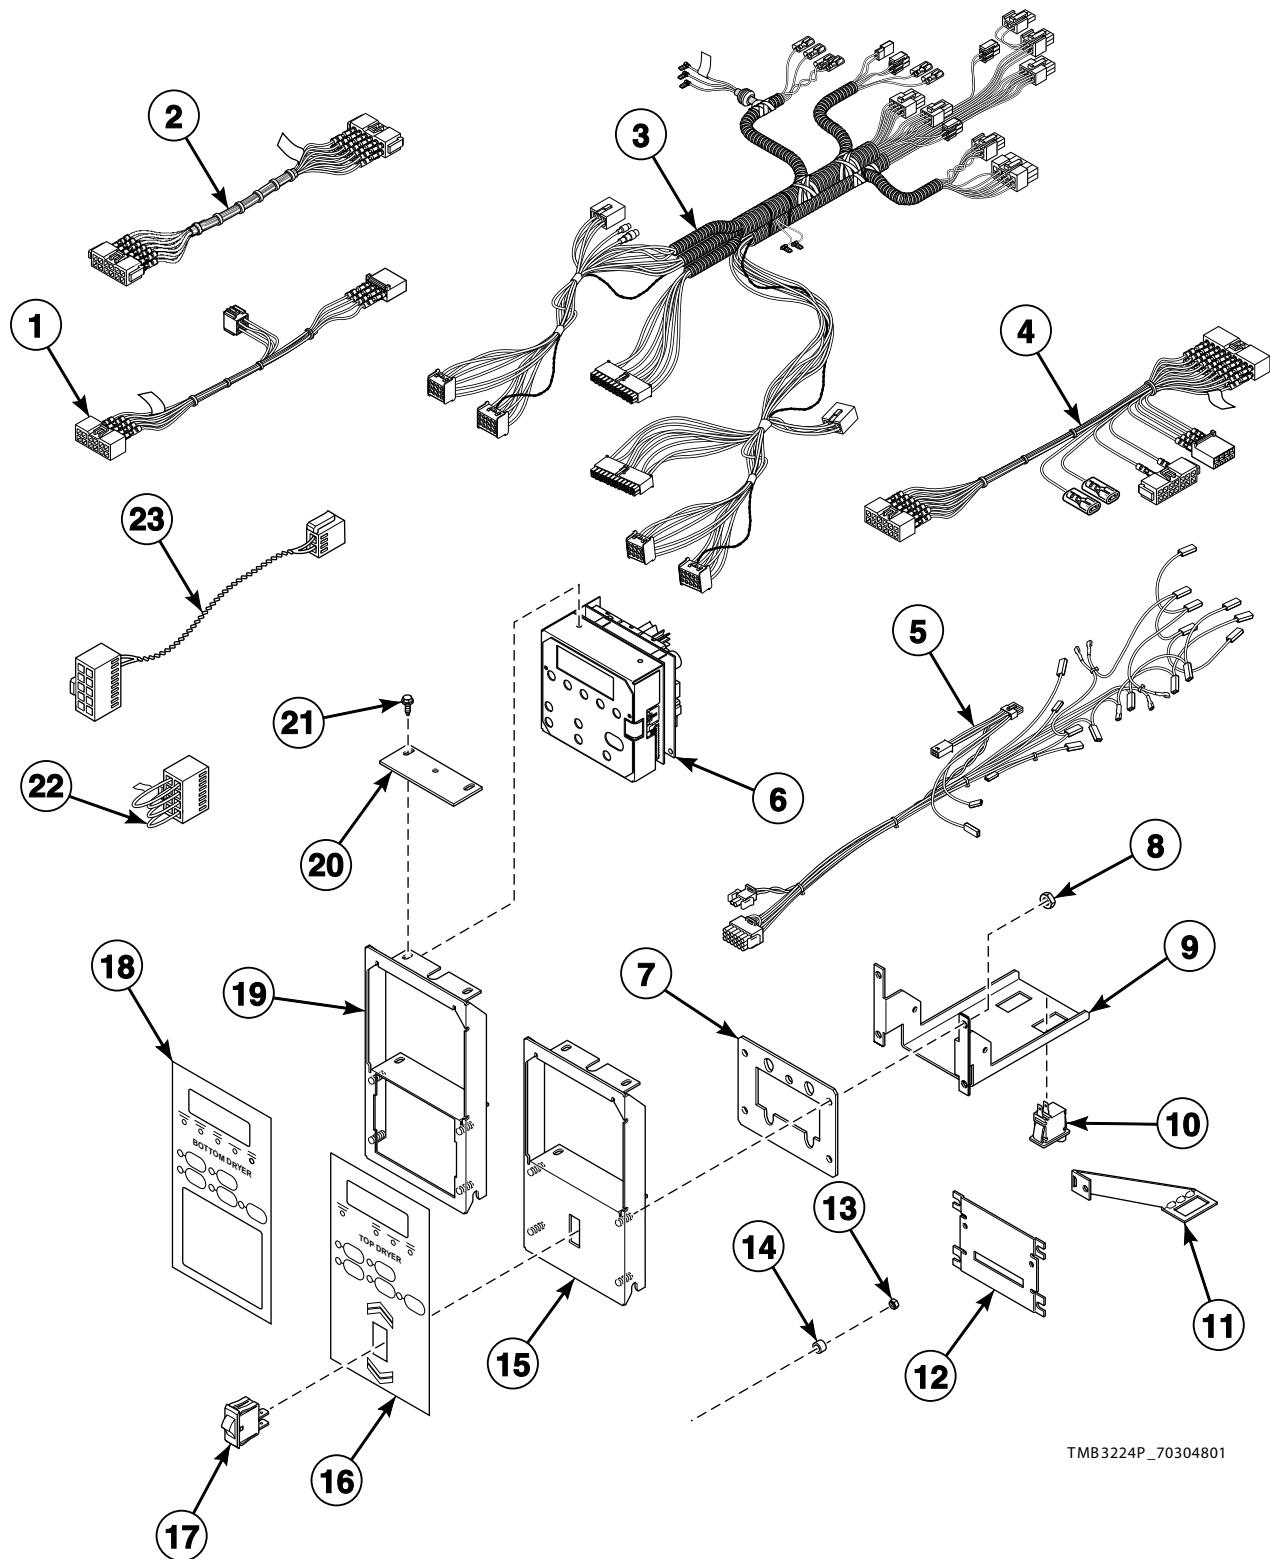


TMB3224P\_70304801

## Card Reader Components for Micro Models

REF	PART NO.	DESCRIPTION	COMMENTS
	430497	Screw	
	70366201	Wire Clip	
	70307003	Control Housing Cover	
1	70420101P	Lower Card Reader Harness	
2	70419901P	Main Harness	Single card reader; Electric models need 55881 Harness Strap
3	70346001P	Main Harness	Electric models need 55881 Harness Strap
4	70420001P	Upper Card Reader Harness	
5	70368001P	Control Panel Harness	Non-CE and non-Australian models
	70315501P	Control Panel Harness	CE and Australian models
6	505905P	Control Kit	
	510036P	Membrane Switch	Order to replace touchpad for 510034 Control Assembly in 505905P Control Kit
7	70208801	Mounting Plate	
8	70054	Nut	
9	70119001	Chassis Mounting Bracket	
10	70413301	Pushbutton Switch	Coin vault switch
11	70183901	Audit Switch Bracket	Use with item 10
12	44089501	Slot Card Plate Assembly	
13	29787	Nut	
14	56079	Panel Locator	
15	70420201	Control Mounting Bracket Assembly	
16	70418001	Overlay	Upper
17	44099601	Rocker Switch	
18	70417901	Overlay	Bottom
19	70348901	Control Plate Assembly	
20	70184501	Latch Mounting Bracket	
21	501524	Screw	4 required
22	70364103	Bypass Harness	Non-CE models
23	70324603	Jumper Calibration Wire	

# Coin Drop Components for NetMaster Models

KT Models Through Serial No. 1101018349 and ST Models Through Serial No. 0904004427  
NC, NX, ZC and ZX Control Suffixes

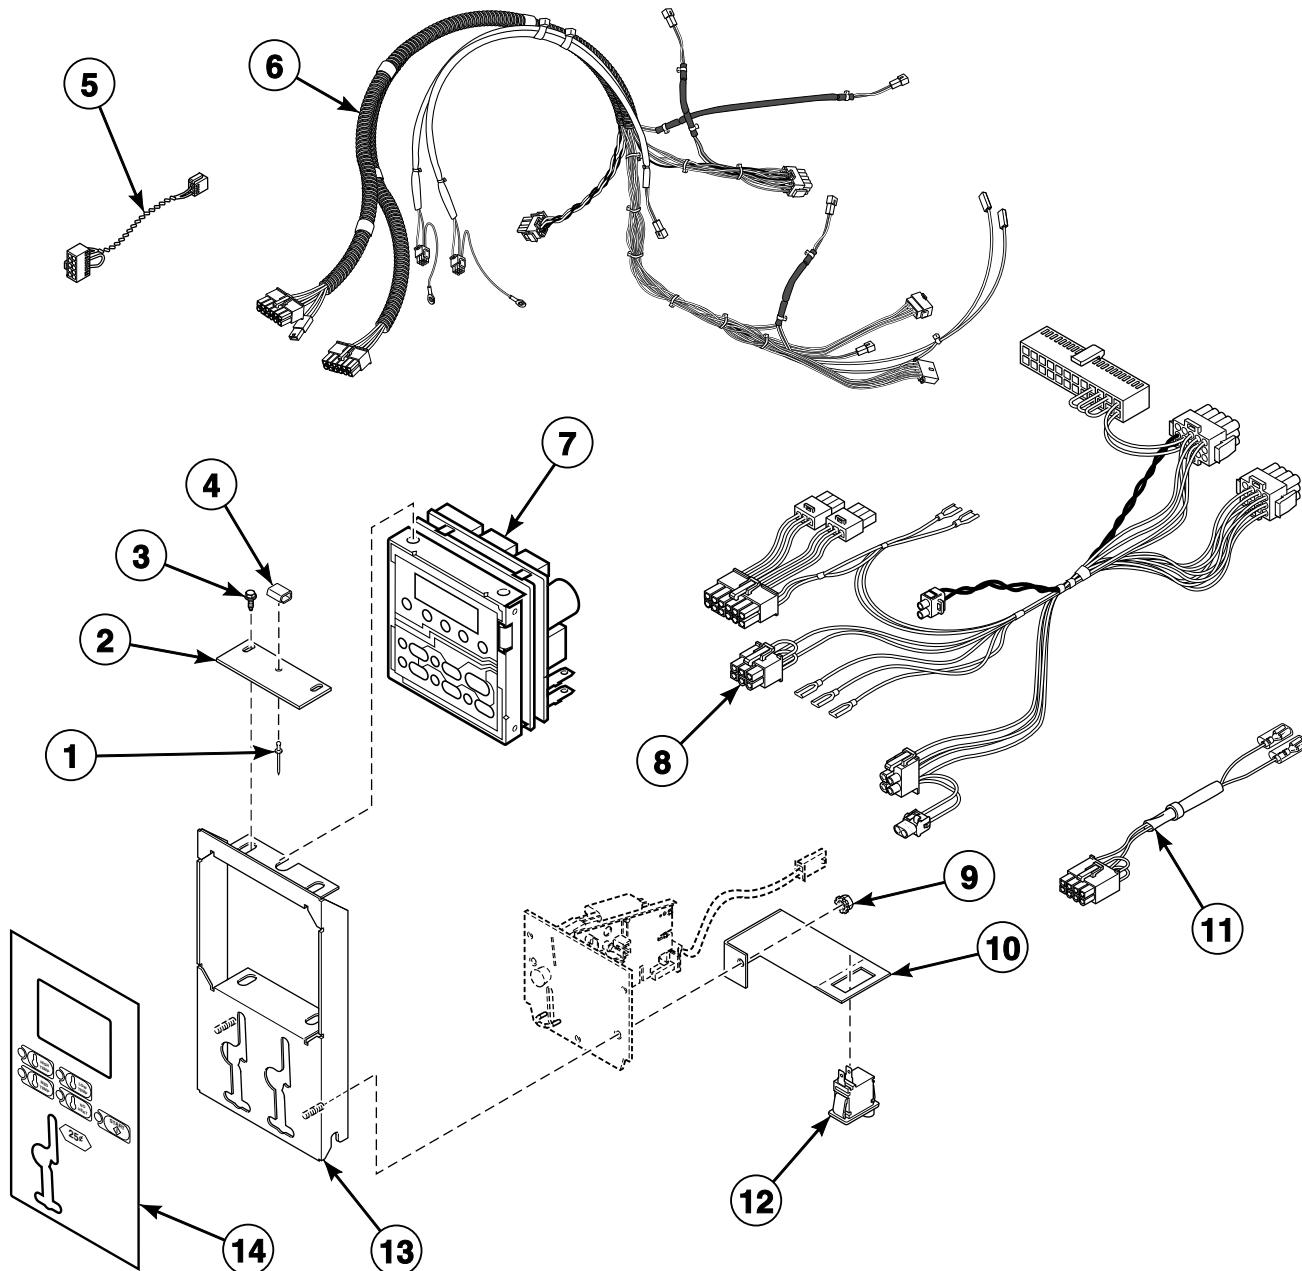


TMB2782P\_70304801

## Coin Drop Components for NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
	44147801	Overlay	K models
1	M400003	Pop Rivet	
2	70184501	Latch Mounting Bracket	
3	501524	Screw	4 required
4	431318	Control Door Latch	
5	70211703P	Jumper Calibration Assembly	
6	70346002P	Main Harness	Electric models need 55881 Harness Strap
7	505905P	Control Kit	Includes tape
	510036P	Membrane Switch	Order to replace touchpad for 510034 Control Assembly in 505905P Control Kit
8	70368001P	Control Panel Harness	
9	29786	Nut	
10	70292601	Audit Switch Bracket	
11	70364104P	Coin Vault Switch Harness	NC and ZC control suffixes; Non-CE models
12	70413301	Pushbutton Switch	Coin vault switch
13	70291101P	Control Plate Kit	
	70419501	Control Plate Assembly	K models
14	70184101	Overlay	Single drop
	70184102	Overlay	Dual drop
	70413601	Overlay	K models; NC and NX control suffixes; Single drop; Bottom
	70413602	Overlay	K models; NC and NX control suffixes; Dual drop; Bottom
	70413901	Overlay	K models; NC and NX control suffixes; Single drop; Upper
	70413902	Overlay	K models; NC and NX control suffixes; Dual drop; Upper

# Card Reader Components for NetMaster Models

KT Models Through Serial No. 1101018349 and SA and ST Models Through Serial No. 0904004427  
NR, NY, ZR and ZY Control Suffixes

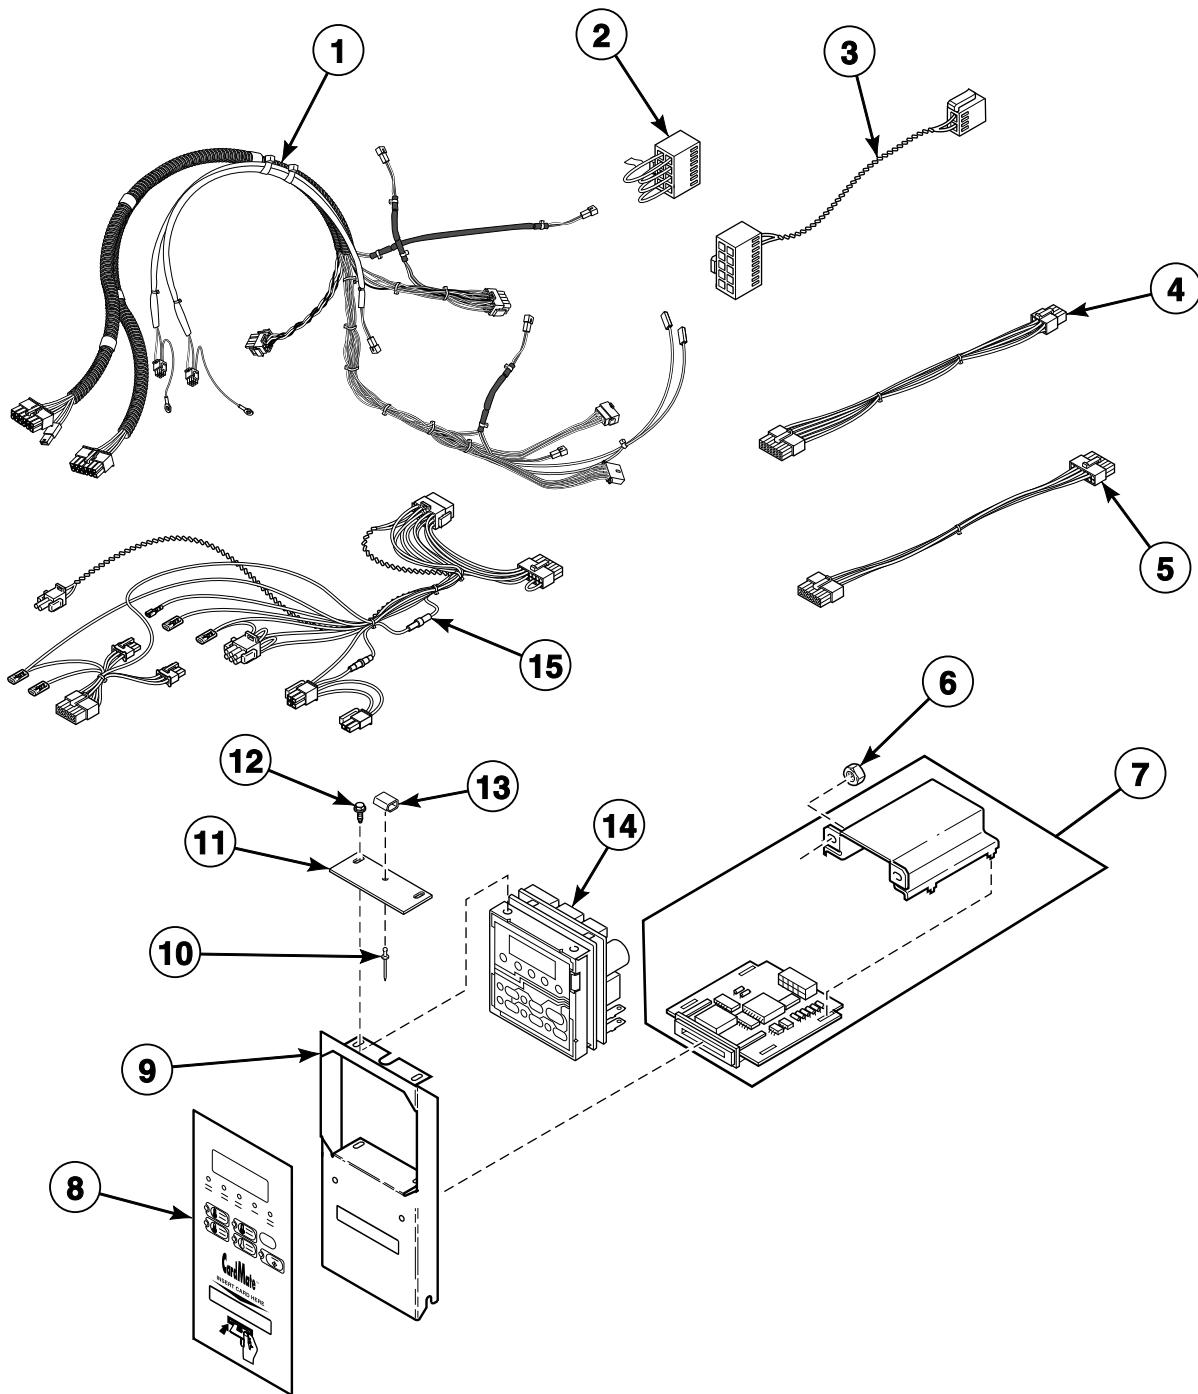


TMB2783P\_70304801

## Card Reader Components for NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70346002P	Main Harness	ZR and ZY control suffixes; Electric models need 55881 Harness Strap
2	70364103	Bypass Harness	Non-CE models
3	70211703P	Jumper Calibration Assembly	
4	70206601	Card Reader Network Harness Assembly	Card reader or network
5	70211801	Card Reader Harness Assembly	
6	70054	Nut	2 required
7	510068P	Card Reader and Bracket Assembly	
8	70184201	Overlay	Card reader installed
	70235101	Overlay	Card reader ready
	70416301	Overlay	K models; NY control suffix; Upper
	70416401	Overlay	K models; NY control suffix; Bottom
9	70175911	Control Door Assembly	NR control suffix
10	M400003	Pop Rivet	
11	70184501	Latch Mounting Bracket	
12	501524	Screw	4 required
13	431318	Control Door Latch	
14	505905P	Control Kit	Includes tape
	510036P	Membrane Switch	Order to replace touchpad for 510034 Control Assembly in 505905P Control Kit
15	70368001P	Control Panel Harness	KT and ST models
	70315501P	Control Panel Harness	SA models

# Network Board for NetMaster Models

SA and ST Models Through Serial No. 0904004427 with ZC, ZR, ZX and ZY Control Suffixes

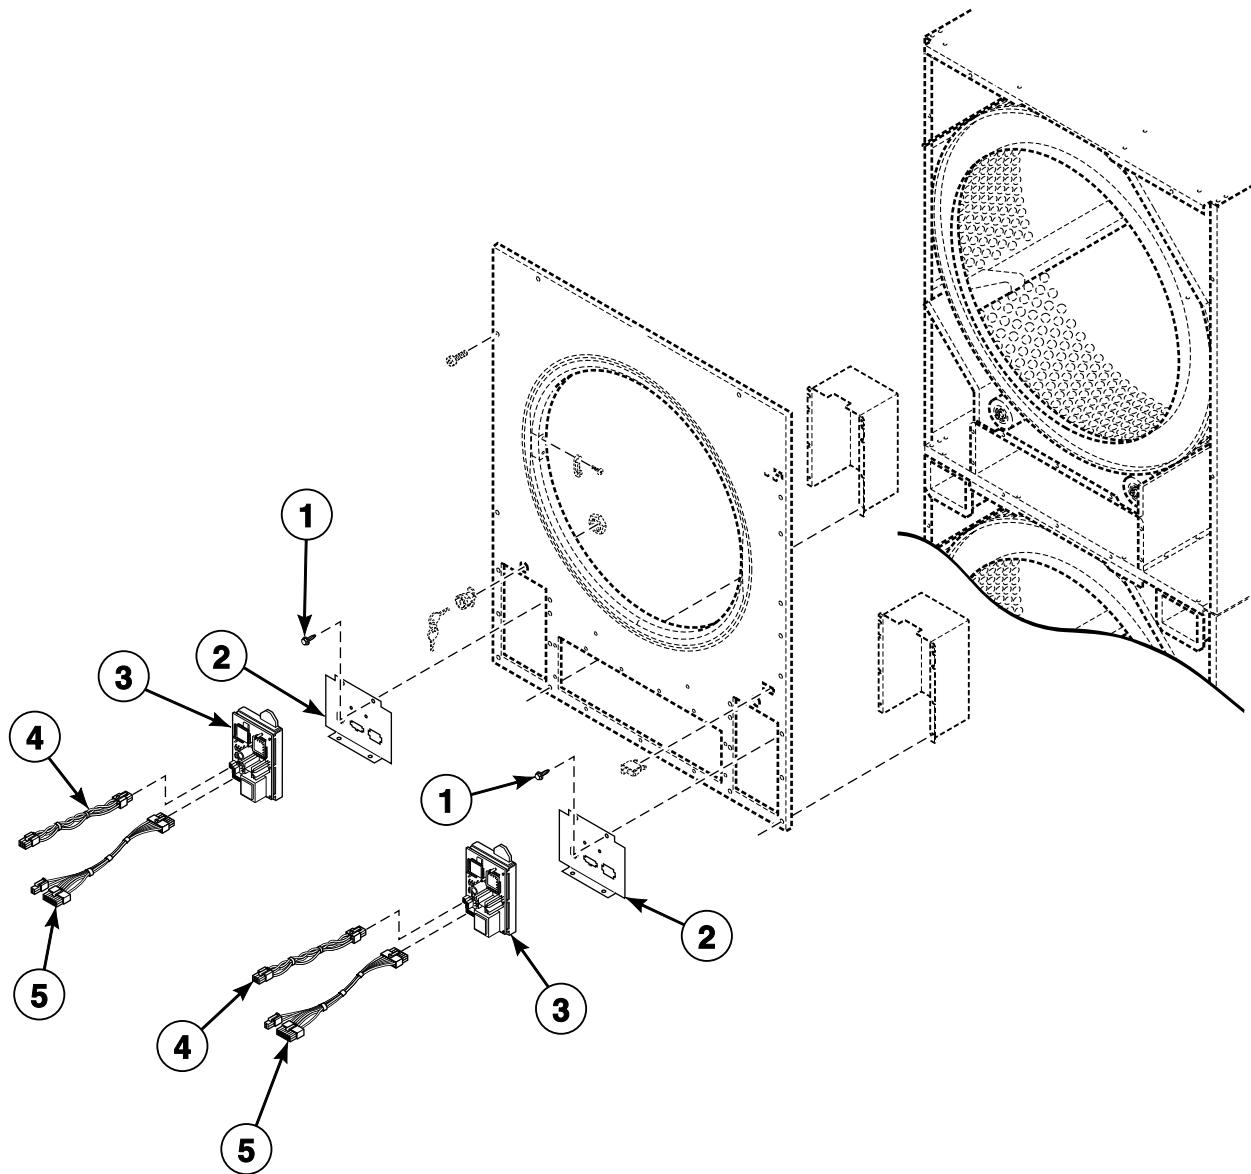


TMB2308P\_70304801

## Network Board for NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	52909	Screw	
2	70307002	Control Housing Cover	
3	210016P	Network Board Assembly	
4	70211101	Communication Harness Assembly	Network board to main harness at control bulkhead
5	800217	Network Wire Harness Assembly	

# Coin Drop Components for Quantum Models

M and S Models with LC, LL, LX, WC, WL and WX Control Suffixes

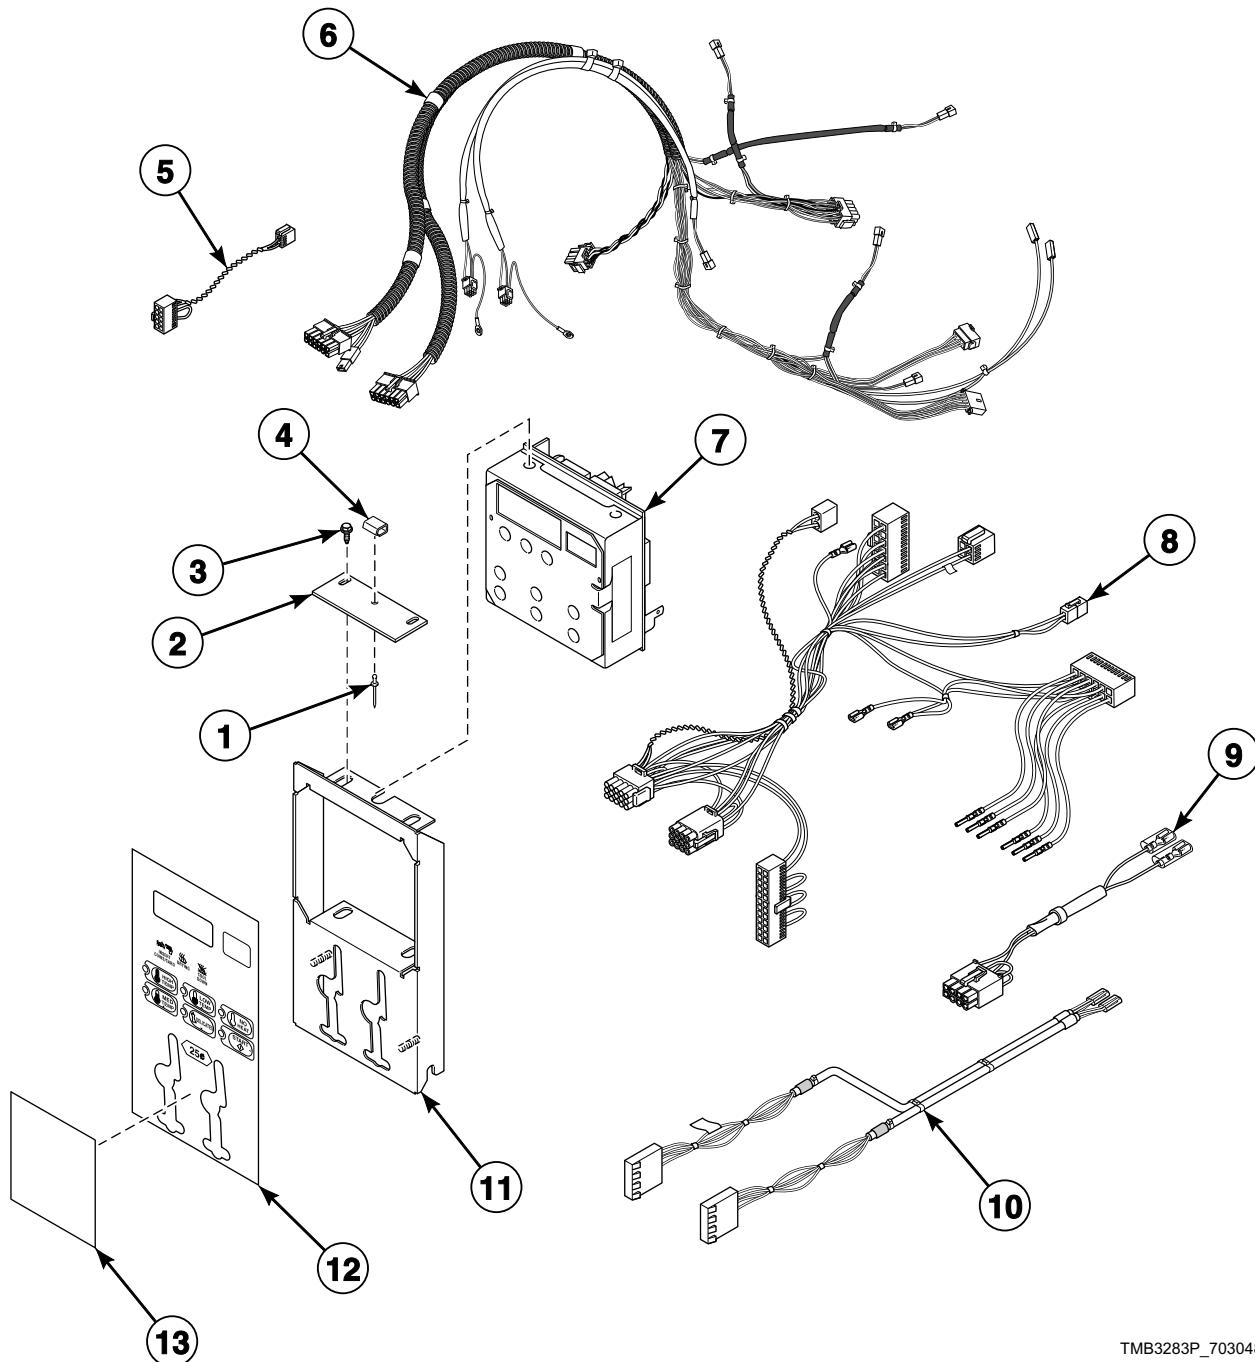


TMB3283P\_70304801

## Coin Drop Components for Quantum Models

REF	PART NO.	DESCRIPTION	COMMENTS
	NK207	Network Retrofit Kit	LC and LX control suffixes; Wired
	NK220	Network Controller Kit	LC and LX control suffixes; Wired
	NK301	Wireless Network Kit	LC and LX control suffixes
	NK320	Ethernet Gateway Kit	LC and LX control suffixes; Wireless
	NK330	USB Gateway Kit	LC and LX control suffixes; Wireless
	203346	USB IR Interface Kit	
<b>1</b>	M400003	Pop Rivet	
<b>2</b>	70184501	Latch Mounting Bracket	
<b>3</b>	501524	Screw	4 required
<b>4</b>	431318	Control Door Latch	
<b>5</b>	70324603	Jumper Calibration Wire	
<b>6</b>	70346001P	Main Harness	LC and LX control suffixes; Electric models need 55881 Harness Strap; Models through 1/15/12
	70346002P	Main Harness	WC and WX control suffixes; Electric models need 55881 Harness Strap; Models through 1/15/12
	70441401	Main Harness	Electric models need 55881 Harness Strap; Models starting 1/16/12
<b>7</b>	70450501P	Control Assembly	Includes tape
<b>8</b>	70410401P	Control Panel Harness	
<b>9</b>	70364104P	Coin Vault Switch Harness	Non-CE models
<b>10</b>	70484501	Central Pay Harness	LL and WL control suffixes
<b>11</b>	70291101P	Control Plate Kit	
<b>12</b>	70449401	Control Overlay	STT30D, STT45D and M models
	70443401	Control Overlay	Models STT30D and STT45D; Upper
	70443501	Control Overlay	Models STT30D and STT45D; Lower
	70410101	Control Overlay	All other models; Single drop
	70410102	Control Overlay	All other models; Dual drop
<b>13</b>	39564	Coin Drop Overlay	LL and WL control suffixes; Cover

# Card Reader Components for Quantum Models

M and S Models with LY and WY Control Suffixes

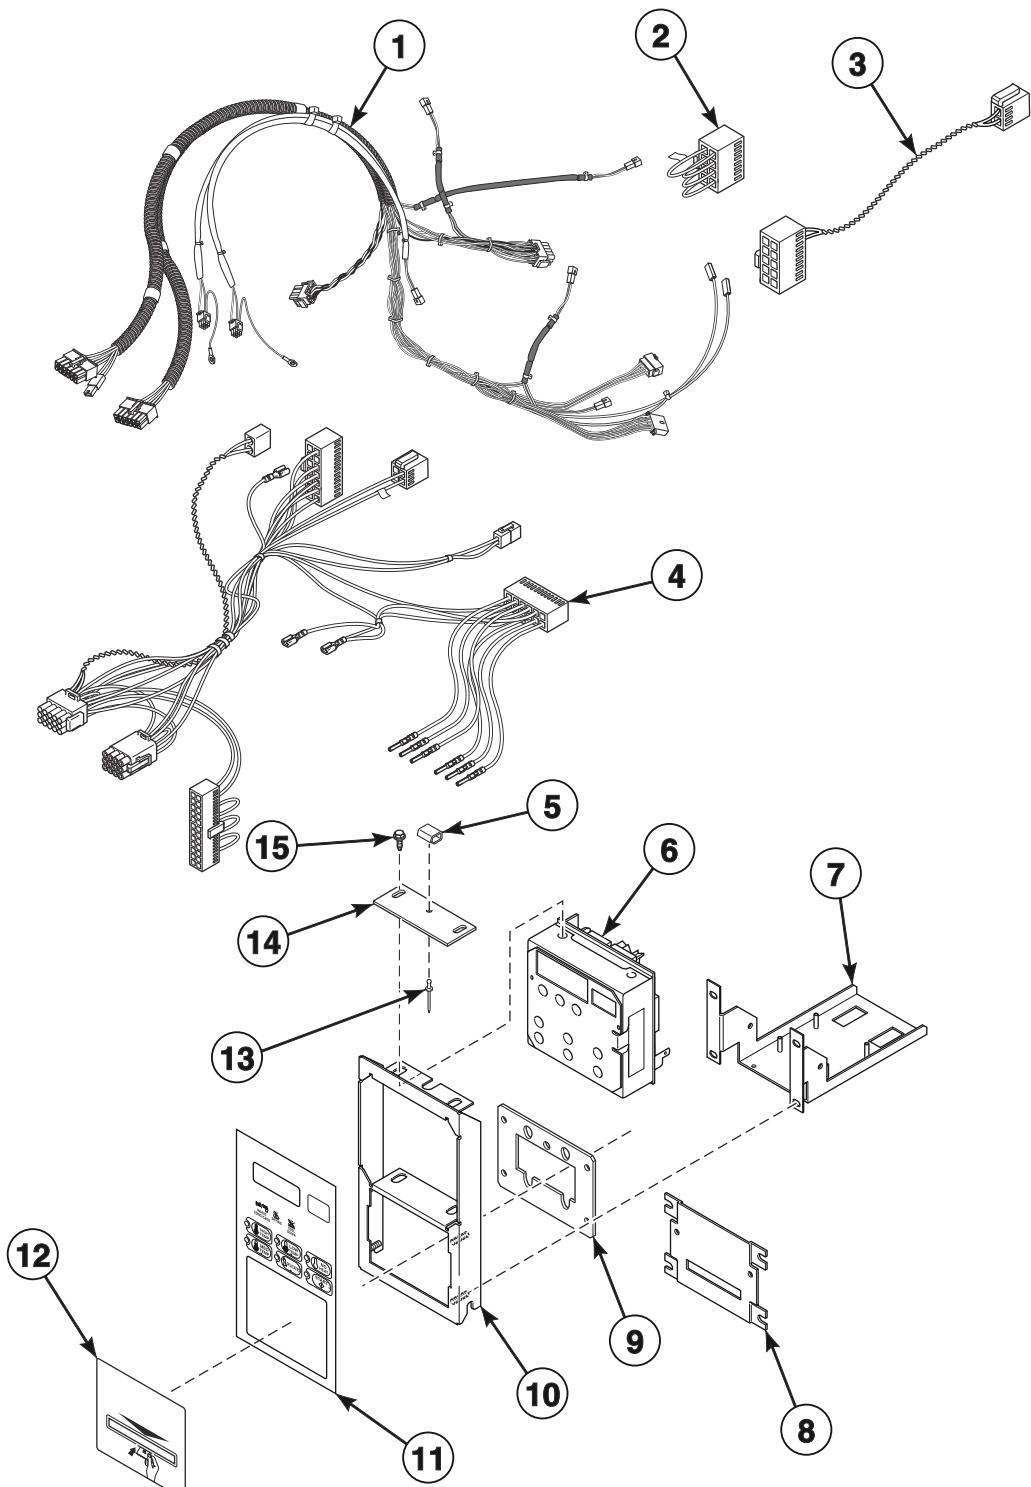


TMB3351P\_70304801

## Card Reader Components for Quantum Models

REF	PART NO.	DESCRIPTION	COMMENTS
	NK207	Network Retrofit Kit	LY control suffix; Wired
	NK220	Network Controller Kit	LY control suffix: Wired
	NK301	Wireless Network Kit	LY control suffix
	NK320	Ethernet Gateway Kit	LY control suffix; Wireless
	NK330	USB Gateway Kit	LY control suffix; Wireless
	203346	USB IR Interface Kit	
<b>1</b>	70346001P	Main Harness	LY control suffix; Electric models need 55881 Harness Strap; Models through 1/15/12
	70346002P	Main Harness	WY control suffix; Electric models need 55881 Harness Strap; Models through 1/15/12
	70441401	Main Harness	Electric models need 55881 Harness Strap; Models starting 1/16/12
<b>2</b>	70364103	Bypass Harness	Non-CE models
<b>3</b>	70324603	Jumper Calibration Wire	
<b>4</b>	70410401P	Control Panel Harness	
<b>5</b>	431318	Control Door Latch	
<b>6</b>	70450501P	Control Assembly	Includes tape
<b>7</b>	70419201	Chassis Mounting Bracket Assembly	
<b>8</b>	44089501	Slot Card Plate Assembly	
<b>9</b>	70208801	Mounting Plate	
<b>10</b>	70348901	Control Plate Assembly	
<b>11</b>	70417601	Control Overlay	English
	70523401	Control Overlay	Chinese; T30 M models
<b>12</b>	70523601	Card Reader Overlay	T30 M models
	70334201	Card Reader Overlay	All other models
<b>13</b>	M400003	Pop Rivet	
<b>14</b>	70184501	Latch Mounting Bracket	
<b>15</b>	501524	Screw	4 required

# Network Board for Quantum Models

M and S Models with WC, WX and WY Control Suffixes

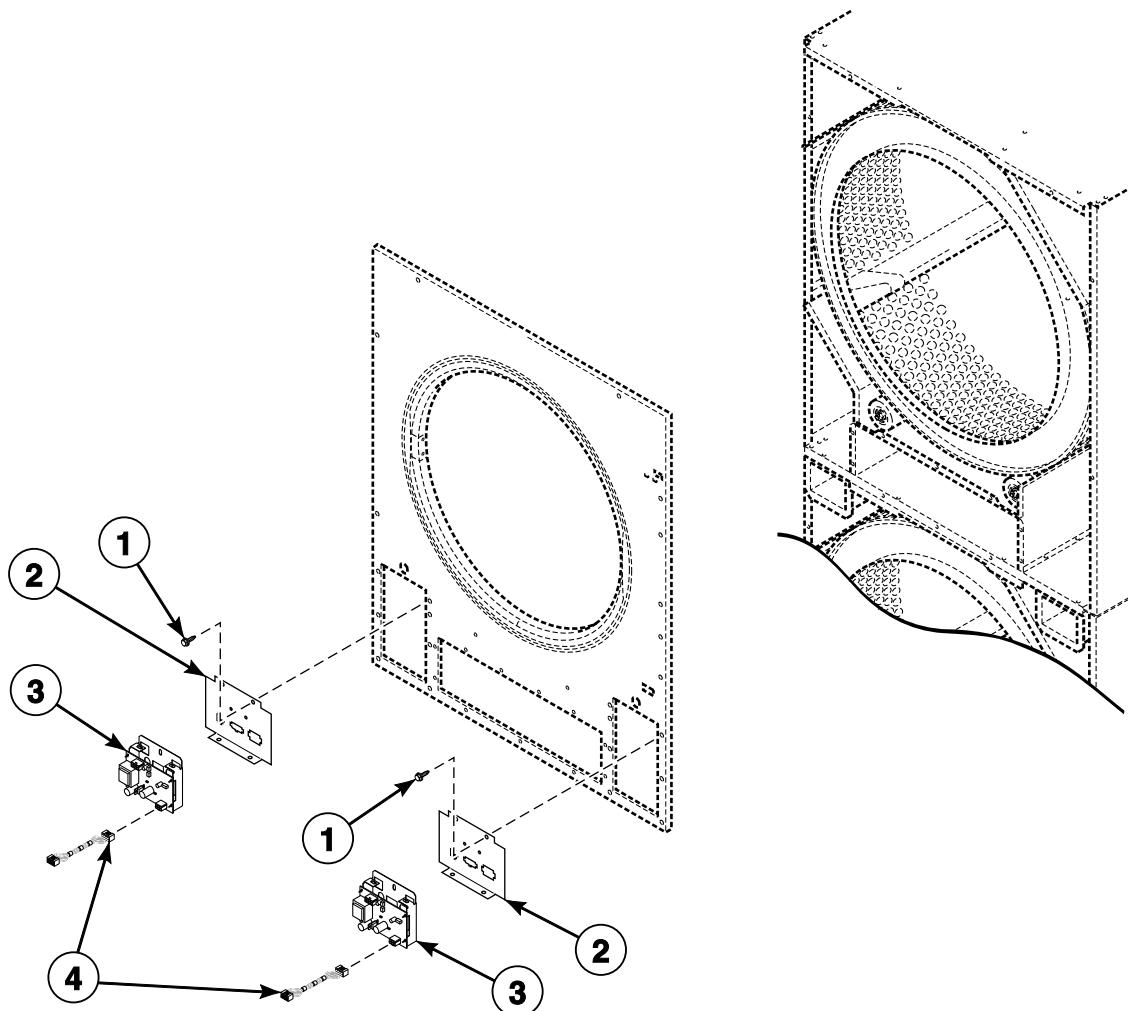


TMB2935P\_70304801

## Network Board for Quantum Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	52909	Screw	
2	70307002	Control Housing Cover	
3	201341	Network Board Assembly	
4	44088501P	Network Wire Harness Assembly	

# Communication Board

M and S Models with WC, ZC and ZR Control Suffixes

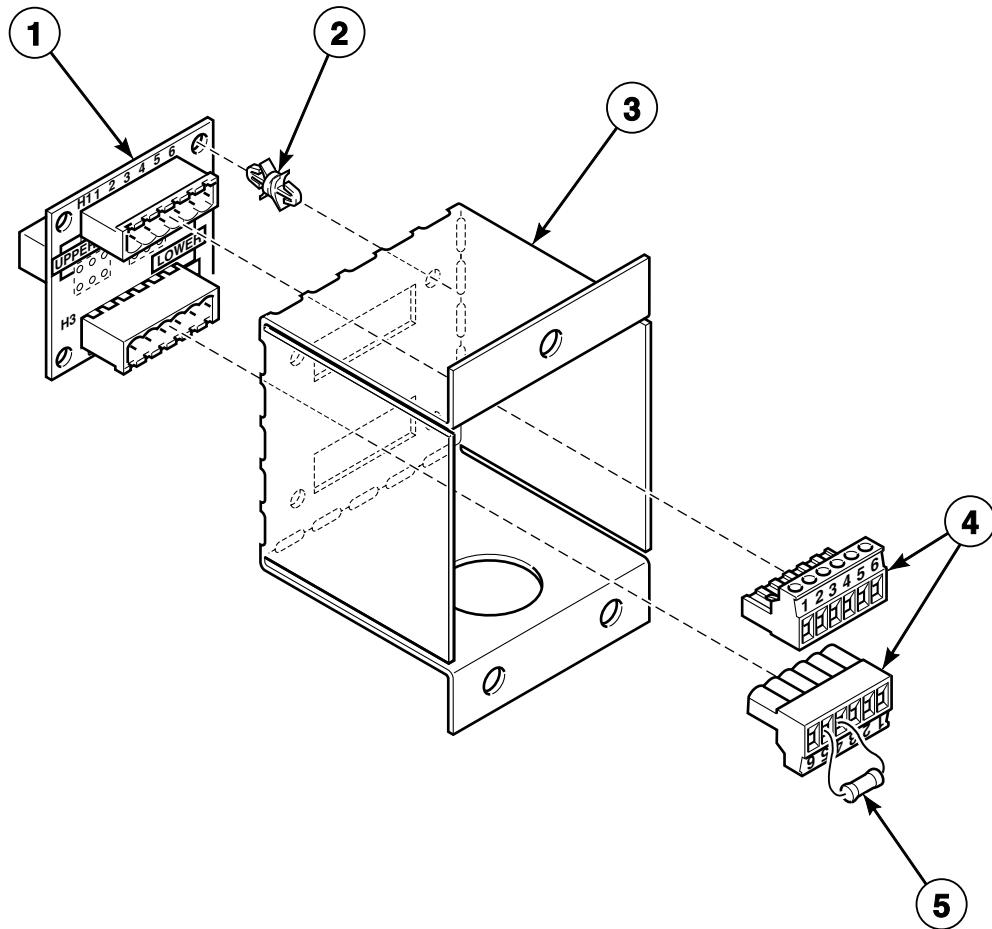


TMB2351P\_70304801

## Communication Board

REF	PART NO.	DESCRIPTION	COMMENTS
1	210097	Communication Board	
2	210098	PC Board Standoff	4 required
3	70323101	Communication Board Bracket	
4	210099	Communication Connector	
5	210162	Terminating Resistor	120 Ohms

# Coin Drop Components for Galaxy 600 Models

H Models with KC, KL and KX Control Suffixes

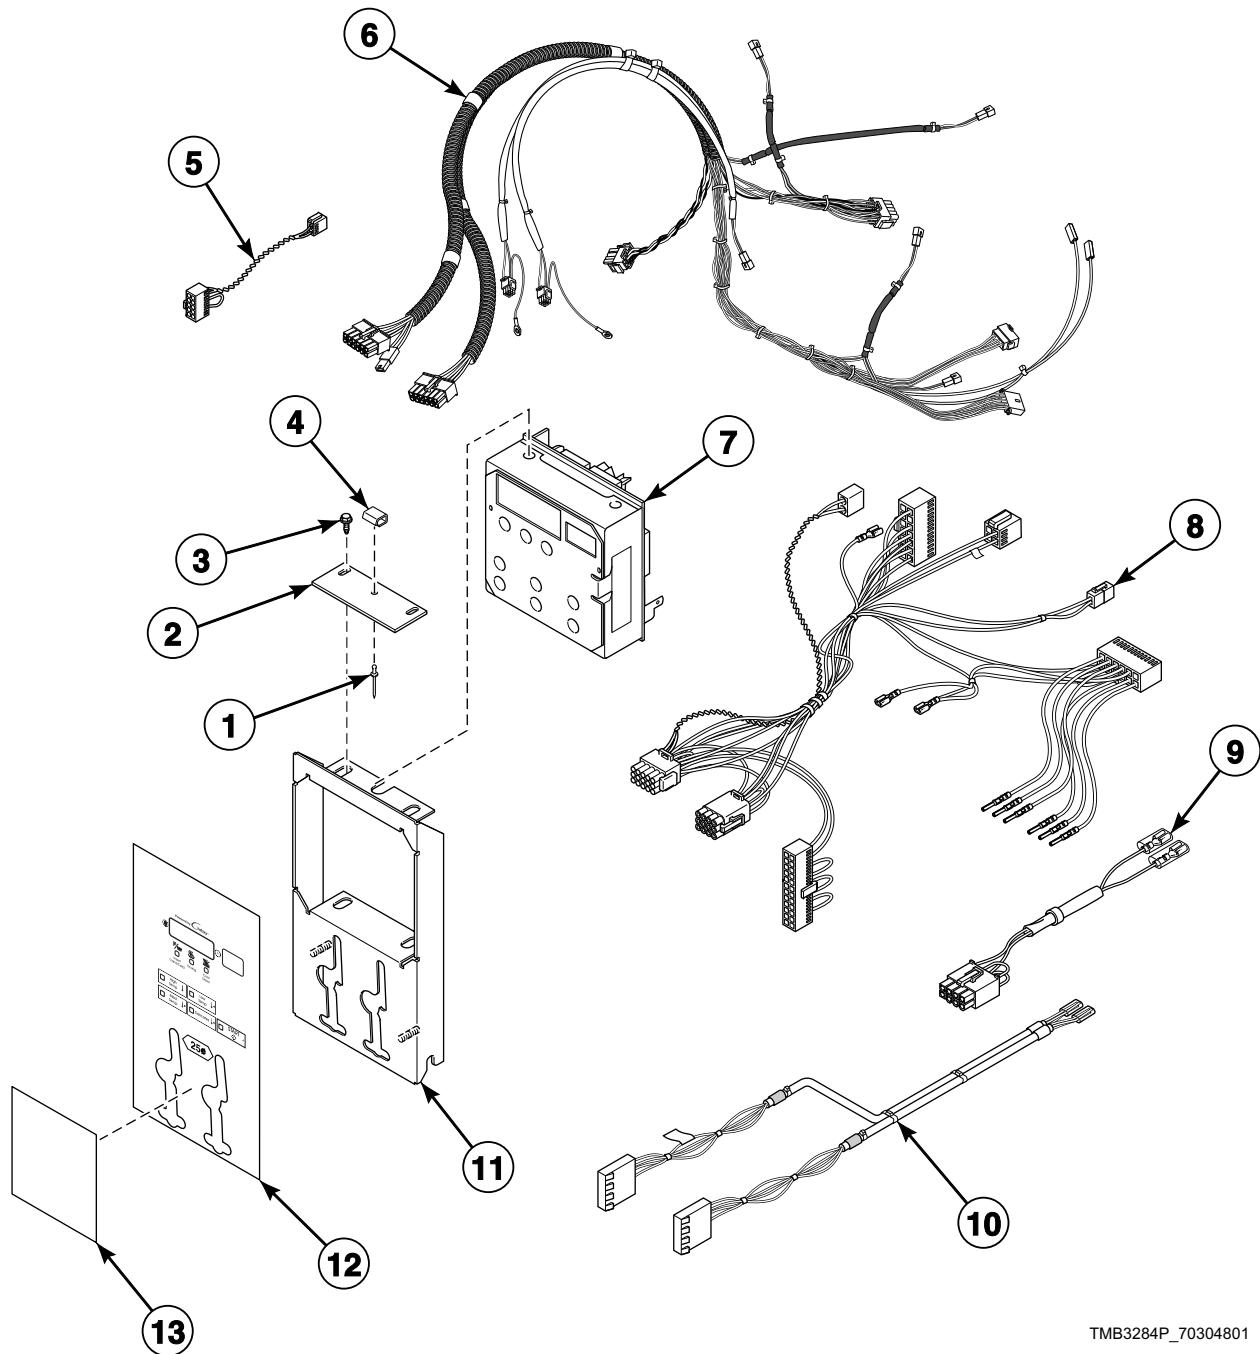


TMB3284P\_70304801

## Coin Drop Components for Galaxy 600 Models

REF	PART NO.	DESCRIPTION	COMMENTS
	203346	USB IR Interface Kit	
1	M400003	Pop Rivet	
2	70184501	Latch Mounting Bracket	
3	501524	Screw	4 required
4	431318	Control Door Latch	
5	70324603	Jumper Calibration Wire	
6	70441401	Main Harness	Electric models need 55881 Harness Strap
7	70450502P	Control Assembly	Includes tape
8	70410401P	Control Panel Harness	
9	70364104P	Coin Vault Switch Harness	Non-CE models
10	70484501	Central Pay Harness	KL control suffix
11	70291201P	Control Plate Kit	
12	70472101	Control Overlay	Single drop
	70472102	Control Overlay	Dual drop
13	70246301	Coin Cover Overlay	KL control suffix; Cover

# Card Reader Components for Galaxy 600 Models

H Models with KY Control Suffix

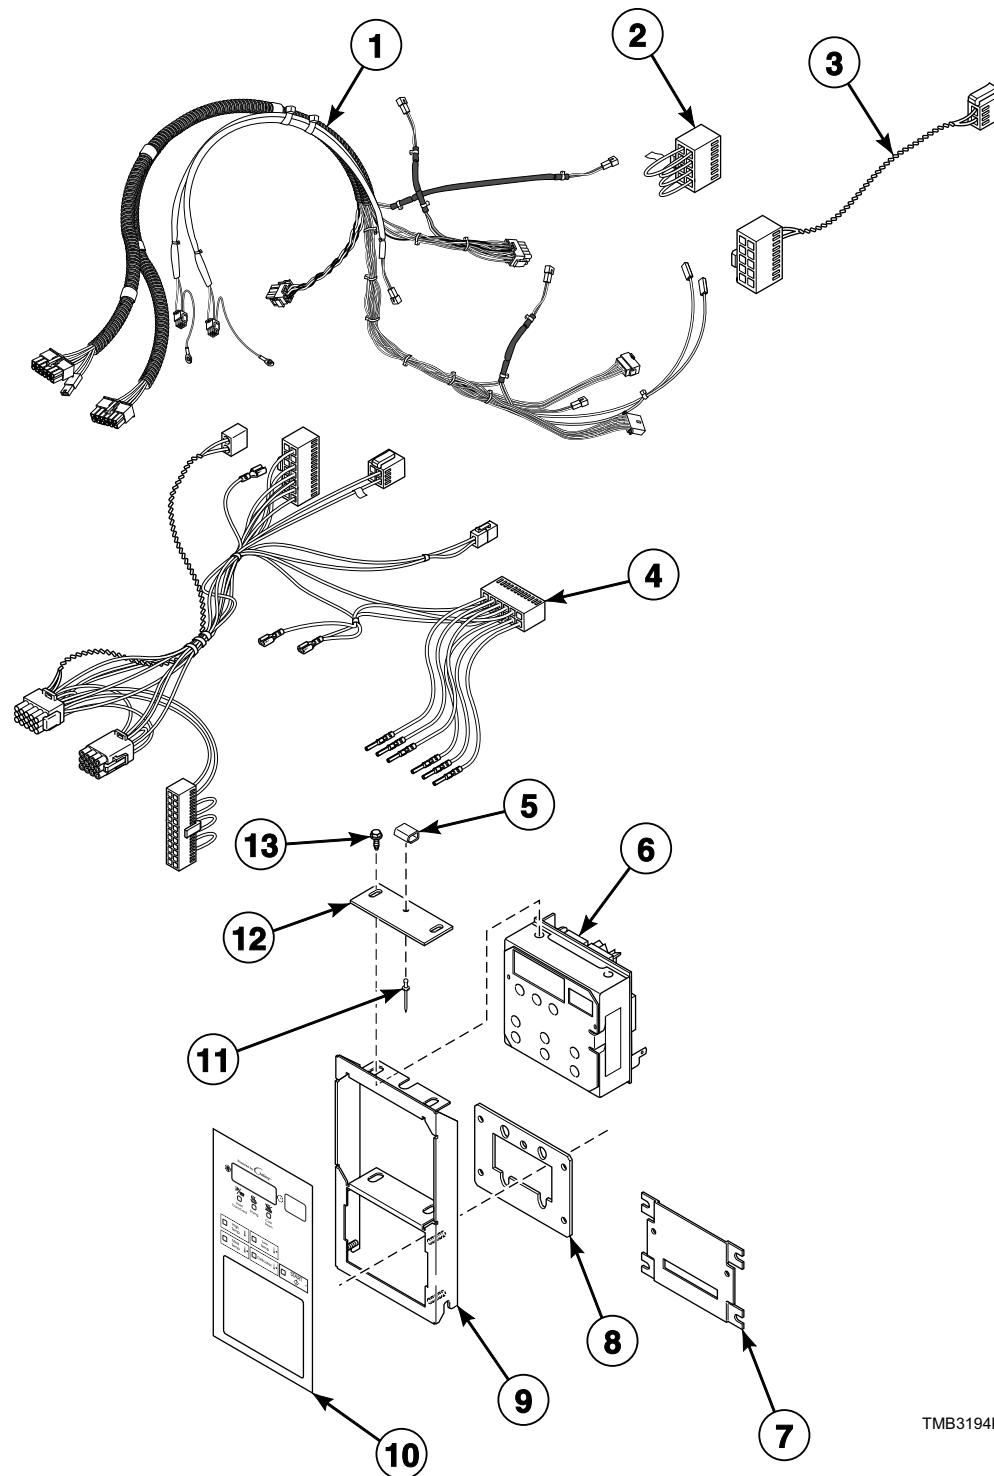


TMB3194P\_70304801

## Card Reader Components for Galaxy 600 Models

REF	PART NO.	DESCRIPTION	COMMENTS
	203346	USB IR Interface Kit	
1	70441401	Main Harness	Electric models need 55881 Harness Strap
2	70364103	Bypass Harness	Non-CE models
3	70324603	Jumper Calibration Wire	
4	70410401P	Control Panel Harness	
5	431318	Control Door Latch	
6	70450502P	Control Assembly	Includes tape
7	44089501	Slot Card Plate Assembly	
8	70208801	Mounting Plate	
9	70349001	Control Plate Assembly	
10	70472101	Control Overlay	Single drop; KC and KX control suffixes
	70472102	Control Overlay	Dual drop; KC and KX control suffixes
	70472901	Control Overlay	KY control suffix
11	M400003	Pop Rivet	
12	70184501	Latch Mounting Bracket	
13	501524	Screw	4 required

# LED OPL Control

C, D, H, I, S and U Models  
G, K, L and P Models Starting 1/16/12  
Models with EO Control Suffix

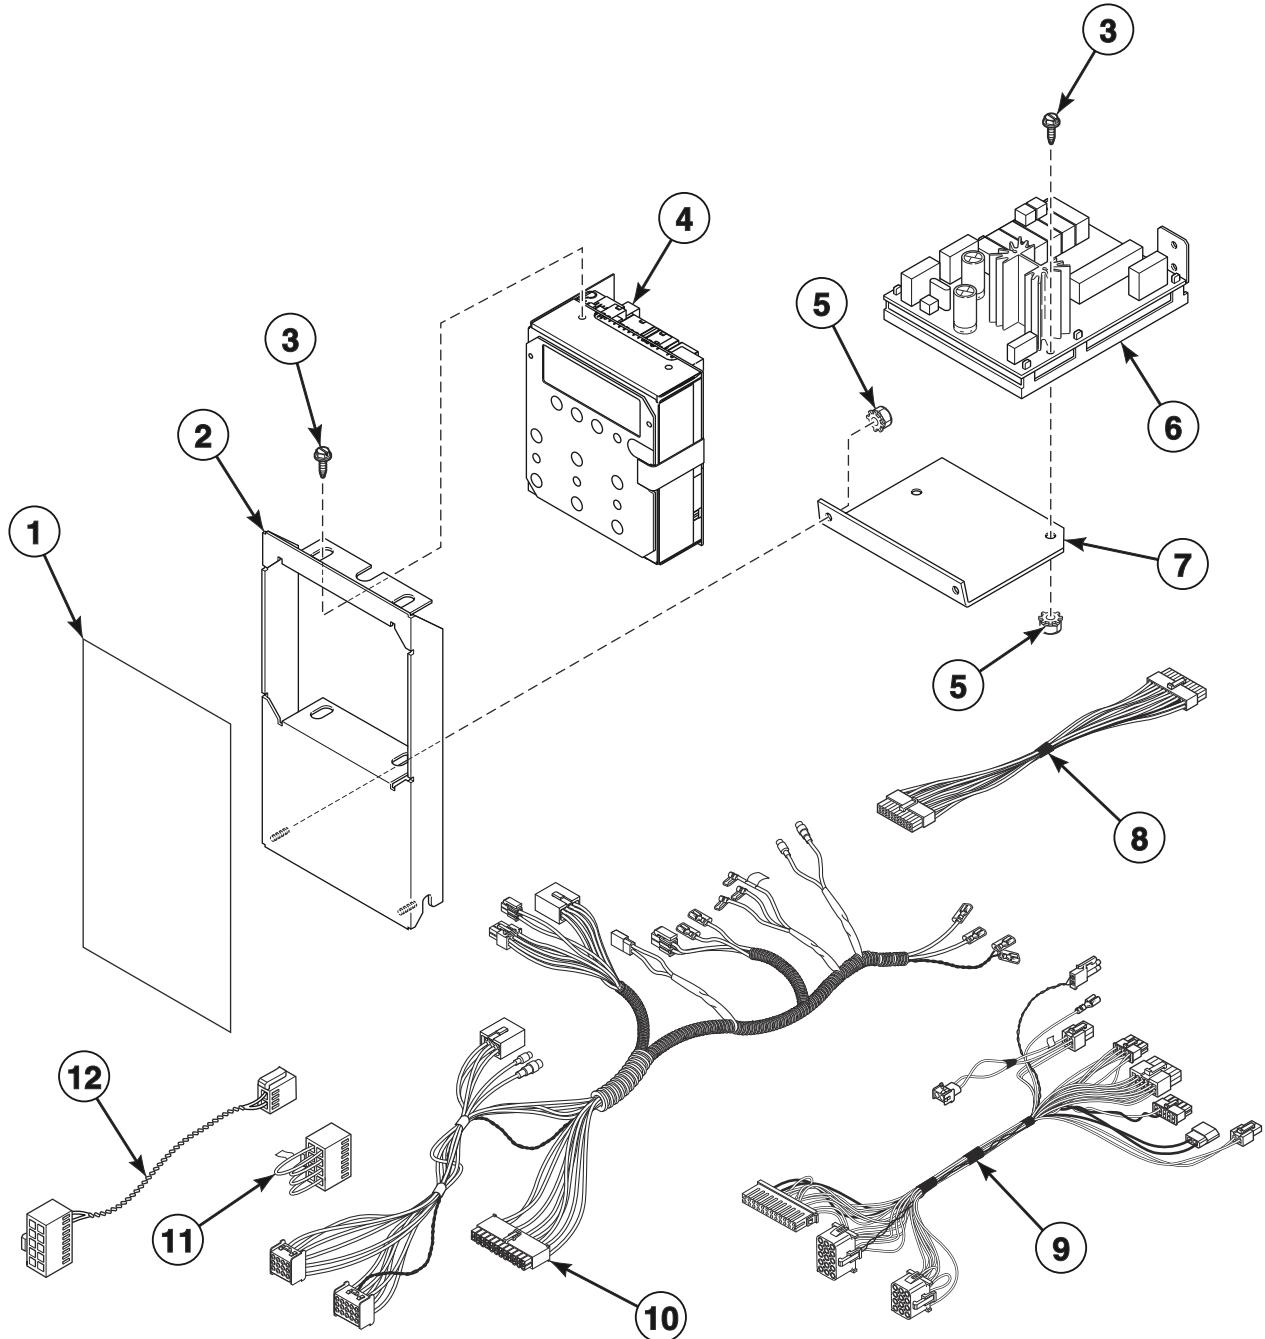


TMB3314P\_70304801

## LED OPL Control

REF	PART NO.	DESCRIPTION	COMMENTS
	203346	USB IR Interface Kit	
<b>1</b>	70467102	Overlay	S models
	70445102	Overlay	H models
	70466702	Overlay	C, D and I models; Models through 7/14/14
	70505001	Overlay	C, D and I models; Models starting 7/15/14
	70462801	Overlay	U models; Models through 8/17/14
	70493801	Overlay	U models; Models starting 8/18/14
	70463002	Overlay	G and K models
	70472502	Overlay	P models; Models through 9/30/14
	70509101	Overlay	L and P models; Models starting 10/1/14 through 5/31/15
	70472302	Overlay	L models through 9/30/14
	70525901	Overlay	L and P models starting 6/1/15
<b>2</b>	70441001	Control Door and Studs Assembly	C, D, I, S and U models
	70441101	Control Door and Studs Assembly	H models
<b>3</b>	501524	Screw	
<b>4</b>	70454101P	Control Assembly	H, S and U models; L and P models starting 6/1/15
	70437102P	Control Assembly	C, D and I models; Models through 7/14/14
	70503702	Control Assembly	C, D and I models; Models starting 7/15/14
	70437103P	Control Assembly	P models through 5/31/15; L models starting 10/1/14 through 5/31/15
	70437104P	Control Assembly	G and K models
	70437105P	Control Assembly	L models through 9/30/14
<b>5</b>	70054	Nut	
<b>6</b>	70434101P	Control Assembly	
<b>7</b>	44223101	Output Bracket	
<b>8</b>	44186101	Output Harness	Use between item 4 and item 6
<b>9</b>	44240301	Control Panel Harness	Goes from item 4 to main harness
<b>10</b>	70441401	Main Harness	
<b>11</b>	70364103	Bypass Harness	Non-CE models
<b>12</b>	70324603	Jumper Calibration Wire	

## Door Assemblies

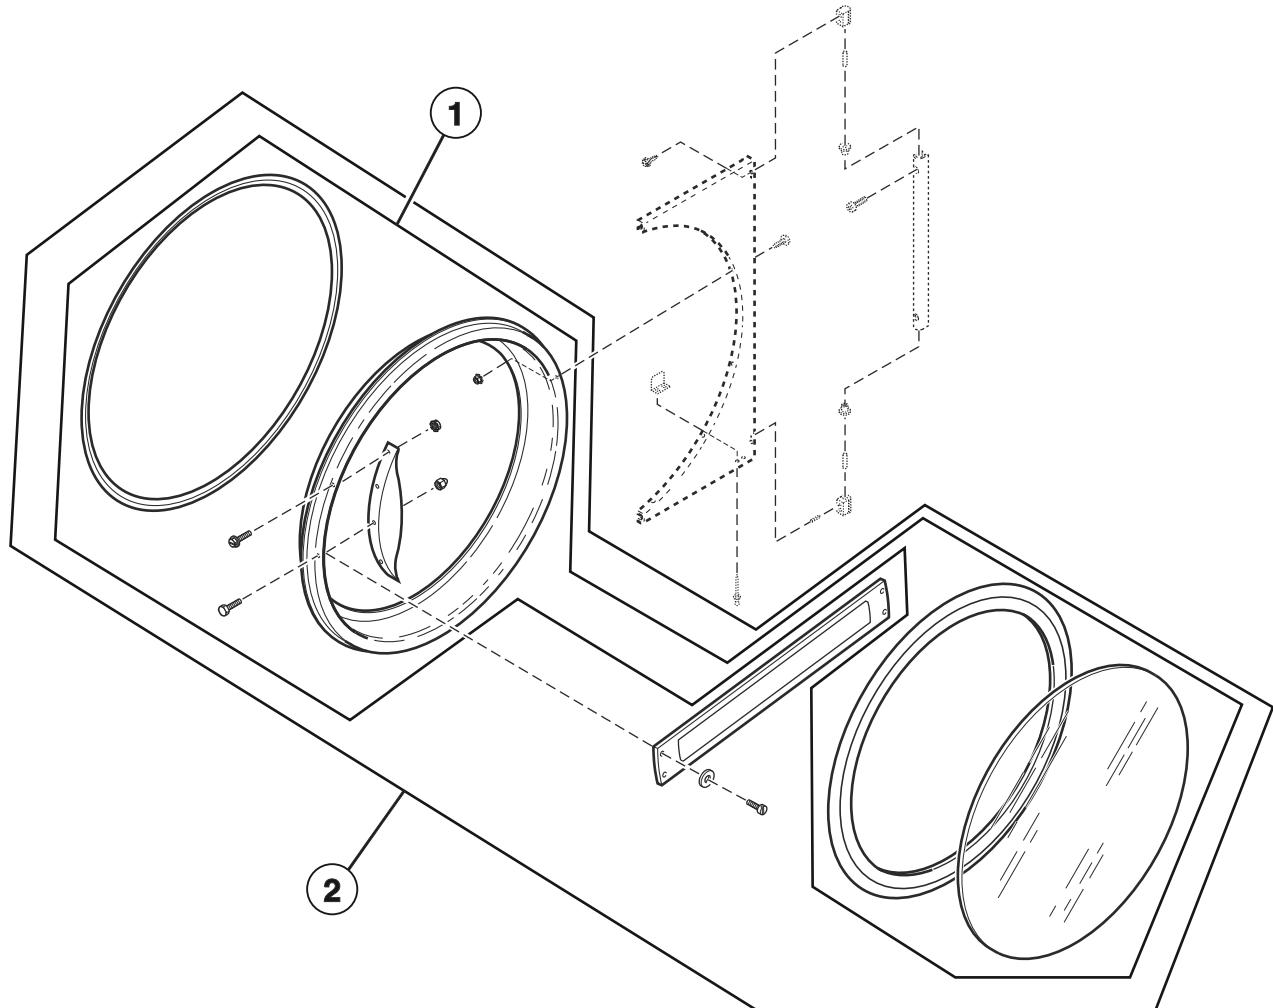


TMB3086P\_70304801

## Door Assemblies

REF	PART NO.	DESCRIPTION	COMMENTS
1	70212300	Door Assembly	T30 M, S, and U models; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44046701	Door Assembly	T30 C, D, and I models; Models through 7/31/11; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	70212301	Door Assembly	T30 C, D, and I models; Models starting 8/1/11; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44058001P	Door Assembly	T30 H models; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44058004	Door Assembly	T30 H models; Chrome option; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	70496502	Door Assembly	T30 U models; Chrome option; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	70212302	Door Assembly	T30 S models; Chrome option; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44058002	Door Assembly	T30 N models; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44287801LG	Door Assembly	T30 P models starting 10/1/14; T30 L models starting 1/29/15; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	70212200	Door Assembly	T30 P models; Models through 9/30/14; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	70064100	Door Assembly	T30 L models through 1/28/15; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44058102P	Door Assembly	T45 H models; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44058104	Door Assembly	T45 H models; Chrome option; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44028905	Door Assembly	T45 S models; Chrome option; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44266702	Door Assembly	T45 U models; Chrome option; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44028902P	Door Assembly	T45 M, S and U models; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44112101	Door Assembly	T45 C, D and I models; Models through 7/31/11; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44028903	Door Assembly	T45 C, D and I models; Models starting 8/1/11; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44029101	Door Assembly	T45 P models through 9/30/14; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	44292301LG	Door Assembly	T45 P models starting 10/1/14; T45 L models starting 1/29/15; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
2	70408901	Door Assembly	T30 G and K models; Includes items listed on <i>Door Ring and Handle</i> and <i>Door Components</i> pages
	70407401	Door Assembly	T45 K models; Includes door ring and straight handle bar

## Door Ring and Handle

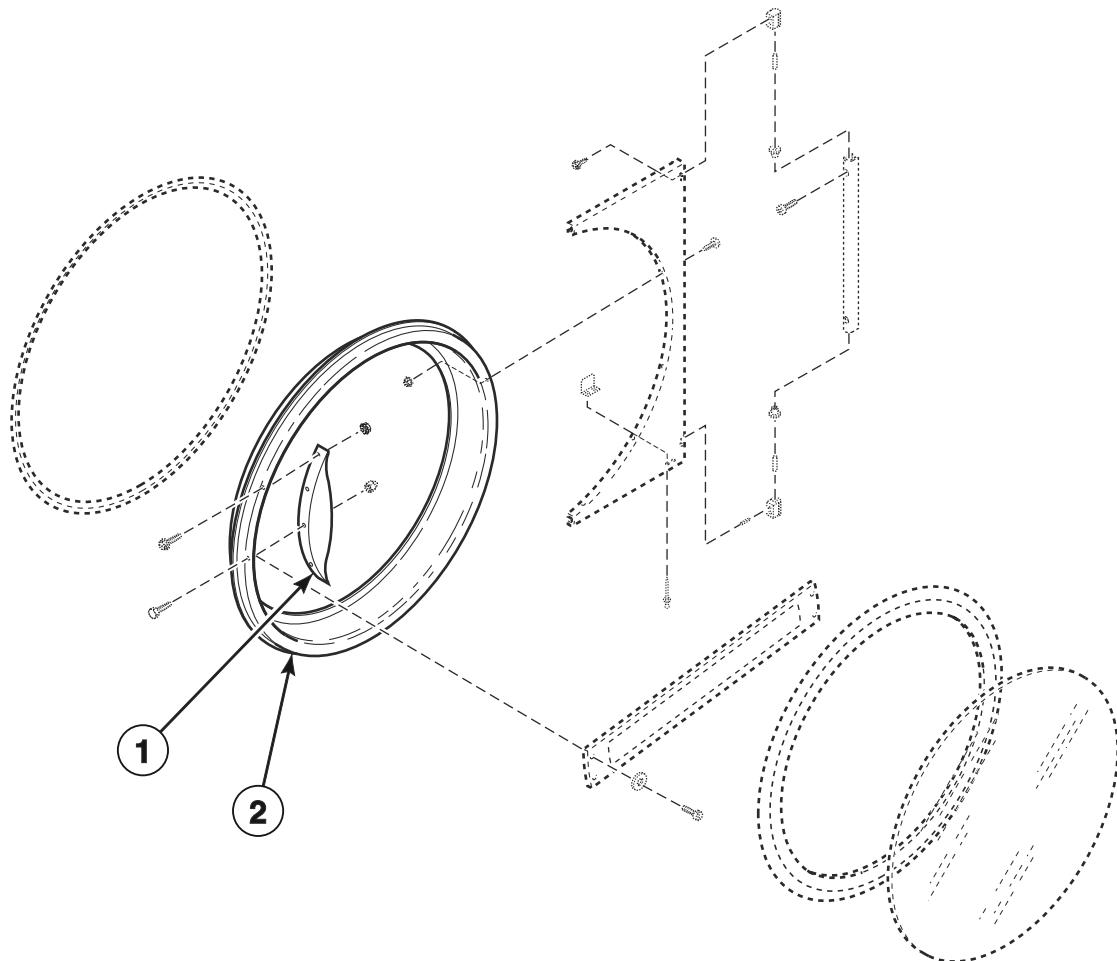


TMB3086PA\_70304801

## Door Ring and Handle

REF	PART NO.	DESCRIPTION	COMMENTS
1	44007902P	Door Handle	T30 M, N and S models; T30 U models through 8/17/14; T30 C, D and I models starting 8/1/11
	44057701	Door Handle	T30 H models
	M400133	Door Handle	T30 P models; Models through 9/30/14
	44287601	Handle	T30 P models starting 10/1/14; T30 L models starting 1/29/15
	44007901	Door Handle	T45 M and S models; T45 U models through 8/17/14
	44057702	Door Handle	T45 H models
	44111901	Door Handle	T45 C, D, and I models
	44292101	Handle	T45 P models starting 10/1/14; T45 L models starting 1/29/15
	430117	Door Handle	T30 L models through 1/28/15
	44263801	Door Handle	U models; Models starting 8/18/14
2	70505701	Door Ring Assembly	T30 H, M, N and S models; T30 P models through 9/30/14; T30 U models through 8/17/14; T30 L models through 1/28/15
	70496401	Door Ring	T30 U models; Models starting 8/18/14
	70505712	Door Ring Assembly	T30 H and S models; Chrome option
	70505713	Door Ring Assembly	T30 U models; Chrome option
	44043501	Door Ring and Handle Assembly	T30 C, D and I models; Models through 7/31/11
	70505709B	Door Ring Assembly	T30 C, D and I models; Models starting 8/1/11
	70399701B	Door Ring	T30 G and K models
	44287701LG	Door Ring and Handle Assembly	T30 P models starting 10/1/14; T30 L models starting 1/29/15
	44112001	Door Ring and Handle Assembly	T45 C and I models; Models through 7/31/11
	44007704B	Door Ring	T45 C, D and I models; Models starting 8/1/11
	44007702	Door Ring Assembly	T45 H, M and S models; T45 P models through 9/30/14; T45 U models through 8/17/14
	44007705	Door Ring	T45 U models; Models starting 8/18/14
	44283108	Door Ring Assembly	T45 H and S models; Chrome option
	44283109	Door Ring Assembly	T45 U models; Chrome option
	44007703B	Door Ring	T45 G and K models
	44292201LG	Door Ring and Handle Assembly	T45 P models starting 10/1/14; T45 L models starting 1/29/15

## Door Components

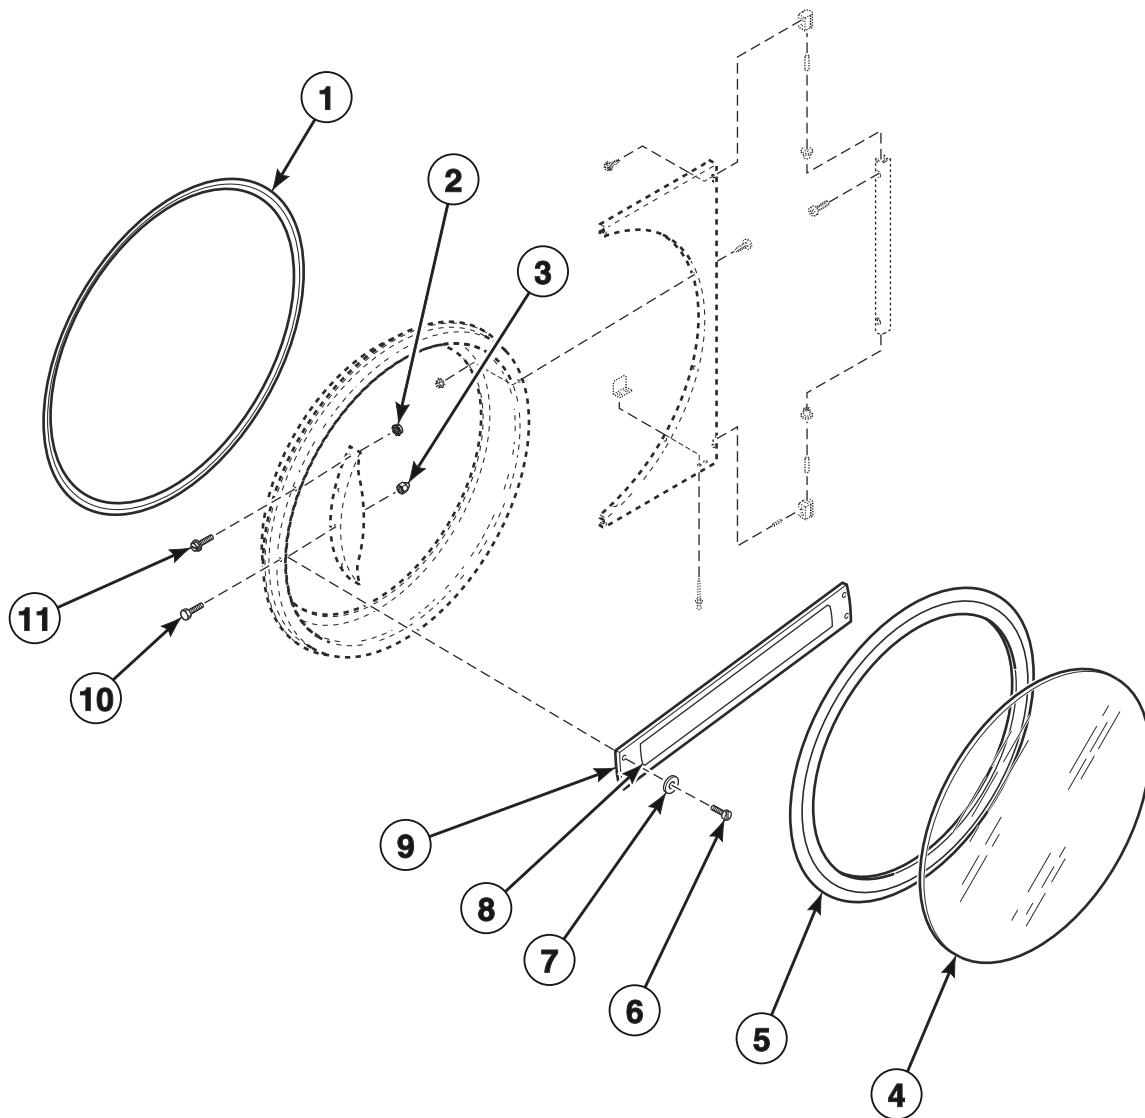


TMB3086PB\_70304801

## Door Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70296801	Door Ring Gasket	T30 models
	44008201P	Door Ring Gasket	T45 models
2	44071201	Nut	
3	M414215	Nut	Door strike
4	70133601P	Door Glass	T30 H models; Use Loctite 414 or equivalent adhesive to attach to item 5
	M400784P	Door Glass	All other T30 models; Use Loctite 414 or equivalent adhesive to attach to item 5
	44008402P	Door Glass	T45 H models; Use Loctite 414 or equivalent adhesive to attach to item 5
	44008401P	Door Glass	All other T45 models; Use Loctite 414 or equivalent adhesive to attach to item 5
5	70211901P	Door Glass Seal Kit	T30 models; Use Loctite 414 for seal
	70211902P	Door Seal Kit	T45 models; Use Loctite 414 for seal
6	70412601	Pop Rivet	G and K models; Attaches door handle to door ring
7	70409301	Washer	G and K models
8	70411401	Nameplate Overlay	G models; Coin
	44144401	Nameplate Overlay	K models; Coin
9	70399502B	Handle Bar	T30 G and K models
	70399501B	Handle Bar	T45 G and K models
10	M400661	Screw	Door strike
11	430757	Screw	T30 M, S and U models
	430756	Screw	2 required for left side of door handle for L models
	61199	Screw	H and N models; T45 M, S and U models
	70126301	Pop Rivet	G and K models; 4 required

## Door Hinge Components

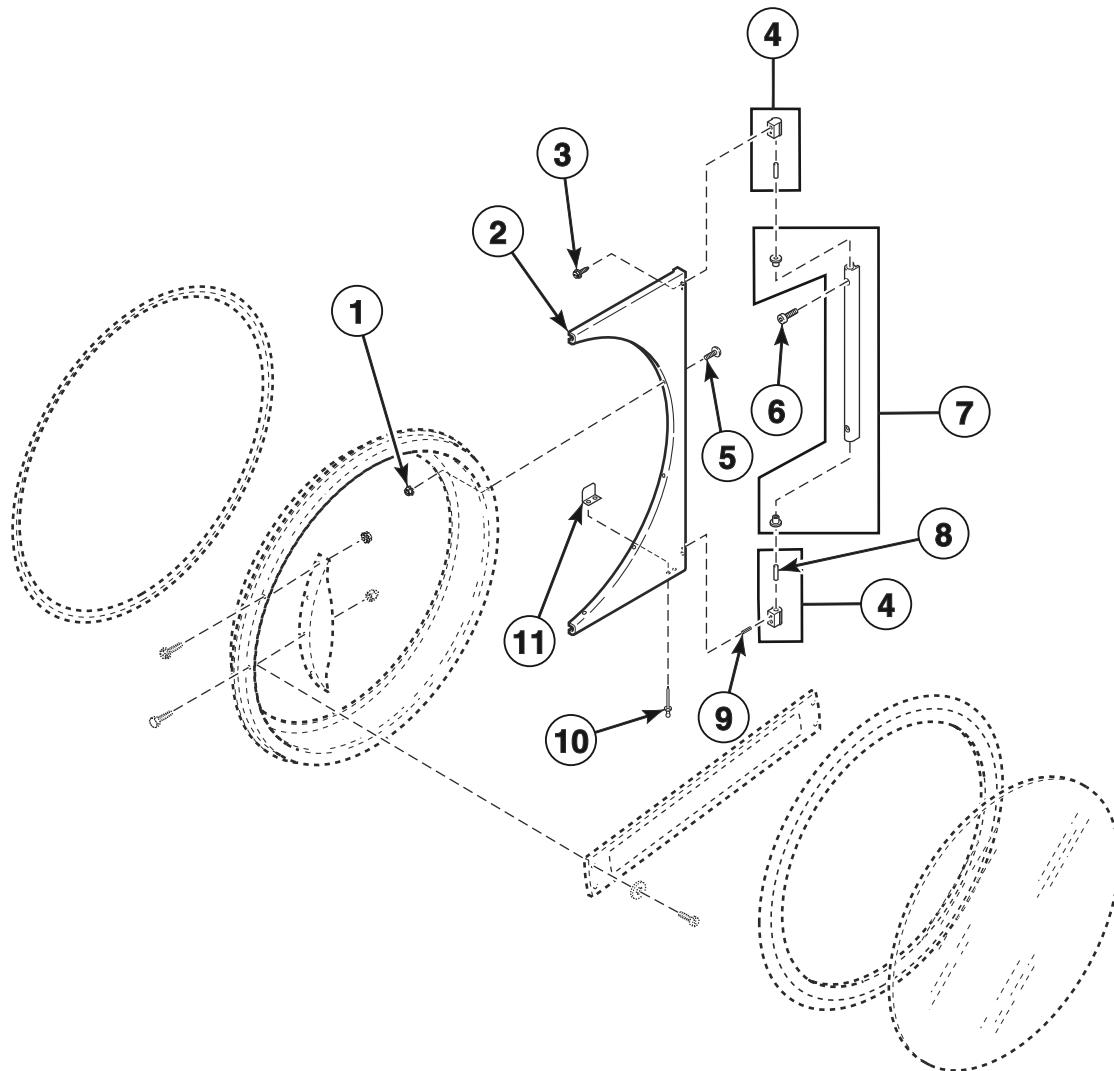


TMB3086PC\_70304801

## Door Hinge Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4788P3	Door Hinge Kit	T30 D and I models; To change from old look to new look
1	23951	Nut	
2	70115903B	Door Hinge	T30 G and K models; T30 D and I models starting 8/1/11; T30 P models through 9/30/14
	70115901*	Door Hinge	T30 H, M, S and U models; T30 L models through 1/28/15; T30 P models through 9/30/14; T30 C models starting 8/1/11
	70115902	Door Hinge	T30 C, H, M, S and U models through 3/31/15; T30 I models through 7/31/11; T30 L models through 1/28/15; Stainless steel
	70115904	Door Hinge	T30 H, M, S and U models starting 4/1/15; Stainless steel
	70115903LG	Door Hinge	T30 U models starting 8/18/14; T30 P models starting 10/1/14; T30 L models starting 1/29/15; Light gray
	44075209B	Door Hinge Assembly	T45 G and K models; T45 D and I models starting 8/1/11; T45 P models through 9/30/14
	44075205*	Door Hinge Assembly	T45 H, M, S and U models; T45 P models through 9/30/14; T45 C models starting 8/1/11
	44075206	Door Hinge Assembly	T45 C, H, M, S and U models through 3/31/15; T45 I models through 7/31/11; Stainless steel
	44075212	Door Hinge	T45 H, M, S and U models starting 4/1/15; Stainless steel
	44075209LG	Door Hinge Assembly	T45 U models starting 8/18/14; T45 P models starting 10/1/14; T45 L models starting 1/29/15; Light gray
3	70442101	Screw	
4	M4773P3	Cam and Hinge Kit	G and K models; D and I models starting 8/1/11
	M4772P3	Cam and Hinge Kit	C, H, L, M, P, S and U models; I models through 7/31/11
5	M400044	Screw	
6	70407301	Screw	G and K models; D and I models starting 8/1/11
	70033502	Screw	C, H, L, M, P, S and U models; I models through 7/31/11
7	44035002	Door Hinge Lug Assembly	G and K models; D and I models starting 8/1/11; Black
	44035001	Door Hinge Lug Assembly	C, H, L, M, P, S and U models; I models through 7/31/11
8	70071401	Pin	
9	70071401	Pin	
10	70058501	Pop Rivet	
11	70215001P	Door Switch Actuator Kit	

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

## Upper Front Panel Assemblies and False Fronts

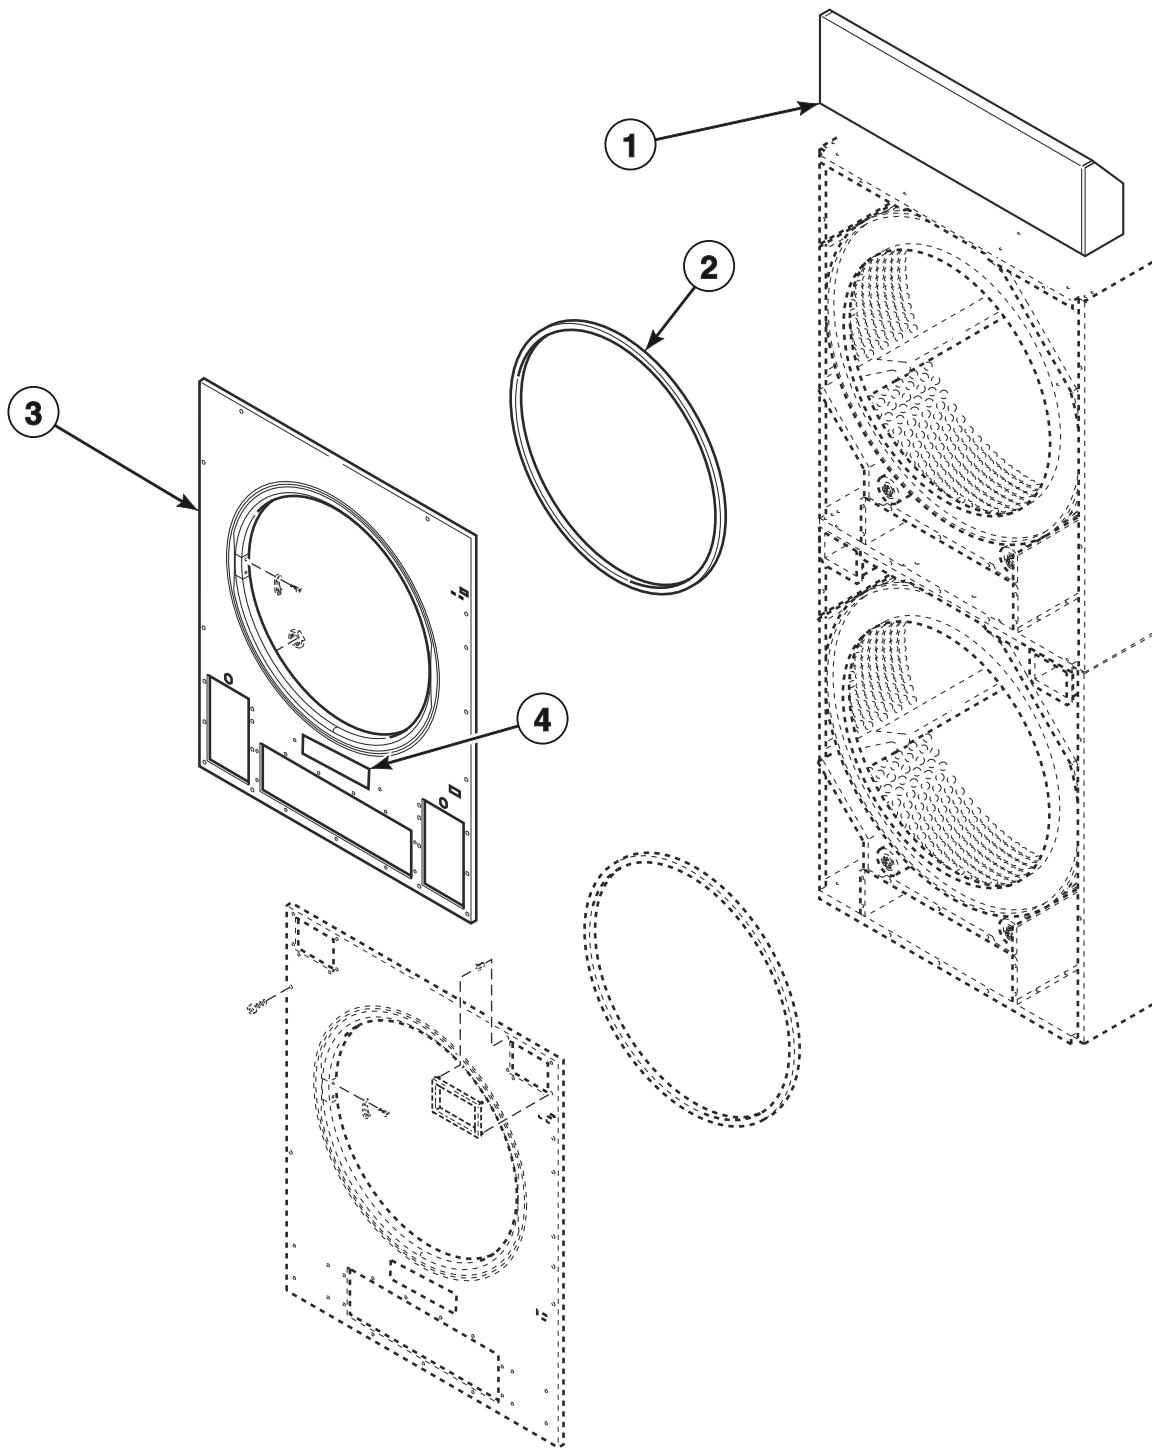


TMB3161P\_70304801

# Upper Front Panel Assemblies and False Fronts

REF	PART NO.	DESCRIPTION	COMMENTS
	70399406	Access Panel Trim	T45 G and K models
	70399401	Access Panel Trim	T30 G and K models
1	70371701*P	False Front Kit	T30 P models through 9/30/14; T30 L models through 1/28/15; All other T30 models except D and I models; To match T45 height; Includes 2 screws
	70371702P	False Front Kit	T30 P models through 9/30/14; T30 L models through 1/28/15; All other T30 models through 3/31/15; Stainless steel; To match T45 height; Includes 2 screws
	70371704	False Front	T30 G, H, K, M, N, S and U models; Models starting 4/1/15; Stainless steel; To match T45 height
	70371703B	False Front	T30 D and I models; To match T45 height
	70371703LG	False Front	T30 U models; To match T45 height; Light gray
	70371703DG	False Front	T30 P models starting 10/1/14; T30 L models starting 1/29/15; To match T45 height; Dark gray
	2	Front Panel Seal	T30 models; Requires 511637P Adhesive
	70173402	Front Cylinder Seal	T45 models; Requires 511637P Adhesive
3	70341305B	Upper Front Panel	T30 I models; Black
	70391301*P	Upper Front Panel Assembly	T30 C, D, G, H, I, K, M, N and S models; T30 U models through 8/17/14; T30 L models through 1/28/15
	70391302P	Upper Front Panel Assembly	T30 C, D, G, H, I, K, M and N models through 3/31/15; Stainless steel
	70391304	Upper Front Panel Assembly	T30 C, D, G, H, I, K, M and N models starting 4/1/15; Stainless steel
	70391303P	Upper Front Panel Assembly	T30 S models through 3/31/15; T30 U models through 8/17/14; T30 P models through 9/30/14; T30 L models through 1/28/15; Stainless steel
	70391305	Upper Front Panel Assembly	T30 S models starting 4/1/15; Stainless steel
	70485401	Upper Front Panel Assembly Kit	T30 H models; Stainless steel; Includes trim
	70454501	Upper Front Panel Assembly	T30 S models; Stainless steel; Includes trim
	70341305DG	Upper Front Panel	T30 P models starting 10/1/14; T30 L models starting 1/29/15; Dark gray
	70525301DG	Upper Front Panel Assembly	T30 U models; Models starting 8/18/14; Dark gray
	70525401W	Upper Front Panel Assembly	T30 U models; Models starting 8/18/14; White
	70341307	Upper Front Panel Assembly	T30 U models; Models starting 8/18/14 through 3/31/15; Stainless steel
	70341310	Upper Front Panel	T30 U models starting 4/1/15; Stainless steel
	70304005B	Upper Front Panel	T45 I models; Black
	70391501*P	Upper Front Panel Assembly	T45 C, D, G, H, I, K, M and N models; T45 U models through 8/17/14
	70391502P	Upper Front Panel Assembly	T45 C, D, G, H, I, K, M and N models through 3/31/15; T45 U models through 8/17/14; Stainless steel
	70391504	Upper Front Panel Assembly	T45 D, G, H, I, K, M and N models starting 4/1/15; Stainless steel
	70304004LG	Upper Front Panel Assembly	T45 U models; Models starting 8/18/14; Light gray
	70304006W	Upper Front Panel Assembly	T45 U models; Models starting 8/18/14; White
	70304007	Upper Front Panel Assembly	T45 U models; Models starting 8/18/14 through 3/31/15; Stainless steel
	70304010	Upper Front Panel	T45 U models; Models starting 4/1/15; Stainless steel
	70391503P	Upper Front Panel Assembly	T45 S models through 3/31/15; Stainless steel
	70304009	Upper Front Panel	T45 S models; Models starting 4/1/15; Stainless steel
	70304005DG	Upper Front Panel	T45 L and P models; Dark gray
4	70418101	Instruction Label	Card models

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

## Lower Front Panel Assemblies

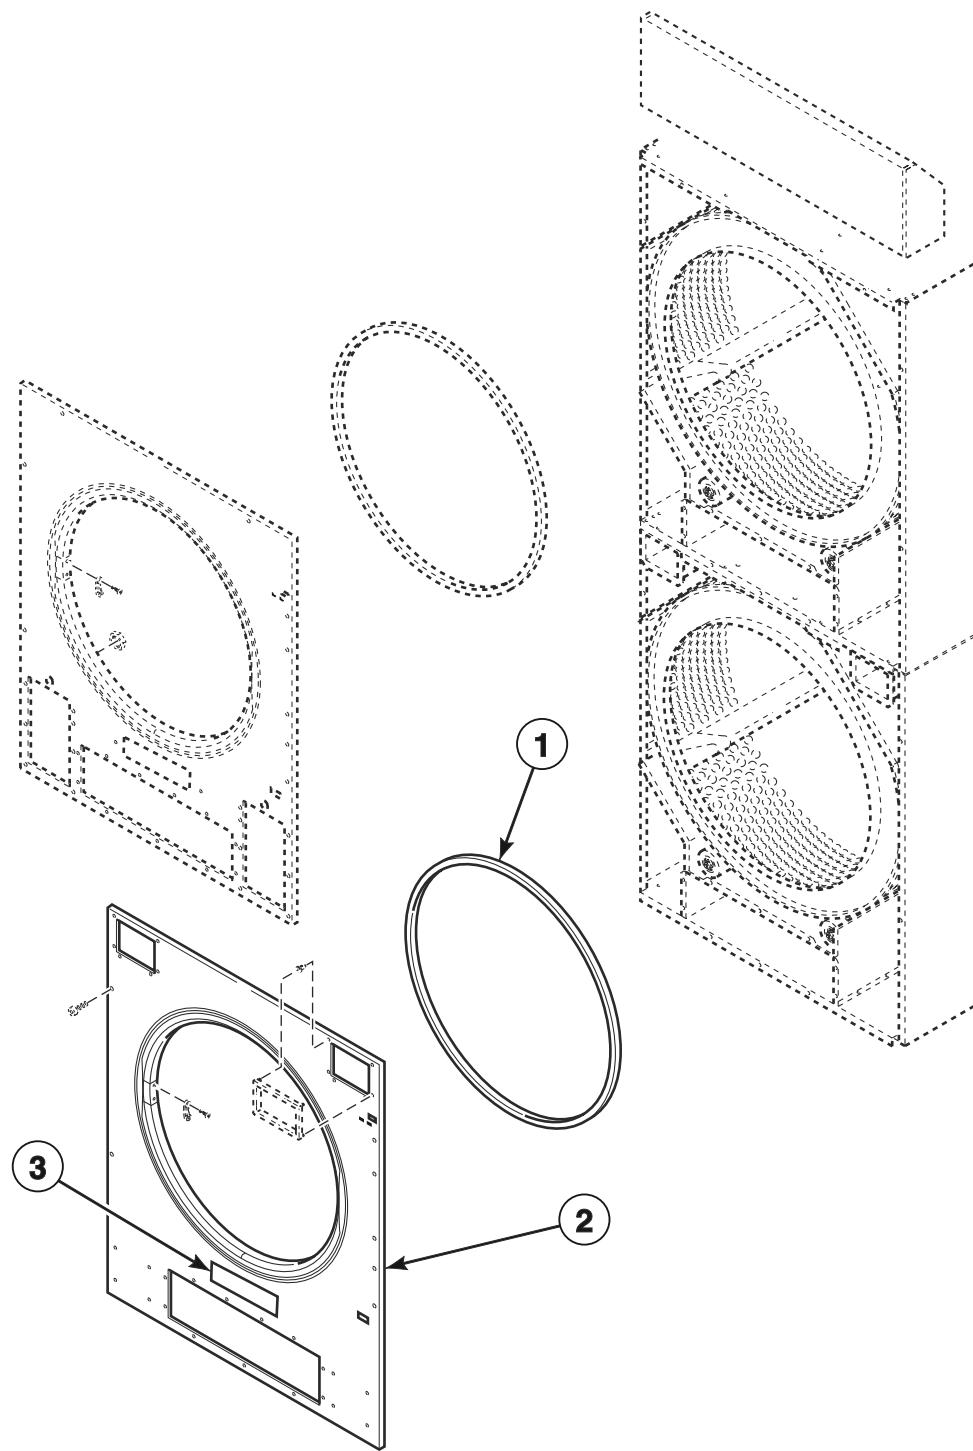


TMB3161PA\_70304801

## Lower Front Panel Assemblies

REF	PART NO.	DESCRIPTION	COMMENTS
	70399406	Access Panel Trim	T45 G and K models
	70399401	Access Panel Trim	T30 G and K models
1	70173401P	Front Panel Seal	T30 models; Requires 511637P Adhesive
	70173402	Front Cylinder Seal	T45 models; Requires 511637P Adhesive
2	70341209B	Lower Front Panel	T30 I models; Coin; Black
	70341207B	Lower Front Panel	T30 I models; OPL; Black
	70391205*	Lower Front Panel Assembly	T30 P CE models through 9/30/14; T30 L CE models through 1/28/15; All other T30 CE models; OPL and card
	70391206P	Lower Front Panel Assembly	T30 P CE models through 9/30/14; T30 L CE models through 1/28/15; All other T30 CE models through 3/31/15; OPL and card; Stainless steel
	70391209	Lower Front Panel	All T30 CE models except L and P models; Models starting 4/1/15; OPL and card; Stainless steel
	70391201*P	Lower Front Panel Assembly	T30 P models through 9/30/14; T30 L models through 1/28/15; All other T30 models; Coin
	70391202P	Lower Front Panel Assembly	T30 P models through 9/30/14; T30 L models through 1/28/15; All other T30 models through 3/31/15; Coin; Stainless steel
	70391207	Lower Front Panel	All T30 models except L and P models; Models starting 4/1/15; Coin; Stainless steel
	70391203*P	Lower Front Panel Assembly	T30 P models through 9/30/14; T30 L models through 1/28/15; All other T30 models; OPL and card
	70391204	Lower Front Panel Assembly	T30 P models through 9/30/14; T30 L models through 1/28/15; All other T30 models through 3/31/15; OPL and card; Stainless steel
	70391208	Lower Front Panel	All T30 models except L and P models; Models starting 4/1/15; OPL and card; Stainless steel
	70485402	Lower Front Panel Assembly Kit	T30 H models; Stainless steel; Includes trim
	70454502	Lower Front Panel Assembly	T30 S models; Stainless steel; Includes trim
	70391401*P	Lower Front Panel Assembly	T45 models except P and U models; Coin
	70391402P	Lower Front Panel Assembly	T45 models except P and U models through 3/31/15; Coin; Stainless steel
	70391405	Lower Front Panel	T45 models except L, P and U models starting 4/1/15; Coin; Stainless steel
	70391403*P	Lower Front Panel Assembly	All other T45 models except P models; OPL and card
	70391404P	Lower Front Panel Assembly	All other T45 models except P models through 3/31/15; OPL and card; Stainless steel
	70391406	Lower Front Panel	T45 models except L and P models starting 4/1/15; OPL and card; Stainless steel
	70341207LG	Lower Front Panel	T30 U non-CE models; OPL; Light gray
	70341208LG	Lower Front Panel	T30 U CE models; OPL; Light gray
	70303909LG	Lower Front Panel	T45 U non-CE models; OPL; Light gray
	70303910LG	Lower Front Panel	T45 U CE models; OPL; Light gray
	70341207DG	Lower Front Panel	T30 P non-CE models starting 10/1/14; T30 L non-CE models starting 1/29/15; OPL and card; Dark gray
	70341208DG	Lower Front Panel	T30 P CE models starting 10/1/14; T30 L CE models starting 1/29/15; OPL and card; Dark gray
	70341209DG	Lower Front Panel	T30 P models starting 10/1/14; T30 L models starting 1/29/15; Coin; Dark gray
	70303909DG	Lower Front Panel	T45 L and P non-CE models; OPL and card; Dark gray
	70303910DG	Lower Front Panel	T45 L and P CE models; OPL and card; Dark gray
	70303911DG	Lower Front Panel	T45 L and P models; Coin; Dark gray
	70303911B	Lower Front Panel	T45 I models; Coin; Black
	70303909B	Lower Front Panel	T45 I models; OPL; Black
3	70418101	Instruction Label	Card

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

## Upper Cabinet Front Components

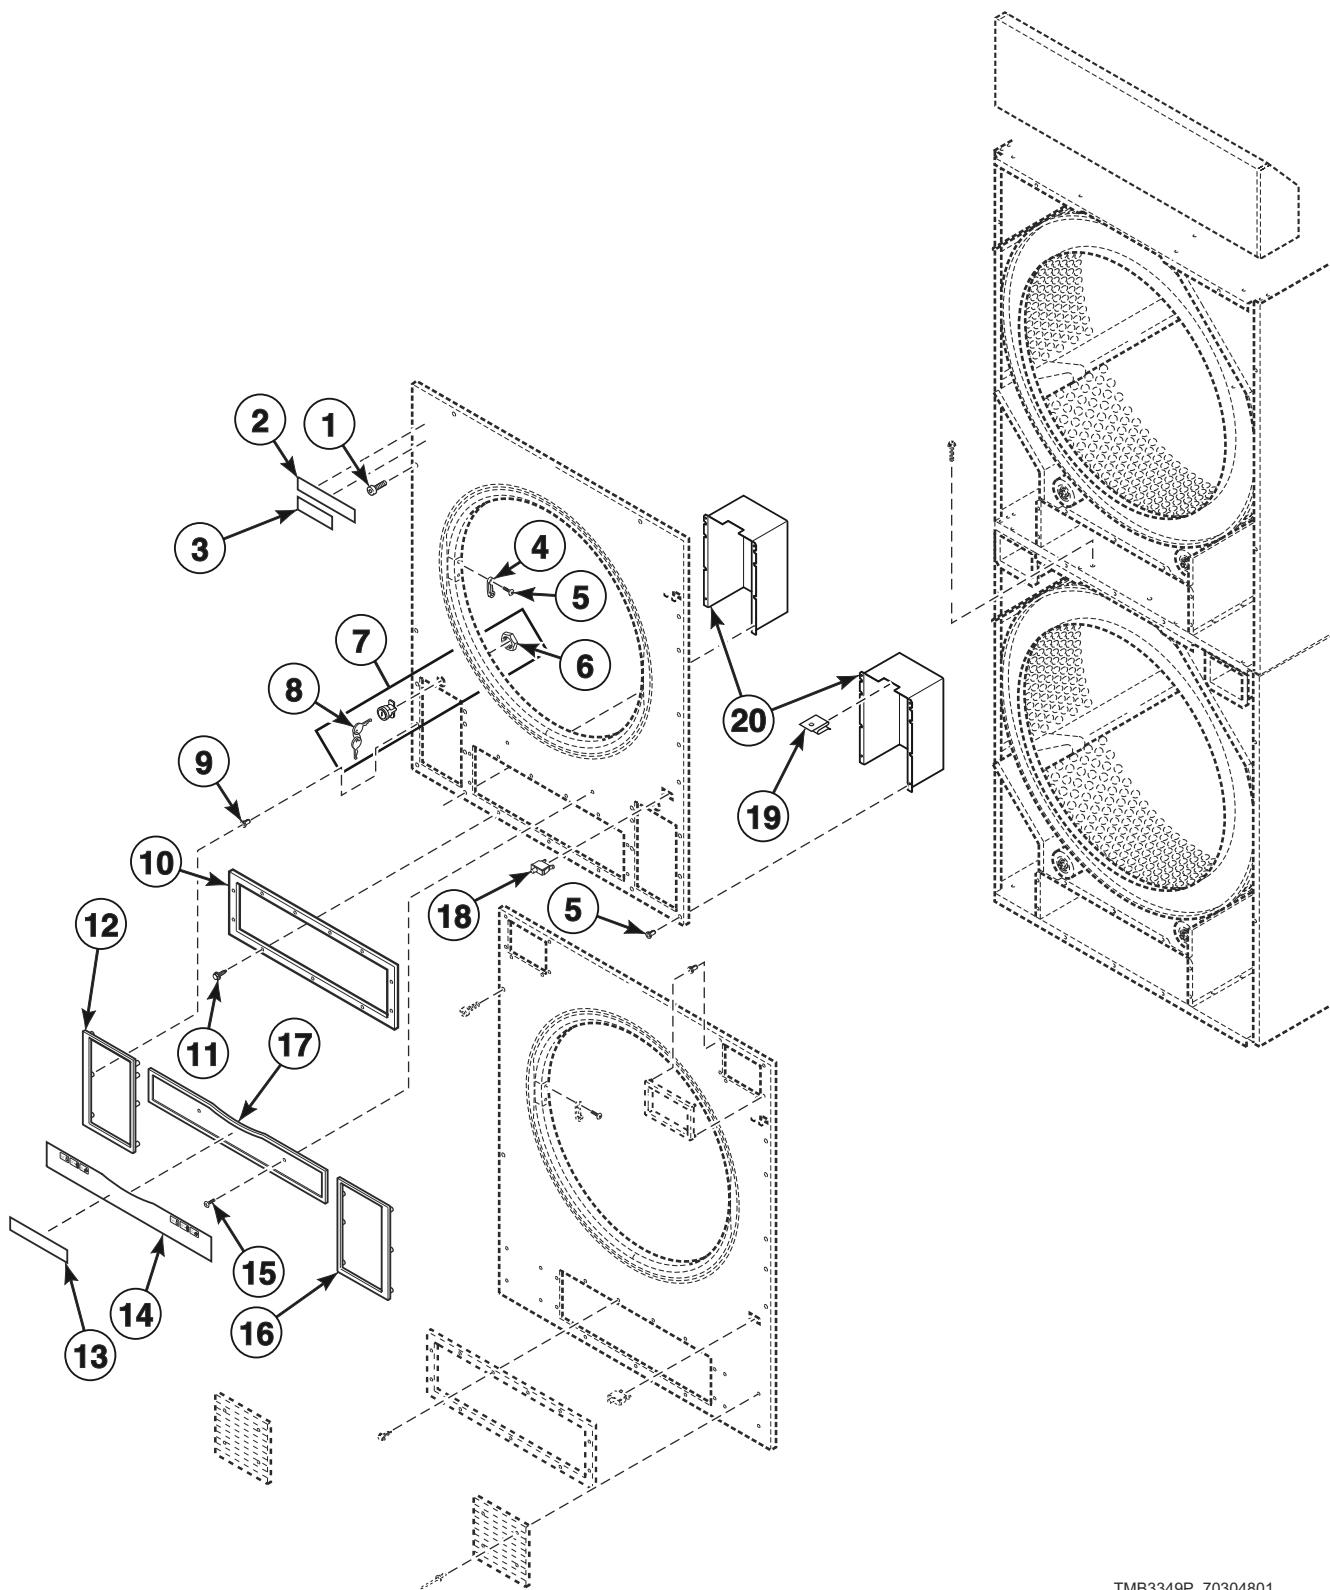


TMB3349P\_70304801

# Upper Cabinet Front Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70017301	Front Panel Baffle Seal	2 required
	M410892	Warning Label	
1	M400003	Pop Rivet	
2	44062901	Nameplate	C models
	44046801	Nameplate	D and I models through 7/9/12
	B12389801	Nameplate	D and I models starting 7/10/12
	70414001	Label	G and K models; Coin
3	70289201	Nameplate	T30 C models through Serial No. 0205xxxx
	44129906	Nameplate	T30 C models starting Serial No. 0205xxxx
	44129908	Nameplate	T45 C models
	70286601	Label	T30 D models through 7/8/12
	70286602	Label	T45 D models through 7/8/12
	70289801	Nameplate	T30 I models through 7/8/12
	70289802	Label	T45 I models through 7/8/12
4	M401223	Door Latch	
5	M400003	Pop Rivet	2 required for item 4; 4 required for item 19
6	44088801	Nut	Panel lock
7	44089301P	Lock, Key and Nut Kit	RL001
8	70155601	Key	RL001
9	M400972	Shadow Box Clip	6 required per coin vault trim
10	70117901P	Lint Drawer Gasket	T30 models
	70300201P	Lint Drawer Gasket	T45 models
11	70275801	Screw	8 required
12	70117001	Control Trim	H and N models; Gray; Left
	70116904	Control Trim	U models; Models starting 8/18/14; Gray; Left
	70116902	Control Trim	U models through 8/17/14; All other models; Black; Left
13	70521201	Nameplate	T30 L models starting 1/29/15
14	70523501	Overlay	T30 M models; Chinese; Card
	70114601	Overlay	T30 S models; Coin
	70115401	Overlay	T30 S models; Card
	70362601	Overlay	T30 S models; T30 U models through 8/17/14; Blank
	70412901	Overlay	T30 P models; Models through 9/30/14
	70509201	Overlay	T30 P models starting 10/1/14; T30 L models starting 3/28/15; Coin
	70509401	Overlay	T30 P models starting 10/1/14; T30 L models starting 3/28/15; OPL
	70243801	Overlay	T30 L models through 3/27/15
	70299701	Center Trim Overlay	T45 S models; Coin
	70362701	Overlay	T45 S models; Card
	70362301	Overlay	T45 S models; T45 U models through 8/17/14; Blank
	70509301	Overlay	T45 P models starting 10/1/14; T45 L models; Coin
	70509501	Overlay	T45 P models starting 10/1/14; T45 L models; OPL
15	M405188	Screw	2 required for S and U models
16	70117001	Control Trim	H and N models; Gray; Right
	70116903	Control Trim	U models; Models starting 8/18/14; Gray; Right
	70116901	Control Trim	U models through 8/17/14; All other models; Black; Right
17	70120501	Control Trim	T30 L, P and S models; Center
	70299601	Center Trim	T45 L, P and S models; Center
18	70413301	Pushbutton Switch	Door switch
19	M406494	Panel Clip	2 required per control housing
20	70119901	Control Housing	

## Lower Cabinet Front Components

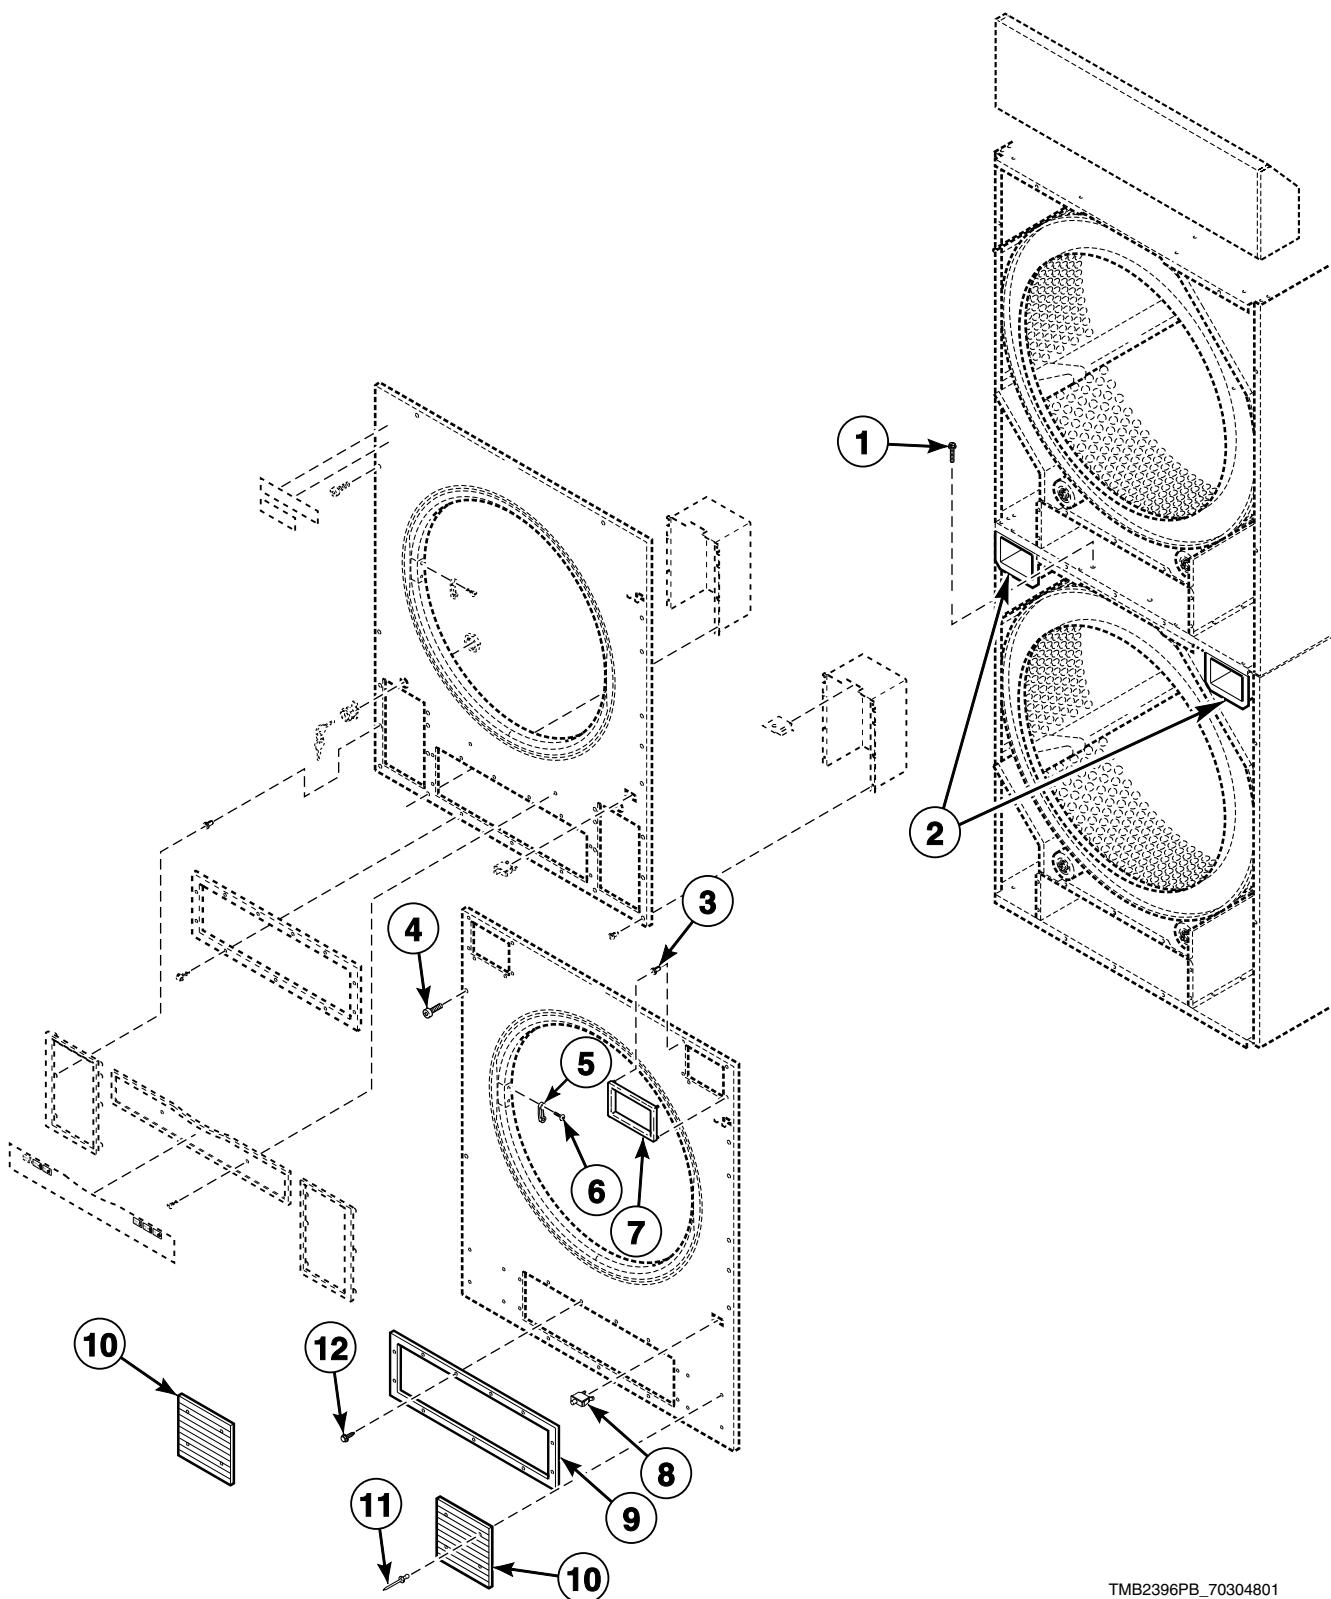


TMB2396PB\_70304801

## Lower Cabinet Front Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4379P4	Tumbler Dolly Kit	
	M410892	Warning Label	
	70345801	Base Harness	Models through 7/31/11
	70449001	Base Harness	Models starting 8/1/11
	70017301	Front Panel Baffle Seal	2 required
1	70069901	Screw	
2	70180101	Coin Vault Assembly	
3	M400972	Shadow Box Clip	6 required per coin vault trim
4	70033502	Screw	For painted front panels
	70182601	Screw	For stainless steel front panels
5	M401223	Door Latch	
6	44166601	Pop Rivet	2 required per latch; 4 required per control housing
7	70117501	Coin Vault Trim	H and N models; Gray
	70117502	Coin Vault Trim	All other models except U models; Black
8	70413301	Pushbutton Switch	Door switch
9	70117901P	Lint Drawer Gasket	T30 models
	70300201P	Lint Drawer Gasket	T45 models
10	70117606	Kickplate	H and N models; U models starting 8/18/14; Gray
	70117605	Kickplate	U models through 8/17/14; All other models; Black
11	70126401	Pop Rivet	H and N models; U models starting 8/18/14; 4 required per kickplate; Gray
	70126301	Pop Rivet	U models through 8/17/14; All other models; 4 required per kickplate; Black
12	70275801	Screw	8 required

## Emergency Stop Button for CE Models

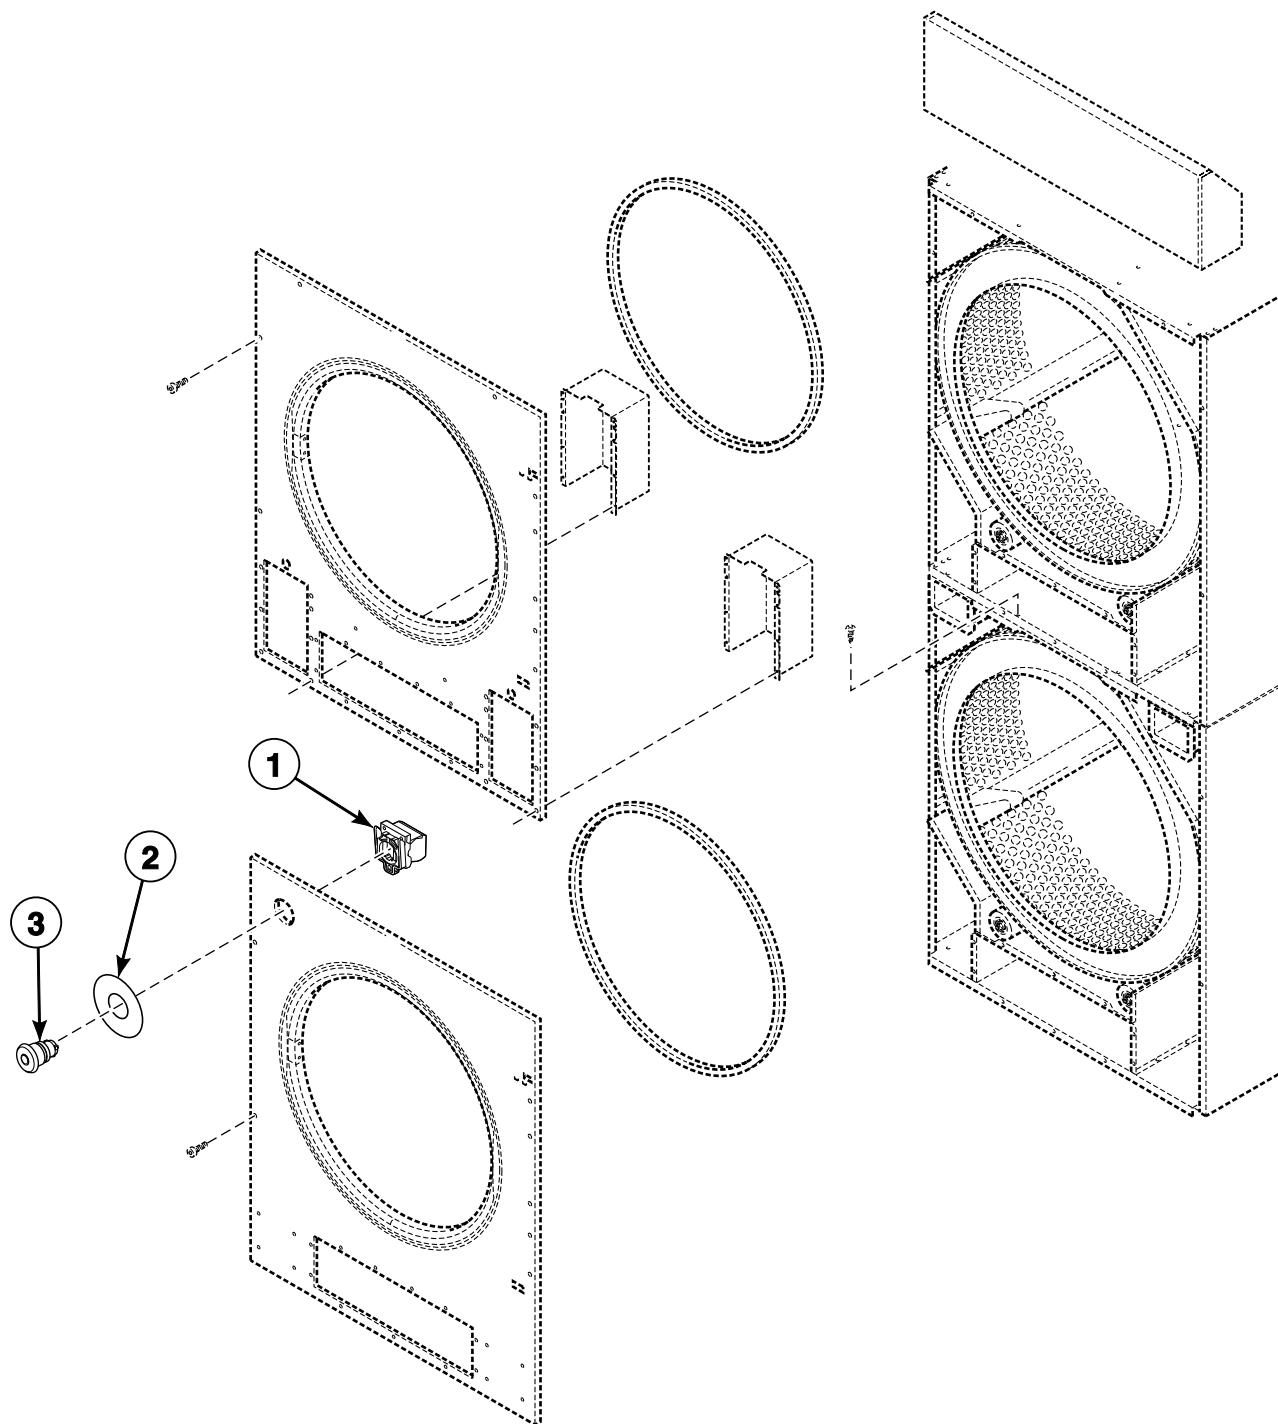


TMB2347P\_70304801

## Emergency Stop Button for CE Models

REF	PART NO.	DESCRIPTION	COMMENTS
	70364102	Emergency Stop Harness	2 contacts
	70364101P	Emergency Stop Harness	4 contacts
	F200233700P	Emergency Stop Button Kit	Models starting 10/1/07
1	44018701	Contact Block	Models through 9/30/07; With base
	44018901	Contact Block	Models through 9/30/07; Without base
	F200233401P	Contact Block Switch	Models starting 10/1/07 through 8/17/14
	F8069501	Contact Switch	Models starting 8/18/14
	F8538101	Contact Base	Models starting 8/18/14
2	44012901	Emergency Stop Label	
3	44018801	Pushbutton	Models through 9/30/07
	F200233500	Emergency Stop Pushbutton	Models starting 10/1/07

## Lint Drawer Components

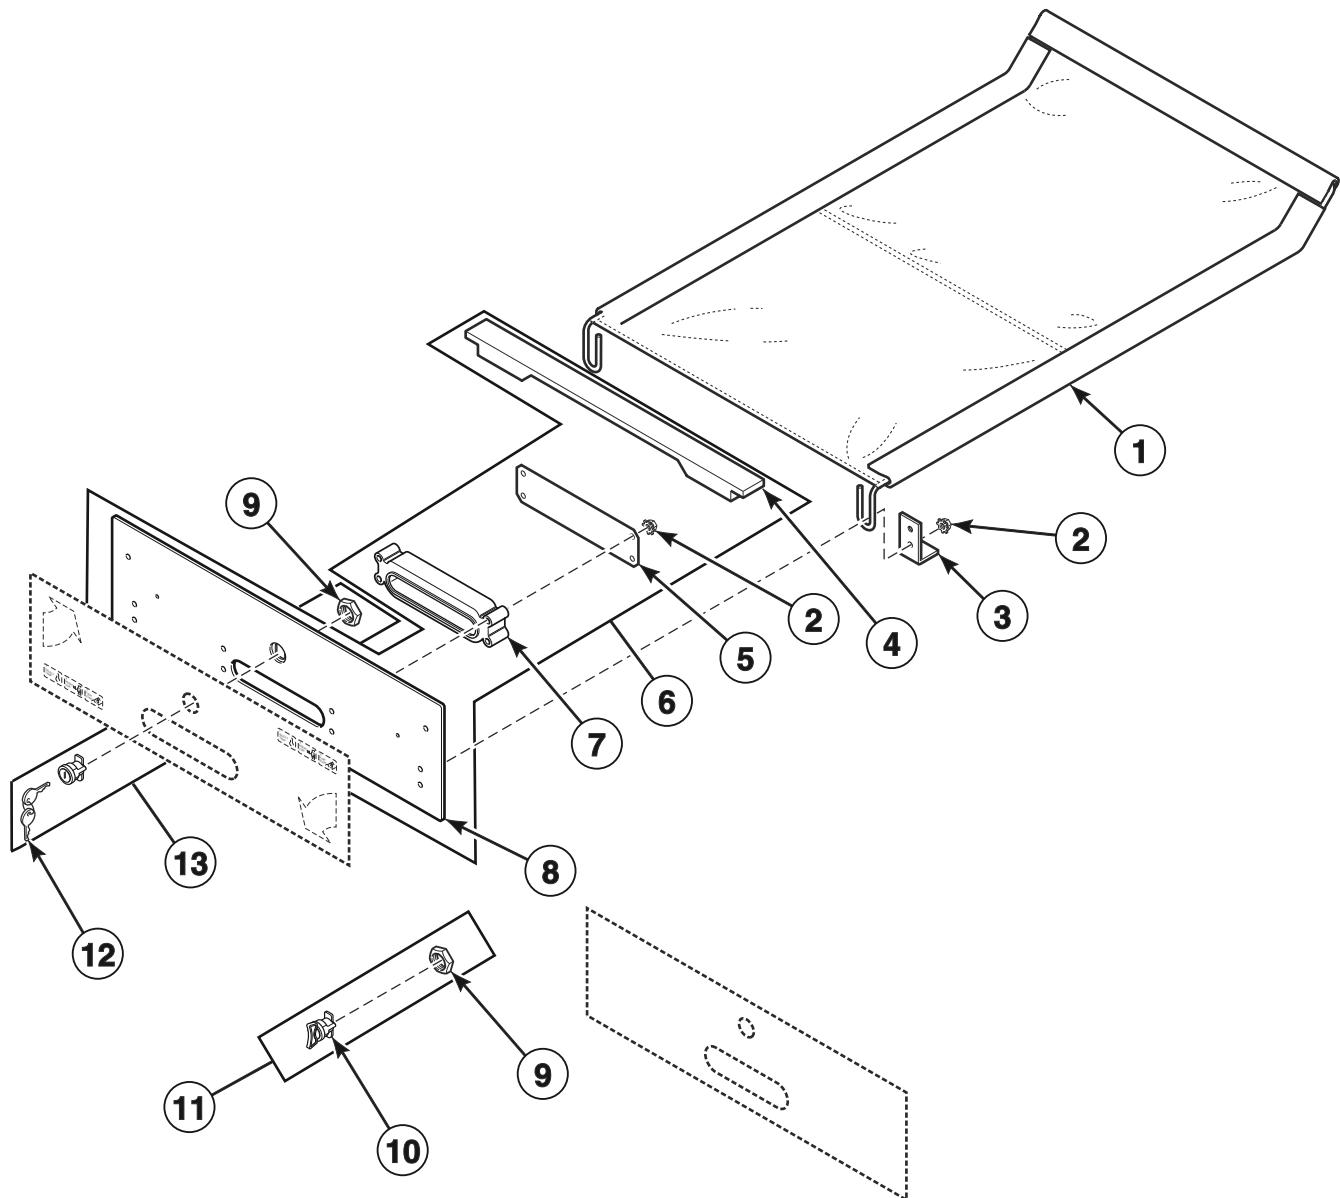


TMB2735P\_70304801

## Lint Drawer Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70342401	Lock Shim	T30 models; Black
	70342402	Lock Shim	T30 models; Gray
1	70290601	Lint Screen Assembly	T30 models
	70301201	Lint Screen Assembly	T45 models
2	44087101	Nut	6 required
3	70026901	Lint Screen Bracket	2 required
4	70333101	Lint Frame Gasket	T30 models
	70333103	Lint Frame Gasket	T45 models
5	70323201	Lint Drawer Handle Plate	
6	70322901P	Lint Drawer Front Kit	T30 models; Black; Includes 70342401 Lock Shim
	70322902P	Lint Drawer Front Kit	T30 models; Gray; Includes 70342402 Lock Shim
	70323001	Lint Drawer Front Assembly	T45 models; Black
	70323002	Lint Drawer Front Assembly	T45 models; Gray
7	70320801	Lint Drawer Handle	Black
	70320802	Lint Drawer Handle	Gray
8	70322906	Lint Panel and Studs Assembly	T30 U models; Models starting 8/18/14; Gray
	70323004	Lint Panel and Studs Assembly	T45 U models; Models starting 8/18/14; Gray
9	44088801	Nut	
10	70399201	Panel Latch	C, D, G, H, I, K, S and U models; 3O, BG and QT control suffixes
11	70399201P	Panel Latch Kit	C, D, G, H, I, K, S and U models
12	70155602	Key	RL002
13	44089302P	Lock, Key and Nut Kit	RL002

# Lint Drawer Overlays

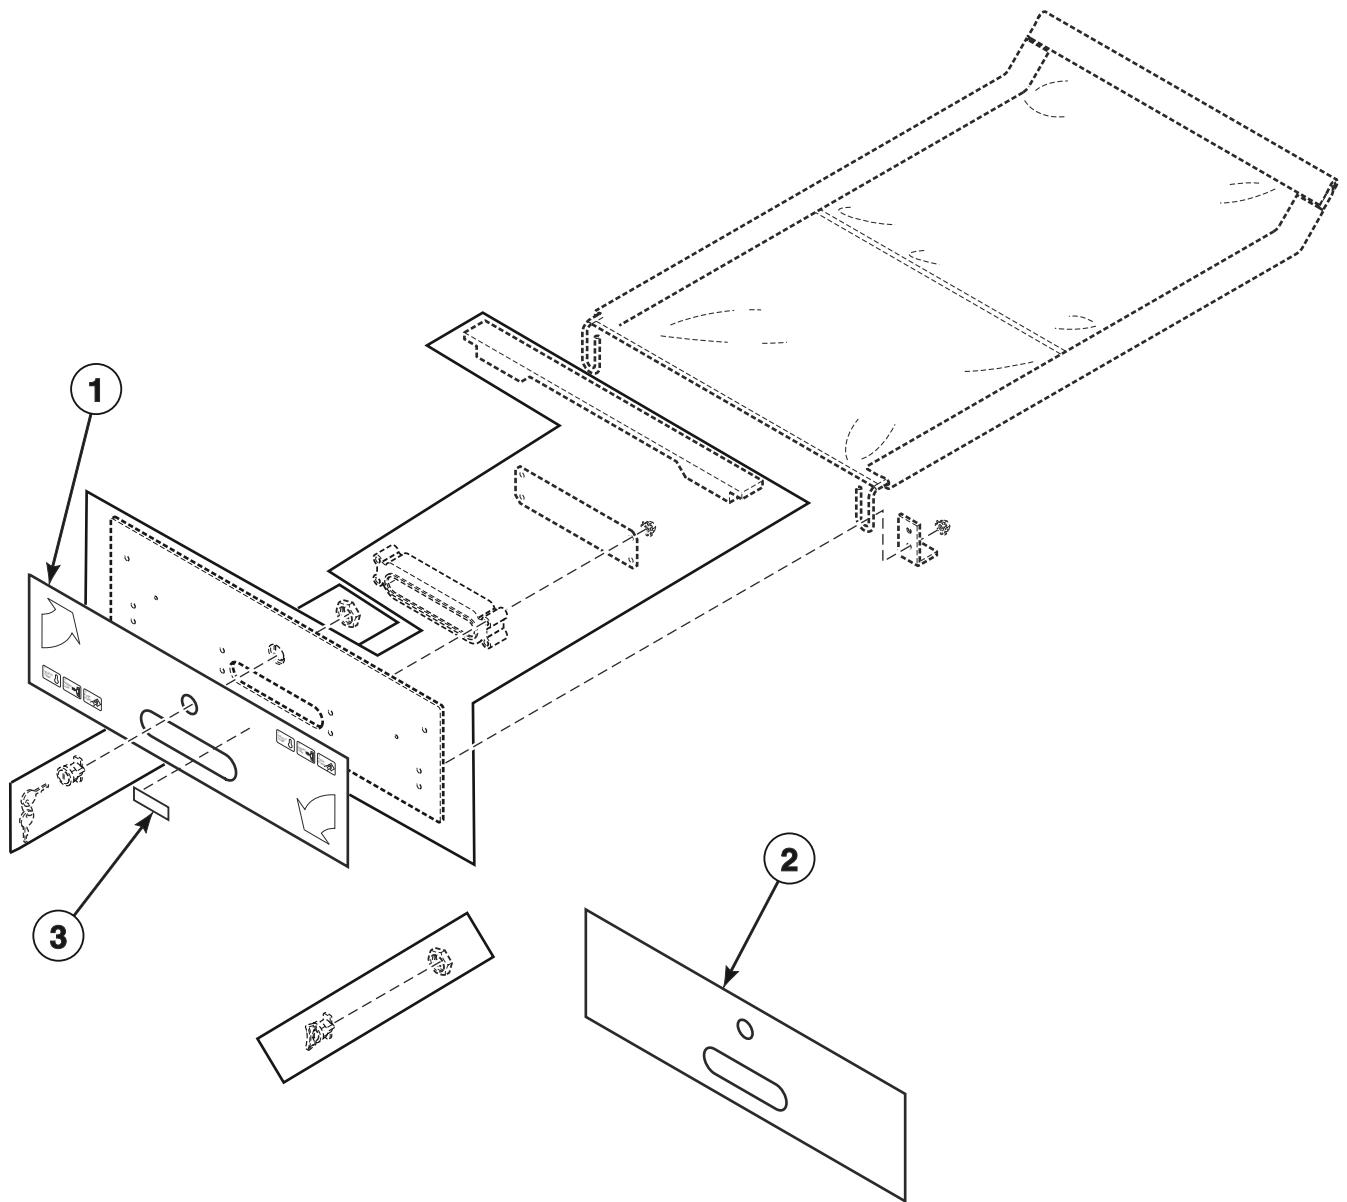


TMB3350P\_70304801

## Lint Drawer Overlays

REF	PART NO.	DESCRIPTION	COMMENTS
1	70114701	Overlay	T30 S models; Upper lint drawer; OPL and coin; Text
	70136301	Overlay	T30 S models; Upper lint drawer; OPL and coin; Icon
	70506001	Overlay	T30 H models; Gray/Green; Upper lint drawer
	70506101	Overlay	T30 H models; Green; Upper lint drawer
	70375301	Overlay	T30 H models; Gray; Upper lint drawer; OPL
	70395901	Overlay	T30 H models; Gray; Upper lint drawer; Coin/card; Text
	70136501	Overlay	T30 H models; Gray; Upper lint drawer; Coin/card; Icon
	70460901	Overlay	T30 U models; Models through 8/17/14; Upper lint drawer
	70499501	Overlay	T30 U models; Models starting 8/18/14; Upper lint drawer
	70304301	Overlay	T30 N models; Upper lint drawer
	70351601	Overlay	T30 M models; Upper lint drawer
	70411601	Overlay	T30 G models through 1/31/11; Upper lint drawer
	70137101	Overlay	T30 L and P models; Upper lint drawer
	70413701	Overlay	T30 K models; T30 G models starting 2/1/11; Upper lint drawer
	70258201	Overlay	T30 C, D and I models; Upper lint drawer; Text
	70285001	Overlay	T30 C and D models; Upper lint drawer; Icon
	70299901	Overlay	T45 S models; Upper lint drawer; Text
	70428701	Overlay	T45 S models; Upper lint drawer; Icon
	70461001	Overlay	T45 U models; Models through 8/17/14; Upper lint drawer
	70494101	Overlay	T45 U models; Models starting 8/18/14; Upper lint drawer
	70506201	Overlay	T45 H models; Gray/Green; Upper lint drawer
	70506301	Overlay	T45 H models; Green; Upper lint drawer
	70363101	Overlay	T45 H models; Gray; Upper lint drawer; OPL
	70428901	Overlay	T45 H models; Gray; Upper lint drawer; OPL; Icon
	70396001	Overlay	T45 H models; Gray; Upper lint drawer; Coin
	70428801	Overlay	T45 H models; Gray; Upper lint drawer; Coin; Icon
	70381101	Overlay	T45 M models; Upper lint drawer
	70408001	Overlay	T45 C, D and I models; Upper lint drawer; Text
	70408002	Overlay	T45 D models; Upper lint drawer; Icon
	70413801	Overlay	T45 G and K models; Upper lint drawer
	70511501	Overlay	T45 L and P models; Upper lint drawer
2	70115301	Overlay	T30 C, D, G, I, K, L, P and S models; T30 U models through 8/17/14; Lower lint drawer; Text
	70136401	Overlay	T30 C, D, G, K, L, P, S models; T30 U models through 8/17/14; Lower lint drawer; Icon
	70115201	Overlay	T30 H models; T30 U models starting 8/18/14; Lower lint drawer; Text
	70136601	Overlay	T30 H models; Lower lint drawer; Icon
	70351701	Overlay	T30 M models; Lower lint drawer
	70300001	Overlay	T45 C, D, G, I, K, L, P and S models; T45 U models through 8/17/14; Lower lint drawer
	70325301	Overlay	T45 H models; T45 U models starting 8/18/14; Lower lint drawer
	70428702	Overlay	T45 S models; Lower lint drawer; Icon
	70428802	Overlay	T45 H models; Lower lint drawer; Icon
	70381201	Overlay	T45 M models; Lower lint drawer
3	70521201	Nameplate	T45 L models

# Cylinder and Trunnion Components

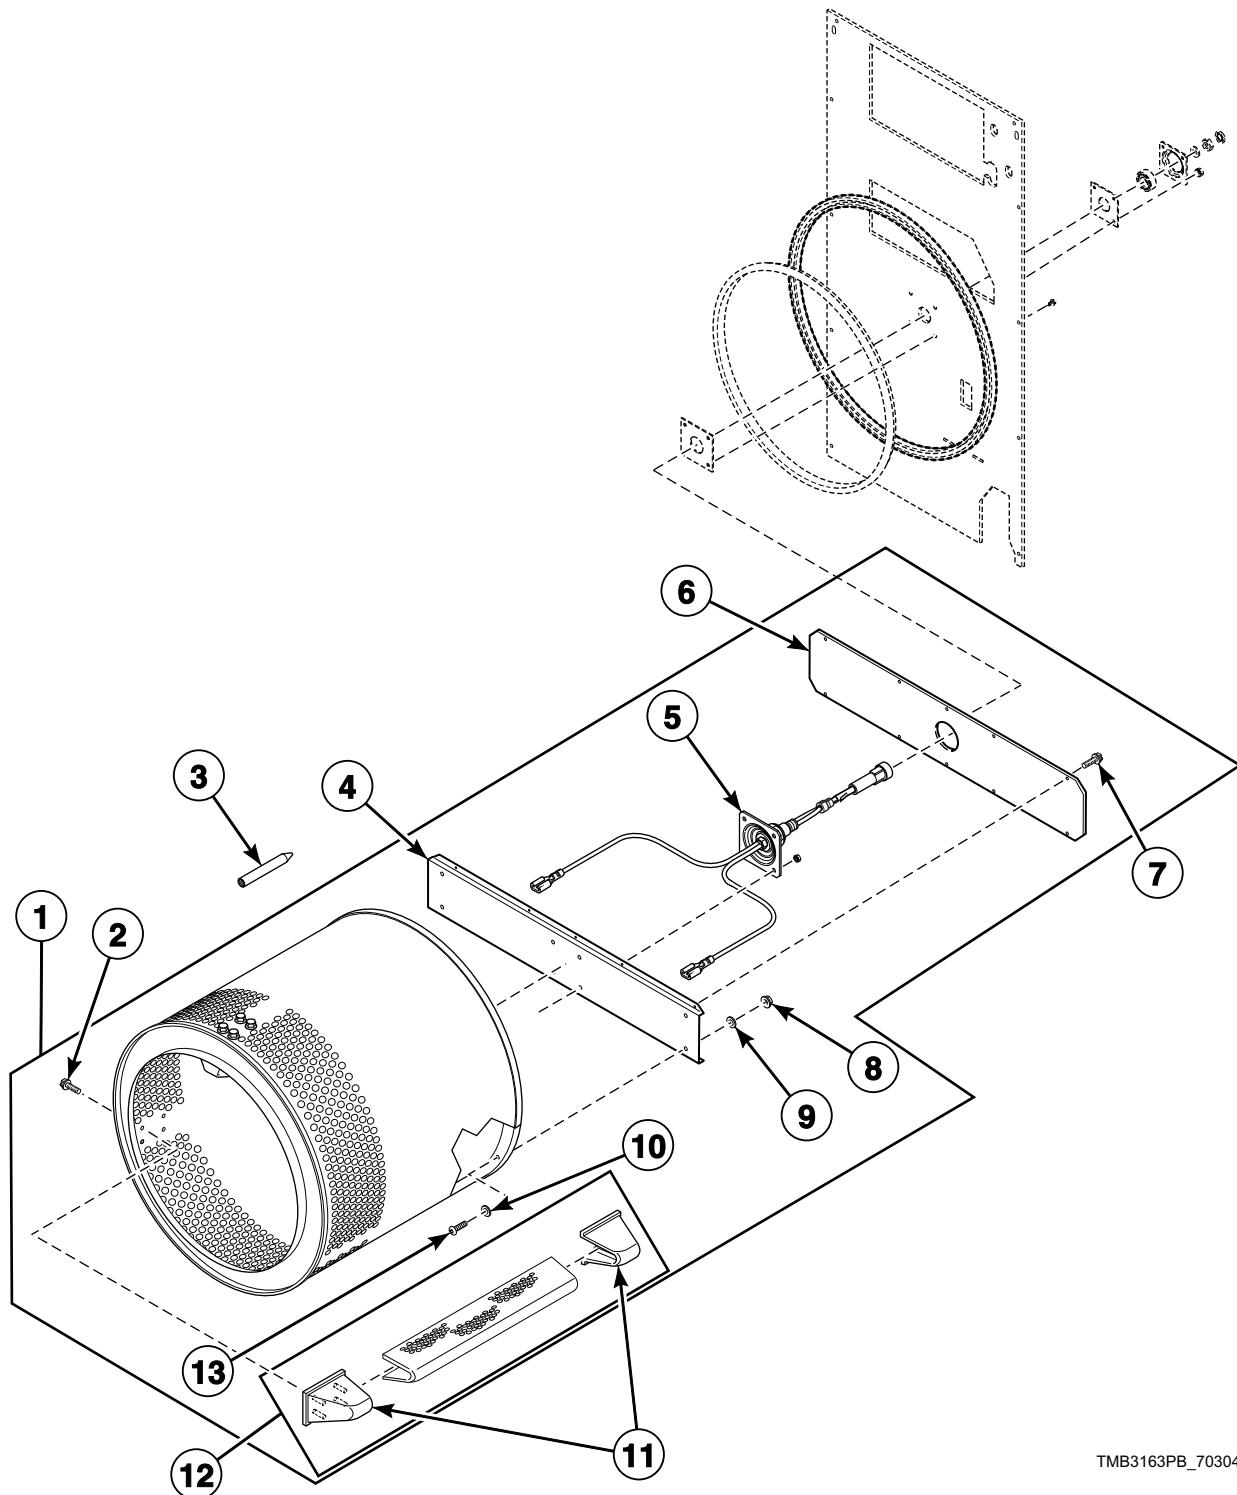


TMB3163PB\_70304801

# Cylinder and Trunnion Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70343101P	Drywall Screw Magnet Kit	Includes 6 magnets and 6 screws
1	70372503P	Cylinder Assembly	T30 K models; Non-moisture sensing
	70372501P	Cylinder Assembly	All other T30 models; Galvanized; Non-moisture sensing
	70372502P	Cylinder Assembly	All other T30 models; Stainless steel; Non-moisture sensing
	70372903	Cylinder Assembly	T45 K models; Non-moisture sensing
	70372901P	Cylinder Assembly	All other T45 models; Galvanized; Non-moisture sensing
	70372902P	Cylinder Assembly	All other T45 models; Stainless steel; Non-moisture sensing
	70443903	Cylinder and Trunnion Assembly	T30 G and K models; Moisture sensing
	70443901	Cylinder and Trunnion Assembly	All other T30 models; Galvanized; Moisture sensing
	70443902	Cylinder and Trunnion Assembly	All other T30 models; Stainless steel; Moisture sensing
	70444003	Cylinder and Trunnion Assembly	T45 G and K models; Moisture sensing
	70444001	Cylinder and Trunnion Assembly	All other T45 models; Galvanized; Moisture sensing
	70444002	Cylinder and Trunnion Assembly	All other T45 models; Stainless steel; Moisture sensing
2	62588	Screw	
3	263P4	Cylinder Guide Tool	
4	70257101	Rear Cylinder Channel	T30 models; Non-moisture sensing
	70257102	Rear Cylinder Channel	T30 models; Moisture sensing
	70305201	Rear Cylinder Channel	T45 models; Non-moisture sensing
	70305202	Rear Cylinder Channel	T45 models; Moisture sensing
5	M4960P3	Trunnion and Seal Kit	T30 models; Also order 511637P Adhesive; Non-moisture sensing
	M4962P3	Trunnion and Seal Kit	T45 models; Also order 511637P Adhesive; Non-moisture sensing
	70454601	Trunnion and Wire Assembly	Moisture sensing; Includes 70244702 Trunnion Assembly
6	70257201	Rear Cylinder Channel Plate	T30 models
	70305301	Rear Cylinder Channel Plate	T45 models
7	430497	Screw	10 required
8	M412986	Nut	
9	M400080	Washer	Models through Serial No. 0708006765
10	70411301	Washer	Models starting Serial No. 0708006766
11	70070101	End Cap	Non-moisture sensing
	70070102	End Cap	Moisture sensing
12	70433002	Cylinder Rib Assembly	T30 models; Moisture sensing
	70433001	Cylinder Rib Assembly	T45 models; Moisture sensing
13	70392801	Bolt	8 required

## Bearing Components

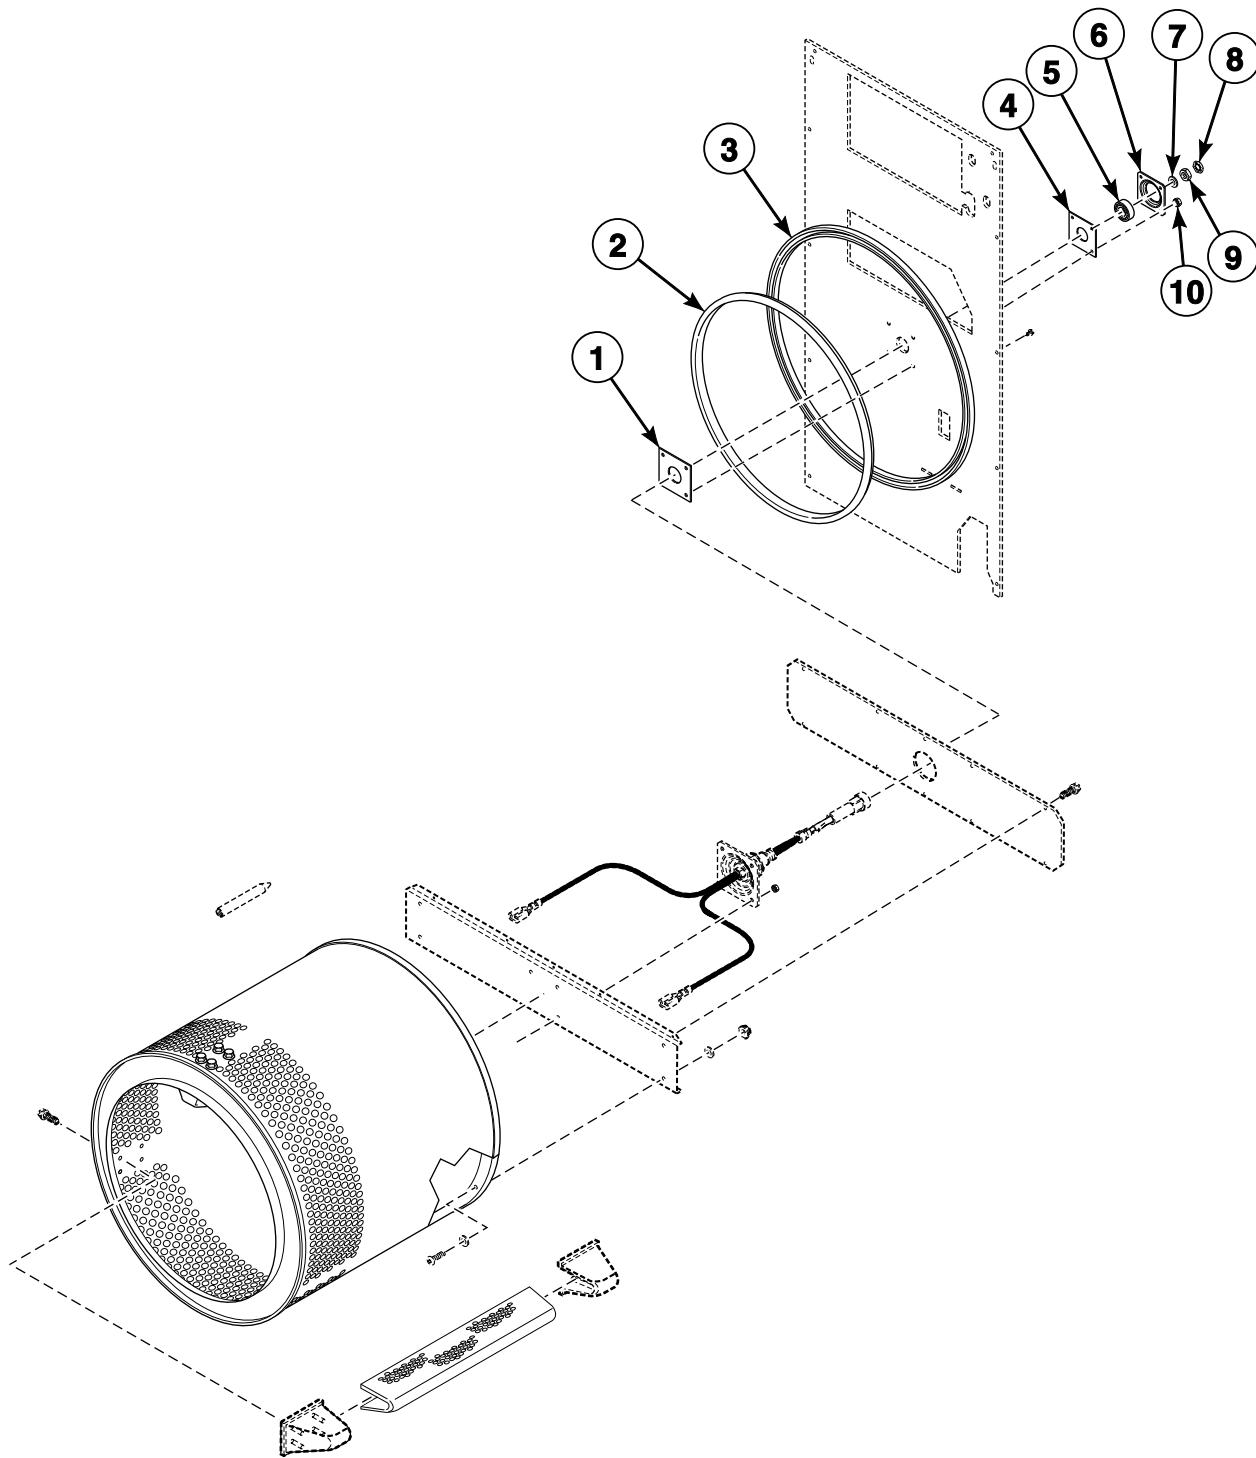


TMB3163PA\_70304801

## Bearing Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	430352	Cylinder Bearing Stud Plate Assembly	
2	70013701P	Rear Cylinder Seal	T30 models; Requires 511637P Adhesive
	70013703	Rear Cylinder Seal	T45 models; Requires 511637P Adhesive
3	70506402	Rear Cylinder Seal Support	T30 models
	70506403	Rear Cylinder Seal Support	T45 models
4	70355001	Rear Bearing Shim	
5	70448701	Support Bearing	
6	70013901	Rear Cylinder Bearing Housing	
7	M400991	Washer	
8	M400034	Nut	
9	M400022	Nut	
10	M412986	Nut	
	70411301	Washer	Models starting Serial No. 0708006766

# Cabinet Components

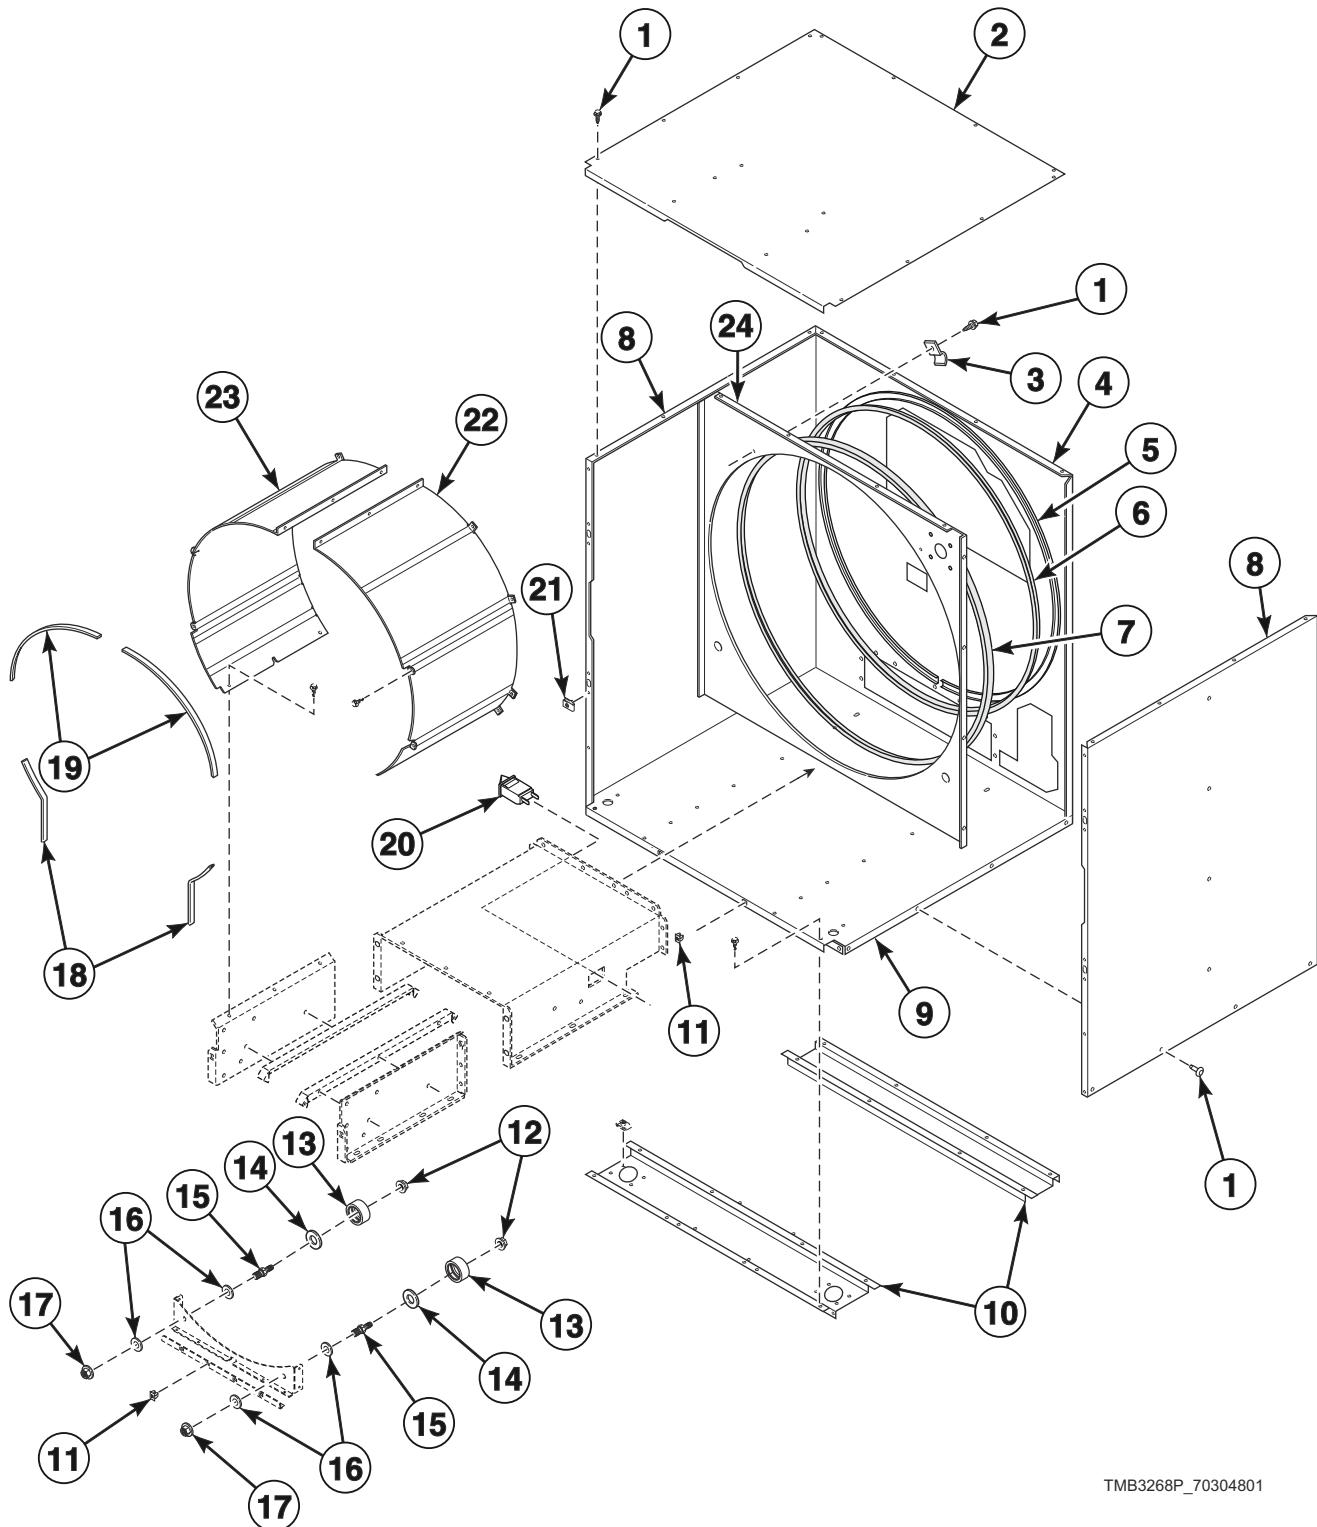


TMB3268P\_70304801

# Cabinet Components

REF	PART NO.	DESCRIPTION	COMMENTS
	430352	Cylinder Bearing Stud Plate Assembly	
	70058501	Pop Rivet	
	21899	Nut	For leveling legs
	70247701	Screw	For leveling legs
1	430497	Screw	
2	70357701	Top Panel Assembly	T30 models; Upper; Includes threaded insert
	70357801	Top Panel Assembly	T45 models; Upper; Includes threaded insert
3	70226701	Clip	
4	70339401	Rear Panel	T30 gas models
	70339402	Rear Panel	T30 electric and steam models
	70301701	Rear Panel	T45 models
5	70506402	Rear Cylinder Seal Support	T30 models
	70506403	Rear Cylinder Seal Support	T45 models
6	70013701P	Rear Cylinder Seal	T30 models; Requires 511637P Adhesive
	70013703	Rear Cylinder Seal	T45 models; Requires 511637P Adhesive
7	70066003	Center Cylinder Seal Assembly	T30 models; Includes center cylinder seal support and center cylinder seal
	70066005	Center Cylinder Seal	T45 models; Includes center cylinder seal support and center cylinder seal
8	70231801LG	Side Panel	T30 U models; Light gray
	70231801DG	Side Panel	T30 P models starting 10/1/14; T30 L models starting 1/29/15; Dark gray
	70231801*P	Side Panel	T30 P models through 9/30/14; T30 L models through 1/28/15; All other T30 models
	70301801LG	Side Panel	T45 U models; Light gray
	70301801DG	Side Panel	T45 P models starting 10/1/14; T45 L models; Dark gray
	70301801*P	Side Panel	T45 P models through 9/30/14; All other T45 models
9	70339501	Top Panel	T30 models; Lower
	70302001	Top Panel	T45 models; Lower
10	70288201	Channel Base Assembly	T30 models
11	70030501	Expansion Clip	
12	430576	Nut	
13	70298701P	Roller Bearing Assembly	
14	70443601	Roller Seal	Models starting 3/1/10
15	70249501	Roller Shaft	
16	70261401	Washer	
17	70288801	Nut	
18	70015711	Sheet Metal Edge Gasket	T30 models; Lower
	70015707	Sheet Metal Edge Gasket	T45 models; Lower
19	70015712	Sheet Metal Edge Gasket	T30 models; Upper
	70015708	Sheet Metal Edge Gasket	T45 models; Upper
20	431159	Switch	For lint drawer
21	70030401	Nut	
22	70339301	Cylinder Shroud	T30 models; Right
	70301901	Cylinder Shroud	T45 models; Right
23	70339302	Cylinder Shroud	T30 models; Left
	70301902	Cylinder Shroud	T45 models; Left
24	70339201	Center Partition	T30 models
	70301601	Center Partition	T45 models

\* Add Letter To Designate Color. L - Almond Q - Bisque W - White

## Touch-Up Paint

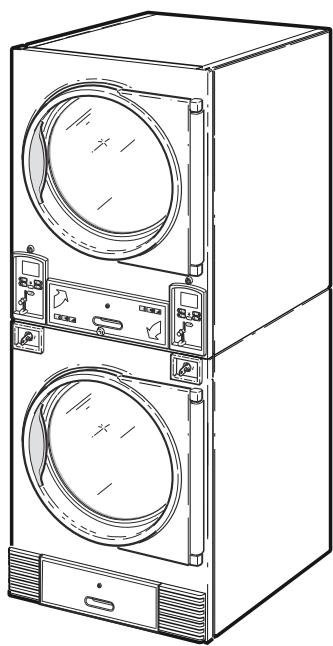


T477C\_70304801

## Touch-Up Paint

REF	PART NO.	DESCRIPTION	COMMENTS
	298P4P	Spray Paint	White
	297P4	Spray Paint	Almond
	122P4P	Porcelain Touch-Up Paint	White
	215P4P	Porcelain Touch-Up Paint	Almond
	370P4P	Porcelain Touch-Up Paint	Bisque

## Drive Motor Components

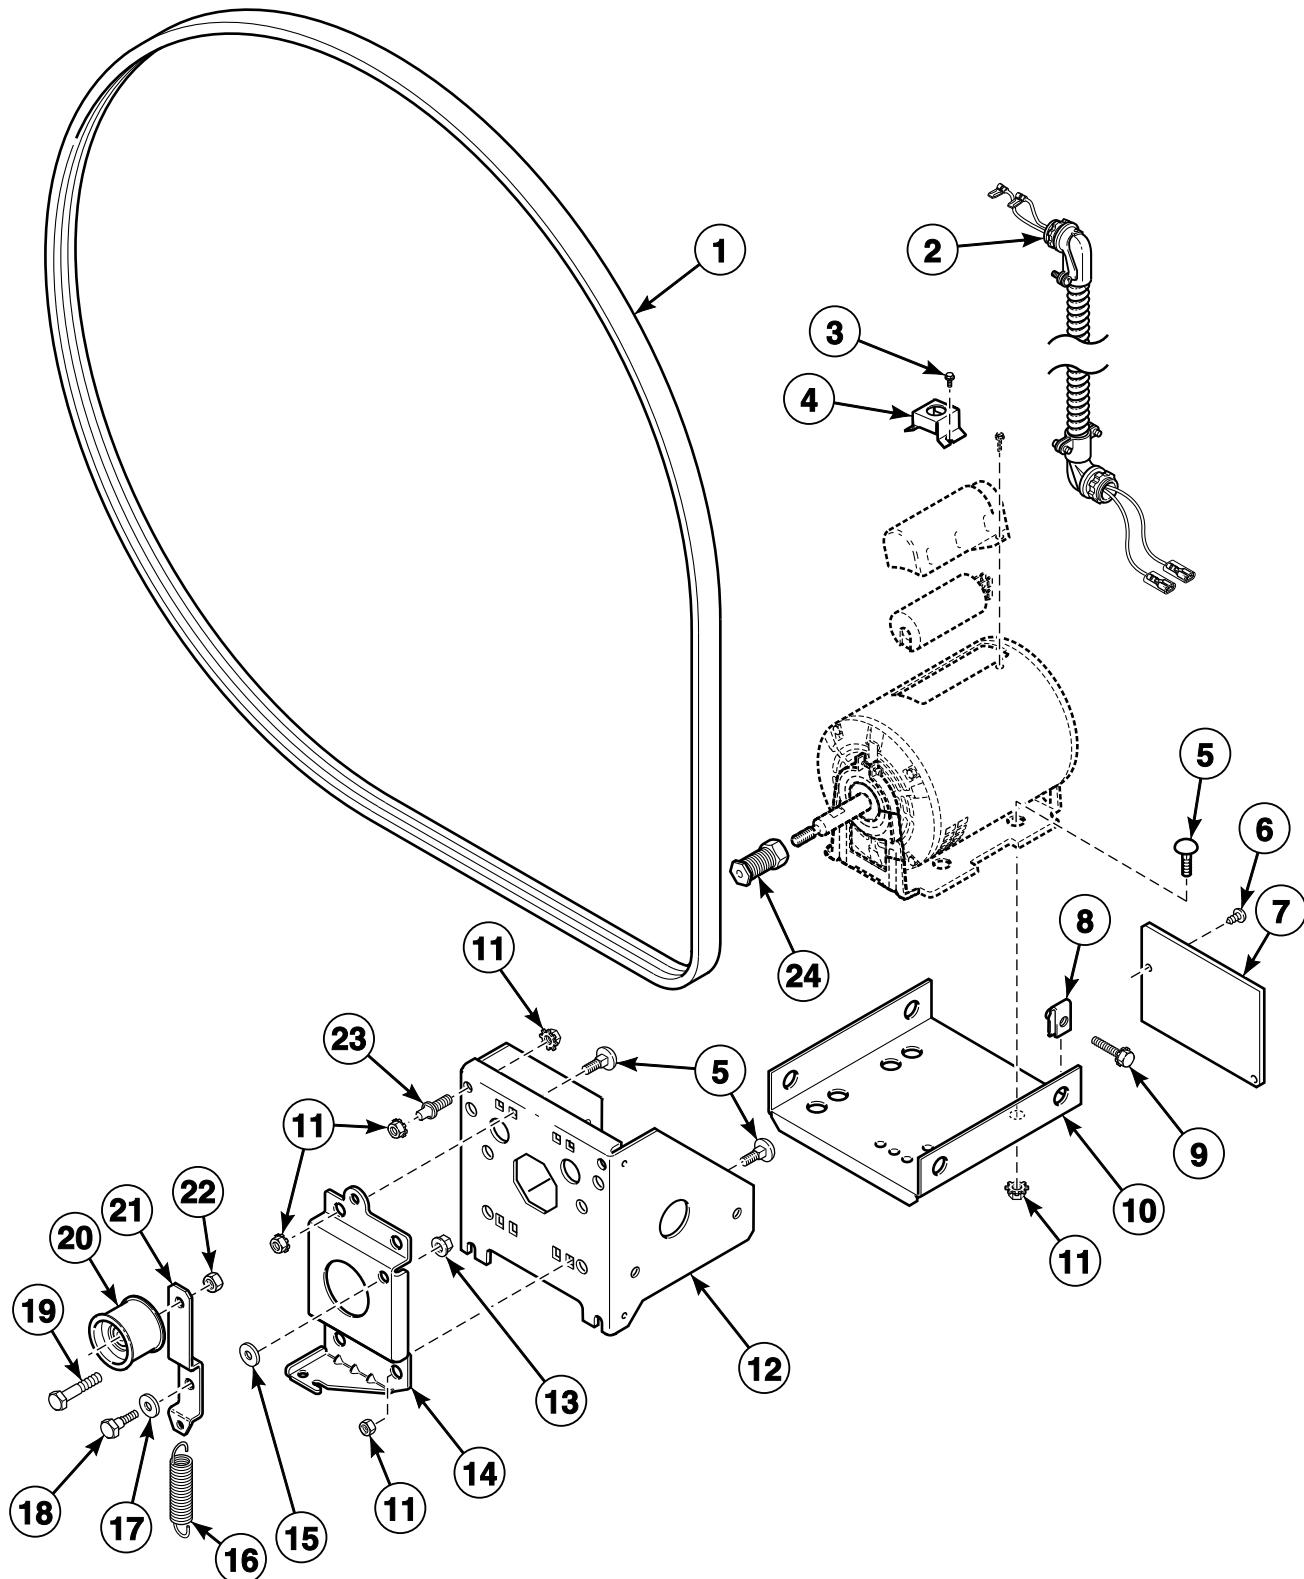


TMB3085P\_70304801

## Drive Motor Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4853P3	Belt Tension Tool Kit	
1	70276201P	Belt	T30 models
	70276204P	Belt	T45 models
2	70316701P	Cylinder Motor Harness	Models through 2/28/10; 1 Phase models; 3 Phase electric models with 240 Volt and below
	70316801P	Cylinder Motor Harness	Models through 2/28/10; 3 Phase models except electric models with 240 Volt and below
	70439901	Cylinder Motor Harness	Models starting 3/1/10; 1 Phase models; 3 Phase electric models with 240 Volt and below
	70440301	Cylinder Motor Harness	Models starting 3/1/10; 3 Phase models except electric models with 240 Volt and below
3	23222	Screw	
4	70321701	Motor Conduit Mounting Bracket	
5	70062401	Bolt	
6	430497	Screw	
7	70202501	Drive Access Cover	
8	27222	Nut	4 required
9	M412985	Screw	
10	70127301	Motor Mount Bracket	T30 models
	70312001	Motor Mount Bracket	T45 models
11	M412986	Nut	
12	70261701	Motor Channel	
13	29796	Nut	
14	70443301	Idler Bracket	
15	70270301	Washer	
16	70045301	Drum Idler Spring	With silencer
17	70265901	Washer	
18	431539	Screw	
19	430648	Screw	
20	70050401P	Idler Wheel Assembly	
21	70259901	Cylinder Idler Arm	
22	56156	Nut	
23	70334701	Double Ended Stud	
24	70284203	Motor Pulley	T30 models; 50 Hertz
	70284201	Motor Pulley	T30 models; 60 Hertz
	70284204	Motor Pulley	T45 models; 50 Hertz
	70284208	Motor Pulley	T45 models; 60 Hertz

## Drive Motors and Motor Capacitors

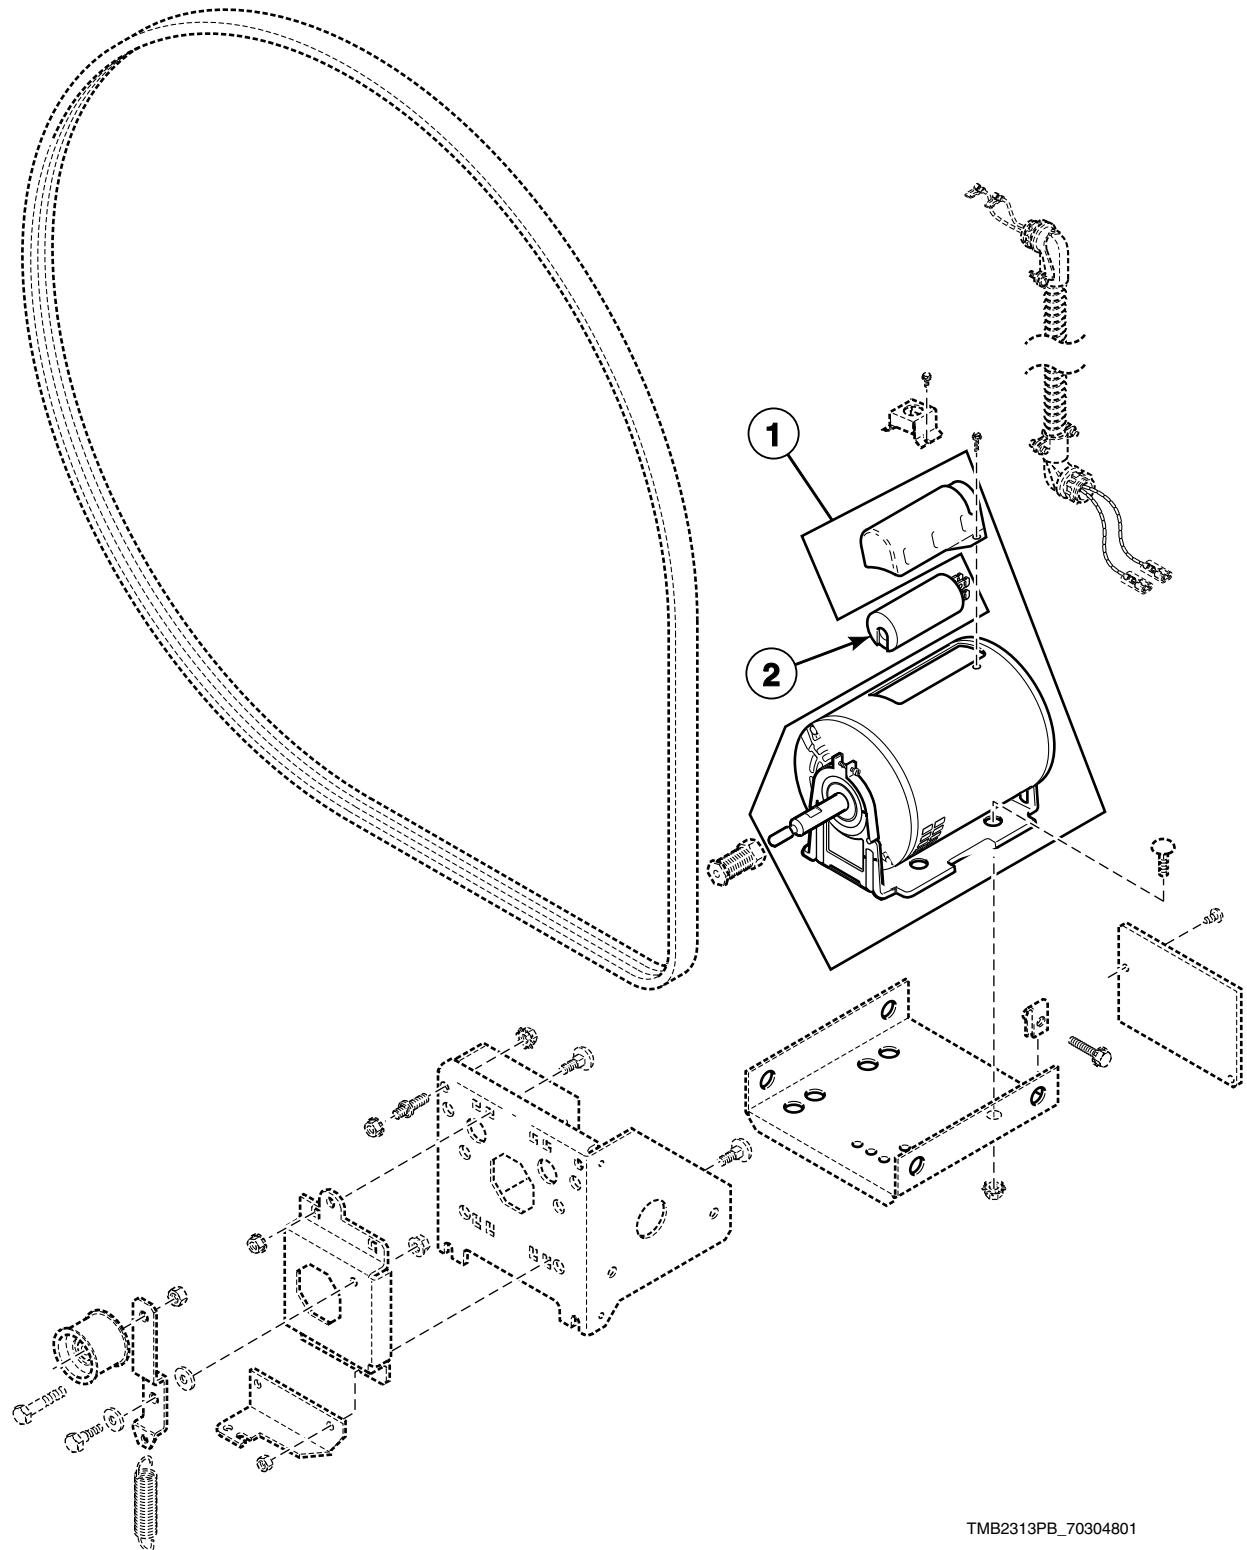


TMB2313PB\_70304801

## Drive Motors and Motor Capacitors

REF	PART NO.	DESCRIPTION	COMMENTS
1	70337901P	Drive Motor Kit	T30 models; 120-240 Volt/60 Hertz/1 Phase; Low Amp
	70338001P	Drive Motor Kit	T30 models; 230-240 Volt/50 Hertz/1 Phase; No run capacitor
	70338101P	Drive Motor	T30 models; 200-480 Volt/60 Hertz/3 Phase and 200-415 Volt/50 Hertz/3 Phase; No capacitors
	70392901P	Drive Motor	T45 models; 100-120 or 208-240 Volt/60 Hertz/1 Phase
	70298401P	Drive Motor	T45 models; 200-240 Volt/60 Hertz/3 Phase; No capacitors
	70401501	Drive Motor	T45 models; 100 or 200 Volt/50 Hertz/1 Phase; No run capacitor
	70401601	Drive Motor	T45 models; 230-240 Volt/50 Hertz/1 Phase; No run capacitor
	70401701	Drive Motor	T45 models; 380 Volt/50 Hertz/3 Phase; No capacitors
2	70401801	Drive Motor	T45 models; 400-415 Volt/50 Hertz/3 Phase; No capacitors
	70211502	Motor Capacitor	T30 models; Start; For 70337901 Drive Motor on 20 Amp models
	70211401	Motor Capacitor	T30 models; Run; For 70337901 Drive Motor on 20 Amp models
	M410296	Motor Capacitor	T30 models; Start; For 70338001P Drive Motor Kit
	70413101	Motor Capacitor	T45 models; Start; For 70392901P Drive Motor
	70413201	Motor Capacitor	T45 models; Run; For 70392901P Drive Motor
	70435702	Motor Capacitor	T45 models; Start; For 70401501 Drive Motor
	70435701	Motor Capacitor	T45 models; Start; For 70401601 Drive Motor

## Exhaust Components

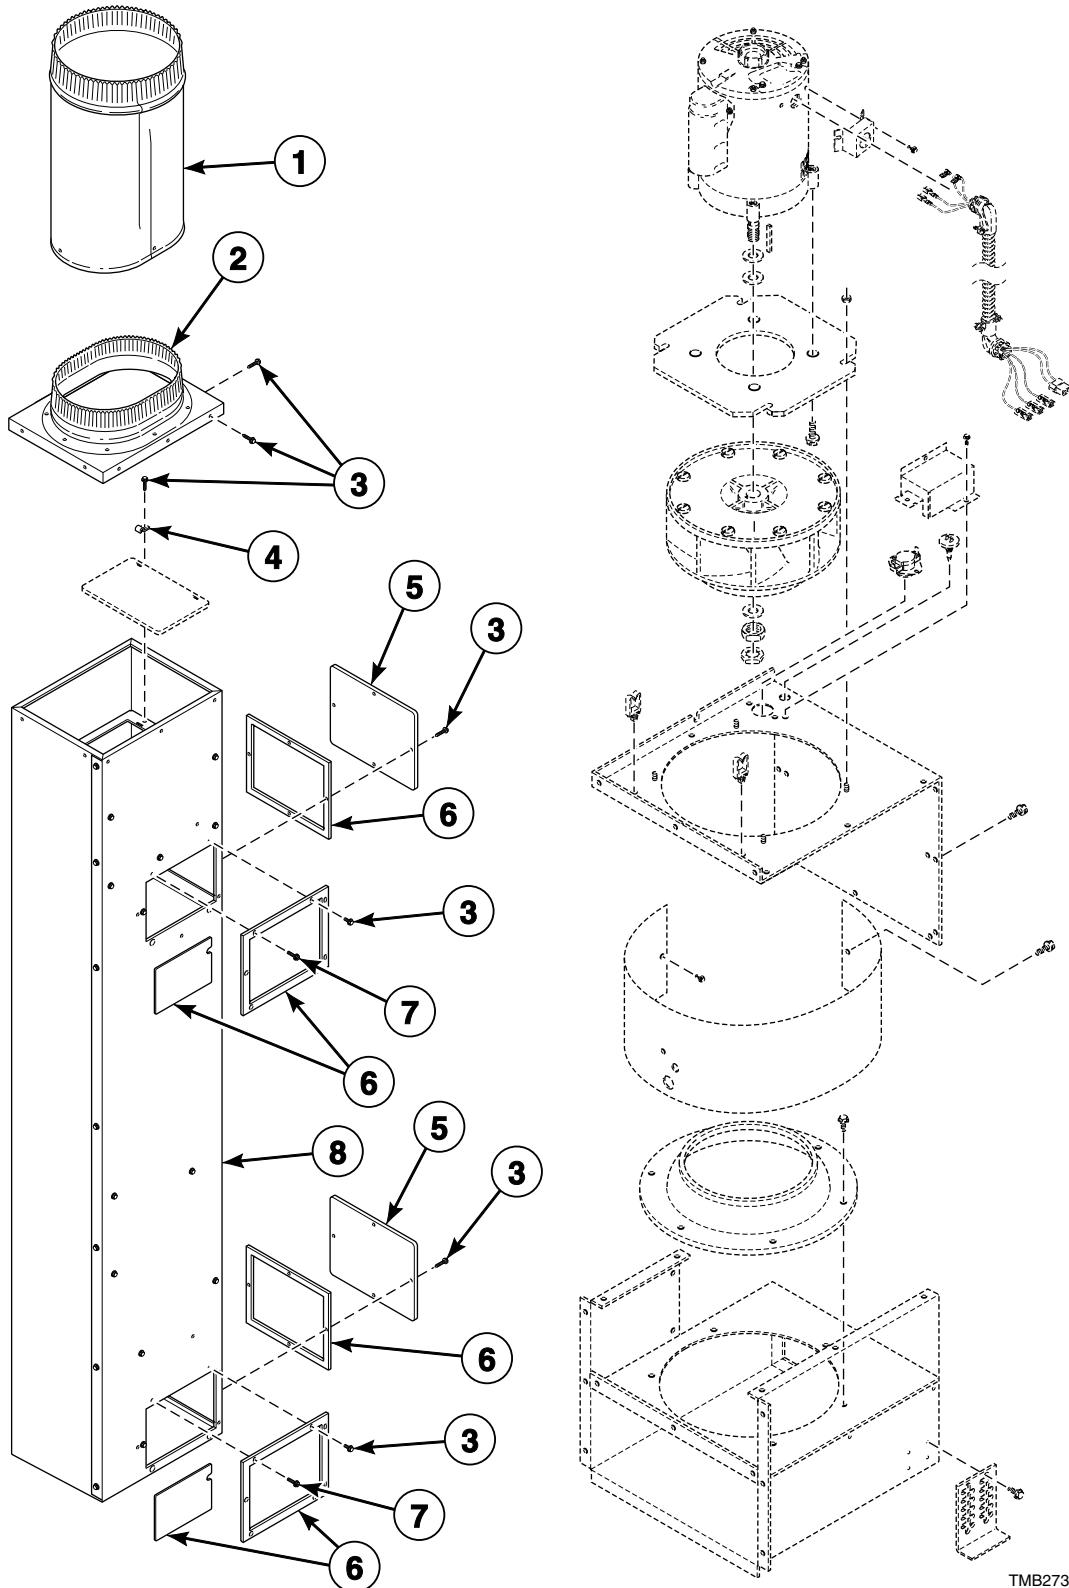


TMB2733P\_70304801

## Exhaust Components

<b>REF</b>	<b>PART NO.</b>	<b>DESCRIPTION</b>	<b>COMMENTS</b>
	70289101P	Lint Panel Gasket	Sold per foot
<b>1</b>	70425801	Exhaust Pipe Assembly	T45 CE models
	44154301	Exhaust Pipe	T30 CE models
<b>2</b>	70207501	Duct Cover	Classic T30 models
	70478101	Duct Cover	Eco T30 models
	70307601	Duct Cover	T45 models
<b>3</b>	430497	Screw	12 required
<b>4</b>	70226701	Clip	
<b>5</b>	70340301	Duct Access Cover	T30 models; 2 required
	70308701	Duct Access Cover	T45 models
<b>6</b>	70340401	Exhaust Duct Gaskets Assembly	T30 models; 2 required
	70302801P	Exhaust Duct Gaskets Assembly	T45 models; 2 required
<b>7</b>	M411072	Screw	2 required
<b>8</b>	70340502	Exhaust Duct Assembly	T30 CE models; Includes cap, dampers and gaskets; Order blower housing scroll separately
	70340501	Exhaust Duct Assembly	All other T30 models; Includes cap, dampers and gaskets; Order blower housing scroll separately
	70311902	Exhaust Duct Assembly	T45 CE models; Includes cap, dampers and gaskets; Order blower housing scroll separately
	70311901	Exhaust Duct Assembly	All other T45 models; Includes cap, dampers and gaskets; Order blower housing scroll separately

## Blower Components

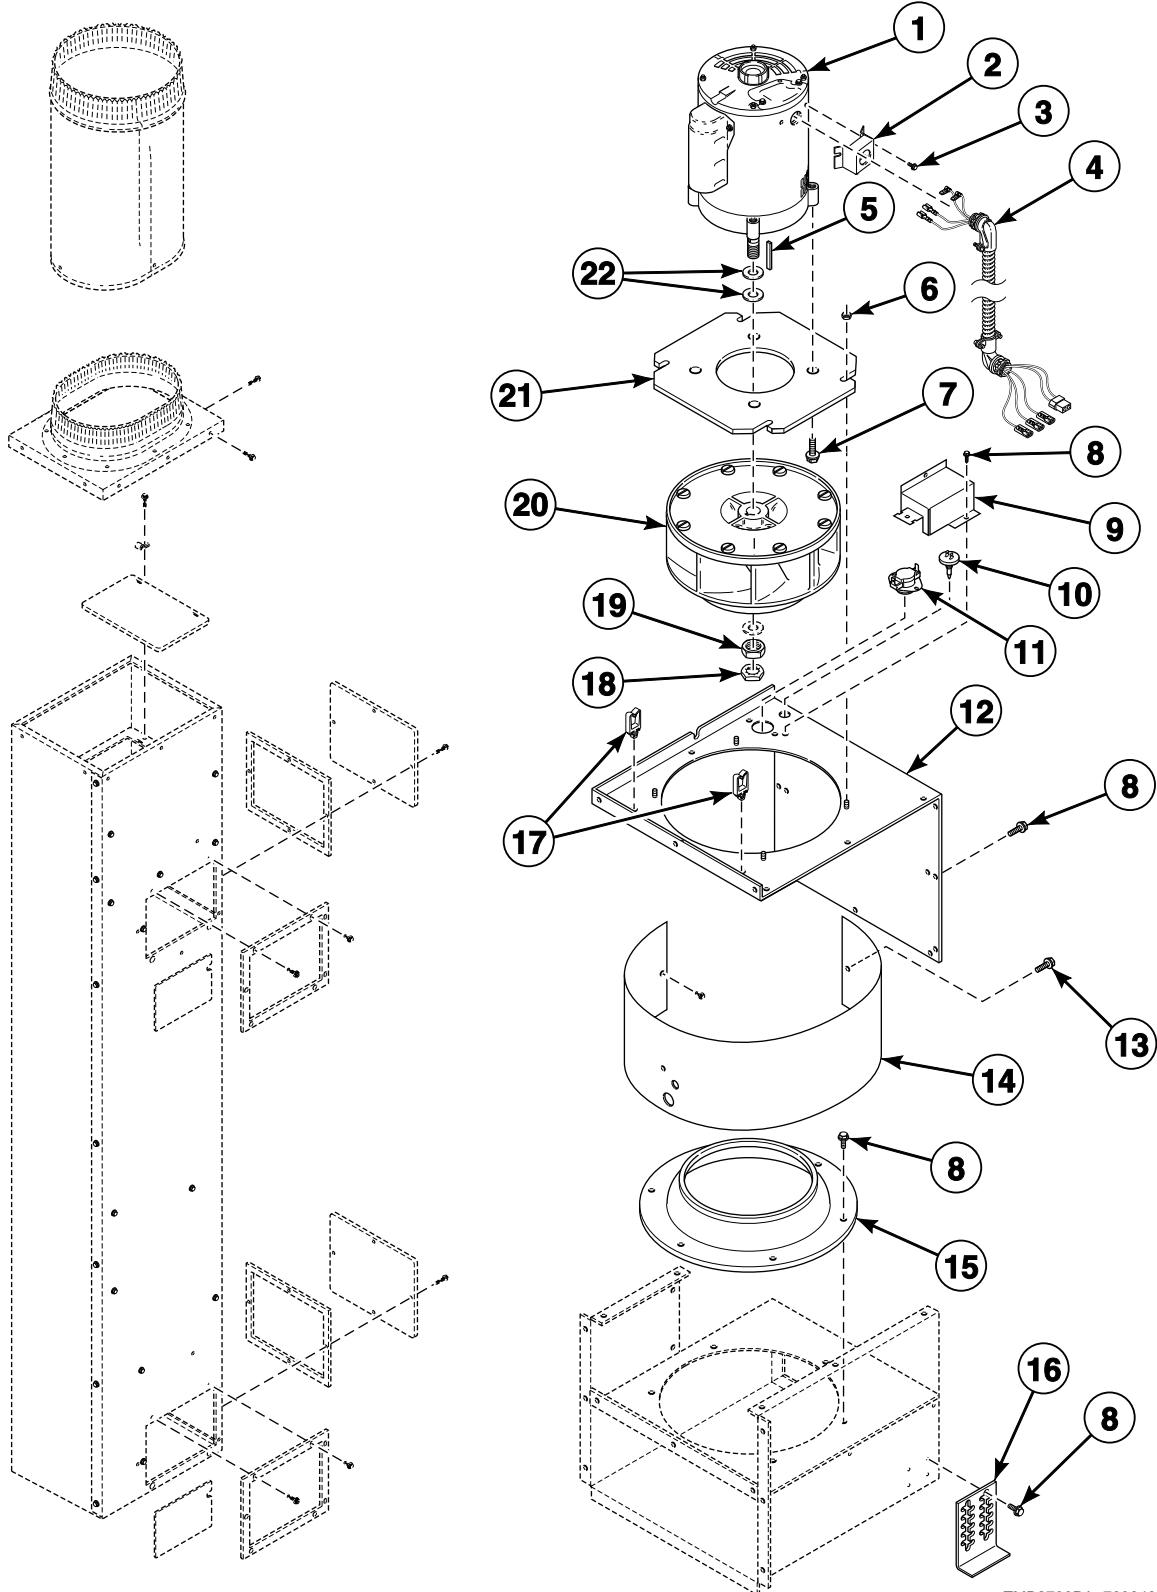


TMB2733PA\_70304801

## Blower Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70392701P	Gasket	For blower housing opening
1	70337601P	Blower Motor Kit	T30 models; 120-240 Volt/60 Hertz/1 Phase; Low Amp; Use 70211501 Motor Capacitor (start)
	70337701P	Blower Motor Kit	T30 models; 230-240 Volt/50 Hertz/1 Phase; Use 70211501 Motor Capacitor (start)
	70342601P	Blower Motor	200-480 Volt/60 Hertz/3 Phase and 200-415 Volt/50 Hertz/3 Phase
	70297901P	Blower Motor	T45 models; 100-120 or 208-240 Volt/60 Hertz/1 Phase; Use 70435701 Motor Capacitor (start)
	70401401	Blower Motor	T45 models; 100 or 200 Volt/50 Hertz/1 Phase
2	70321701	Motor Conduit Mounting Bracket	
3	23222	Screw	
4	70440001P	Fan Motor Harness	1 Phase models; 3 Phase electric models with 240 Volt and below
	70317001	Fan Motor Harness	Models through 2/28/10; 3 Phase models except electric models with 240 Volt and below
	70440401	Fan Motor Harness	Models starting 3/1/10; 3 Phase models except electric models with 240 Volt and below
5	70144101	Key	
6	29786	Nut	4 required
7	70126101	Screw	4 required
8	430497	Screw	12 required
9	70346301	Thermistor Cover	
10	M414704	Thermistor	
11	M411307	Limit Thermostat	Auto reset
12	70341401	Blower Housing Cover Assembly	T30 models
	70322801	Blower Housing Cover Assembly	T45 models
13	51780	Screw	
14	70340801	Blower Housing Scroll	T30 models
	70303201	Blower Housing Scroll	T45 models
15	70014101	Blower Inlet Cone	T30 models
	70303101	Blower Inlet Cone	T45 models
16	70200301	Rear Stabilizer Bracket	
17	70366201	Wire Clip	2 required
18	M400034	Nut	
19	M400022	Nut	
20	70359801P	Blower Assembly	T30 models
	70302201P	Blower Assembly	T45 models
21	70341001	Blower Motor Mounting Plate	T30 models
	70303401	Blower Motor Mounting Plate	T45 models
22	M400991	Washer	3 required

## Moisture Sensing Components

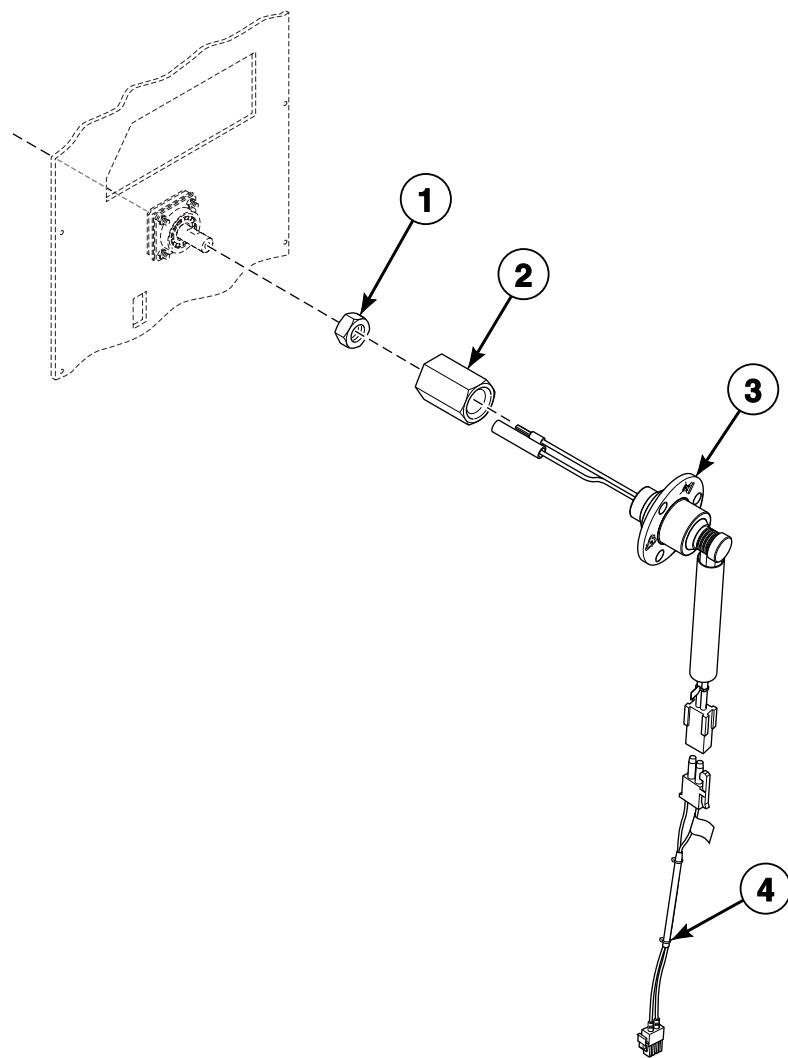


TMB3147P\_70304801

## Moisture Sensing Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70468901	Moisture Sensor Test Wires	Use to troubleshoot the moisture sensor circuit
1	M400035	Nut	
2	44224401	Slip Ring Holder	
3	44222701	Slip Ring Assembly	
4	70448901	Moisture Sensor Harness Assembly	

## Gas Burner Housing and Secondary Stove Limit

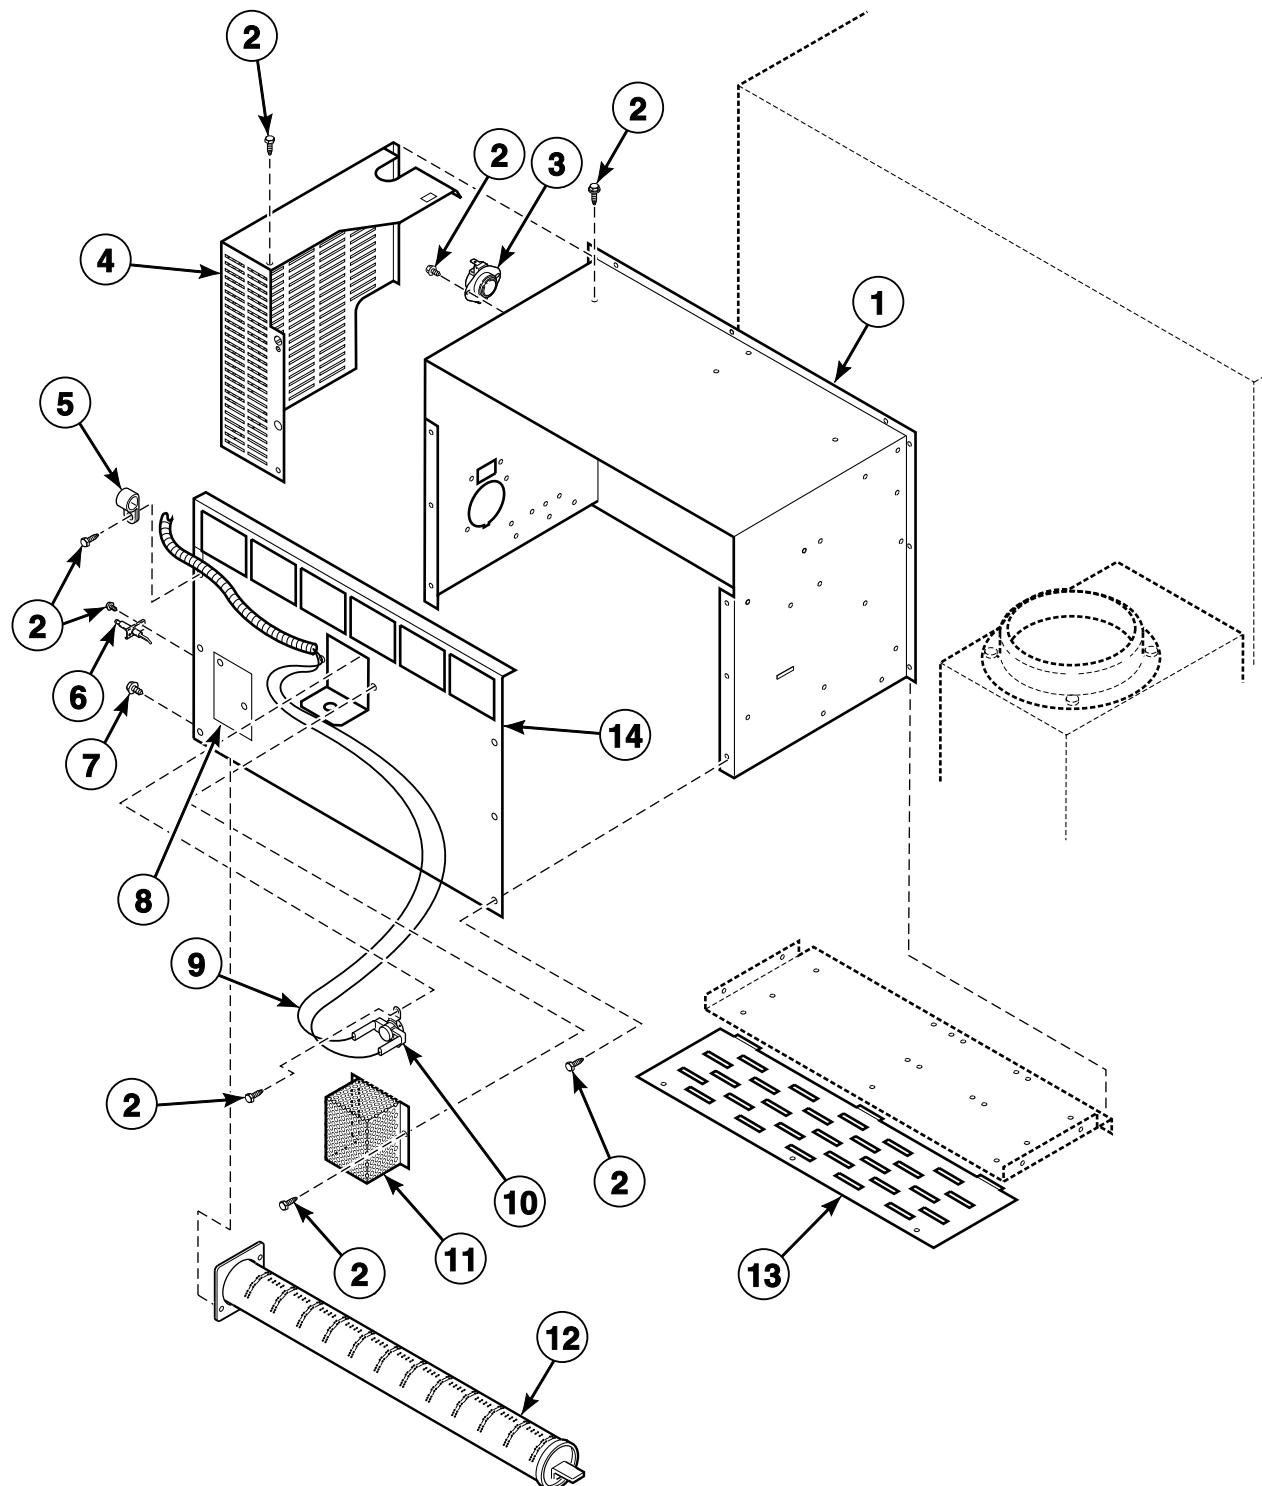


TMB2315P\_70304801

## Gas Burner Housing and Secondary Stove Limit

REF	PART NO.	DESCRIPTION	COMMENTS
	70316501	Stove Limit Harness	
	M4903P3	Stove Limits Kit	T30 Australian models; Models through Serial No. 0311000078; In addition, order 70299101 Secondary Stove Limit Kit
<b>1</b>	70333401	Stove Top and Sides	T30 models
	70306001	Stove Top and Sides	T45 models
<b>2</b>	430497	Screw	
<b>3</b>	M409219	Limit Thermostat	Non-CE models
	70397101	Manual Reset Thermostat	T30 Korean models
	70186301	Manual Reset Thermostat	Australian models; T45 Korean models
<b>4</b>	70233401	Gas Valve Cover	T30 Australian and CE models
	70425001	Gas Valve Cover	T45 Australian and CE models
<b>5</b>	70203701	Pipe Clip	
<b>6</b>	70032801P	Spark Electrode	Models through 9/16/12
	70466501P	Spark Electrode	Models starting 9/17/12
<b>7</b>	05161	Screw	
<b>8</b>	70159601	Igniter Cover	
<b>9</b>	70316501	Stove Limit Harness	
<b>10</b>	70299001	Limit Thermostat	
<b>11</b>	M414477	Thermostat Cover	
<b>12</b>	70229801P	Gas Burner	
<b>13</b>	70188801	Burner Grill	T30 models
	70306501	Burner Grill	T45 models
<b>14</b>	70371501	Stove Back	T30 models
	70375201	Stove Back	T45 models

## Airflow Switch

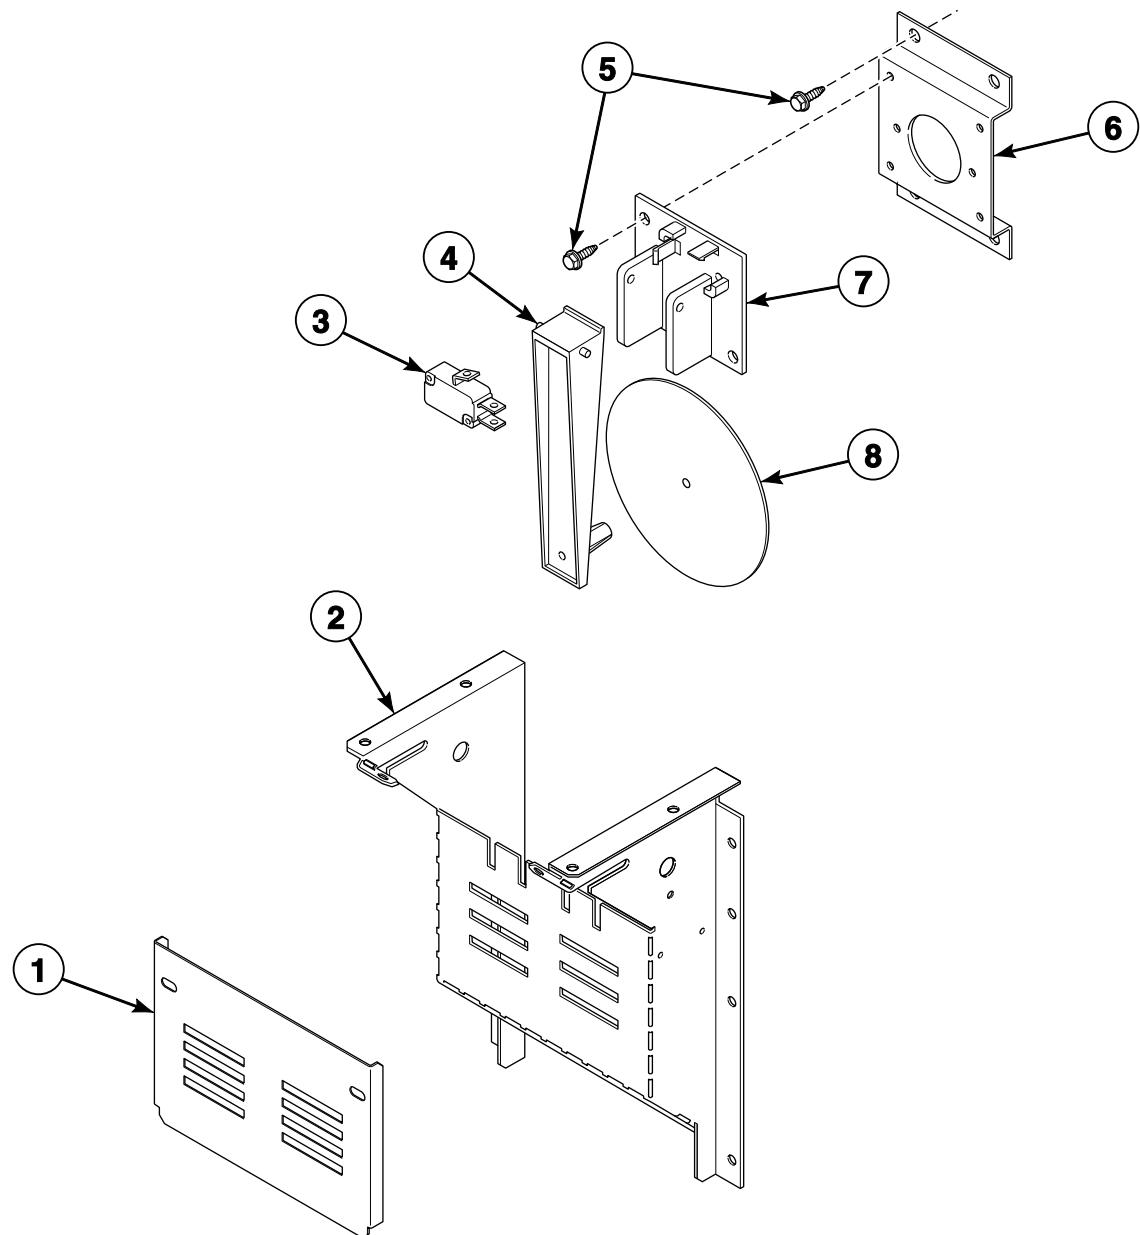


TMB3126P\_70304801

## Airflow Switch

REF	PART NO.	DESCRIPTION	COMMENTS
1	70356601	Airflow Switch Cover	Non-moisture sensing
	70465701	Airflow Switch Cover	Moisture sensing
2	70356101	Airflow Switch Wrapper	
3	70411901	Switch	
4	70319401	Airflow Switch Arm	
5	430497	Screw	
6	70356301	Switch Bracket	
7	70319601	Airflow Switch and Arm Bracket	
8	70319201	Airflow Switch Vane	

## Gas Valve and Piping - Non-CE and Non-Australian Gas Models

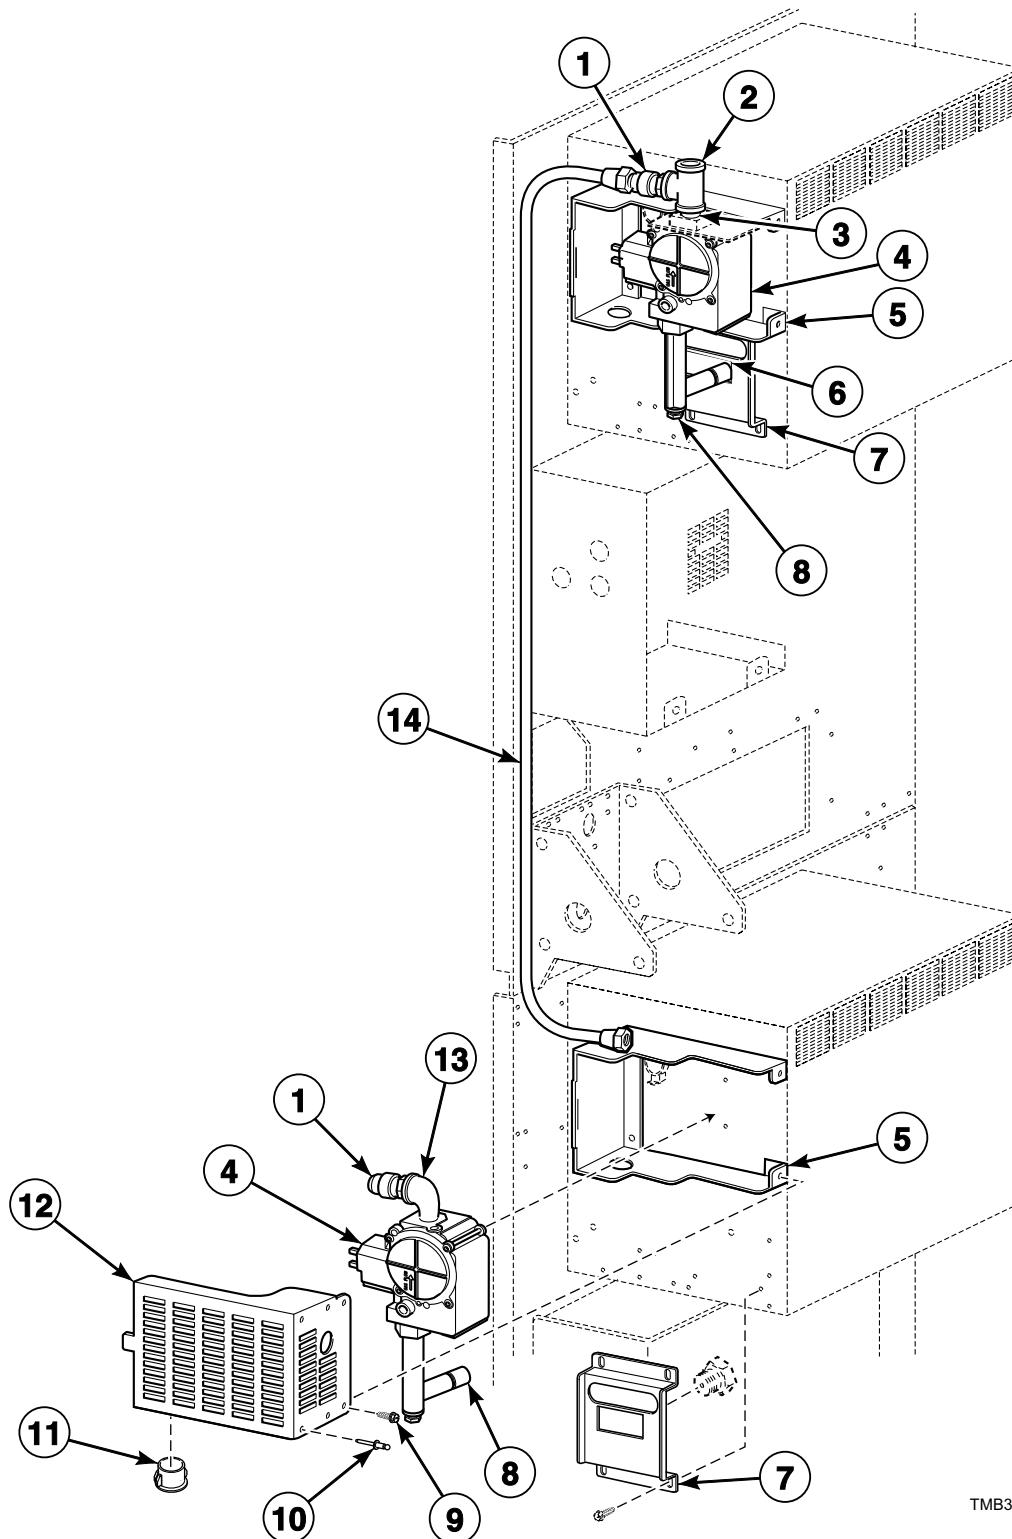


TMB3029P\_70304801

## Gas Valve and Piping - Non-CE and Non-Australian Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M4970P3	Replacement Gas Valve Kit	Natural Gas (N.G.); Use to replace old valve before 12/15/09 with new valve
	M4972P3	Replacement Gas Valve Kit	Liquid Petroleum Gas (L.P.); Use to replace old valve before 12/15/09 with new valve
	M4707P3	L.P. Conversion Kit	T30 models; 0-2,000 feet
	M4880P3	L.P. Conversion Kit	T45 models; 0-2,000 feet
	M412997	Harness Assembly	
<b>1</b>	70262601	Pipe	
<b>2</b>	70267501	Pipe Tee	Models through 1/31/10
	70071801	Tee	Models starting 2/1/10
<b>3</b>	431486	Pipe Nipple	
<b>4</b>	44154501P	Gas Valve	N.G.
	44154502P	Gas Valve	L.P.
<b>5</b>	70328201	Forward Valve Cover	
<b>6</b>	70249001	Orifice Keeper Bracket	
<b>7</b>	70248901	Orifice Holder Bracket	
<b>8</b>	70435901P	Orifice Adapter	
<b>9</b>	430497	Screw	
<b>10</b>	70058501	Pop Rivet	3/16 inch
<b>11</b>	M400770	Snap Bushing	
<b>12</b>	70282401	Rear Valve Cover	
<b>13</b>	H86070034	Street Elbow	
<b>14</b>	70281601	Tube	T30 models
	70281602	Tube	T45 models

## Burner Orifices - Non-CE and Non-Australian Gas Models

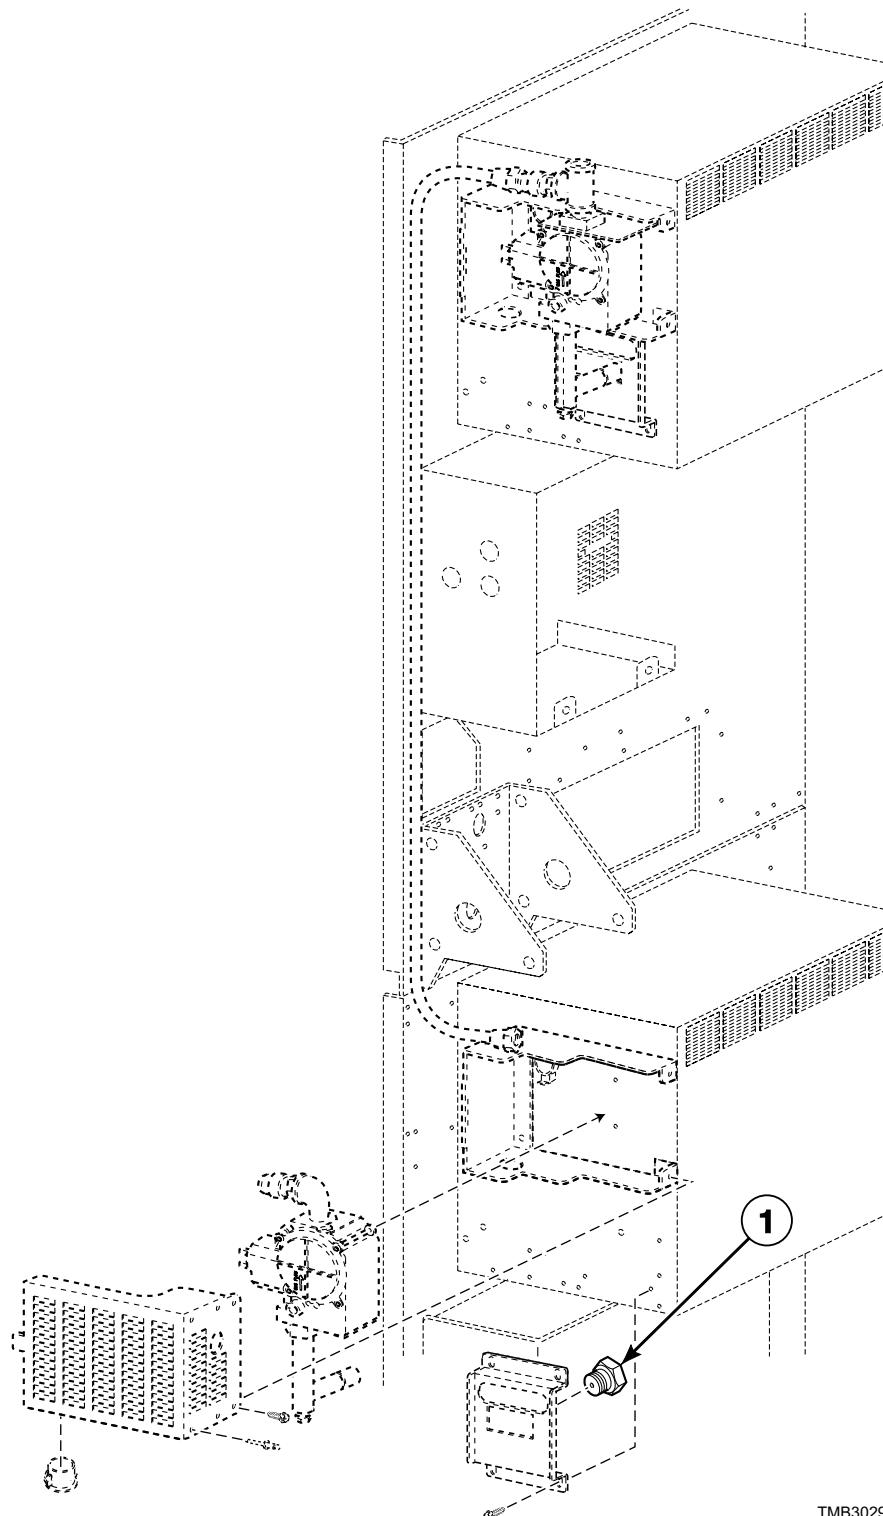

TMB3029PA\_70304801


## Burner Orifices - Non-CE and Non-Australian Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	M406361	Burner Orifice	Classic T30 models; Liquid Petroleum Gas (L.P.); Drill no. 40 (2.5 mm); 0-2,000 feet; *
	M403017	Burner Orifice	Classic T30 models; L.P.; Drill no. 42 (2.4 mm); 2,001-6,000 feet; *
	M406184	Burner Orifice	Classic T30 models; L.P.; Drill no. 43 (2.3 mm); 6,001-8,000 feet; *
	M401011	Burner Orifice	Classic T30 models; L.P.; Drill no. 44 (2.2 mm); 8,001-10,000 feet; *
	M401002	Burner Orifice	Classic T30 models; Natural Gas (N.G.); Drill no. 20 (4.1 mm); 0-2,000 feet; *
	M402996	Burner Orifice	Classic T30 models; N.G.; Drill no. 22 (4.0 mm); 2,001-4,000 feet; *
	M402980	Burner Orifice	Classic T30 models; N.G.; Drill no. 24 (3.9 mm); 4,001-6,000 feet; *
	M401000	Burner Orifice	Classic T30 models; N.G.; Drill no. 26 (3.7 mm); 6,001-8,000 feet; *
	M401014	Burner Orifice	Classic T30 models; N.G.; Drill no. 28 (3.6 mm); 8,001-10,000 feet; *
	M411375	Burner Orifice	Classic T45 models; 50 Hertz; L.P.; Drill no. 36 (2.7 mm); 0-2,000 feet; *
	M411512	Burner Orifice	Classic T45 models; 60 Hertz; L.P.; Drill no. 34 (2.8 mm); 0-2,000 feet; *
	M411375	Burner Orifice	Classic T45 models; L.P.; Drill no. 36 (2.7 mm); 2,001-6,000 feet; *
	M411376	Burner Orifice	Classic T45 models; L.P.; Drill no. 38 (2.6 mm); 6,001-8,000 feet; *
	M406361	Burner Orifice	Classic T45 models; L.P.; Drill no. 40 (2.5 mm); 8,001-10,000 feet; *
	M411373	Burner Orifice	Classic T45 models; 50 Hertz; N.G.; Drill no. 16 (4.5 mm); 0-2,000 feet; *
	M411510	Burner Orifice	Classic T45 models; 60 Hertz; N.G.; Drill no. 13 (4.7 mm); 0-2,000 feet; *
	M411511	Burner Orifice	Classic T45 models; N.G.; Drill no. 15 (4.6 mm); 2,001-4,000 feet; *
	M411373	Burner Orifice	Classic T45 models; N.G.; Drill no. 16 (4.5 mm); 4,001-6,000 feet; *
	M402988	Burner Orifice	Classic T45 models; N.G.; Drill no. 18 (4.3 mm); 6,001-8,000 feet; *
	M401002	Burner Orifice	Classic T45 models; N.G.; Drill no. 20 (4.1 mm); 8,001-10,000 feet; *
	M401007	Burner Orifice	Models HTT45D and STT45D; 50 Hertz; Drill no. 39 (2.5 mm); *
N/A	Burner Orifice	Models HTT45D and STT45D; 60 Hertz; Drill no. 37 (2.6 mm); *	
44254001	Burner Orifice	Eco T30 models; 50 Hertz; N.G.; 3.4 mm; 0-2,000 feet; *	
M402489	Burner Orifice	Eco T30 models; 50 Hertz; N.G.; Drill no. 1/8 (3.2 mm); 2,001-4,000 feet; *	
70070903	Burner Orifice	Eco T30 models; 50 Hertz; N.G.; 3.1 mm; 4,001-6,000 feet; *	
M401017	Burner Orifice	Eco T30 models; 50 Hertz; N.G.; Drill no. 31 (3.0 mm); 6,001-8,000 feet; *	
M401022	Burner Orifice	Eco T30 models; 50 Hertz; N.G.; Drill no. 33 (2.9 mm); 8,001-10,000 feet; *	
M400997	Burner Orifice	Eco T30 models; 60 Hertz; N.G.; Drill no. 29; 0-2,000 feet; *	
44253801	Burner Orifice	Eco T30 models; 60 Hertz; N.G.; 3.3 mm; 2,001-4,000 feet; *	
M402489	Burner Orifice	Eco T30 models; 60 Hertz; N.G.; Drill no. 1/8 (3.2 mm); 4,001-6,000 feet; *	
70070903	Burner Orifice	Eco T30 models; 60 Hertz; N.G.; 3.1 mm; 6,001-8,000 feet; *	
M402444	Burner Orifice	Eco T30 models; 60 Hertz; N.G.; Drill no. 32 (2.9 mm); 8,001-10,000 feet; *	
M402992	Burner Orifice	Eco T45 models; 50 Hertz; N.G.; Drill no 21 (4.0 mm) ; 0-2,000 feet; *	
M402980	Burner Orifice	Eco T45 models; 50 Hertz; N.G.; Drill no. 24 (3.9 mm); 2,001-4,000 feet; *	
M401000	Burner Orifice	Eco T45 models; 50 Hertz; N.G.; Drill no. 26 (3.7 mm); 4,001-6,000 feet; *	
M401014	Burner Orifice	Eco T45 models; 50 Hertz; N.G.; Drill no. 28 (3.6 mm); 6,001-8,000 feet; *	
M400997	Burner Orifice	Eco T45 models; 50 Hertz; N.G.; Drill no. 29; 8,001-10,000 feet; *	
M402995	Burner Orifice	Eco T45 models; 60 Hertz; N.G.; Drill no. 19 (4.2 mm); 0-2,000 feet; *	
M402992	Burner Orifice	Eco T45 models; 60 Hertz; N.G.; Drill no. 21 (4.0 mm); 2,001-4,000 feet; *	
M401020	Burner Orifice	Eco T45 models; 60 Hertz; N.G.; Drill no. 23 (3.9 mm); 4,001-6,000 feet; *	
M401000	Burner Orifice	Eco T45 models; 60 Hertz; N.G.; Drill no. 26 (3.7 mm); 6,001-8,000 feet; *	
M401014	Burner Orifice	Eco T45 models; 60 Hertz; N.G.; Drill no. 28 (3.6 mm); 8,001-10,000 feet; *	

N/A = Part no longer available

\* NOTE: One orifice required per pocket

## Gas Valve and Piping - T30 CE and Australian Gas Models

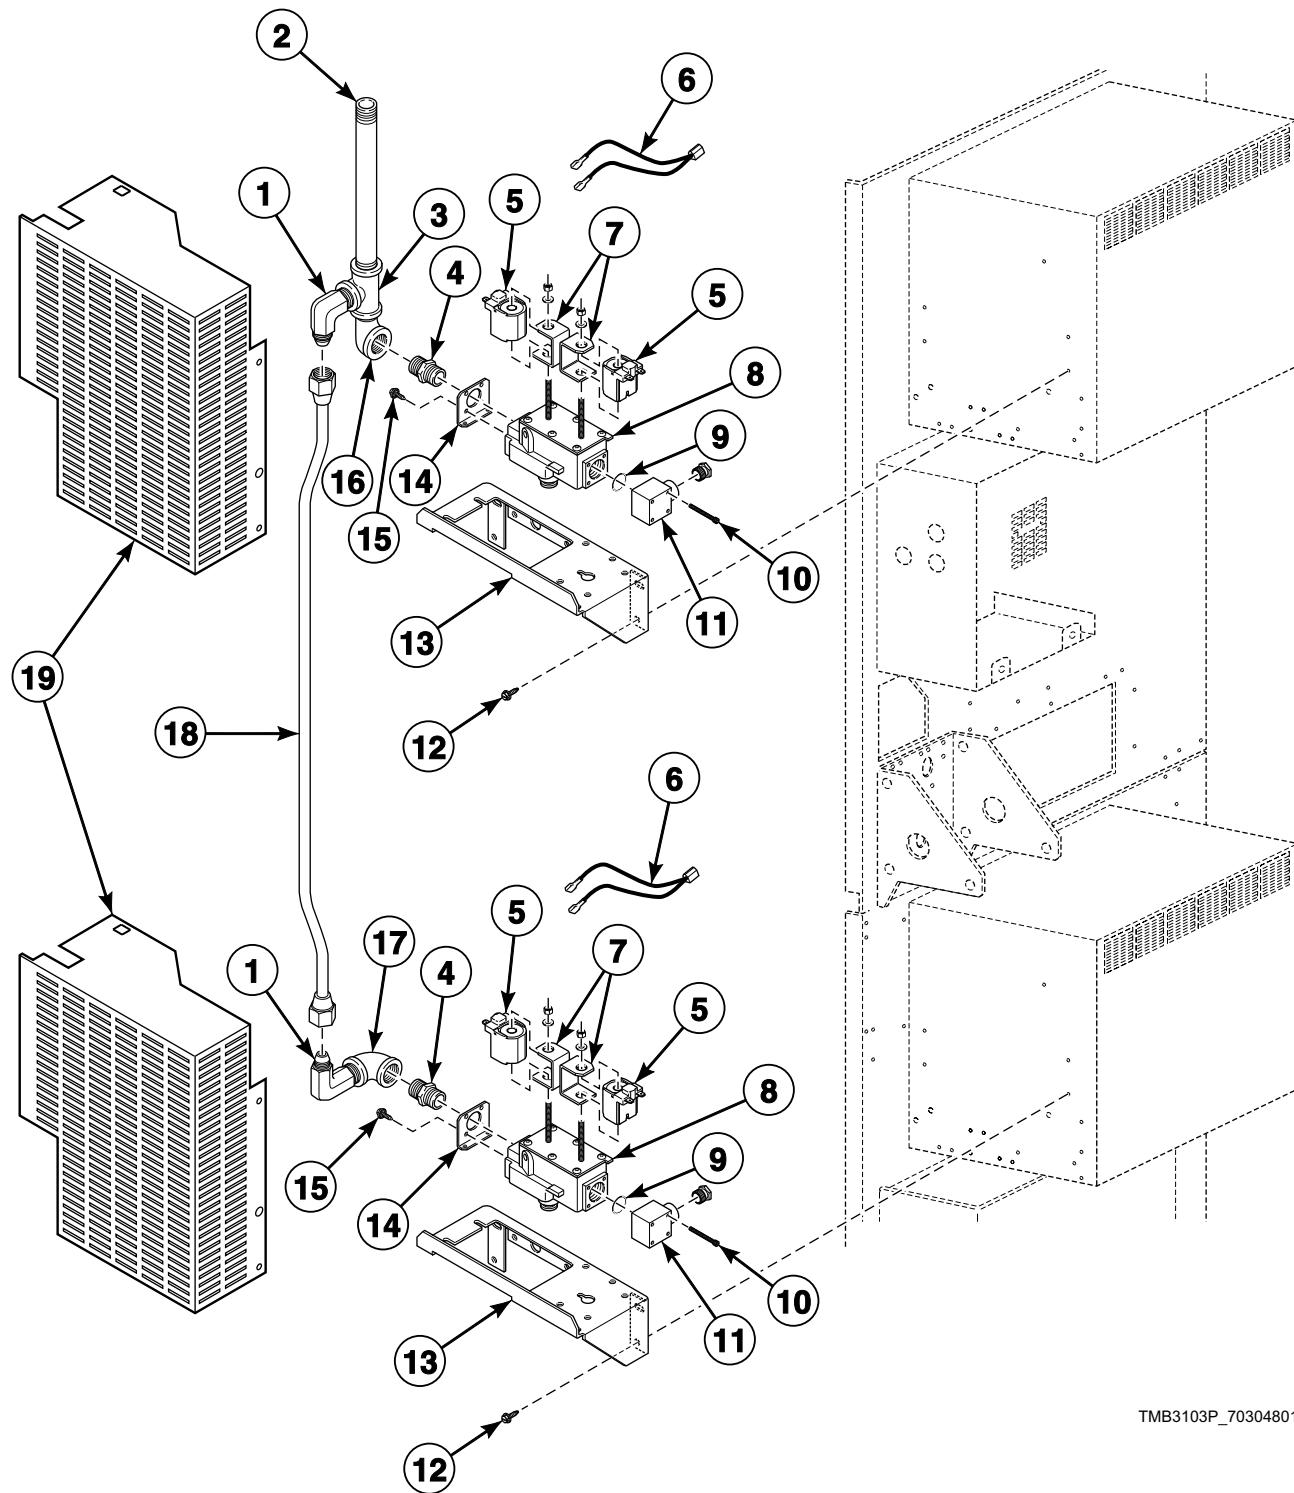


TMB3103P\_70304801

# Gas Valve and Piping - T30 CE and Australian Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M4733P3	N.G. Valve Conversion Kit	Regulated; Liquid Petroleum Gas (L.P.) to Natural Gas (N.G.)
	M4734P3	L.P. Valve Conversion Kit	Unregulated; N.G. to L.P.; Models through 12/31/13
	M4746P3	Valve Bracket and Cover Kit	Includes items 13 and 19
	M413650	Gas Valve Harness Assembly	Australian models; Use with item 8
	70184001	Gas Valve Harness	CE models; Use with item 8
<b>1</b>	70208701	Elbow	
<b>2</b>	70210201	Pipe Nipple	
<b>3</b>	70071801	Tee	
<b>4</b>	70131901	Adapter	
<b>5</b>	70260101	Gas Valve Coil	24 Volt
<b>6</b>	M413650	Gas Valve Harness Assembly	
<b>7</b>	70260601	Valve Coil Bracket	
<b>8</b>	70457301P	N.G. Valve	Models through 12/31/13
	44154503	N.G. Valve	Models starting 1/1/14
	70457302P	L.P. Valve	Models through 12/31/13
	44154504	L.P. Valve	Models starting 1/1/14
<b>9</b>	431482	O-Ring	
<b>10</b>	431484	Screw	
<b>11</b>	70223501	Spud Adapter	
<b>12</b>	430497	Screw	
<b>13</b>	70233301	Gas Valve Bracket	
<b>14</b>	70457701	Valve Support Bracket	
<b>15</b>	23222	Screw	8 required
<b>16</b>	H86070034	Street Elbow	
<b>17</b>	70079601	Elbow	
<b>18</b>	70281603	Tube	
<b>19</b>	70233401	Gas Valve Cover	

NOTE: For CE gas and orifice information, refer to installation manual.

## Gas Valve and Piping - T45 CE and Australian Gas Models

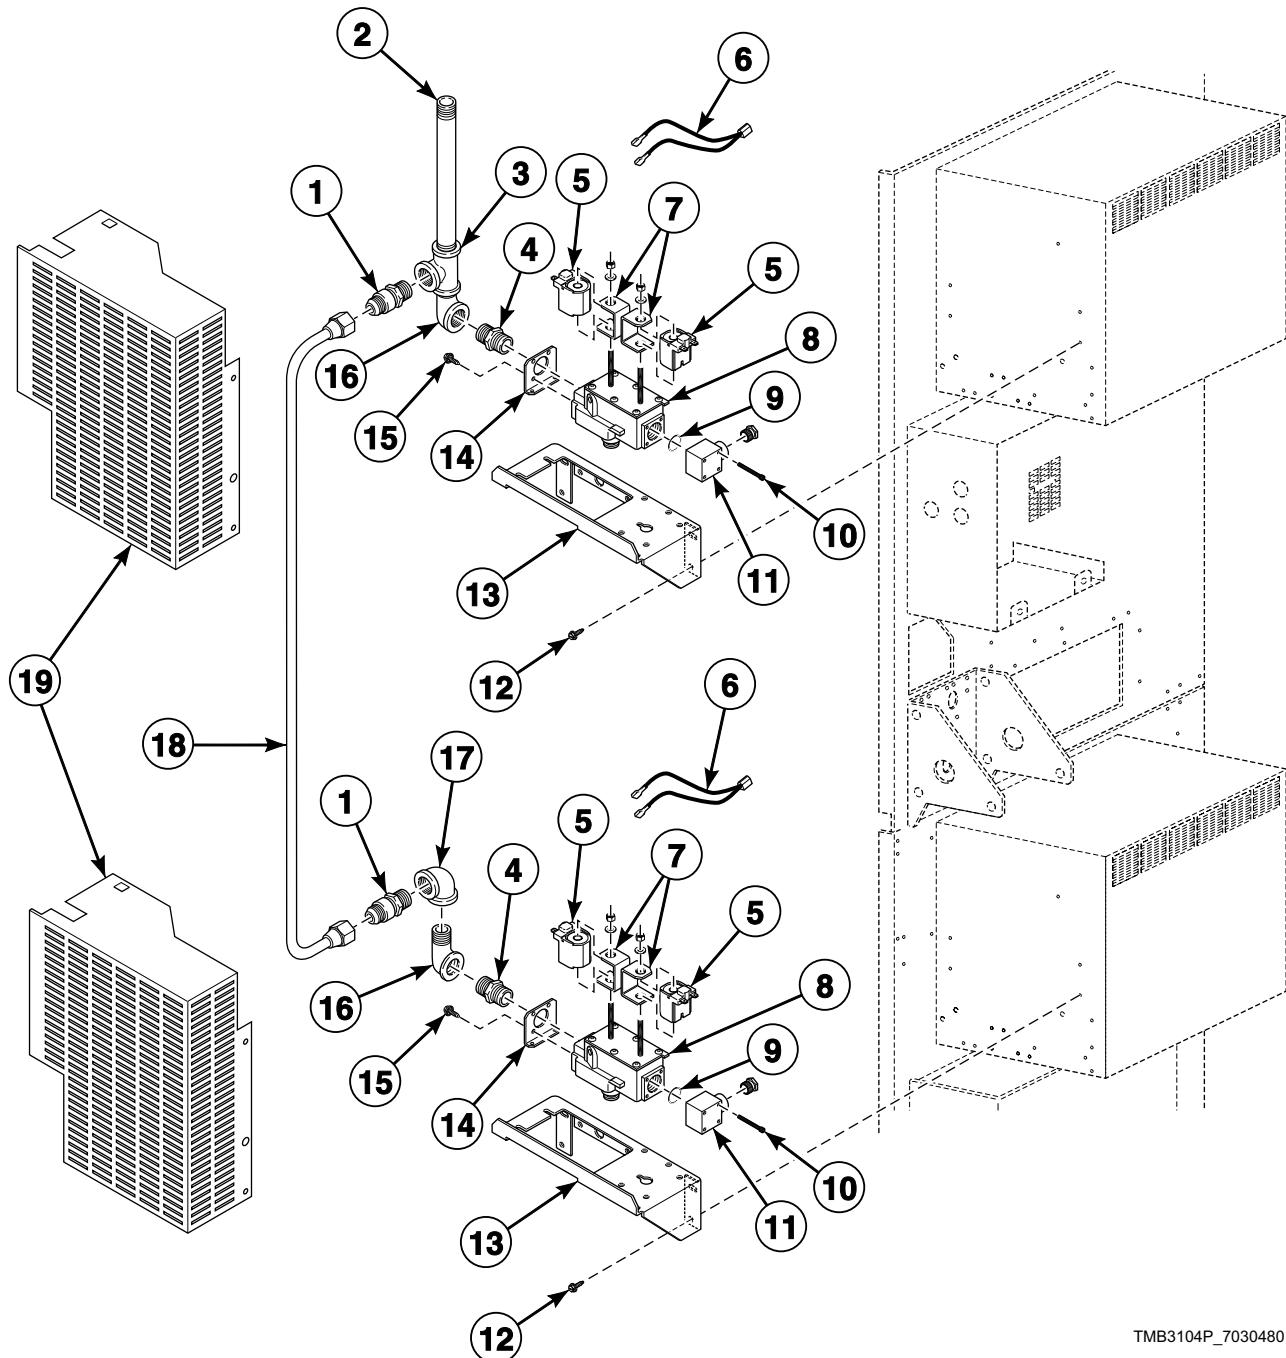

TMB3104P\_70304801


## Gas Valve and Piping - T45 CE and Australian Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M4733P3	N.G. Valve Conversion Kit	Regulated; Liquid Petroleum Gas (L.P.) to Natural Gas (N.G.)
	M4734P3	L.P. Valve Conversion Kit	Unregulated; N.G. to L.P.; Models through 12/31/13
	M4746P3	Valve Bracket and Cover Kit	Includes items 13 and 19
	M413650	Gas Valve Harness Assembly	Australian models; Use with item 8
	70184001	Gas Valve Harness	CE models; Use with item 8
<b>1</b>	70262601	Pipe	
<b>2</b>	70139601	Pipe Nipple	
<b>3</b>	70071801	Tee	
<b>4</b>	70131901	Adapter	
<b>5</b>	70260101	Gas Valve Coil	24 Volt
<b>6</b>	M413650	Gas Valve Harness Assembly	
<b>7</b>	70260601	Valve Coil Bracket	
<b>8</b>	70457301P	N.G. Valve	Models through 12/31/13
	44154503	N.G. Valve	Models starting 1/1/14
	70457302P	L.P. Valve	Models through 12/31/13
	44154504	L.P. Valve	Models starting 1/1/14
<b>9</b>	431482	O-Ring	
<b>10</b>	431484	Screw	
<b>11</b>	70223501	Spud Adapter	
<b>12</b>	430497	Screw	
<b>13</b>	70233301	Gas Valve Bracket	
<b>14</b>	70457701	Valve Support Bracket	
<b>15</b>	23222	Screw	8 required
<b>16</b>	H86070034	Street Elbow	
<b>17</b>	70079601	Elbow	
<b>18</b>	70281603	Tube	
<b>19</b>	70233401	Gas Valve Cover	

**NOTE:** For CE gas and orifice information, refer to installation manual.

# Electric Heater Components

T30 Electric Models

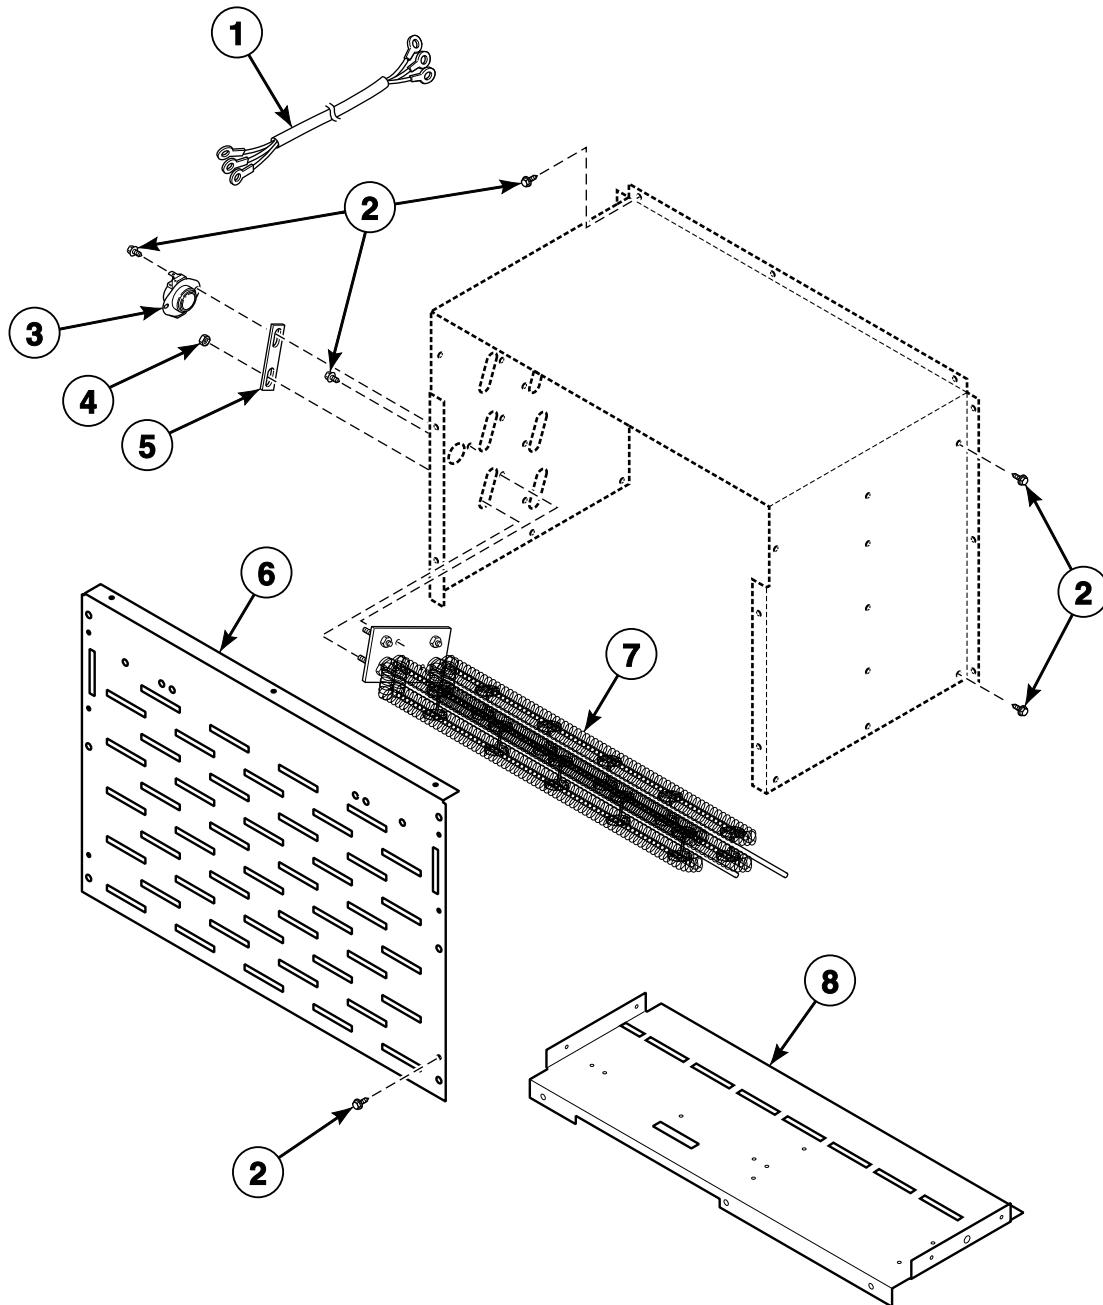


TMB3151P\_70304801

## Electric Heater Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70167901	Heater Cable Set Assembly	H1-H3
	70168001	Heater Cable Set Assembly	H4-H6; Models with 240 Volt and below
2	430497	Screw	
3	M410220	Limit Thermostat	
4	Q6163	Nut	
5	M400869	Jumper Strip	
6	70214901	Stove Grill	
7	70034401P	Heater Element	Classic Non-CE and non-Australian models; 3 required; 7 kW; 208 Volt heater element for 200-208 Volt/1 or 3 Phase
	70034402P	Heater Element	Classic models; 3 required; 7 kW; 220 Volt heater element for 380 and 440 Volt/3 Phase
	70034403P	Heater Element	Classic models; 3 required; 7 kW; 240 Volt heater element for 230-240 Volt/1 or 3 Phase and 400-415 and 460-480 Volt/3 Phase
	70034415P	Heater Element	Eco models; 3 required; 4 kW; 208 Volt heater element for 200-208 Volt/1 or 3 Phase
	70034414P	Heater Element	Eco models; 3 required; 4 kW; 220 Volt heater element for 380 and 440 Volt/3 Phase
8	70034416P	Heater Element	Eco models; 3 required; 4 kW; 240 Volt heater element for 230-240 Volt/1 or 3 Phase and 400-415 and 460-480 Volt/3 Phase
	70333501	Lower Stove Cover	

# Steam Heater Components

T30 Steam Models

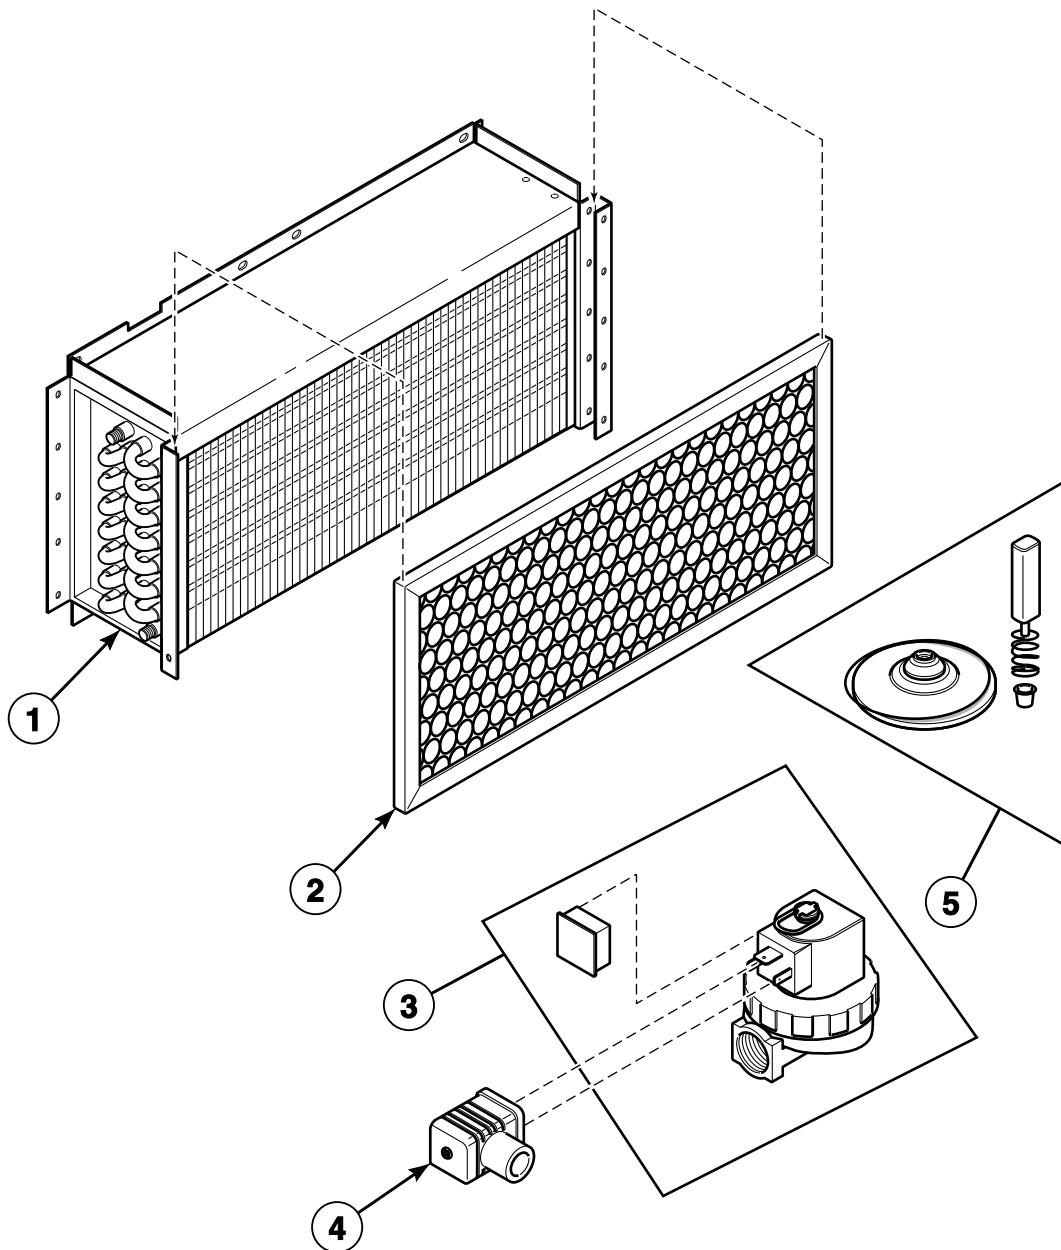


TMB3138P\_70304801

## Steam Heater Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M412997	Harness Assembly	
	F8382301	DIN Valve Adapter Kit	Use with F8322902 Steam Valve
	F8514801	Valve Coil	Use with F8322902 Steam Valve
1	70369101P	Steam Coil	4 coil
2	44172001	Filter	CE models
	70036001	Air Filter	All other models
3	F8521701	DIN Valve Kit	Parker; To replace 70351001 Steam Valve
	F8322902	Steam Valve	Asco
	70205701P	Steam Valve Coil	60 Hertz
	M412258	Steam Valve Coil	50 Hertz
4	70370301P	Solenoid Valve DIN Connector	
5	70351021P	Steam Valve Rebuild Kit	Parker; Use to rebuild 70351001P Steam Valve
	F8379502	Valve Rebuild Kit	Asco; Use to rebuild F8322902 Steam Valve

## Control Tray Harness - Gas Models

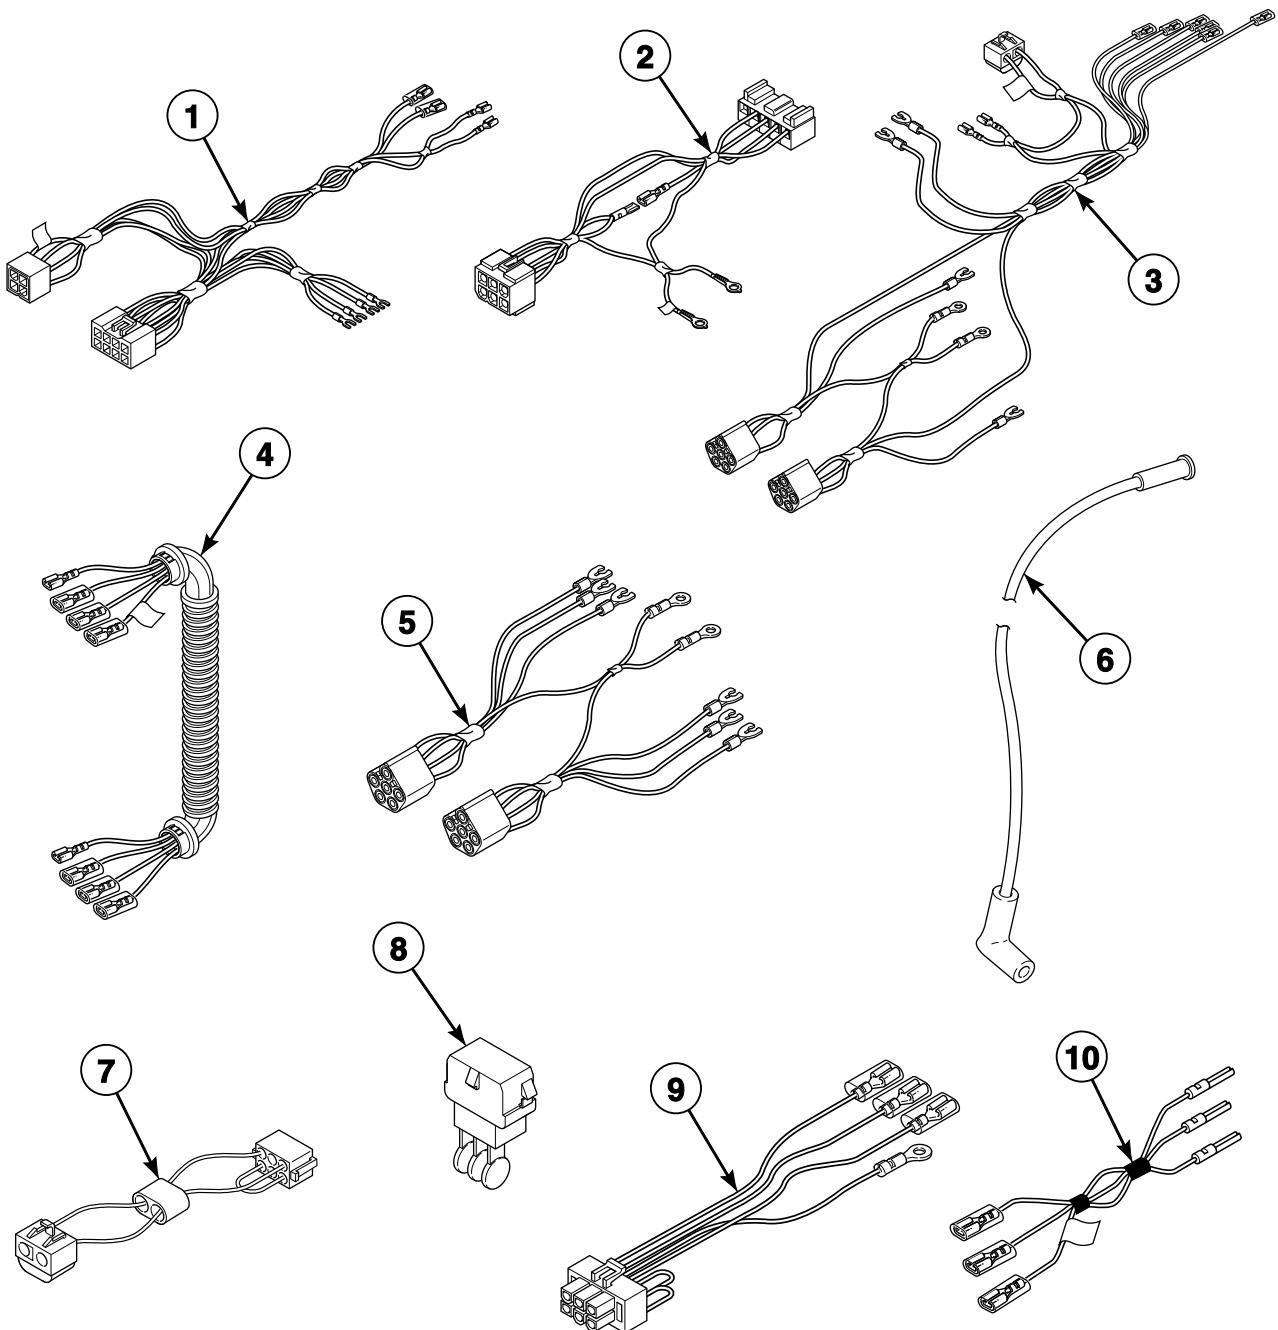


TMB3102P\_70304801

## Control Tray Harness - Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70315801	Junction Box Harness	Dual secondary
2	44186701	Ignition Control Harness	Non-CE models
	44136601P	Ignition Control Harness	CE models
3	70347701P	Power Harness	Models through 2/28/10; Contactor; 1 Phase
	70316101P	Power Harness	Non-CE models; Models through 2/28/10; 3 Phase models with less than 380 Volts
	70332201	Power Harness	Models through 2/28/10; 3 Phase models with 380 Volts or more
	70445501	Power Harness	Models starting 3/1/10; Contactor; 1 Phase
	70439001	Power Harness	Non-CE models; Models starting 3/1/10; 3 Phase models with less than 380 Volts
	70438901	Power Harness	Models starting 3/1/10; 3 Phase models with 380 Volts or more
4	70316201	Power Harness	Models through 2/28/10; Upper pocket to lower pocket
	70439501	Power Harness	Models starting 3/1/10; Upper pocket to lower pocket
5	70320201	Motor Contactor Harness	Models through 2/28/10; 3 Phase
	44142601P	Motor Contactor Harness	Models starting 3/1/10; 3 Phase
6	70323601	High Voltage Lead	Models through 9/16/12; Use with 70367301P or 70367401P Ignition Control
	44239701	High Voltage Suppression Cable	Models starting 9/17/12; Use with 70458601, 70458701 or 70483201 Ignition Control
7	M413505	Jumper Harness Assembly	Non-CE models; 208 Volt/60 Hertz/1 Phase and 240 Volt/60 Hertz/1 Phase
	M413507	Jumper Configuration Assembly	CE models; Non-CE models with 230-240 Volt/50 Hertz/1 Phase, 200-208, 240 Volt/60 Hertz/3 Phase and 230-240 Volt/50 Hertz/3 Phase models with less than 380 Volts
	M413506	Jumper Harness Assembly	Non-CE models; 100, 200, 220 Volt/60 Hertz/1 Phase, 100, 200 Volt/50 Hertz/1 Phase and 200 Volt/50 Hertz/3 Phase models with less than 380 Volts
	M413508	Jumper Harness Assembly	Non-CE models with 380, 400-415 Volt/50 Hertz/3 Phase models with 380 Volts or more; CE 3 Phase models with 380 Volts or more
	M413510	Jumper Configuration Assembly	Non-CE models; 460-480 Volt/60 Hertz/3 Phase models with 380 Volts or more
8	M413863	Network Capacitor Assembly	3L, 3O, 3V and 3X control suffixes
9	M413878	Network Capacitor Harness Assembly	Models through 7/8/12; 3L, 3O, 3V and 3X control suffixes
	44143401P	Network Capacitor Harness Assembly	Models starting 7/9/12; Also order 00177 Male Tab Terminal; 3L, 3O, 3V and 3X control suffixes
10	70342101	Gas Disconnect Harness	CE models; Models through 2/28/10; Upper pocket
	70440501	Gas Disconnect Harness	CE models; Models starting 3/1/10; Upper pocket

## Control Tray Components - Non-CE and Non-Australian Gas Models (Drawing 1 of 2)

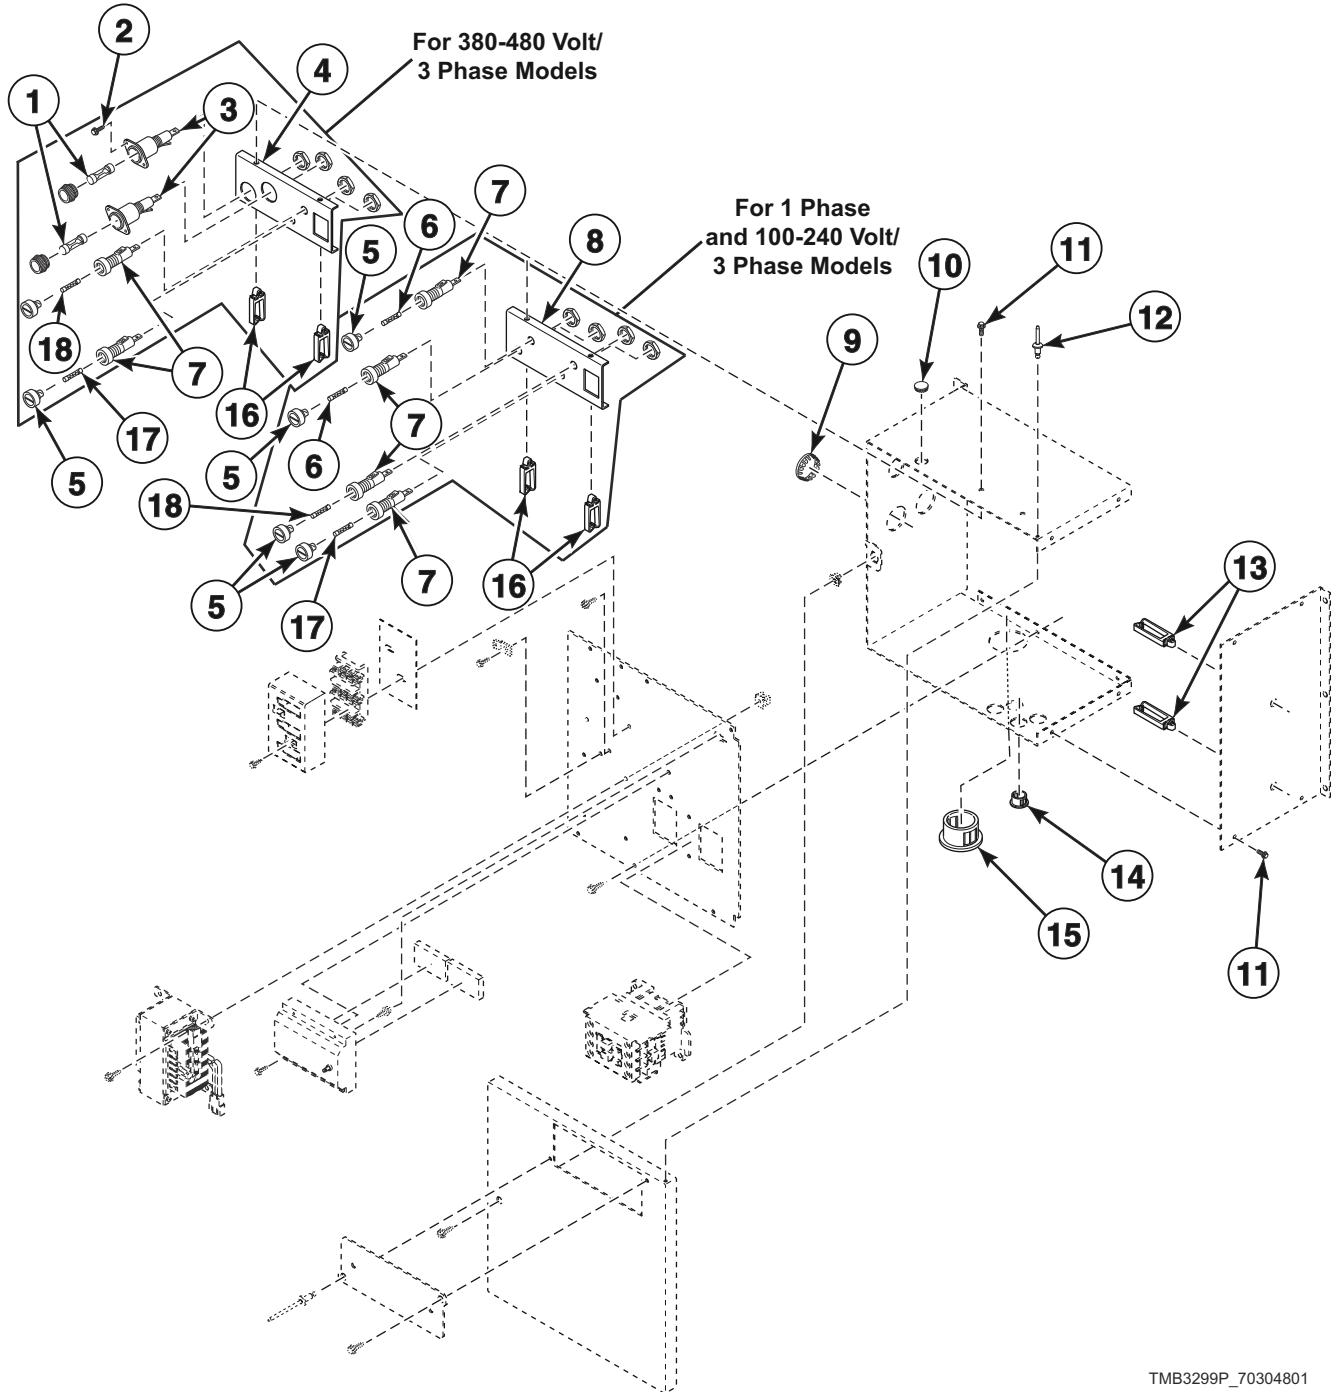


TMB3299P\_70304801

## Control Tray Components - Non-CE and Non-Australian Gas Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413621	Fuse	2 required; 3 Phase models with 380 Volts or more
2	501086	Screw	4 required; 3 Phase models with 380 Volts or more
3	M413544P	Fuse Holder	2 required; 3 Phase models with 380 Volts or more; Models through 2/28/10
	44155601P	Fuse Holder	2 required; 3 Phase models with 380 Volts or more; Models starting 3/1/10
4	70313601	Fuse Bracket	3 Phase models with 380 Volts or more; Models through 2/28/10
	70313602	Fuse Bracket	3 Phase models with 380 Volts or more; Models starting 3/1/10
5	70329501	Fuse Holder Cap	3 required 1 Phase models; 4 required 3 Phase models with less than 380 Volts; 2 required 3 Phase models with 380 Volts or more
6	70406701	Fuse	1 required for 1 Phase; 2 required for 3 Phase models with less than 380 Volts; 2 Amp
7	70329401P	Fuse Holder Body	3 required 1 Phase models; 4 required 3 Phase models with less than 380 Volts; 2 required 3 Phase models with 380 Volts or more
8	70306901	Fuse Bracket	1 Phase and 3 Phase models with less than 380 Volts
9	M400985	Plug	2 required
10	M406124	Bushing	
11	51780	Screw	11 required
12	70058502	Pop Rivet	2 required
13	70366201	Wire Clip	3 required
14	70178701	Snap Bushing	Models with 3L, BL, KL, LL or WL control suffixes
15	M402542	Snap Bushing	
16	70347601	Wire Clip	2 required
17	70406601	Fuse	3.5 Amp
18	70406501	Fuse	1.25 Amp

## Control Tray Components - Non-CE and Non-Australian Gas Models (Drawing 2 of 2)

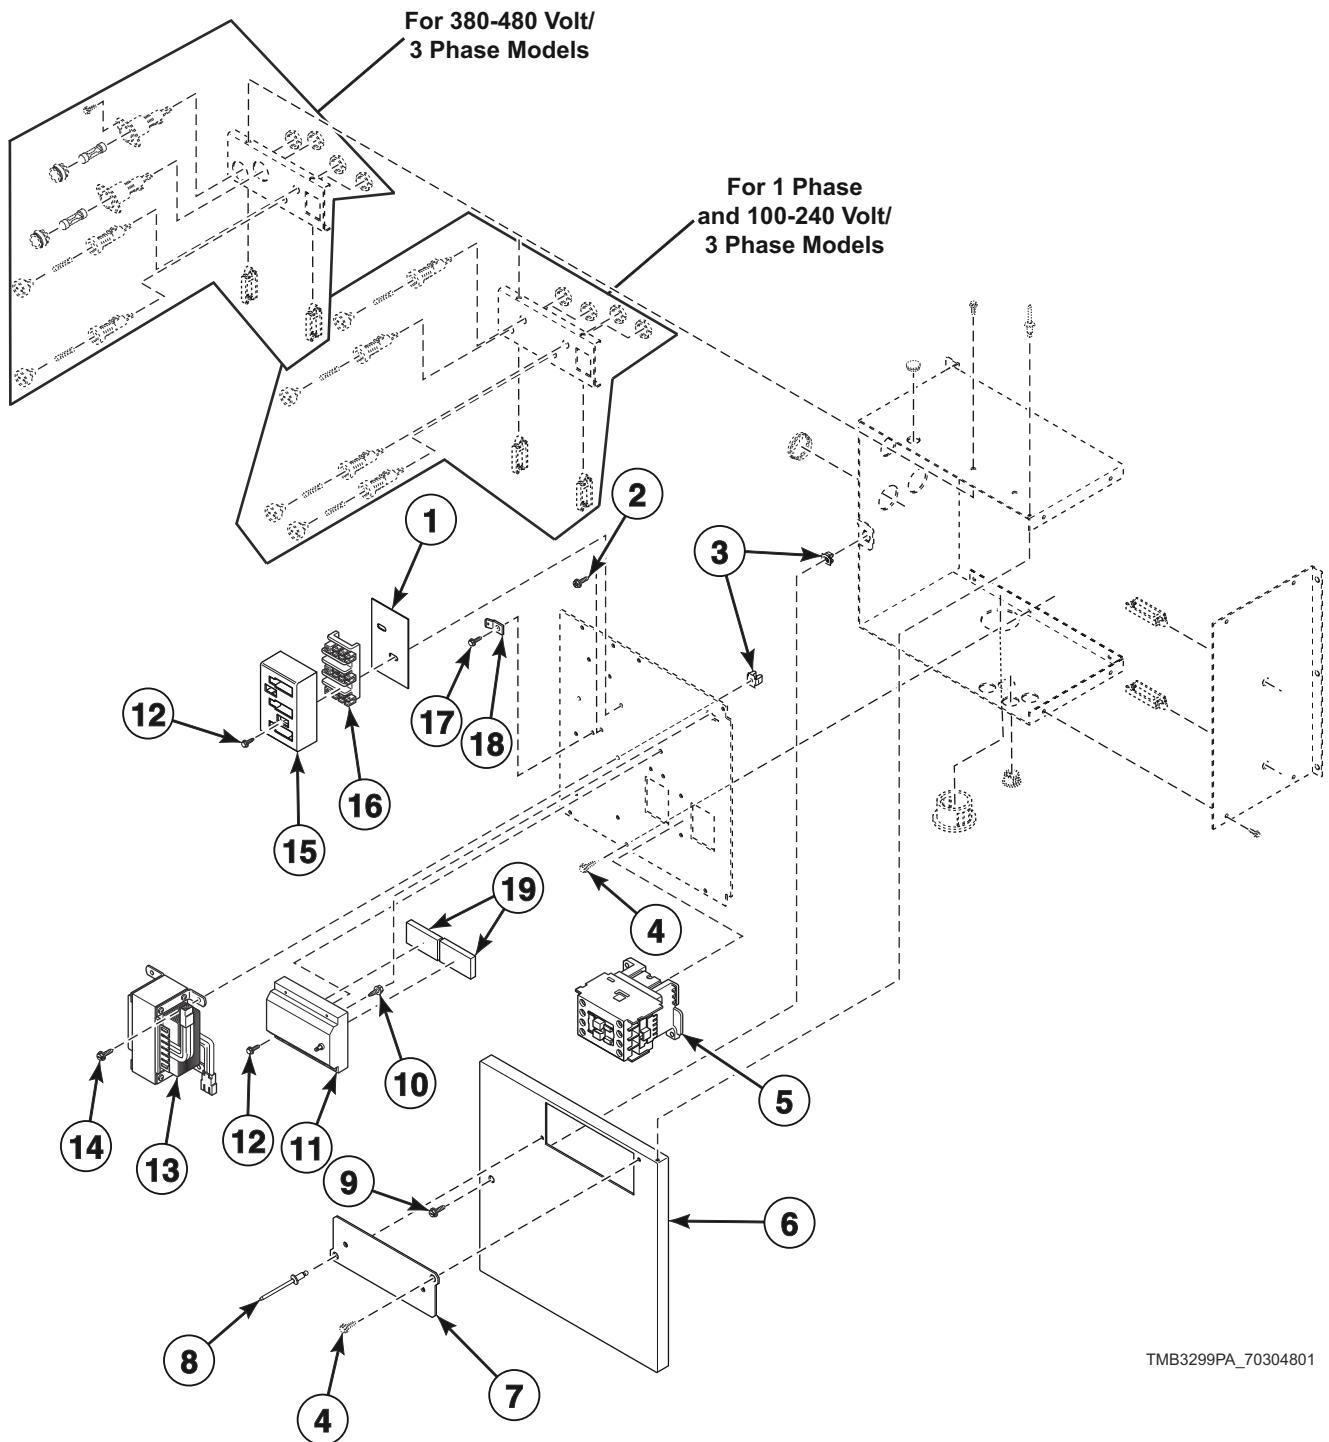


TMB3299PA\_70304801

## Control Tray Components - Non-CE and Non-Australian Gas Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413862	Insulator	
2	M402917	Screw	
3	70030501	Expansion Clip	5 required
4	51780	Screw	11 required
5	70323701P	Contactor	24 Volt
6	70313401	Contactor Box Cover	
7	70313301	Fuse Cover	
8	70058501	Pop Rivet	
9	33562	Screw	
10	38272	Screw	
11	70492501	Ignition Control Kit	Models through 9/16/12; Use with 44239701 High Voltage Suppression Cable
	70458601P	Ignition Control	Models starting 9/17/12; Use with 44239701 High Voltage Suppression Cable
12	44083001	Screw	2 required; Models through 9/16/12
	51783	Screw	2 required; Models starting 9/17/12
13	M414228P	Transformer	Multitap; 100, 200, 220 Volt/60 Hertz/1 Phase, 100, 200 Volt/50 Hertz/1 Phase and 230-240 Volt/50 Hertz/1 Phase models with 3L, 3O, 3V, 3X, LC, LL, LX, LY, NC, NJ, NR, NX, NY, WC, WL, WX, WY, ZC, ZR, ZX and ZY control suffixes; 3 Phase models with less than 380 Volts
	M414230P	Transformer	208-240 Volt/60 Hertz/1 Phase models with QT and SD control suffixes; 120, 208-240 Volt/60 Hertz/1 Phase models QT and SD control suffixes
	M414312P	Transformer	208-240 Volt/60 Hertz/1 Phase 3L, 3O, 3V, 3X, BC, BG, BL, BX, BY, LC, LL, LX, LY, NC, NJ, NR, NX, NY, WC, WL, WX, WY, ZC, ZR, ZX and ZY control suffixes
	M414229P	Transformer	Multitap; 3 Phase models with 380 Volts or more
14	M411072	Screw	4 required
15	70333001	Terminal Block Shield	
16	430642	Terminal Block	
17	430497	Screw	
18	00177	Male Tab Terminal	Ground
19	56128	Bumper Pad	2 required

# Control Tray Components - CE and Australian Gas Models

## (Drawing 1 of 2)

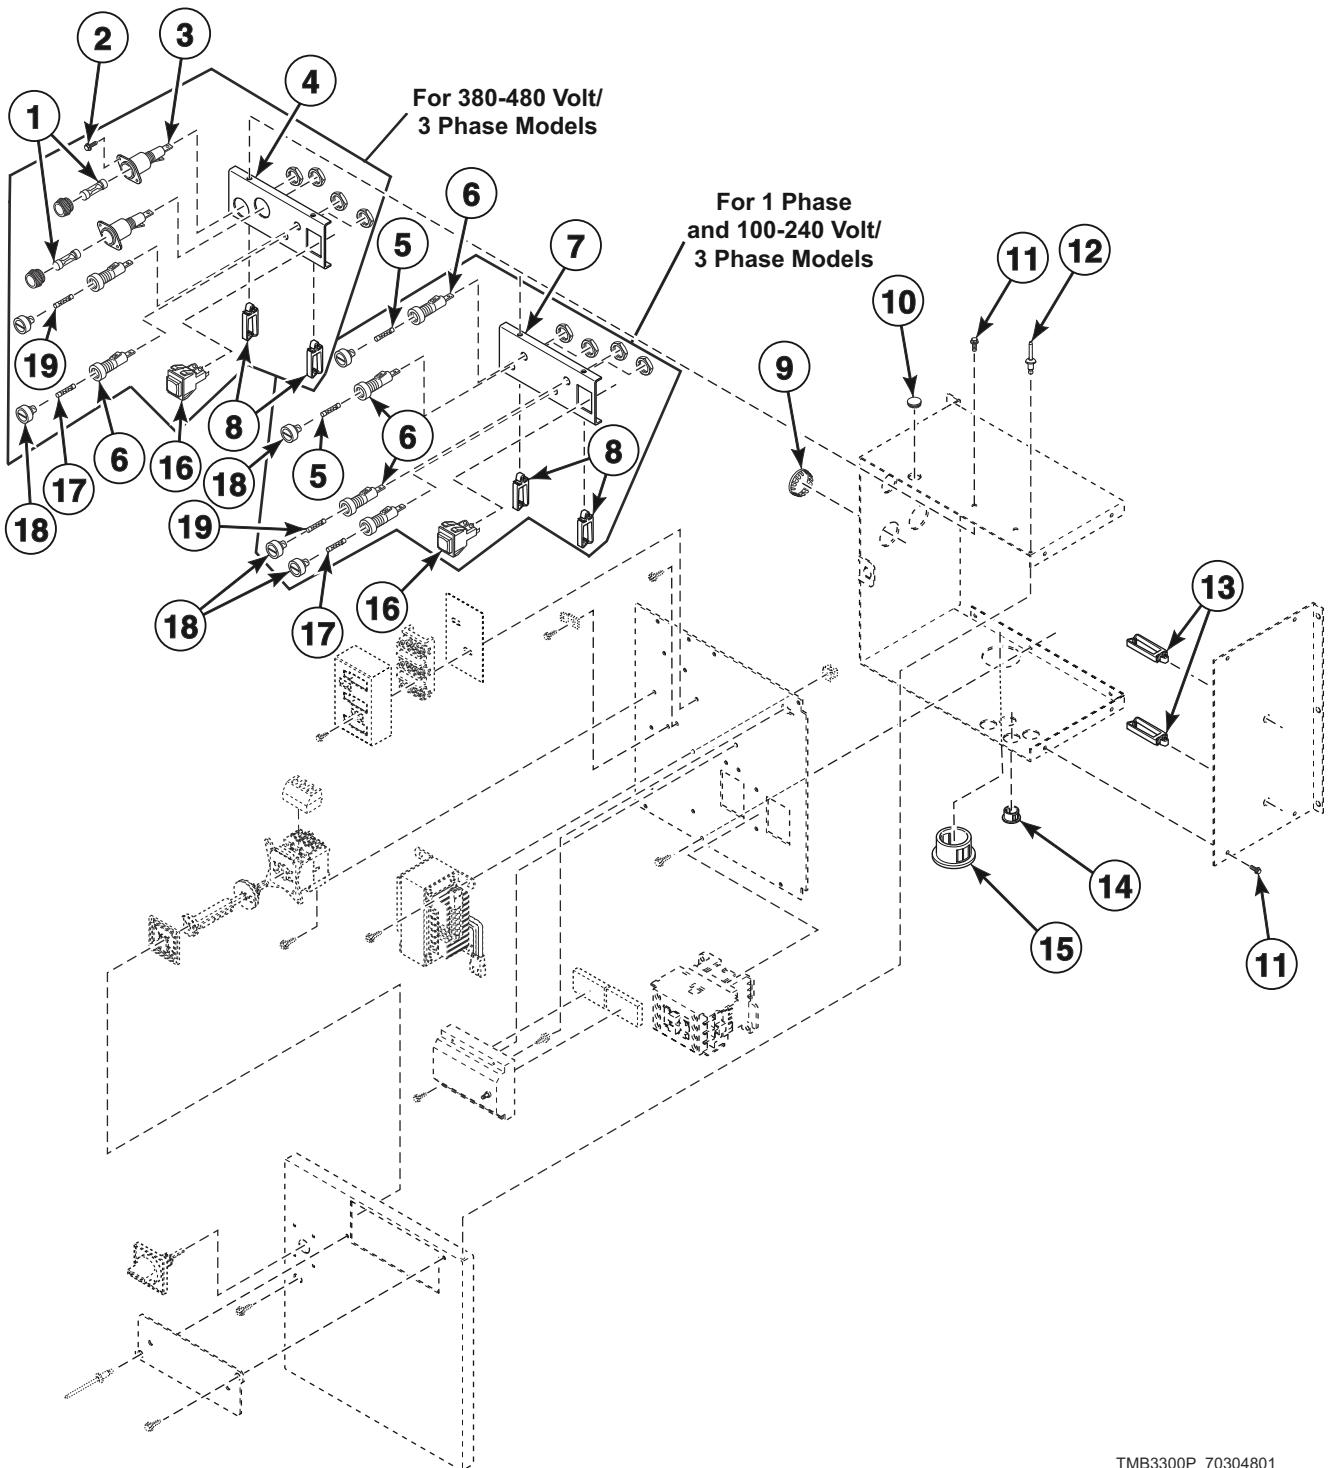


TMB3300P\_70304801

# Control Tray Components - CE and Australian Gas Models

## (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413621	Fuse	2 required for 3 Phase models with 380 Volts or more
2	501086	Screw	3 Phase models with 380 Volts or more
3	M413544P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models starting 3/1/10
4	70313601	Fuse Bracket	3 Phase models with 380 Volts or more; Models through 2/28/10
	70313602	Fuse Bracket	3 Phase models with 380 Volts or more; Models starting 3/1/10
5	70406701	Fuse	1 required 1 Phase models; 2 required 3 Phase models with less than 380 Volts; 2 Amp
6	70329401P	Fuse Holder Body	3 required 1 Phase models; 4 required 3 Phase models with less than 380 Volts; 2 required 3 Phase models with 380 Volts or more
7	70306901	Fuse Bracket	1 Phase and 3 Phase models with less than 380 Volts
8	70347601	Wire Clip	2 required
9	M400985	Plug	2 required
10	M406124	Bushing	
11	51780	Screw	11 required
12	70058502	Pop Rivet	2 required
13	70366201	Wire Clip	3 required
14	70178701	Snap Bushing	Models with 3L, BL, KL, LL and WL control suffixes
15	M402542	Snap Bushing	
16	M413431	Pushbutton Switch	
17	70406601	Fuse	3.5 Amp
18	70329501	Fuse Holder Cap	3 required 1 Phase models; 4 required 3 Phase models with less than 380 Volts; 2 required 3 Phase models with 380 Volts or more
19	70406501	Fuse	1.25 Amp


## Control Tray Components - CE and Australian Gas Models (Drawing 2 of 2)

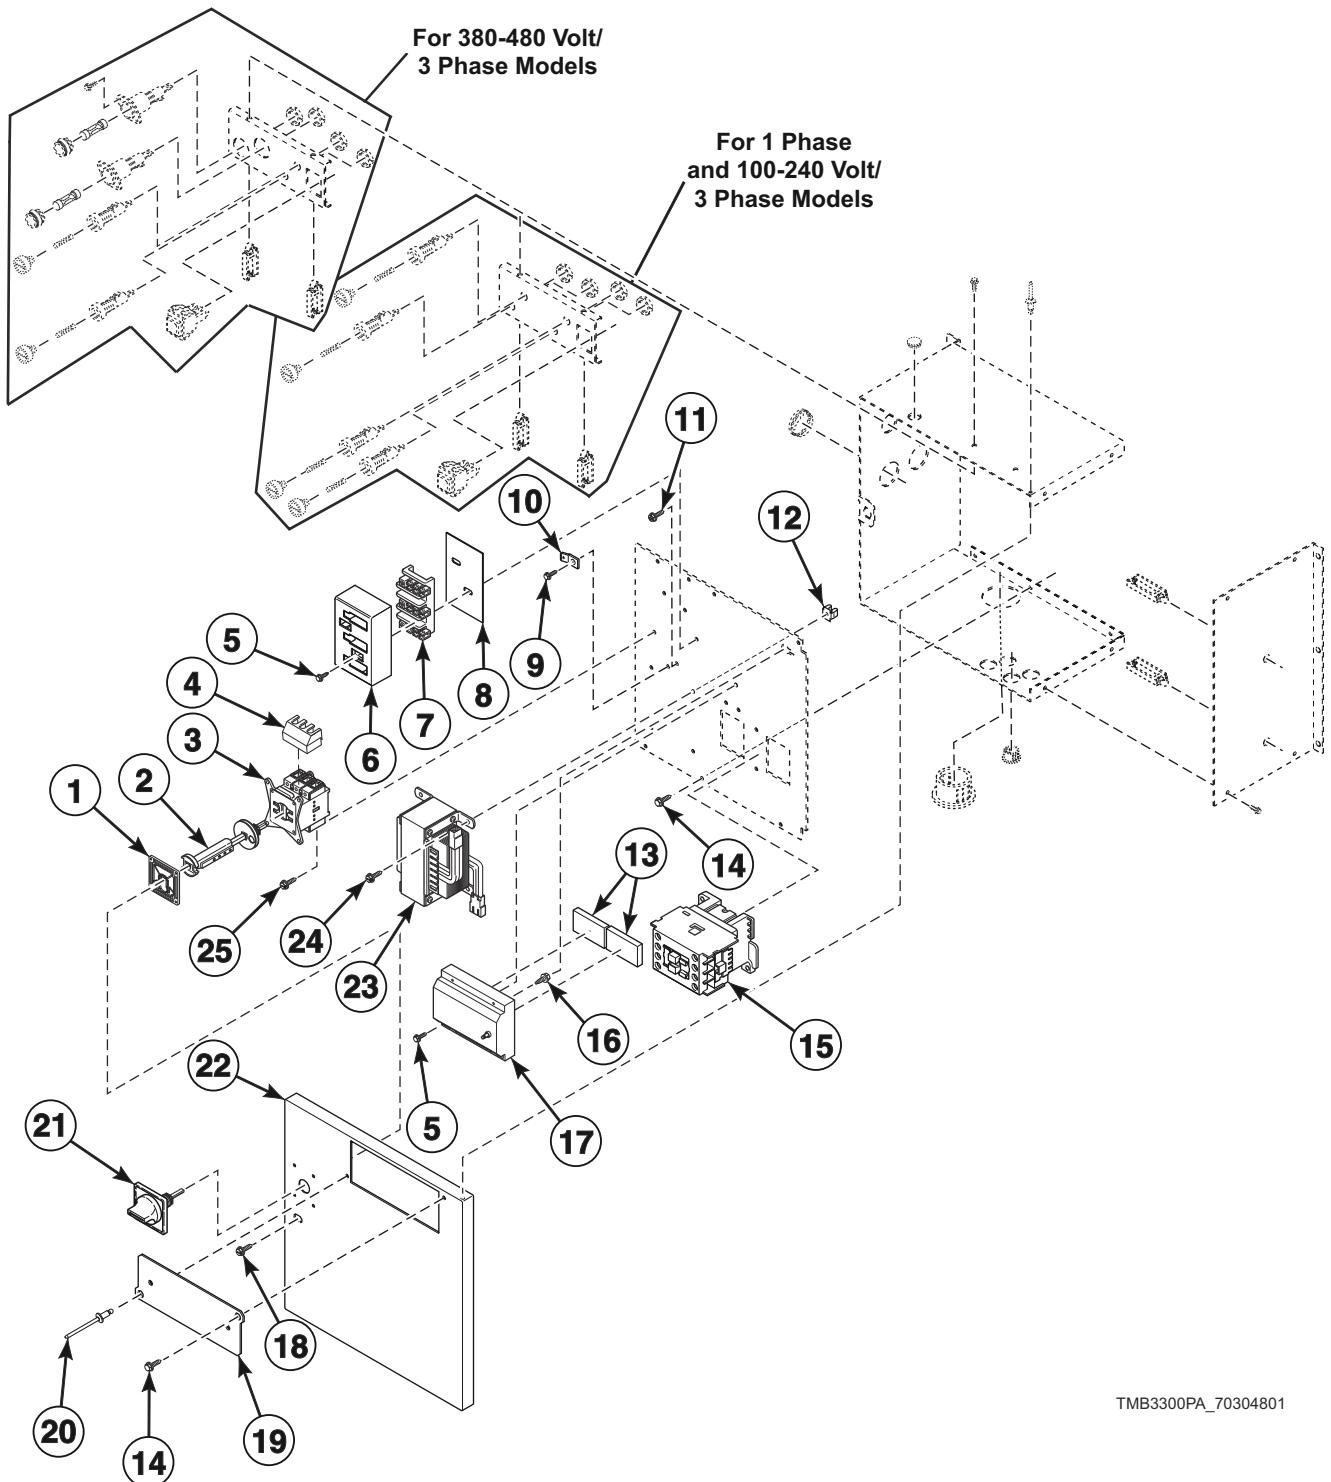

## Control Tray Components - CE and Australian Gas Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	70411001	ICM Reset Label	Ignition control
1	M412368	Door Interlock	Upper pocket; Models through 7/31/11
2	70342501P	Extension Handle	Upper pocket; Models through 7/31/11
3	M412187P	Mounting Switch Base	Upper pocket; Models through 7/31/11
4	M412366	Finger Guard	Upper pocket; Models through 7/31/11
5	44083001	Screw	2 required; Models through 9/16/12
	51783	Screw	2 required; Models starting 9/17/12
6	70333001	Terminal Block Shield	
7	430642	Terminal Block	
8	M413862	Insulator	
9	430497	Screw	
10	00177	Male Tab Terminal	Ground
11	M402917	Screw	
12	70030501	Expansion Clip	
13	56128	Bumper Pad	2 required
14	51780	Screw	11 required
15	70323701P	Contactor	
16	38272	Screw	
17	70492601	Ignition Control Kit	CE models through 1/16/13; Australian models through 1/16/13 and starting again 4/1/13 through 7/31/13; Use with 44239701 High Voltage Suppression Cable
	70483201P	Ignition Control	CE models starting 1/17/13; Australian models starting 1/17/13 through 3/31/13 and starting again 8/1/13; Use with 44239701 High Voltage Suppression Cable
18	33562	Screw	Lower pocket
19	70313301	Fuse Cover	
20	70058501	Pop Rivet	
21	M412208	Handle	Upper pocket; Models through 7/31/11
22	70313402	Contactor Box Cover	
23	M414228P	Transformer	Multitap; 1 Phase and 3 Phase models with less than 380 Volts
	M414229P	Transformer	Multitap; 3 Phase models with 380 Volts or more
24	M411072	Screw	4 required
25	51782	Screw	2 required; Upper pocket

## Control Tray Harnesses - Steam Models

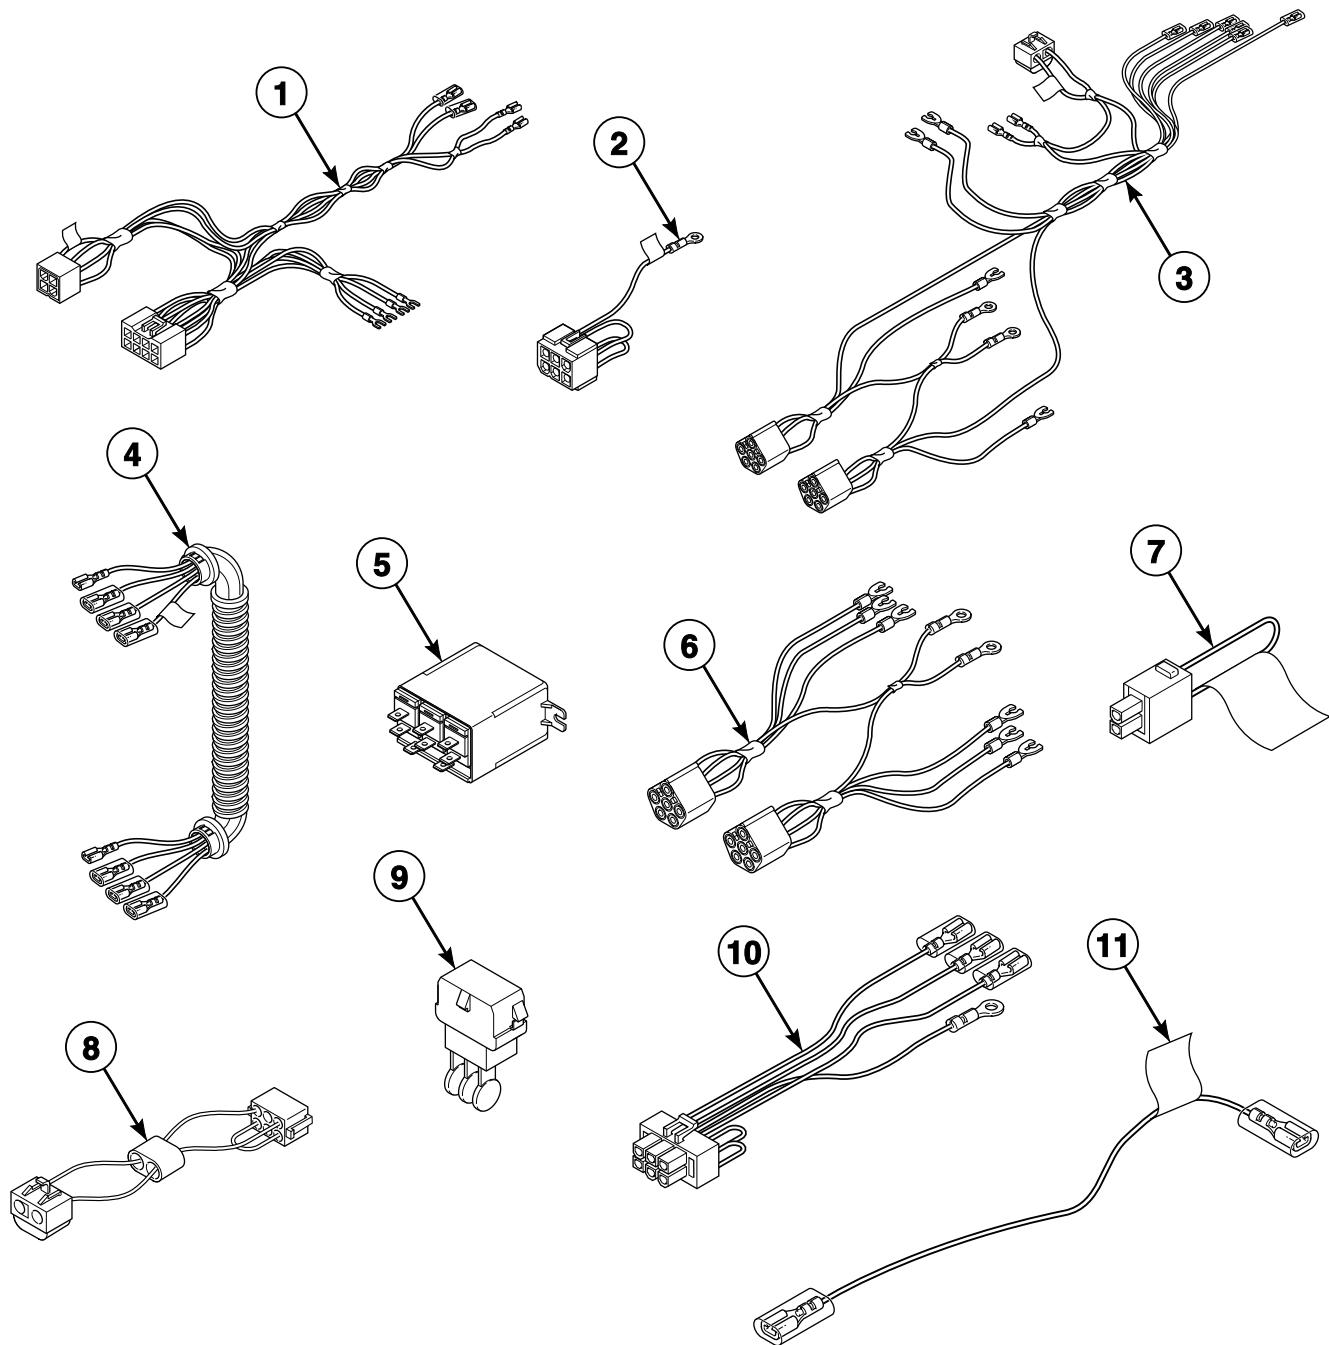


TMB2792P\_70304801

## Control Tray Harnesses - Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70315801	Junction Box Harness	Dual secondary
2	70322401P	Steam Configuration Harness	
3	70347701P	Power Harness	Models through 2/28/10; Contactor; 1 Phase
	70316101P	Power Harness	CE models; Models through 2/28/10; 3 Phase models with less than 380 Volts
	70332201	Power Harness	Models through 2/28/10; 3 Phase models with 380 Volts or more
	70445501	Power Harness	Models starting 3/1/10; Contactor; 1 Phase
	70439001	Power Harness	CE models; Models starting 3/1/10; 3 Phase models with less than 380 Volts
	70438901	Power Harness	Models starting 3/1/10; 3 Phase models with 380 Volts or more
4	70316201	Power Harness	Models through 2/28/10; Upper pocket to lower pocket
	70439501	Power Harness	Models starting 3/1/10; Upper pocket to lower pocket
5	70210901P	Relay	Non-CE models; 1 Phase
6	70320201	Motor Contactor Harness	Models through 2/28/10; 3 Phase models with 380 Volts or more
	44142601P	Motor Contactor Harness	Models starting 3/1/10; 3 Phase models with 380 Volts or more
7	70316601	Stove Limit Bypass Harness	
8	M413505	Jumper Harness Assembly	Non-CE models; 208 Volt/60 Hertz/1 Phase and 240 Volt/60 Hertz/1 Phase
	M413507	Jumper Configuration Assembly	CE models with less than 380 Volts; Non-CE models with 230-240 Volt/50 Hertz/1 Phase and 3 Phase models with less than 380 Volts
	M413508	Jumper Harness Assembly	Non-CE models with 100, 200, 220 Volt/60 Hertz/1 Phase, 100, 200 Volt/50 Hertz/1 Phase and 3 Phase models with less than 380 Volts; CE models with 380 Volts or more
	M413510	Jumper Configuration Assembly	Non-CE models; 460-480 Volt/60 Hertz/3 Phase
9	M413863	Network Capacitor Assembly	3L, 3O, 3V and 3X control suffixes
10	M413878	Network Capacitor Harness Assembly	Models through 7/8/12; 3L, 3O, 3V and 3X control suffixes
	44143401P	Network Capacitor Harness Assembly	Models starting 7/9/12; Also order 00177 Male Tab Terminal; 3L, 3O, 3V and 3X control suffixes
11	70389901	Steam Stove Limit Bypass Harness	

## Control Tray Components - Non-CE Steam Models

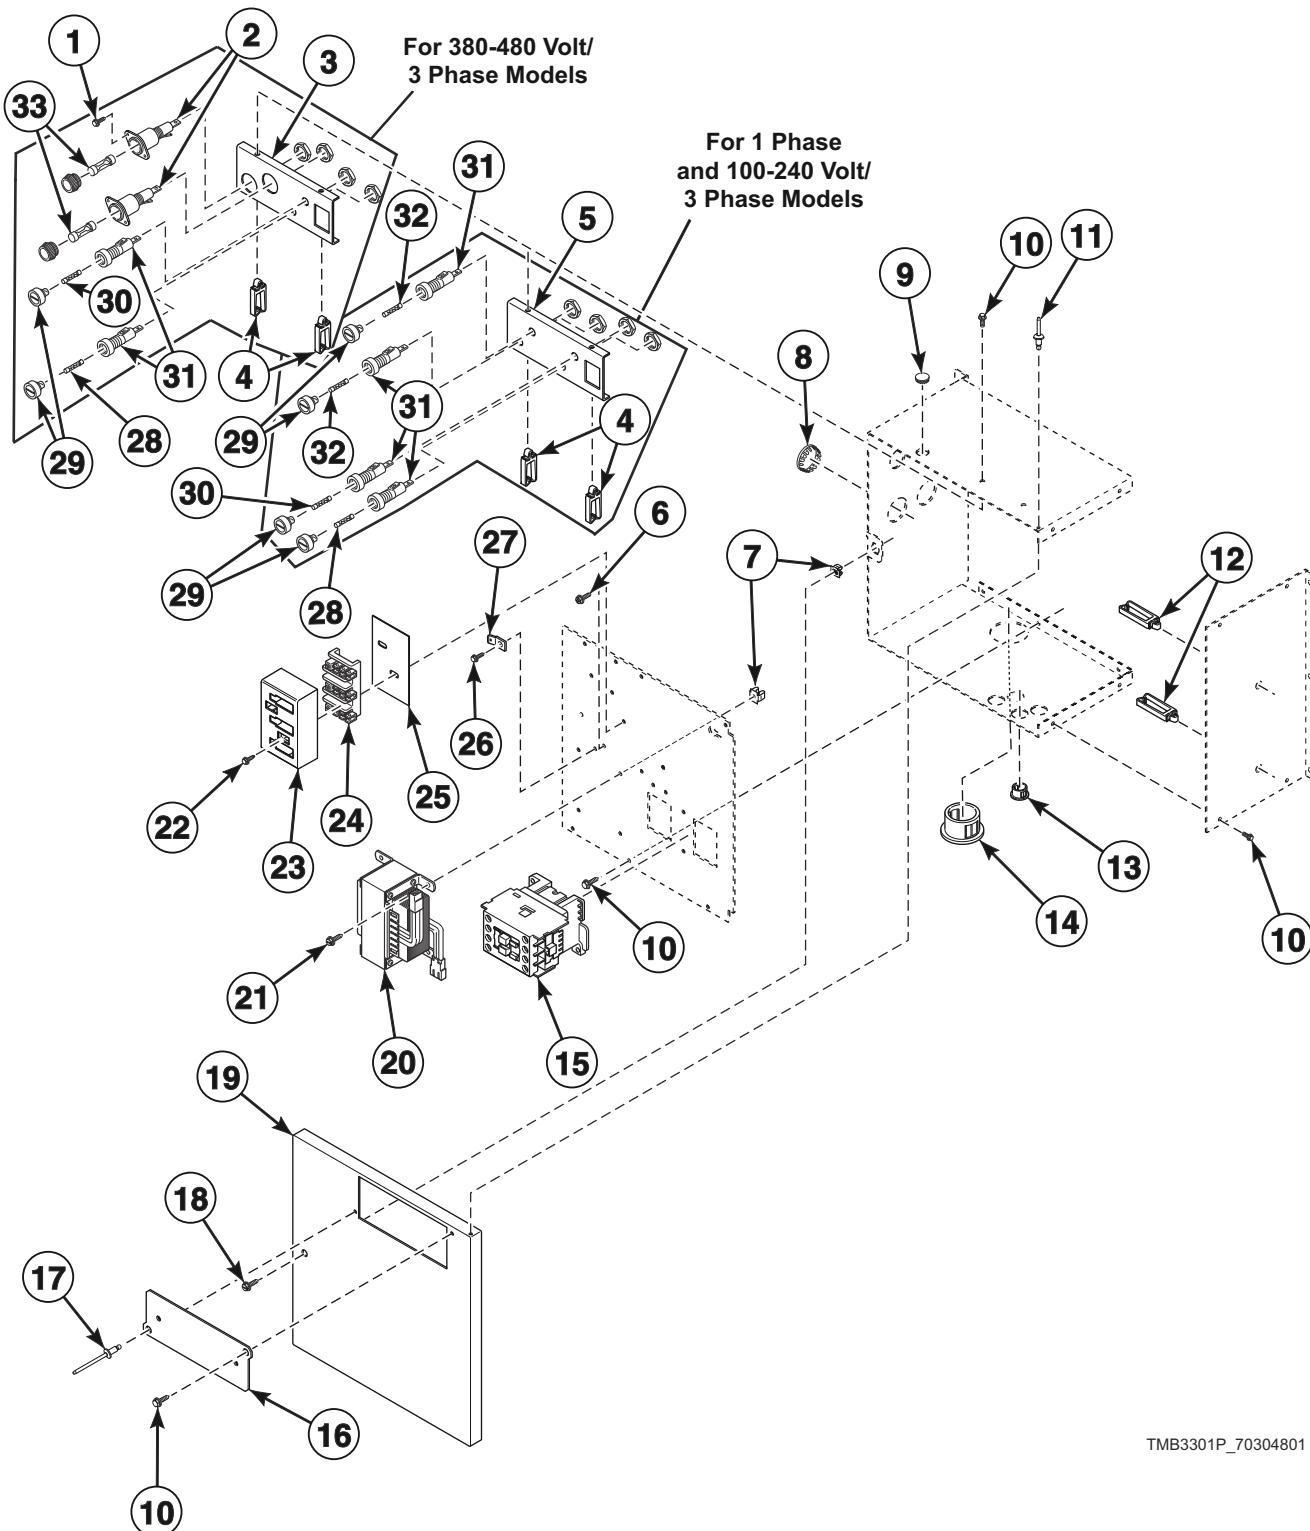


TMB3301P 70304801

## Control Tray Components - Non-CE Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	501086	Screw	4 required for models with 380 Volts or more
2	M413544P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models starting 3/1/10
3	70313601	Fuse Bracket	3 Phase models with 380 Volts or more; Models through 2/28/10
	70313602	Fuse Bracket	3 Phase models with 380 Volts or more; Models starting 3/1/10
4	70347601	Wire Clip	2 required
5	70306901	Fuse Bracket	
6	M402917	Screw	
7	70030501	Expansion Clip	5 required
8	M400985	Plug	2 required
9	44024202	Hole Plug	
10	51780	Screw	11 required
11	70058502	Pop Rivet	2 required
12	70366201	Wire Clip	3 required
13	70178701	Snap Bushing	Models with 3L, BL, KL, LL and WL control suffixes
14	M402542	Snap Bushing	
15	70323701P	Contactor	
16	70313301	Fuse Cover	
17	70058501	Pop Rivet	
18	33562	Screw	
19	70313401	Contactor Box Cover	
20	M414312P	Transformer	Dual secondary: 120, 208-240 Volt/60 Hertz/1 Phase models with 3L, 3O, 3V, 3X, BC, BG, BL, BX, BY, LC, LX, LY, NC, NJ, NR, NX, NY, WC, WX, WY, ZC, ZR, ZX and ZY control suffixes
	M414230P	Transformer	Primary/secondary; 120, 208-240 Volt/60 Hertz/1 Phase models with QT and SD control suffixes
	M414228P	Transformer	Multitap; All other 1 Phase models; 3 Phase models with less than 380 Volts
	M414229P	Transformer	Multitap; 3 Phase models with 380 Volts or more
	44074401	Transformer	Dual secondary; 440 Volt/60 Hertz/3 Phase
21	M411072	Screw	4 required
22	51783	Screw	2 required
23	70333001	Terminal Block Shield	
24	430642	Terminal Block	
25	M413862	Insulator	
26	430497	Screw	
27	00177	Male Tab Terminal	Ground
28	70406601	Fuse	3.5 Amp
29	70329501	Fuse Holder Cap	3 required 1 Phase models; 4 required 3 Phase models with less than 380 Volts; 2 required 3 Phase models with 380 Volts or more
30	70406501	Fuse	1.25 Amp
31	70329401P	Fuse Holder Body	3 required 1 Phase models; 4 required 3 Phase models with less than 380 Volts; 2 required 3 Phase models with 380 Volts or more
32	70406701	Fuse	2 Amp
33	M413621	Fuse	2 required for models with 380 Volts or more

## Control Tray Components - CE Steam Models

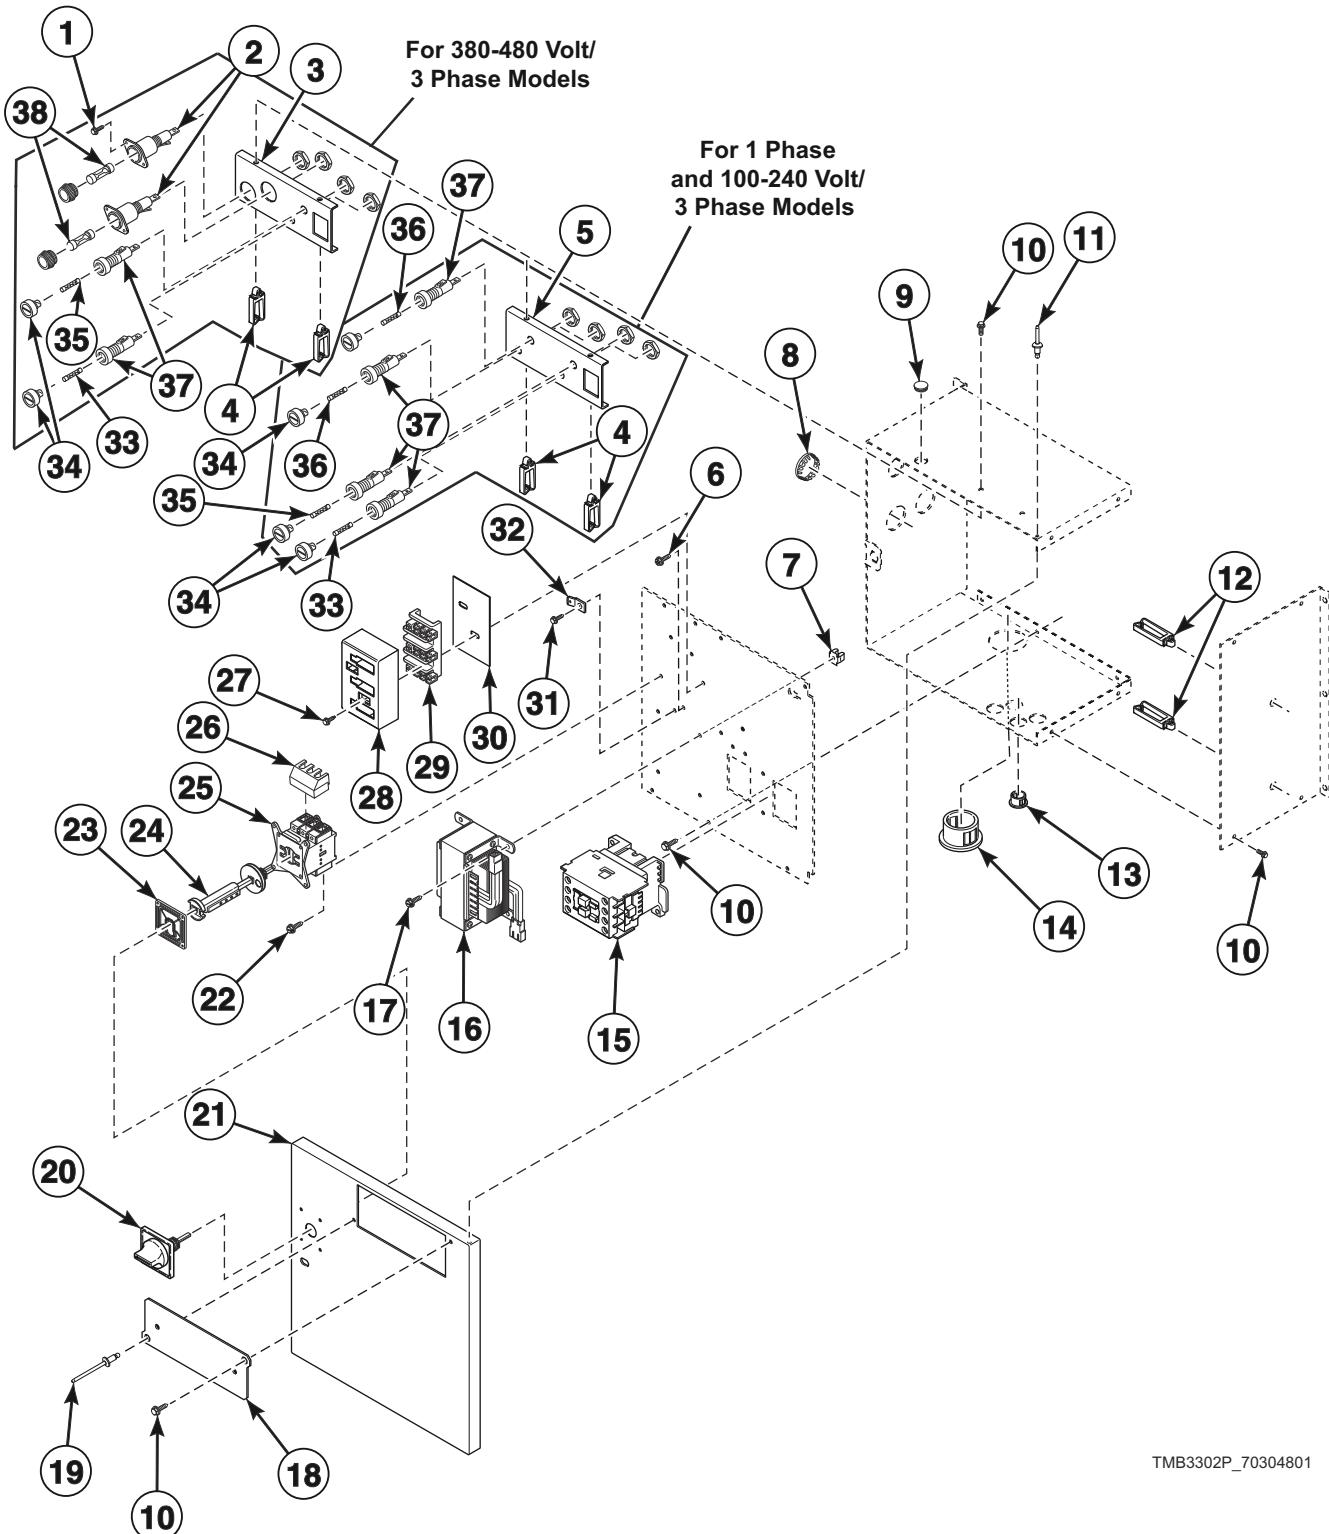


TMB3302P\_70304801

## Control Tray Components - CE Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	501086	Screw	4 required; Models with 380 Volts or more
2	M413544P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models starting 3/1/10
3	70313601	Fuse Bracket	3 Phase models with 380 Volts or more; Models through 2/28/10
	70313602	Fuse Bracket	3 Phase models with 380 Volts or more; Models starting 3/1/10
4	70347601	Wire Clip	2 required
5	70306901	Fuse Bracket	Models with less than 380 Volts
6	M402917	Screw	
7	70030501	Expansion Clip	
8	M400985	Plug	2 required
9	44024202	Hole Plug	
10	51780	Screw	11 required
11	70058502	Pop Rivet	2 required
12	70366201	Wire Clip	4 required
13	70178701	Snap Bushing	Models with 3L, BL, KL, LL and WL control suffixes
14	M402542	Snap Bushing	
15	70323701P	Contactor	24 Volt
16	M414228P	Transformer	Multitap; Models with less than 380 Volts
	M414229P	Transformer	Multitap; Models with 380 Volts or more
	44074401	Transformer	Dual secondary; 440 Volt/60 Hertz/3 Phase
17	M411072	Screw	4 required
18	70313301	Fuse Cover	3 required
19	70058501	Pop Rivet	
20	M412208	Handle	Upper pocket; Models through 7/31/11
21	70313402	Contactor Box Cover	
22	51782	Screw	2 required; Upper pocket
23	M412368	Door Interlock	Upper pocket; Models through 7/31/11
24	70342501P	Extension Handle	Upper pocket; Models through 7/31/11
25	M412187P	Mounting Switch Base	Upper pocket; Models through 7/31/11
26	M412366	Finger Guard	Upper pocket; Models through 7/31/11
27	51783	Screw	2 required
28	70333001	Terminal Block Shield	
29	430642	Terminal Block	
30	M413862	Insulator	
31	430497	Screw	3 required
32	00177	Male Tab Terminal	Ground
33	70406601	Fuse	3.5 Amp
34	70329501	Fuse Holder Cap	3 required 1 Phase models; 4 required 3 Phase models with less than 380 Volts; 2 required 3 Phase models with more than 380 Volts
35	70406501	Fuse	1.25 Amp
36	70406701	Fuse	Models with less than 380 Volts; 2 Amp
37	70329401P	Fuse Holder Body	3 required 1 Phase models; 4 required 3 Phase models with less than 380 Volts; 2 required 3 Phase models with more than 380 Volts
38	M413621	Fuse	2 required; Models with 380 Volts or more

## Accessory Box Harnesses - Electric Models

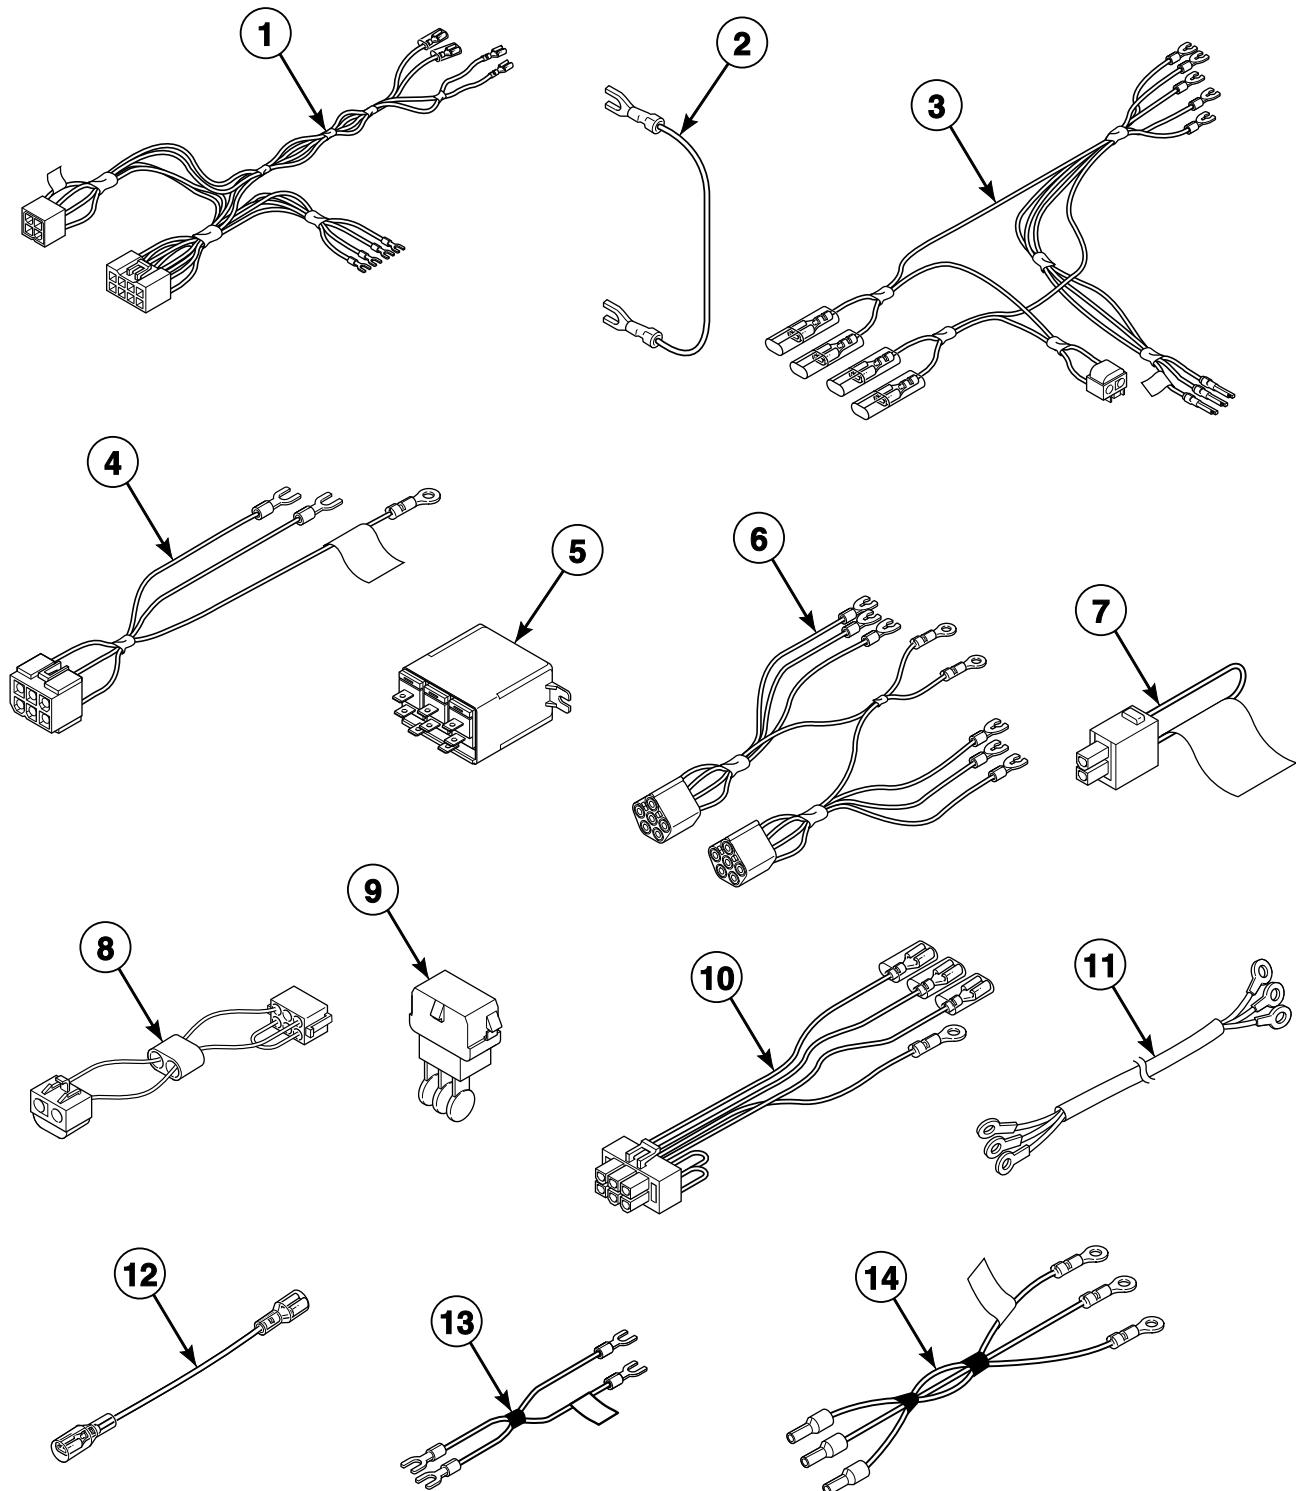


TMB2793P\_70304801

## Accessory Box Harnesses - Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70315801	Junction Box Harness	Dual secondary
2	M413933	Jumper Cable Assembly	Non-CE and CE models; Non-CE models require 3; 7.5 inches
	M414121	Jumper Cable Assembly	CE models; 3 required
3	70357401	Power Harness	Models through 2/28/10; Models with less than 380 Volts
	70357501	Power Harness	Models through 2/28/10; Models with 380 Volts or more
	70439401	Power Harness	Models starting 3/1/10; Models with less than 380 Volts
	70439301	Power Harness	Models starting 3/1/10; Models with 380 Volts or more
4	70357601P	Electric Configuration Harness	
5	70210901P	Relay	Non-CE models; 1 Phase
6	70320201	Motor Contactor Harness	Models through 2/28/10; 3 Phase
	44142601P	Motor Contactor Harness	Models starting 3/1/10; 3 Phase
7	70316601	Stove Limit Bypass Harness	
8	M413505	Jumper Harness Assembly	Non-CE models; 208 Volt/60 Hertz/1 Phase and 240 Volt/60 Hertz/1 Phase
	M413506	Jumper Harness Assembly	Non-CE models; 200-208 Volt/60 Hertz/3 Phase and 200 Volt/50 Hertz/3 Phase
	M413507	Jumper Configuration Assembly	Non-CE models; 240 Volt/60 Hertz/3 Phase and 240 Volt/50 Hertz/3 Phase
	M413508	Jumper Harness Assembly	380 Volt/50 Hertz/3 Phase
	M413509	Jumper Harness Assembly	400-415 Volt/50 Hertz/3 Phase
	M413510	Jumper Configuration Assembly	Non-CE models; 460-480 Volt/60 Hertz/3 Phase
9	M413863	Network Capacitor Assembly	3L, 3O, 3V and 3X control suffixes
10	70286501	Network Capacitor Harness Assembly	Models through 7/8/12; 3L, 3O, 3V and 3X control suffixes
	44152001	Network Capacitor Harness Assembly	Models starting 7/9/12; 3L, 3O, 3V and 3X control suffixes
11	70167901	Heater Cable Set Assembly	H1-H3
	70168001	Heater Cable Set Assembly	H4-H6; Non-CE models; Models with less than 380 Volts
12	70139001	Jumper Assembly	Non-CE models; Models with less than 380 Volts; 3 required; 10 inches
	70260201	Jumper Wire	CE models
13	70355801P	Electric Contactor Jumper Set Harness	Non-CE models; Models with less than 380 Volts
14	70371301P	Cable Set Heater Assembly	
	70371401P	Cable Set Heater Assembly	Models with 240 Volts or less

## Accessory Box Components - Non-CE Electric Models

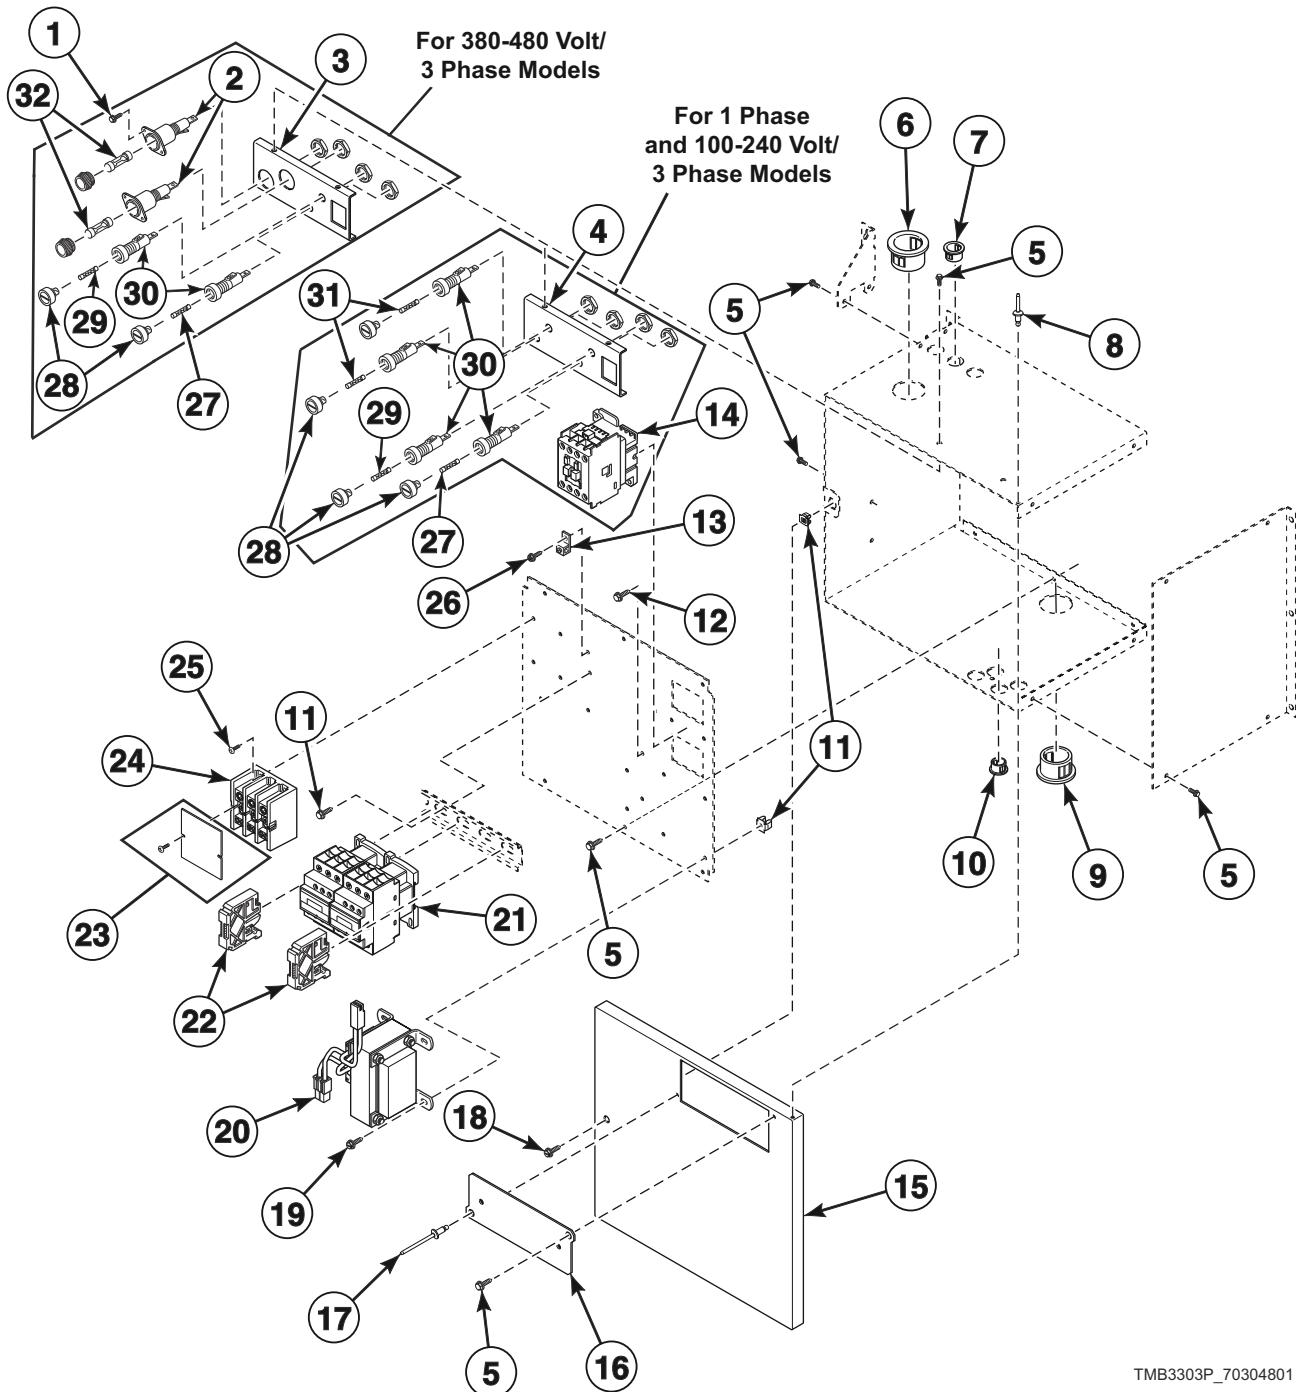


TMB3303P\_70304801

## Accessory Box Components - Non-CE Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	501086	Screw	4 required; Models with 380 Volts or more
2	M413544P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models starting 3/1/10
3	70313601	Fuse Bracket	3 Phase models with 380 Volts or more; Models through 2/28/10
	70313602	Fuse Bracket	3 Phase models with 380 Volts or more; Models starting 3/1/10
4	70306901	Fuse Bracket	Models with less than 380 Volts
5	51780	Screw	9 required
6	M405340	Snap Bushing	
7	M400770	Snap Bushing	
8	70058502	Pop Rivet	2 required
9	70346501	Bushing	
10	70178701	Snap Bushing	Models with 3L, BL, KL, LL and WL control suffixes
11	70030501	Expansion Clip	5 required
12	430497	Screw	
13	M411283	Ground Lug Connector	
14	70323701P	Contactor	24 Volt
15	70348201	Contactor Box Cover	
16	70313301	Fuse Cover	
17	70058501	Pop Rivet	
18	33562	Screw	
19	M411072	Screw	4 required
20	M414229P	Transformer	Multitap; Models with 380 Volts or more
	M414228P	Transformer	Multitap; Models with less than 380 Volts
	44074401	Transformer	Dual secondary; 440 Volt/60 Hertz/3 Phase
21	70343301P	Contactor	2 required
22	70121001	End Stop	3 required
23	44014901P	Power Distribution Block Cover	Includes screws
24	M413865	Terminal Block	
25	39733	Screw	4 required
26	M402917	Screw	
27	70406601	Fuse	Models with less than 380 Volts; 3.5 Amp
28	70329501	Fuse Holder Cap	4 required
29	70406501	Fuse	1.25 Amp
30	70329401P	Fuse Holder Body	4 required
31	70406701	Fuse	2 required; 2 Amp
32	M413621	Fuse	2 required; Models with 380 Volts or more

## Accessory Box Components - CE Electric Models

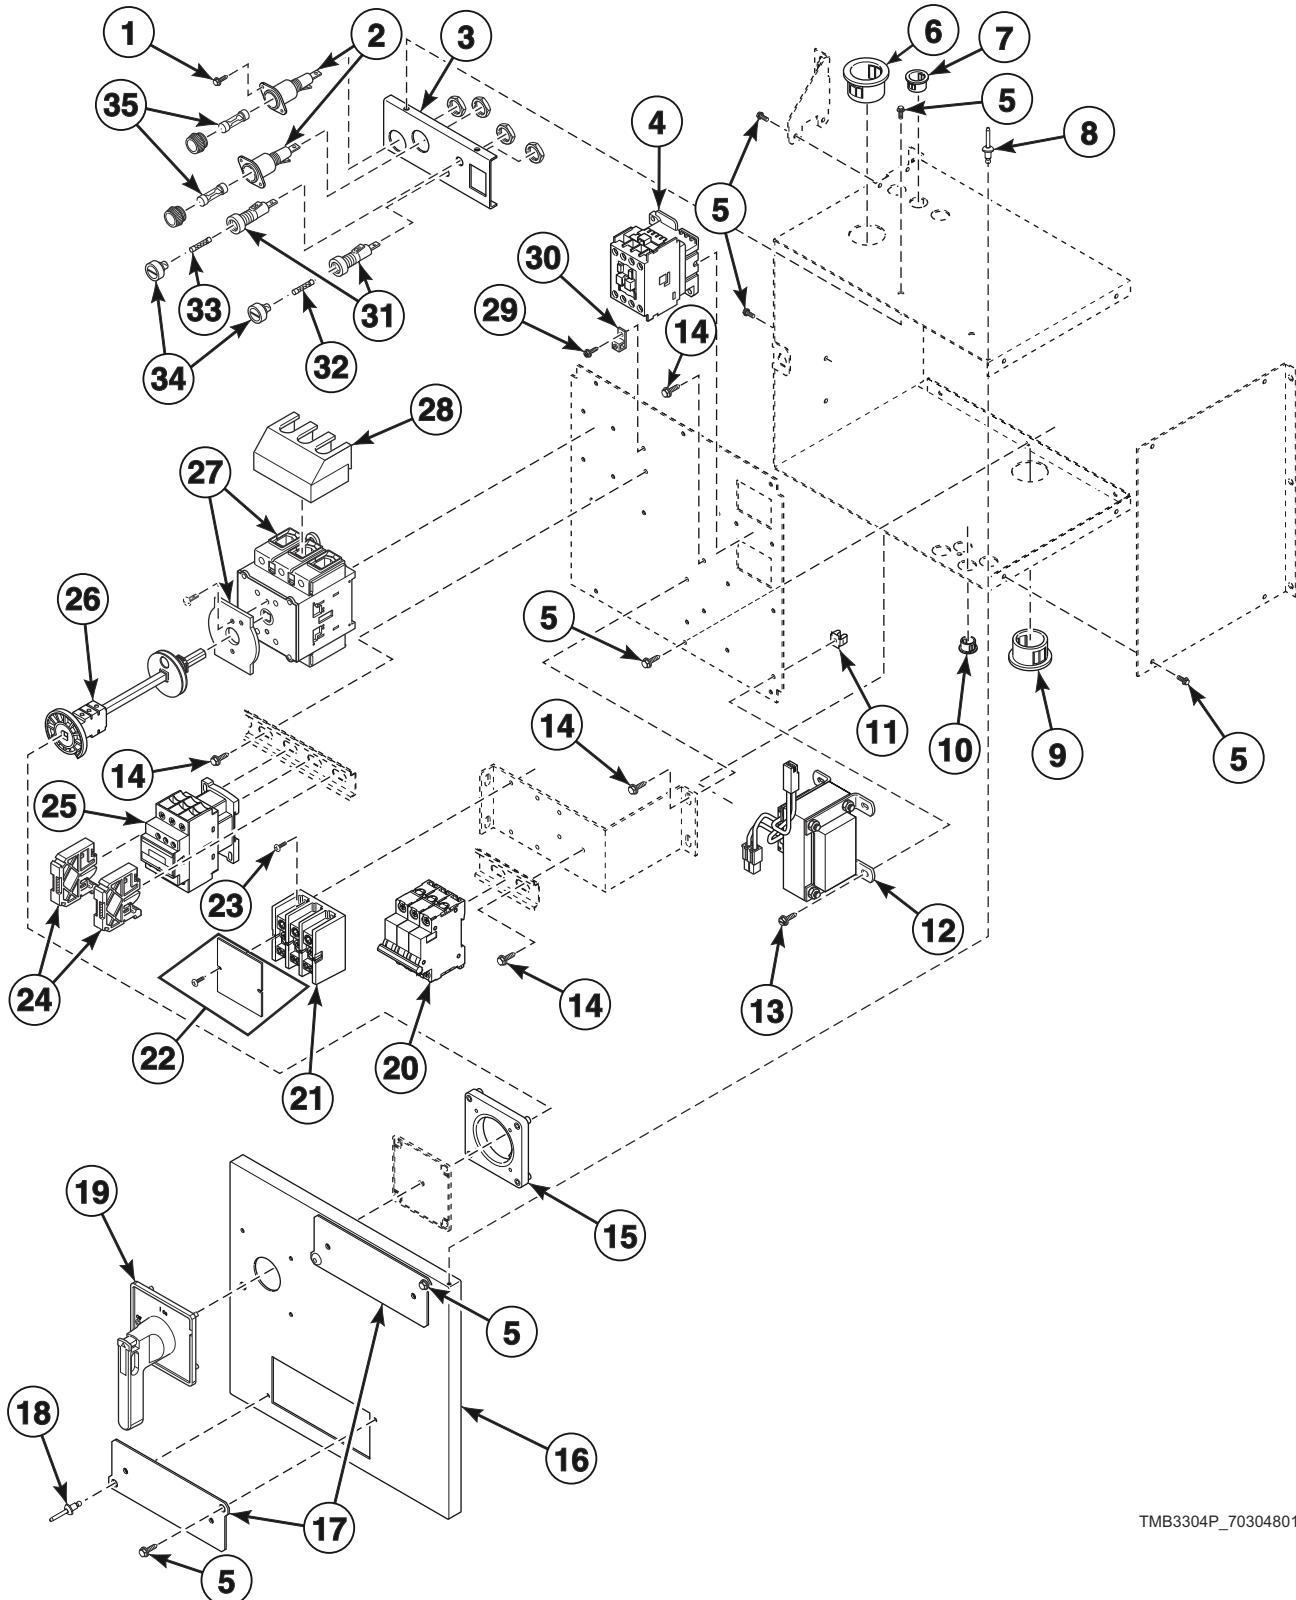

TMB3304P\_70304801

## Accessory Box Components - CE Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
	33562	Screw	2 required
	M412096	Earth Terminal Sticker	Next to item 29
1	501086	Screw	4 required
2	M413544P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models through 2/28/10
	44155601P	Fuse Holder	2 required for 3 Phase models with 380 Volts or more; Models starting 3/1/10
3	70313601	Fuse Bracket	3 Phase models with 380 Volts or more; Models through 2/28/10
	70313602	Fuse Bracket	3 Phase models with 380 Volts or more; Models starting 3/1/10
4	70323701P	Contactor	24 Volt
5	51780	Screw	12 required
6	M405340	Snap Bushing	
7	M400770	Snap Bushing	3 required
8	70058502	Pop Rivet	2 required
9	M402542	Snap Bushing	
10	70178701	Snap Bushing	Models with 3L, BL, KL, LL and WL control suffixes
11	70030501	Expansion Clip	4 required
12	M414229P	Transformer	Multitap
	44074401	Transformer	Dual secondary; 440 Volt
13	M411072	Screw	4 required
14	430497	Screw	
15	M412369	Door Interlock	Models through 7/31/11
16	70348202	Contactor Box Cover	
17	70313301	Fuse Cover	2 required
18	70058501	Pop Rivet	2 required
19	70268001	Handle	Models through 7/31/11
20	M412407P	Circuit Breaker	
21	M413865	Terminal Block	
22	44014901P	Power Distribution Block Cover	
23	39733	Screw	4 required
24	70121001	End Stop	2 required
25	70343301P	Contactor	
26	M412371P	Extension Handle	Models through 7/31/11
27	M412186	Mounting Switch Base	Models through 7/31/11
28	M412367	Finger Guard	Models through 7/31/11
29	M402917	Screw	
30	M411283	Ground Lug Connector	
31	70329401P	Fuse Holder Body	2 required
32	70406601	Fuse	3.5 Amp
33	70406501	Fuse	1.25 Amp
34	70329501	Fuse Holder Cap	2 required
35	M413621	Fuse	2 required

## Notes

# Parts Index

## A

Access Panel Trim	
70399401 .....	61, 63
70399406 .....	61, 63
Adapter	
70131901 .....	101, 103
Air Filter	
70036001 .....	107
Airflow Switch and Arm Bracket	
70319601 .....	95
Airflow Switch Arm	
70319401 .....	95
Airflow Switch Cover	
70356601 .....	95
70465701 .....	95
Airflow Switch Vane	
70319201 .....	95
Airflow Switch Wrapper	
70356101 .....	95
Audit Switch Bracket	
70183901 .....	21, 23, 31
70292601 .....	29, 33

## B

Base Harness	
70345801 .....	67
70449001 .....	67
Belt	
70276201P.....	83
70276204P.....	83
Belt Tension Tool Kit	
M4853P3.....	83
Blower Assembly	
70302201P.....	89
70359801P.....	89
Blower Housing Cover Assembly	
70322801 .....	89
70341401 .....	89
Blower Housing Scroll	
70303201 .....	89
70340801 .....	89
Blower Inlet Cone	
70014101 .....	89
70303101 .....	89
Blower Motor	
70297901P.....	89
70342601P.....	89
70401401 .....	89
Blower Motor Kit	
70337601P.....	89
70337701P.....	89
Blower Motor Mounting Plate	
70303401 .....	89
70341001 .....	89
Bolt	
70062401 .....	83
70392801 .....	75

Bumper Pad	
56128 .....	113, 117
Burner Grill	
70188801 .....	93
70306501 .....	93
Burner Orifice	
M400997 .....	99
M401000 .....	99
M401002 .....	99
M401007 .....	99
M401011 .....	99
M401014 .....	99
M401017 .....	99
M401020 .....	99
M401022 .....	99
M402444 .....	99
M402489 .....	99
M402980 .....	99
M402988 .....	99
M402992 .....	99
M402995 .....	99
M402996 .....	99
M403017 .....	99
M406184 .....	99
M406361 .....	99
M411373 .....	99
M411375 .....	99
M411376 .....	99
M411510 .....	99
M411511 .....	99
M411512 .....	99
44253801 .....	99
44254001 .....	99
70070903 .....	99
Bushing	
M406124 .....	111, 115
70346501 .....	127
Buzzer Kit	
M4860P3 .....	17
Bypass Harness	
70364103 .....	17, 19, 23, 31, 35, 41, 49, 51
C	
Cable Set Heater Assembly	
70371301P .....	125
70371401P .....	125
Cam and Hinge Kit	
M4772P3 .....	59
M4773P3 .....	59
Card Reader and Bracket Assembly	
510068P .....	35
Card Reader Harness Assembly	
70211801 .....	35
Card Reader Network Harness Assembly	
70206601 .....	35
Card Reader Overlay	
70334201 .....	23, 41
70334301 .....	23
70523601 .....	41
Center Cylinder Seal	
70066005 .....	79

N/A items do not appear in index.

Center Cylinder Seal Assembly	
70066003 .....	79
Center Partition	
70301601 .....	79
70339201 .....	79
Center Trim	
70299601 .....	65
Center Trim Overlay	
70299701 .....	65
Central Pay Harness	
70484501 .....	23, 39, 47
70491501 .....	19
70491502 .....	19
Central Pay Interface Control Assembly	
209/00471/75 .....	19
Channel Base Assembly	
70288201 .....	79
Chassis Mounting Bracket	
70119001 .....	23, 31
Chassis Mounting Bracket Assembly	
70419201 .....	41
Circuit Breaker	
M412407P.....	129
Clip	
70226701 .....	79, 87
Coin Cover Overlay	
70246301 .....	23, 47
Coin Drop	
38963P.....	25
39748 .....	25
70256402P.....	25
70429001 .....	25
70441601P.....	25
Coin Drop Assembly	
210195 .....	25
210196 .....	25
38462P.....	25
38463 .....	25
38464P.....	25
38467 .....	25
38472 .....	25
38475 .....	25
38519 .....	25
38521 .....	25
39157 .....	25
70441602 .....	25
70447301 .....	25
70471601 .....	25
70482401 .....	25
Coin Drop Kit	
CK077 .....	25
Coin Drop Overlay	
39564 .....	39
Coin Identification Paper	
38725 .....	25
Coin Vault Assembly	
70180101 .....	67
Coin Vault Switch Harness	
70364104P.....	15, 19, 21, 33, 39, 47
Coin Vault Trim	
70117501 .....	67
70117502 .....	67
Communication Board	
210097 .....	45
Communication Board Bracket	
70323101 .....	45
Communication Connector	
210099 .....	45
Communication Harness Assembly	
70211101 .....	37
Contact Base	
F8538101 .....	69
Contact Block	
44018701 .....	69
44018901 .....	69
Contact Block Switch	
F200233401P .....	69
Contact Switch	
F8069501 .....	69
Contactactor	
70323701P .....	113, 117, 121, 123, 127, 129
70343301P .....	127, 129
Contactactor Box Cover	
70313401 .....	113, 121
70313402 .....	117, 123
70348201 .....	127
70348202 .....	129
Control Assembly	
511867P .....	21, 23
512202P .....	17
513139P .....	15
514273 .....	21, 23
70434101P .....	51
70437102P .....	51
70437103P .....	51
70437104P .....	51
70437105P .....	51
70450501P .....	39, 41
70450502P .....	47, 49
70454101P .....	51
70462303P .....	19
70462304P .....	19
70462367P .....	19
70462368P .....	19
70462370 .....	19
70462371 .....	19
70503101P .....	17
70503702 .....	51
Control Chassis Mounting Bracket	
70357901 .....	17
70357902 .....	15
Control Door and Studs Assembly	
70441001 .....	51
70441101 .....	51
Control Door Assembly	
70175911 .....	35
70361201 .....	17
70365101 .....	15
70365801 .....	15
Control Door Latch	
431318 .....	15, 17, 23, 33, 35, 39, 41, 47, 49
Control Housing	
70119901 .....	65
Control Housing Cover	
70307002 .....	37, 43
70307003 .....	31
Control Kit	
505905P .....	31, 33, 35
Control Mounting Bracket Assembly	
70420201 .....	31

N/A items do not appear in index.

Control Overlay	79
70410101	39
70410102	39
70417601	41
70443401	39
70443501	39
70449401	39
70472101	47, 49
70472102	47, 49
70472901	49
70523401	41
Control Panel Harness	
44240301	51
70315501P	21, 23, 31, 35
70367001P	17
70367101	15
70368001P	23, 31, 33, 35
70369001	15
70410401P	39, 41, 47, 49
70485301	19
70489901	19
Control Plate Assembly	
70348901	23, 31, 41
70349001	23, 49
70365601	17
70419501	33
Control Plate Kit	
70279301P	19
70291101P	21, 29, 33, 39
70291201P	21, 29, 47
Control Trim	
70116901	65
70116902	65
70116903	65
70116904	65
70117001	65
70120501	65
Cylinder and Trunnion Assembly	
70443901	75
70443902	75
70443903	75
70444001	75
70444002	75
70444003	75
Cylinder Assembly	
70372501P	75
70372502P	75
70372503P	75
70372901P	75
70372902P	75
70372903	75
Cylinder Bearing Stud Plate Assembly	
430352	77, 79
Cylinder Guide Tool	
263P4	75
Cylinder Idler Arm	
70259901	83
Cylinder Motor Harness	
70316701P	83
70316801P	83
70439901	83
70440301	83
Cylinder Rib Assembly	
70433001	75
70433002	75
Cylinder Shroud	
70301901	79
70301902	79
70339301	79
70339302	79

---

<b>D</b>	
DIN Valve Adapter Kit	
F8382301	107
DIN Valve Kit	
F8521701	107
Display Assembly	
512218P	17
Door Assembly	
44028902P	53
44028903	53
44028905	53
44029101	53
44046701	53
44058001P	53
44058002	53
44058004	53
44058102P	53
44058104	53
44112101	53
44266702	53
44287801LG	53
44292301LG	53
70064100	53
70212200	53
70212300	53
70212301	53
70212302	53
70407401	53
70408901	53
70496502	53
Door Glass	
M400784P	57
44008401P	57
44008402P	57
70133601P	57
Door Glass Seal Kit	
70211901P	57
Door Handle	
M400133	55
430117	55
44007901	55
44007902P	55
44057701	55
44057702	55
44111901	55
44263801	55
Door Hinge	
44075212	59
70115901*	59
70115902	59
70115903B	59
70115903LG	59
70115904	59
Door Hinge Assembly	
44075205*	59
44075206	59
44075209B	59
44075209LG	59
Door Hinge Kit	
M4788P3	59

N/A items do not appear in index.

Door Hinge Lug Assembly	
44035001 .....	59
44035002 .....	59
Door Interlock	
M412368 .....	117, 123
M412369 .....	129
Door Latch	
M401223 .....	65, 67
Door Ring	
44007703B.....	55
44007704B.....	55
44007705.....	55
70399701B.....	55
70496401.....	55
Door Ring and Handle Assembly	
44043501 .....	55
44112001 .....	55
44287701LG .....	55
44292201LG .....	55
Door Ring Assembly	
44007702 .....	55
44283108 .....	55
44283109 .....	55
70505701 .....	55
70505709B.....	55
70505712 .....	55
70505713 .....	55
Door Ring Gasket	
44008201P.....	57
70296801 .....	57
Door Seal Kit	
70211902P .....	57
Door Switch Actuator Kit	
70215001P.....	59
Double Ended Stud	
70334701 .....	83
Drive Access Cover	
70202501 .....	83
Drive Motor	
70298401P.....	85
70338101P.....	85
70392901P.....	85
70401501 .....	85
70401601 .....	85
70401701 .....	85
70401801 .....	85
Drive Motor Kit	
70337901P.....	85
70338001P.....	85
Drum Idler Spring	
70045301 .....	83
Drywall Screw Magnet Kit	
70343101P.....	75
Duct Access Cover	
70308701 .....	87
70340301 .....	87
Duct Cover	
70207501 .....	87
70307601 .....	87
70478101 .....	87

## E

Earth Terminal Sticker	
M412096 .....	129
Elbow	
70079601 .....	101, 103
70208701 .....	101
Electric Configuration Harness	
70357601P .....	125
Electric Contactor Jumper Set Harness	
70355801P .....	125
Electronic Coin Drop Assembly	
70294103P .....	25
70294104 .....	25
70294105P .....	25
70294106 .....	25
70294107 .....	25
70294111 .....	25
70294116 .....	25
70294117 .....	25
70294119 .....	25
70294120 .....	25
70294121 .....	25
Electronic Coin Drop Harness	
44065801 .....	25
Electronic Coin Drop Kit	
CK099 .....	27
CK100 .....	27
CK101 .....	27
CK103 .....	27
CK108 .....	27
CK109 .....	27
CK113 .....	27
CK115 .....	27
CK116 .....	27
CK117 .....	27
CK118 .....	27
CK119 .....	27
CK120 .....	27
CK121 .....	27
CK122 .....	27
Emergency Stop Button Kit	
F200233700P .....	69
Emergency Stop Harness	
70364101P .....	69
70364102 .....	69
Emergency Stop Label	
44012901 .....	69
Emergency Stop Pushbutton	
F200233500 .....	69
End Cap	
70070101 .....	75
70070102 .....	75
End Stop	
70121001 .....	127, 129
Ethernet Gateway Kit	
NK320 .....	39, 41
Exhaust Duct Assembly	
70311901 .....	87
70311902 .....	87
70340501 .....	87
70340502 .....	87
Exhaust Duct Gaskets Assembly	
70302801P .....	87
70340401 .....	87

N/A items do not appear in index.

Exhaust Pipe	109
44154301 .....	87
Exhaust Pipe Assembly	
70425801 .....	87
Expansion Clip	
70030501 ..... 79, 113, 117, 121, 123, 127, 129	
Extension Handle	
M412371P..... 129	
70342501P..... 117, 123	

---

## F

False Front	
70371703B..... 61	
70371703DG..... 61	
70371703LG..... 61	
70371704..... 61	
False Front Kit	
70371701*P .....	61
70371702P..... 61	
Fan Motor Harness	
70317001 .....	89
70440001P..... 89	
70440401..... 89	
Filter	
44172001 .....	107
Finger Guard	
M412366 .....	117, 123
M412367 .....	129
Forward Valve Cover	
70328201 .....	97
Front Cylinder Seal	
70173402 .....	61, 63
Front Panel Baffle Seal	
70017301 .....	65, 67
Front Panel Seal	
70173401P..... 61, 63	
Fuse	
M413621 .....	111, 115, 121, 123, 127, 129
70406501 .....	111, 115, 121, 123, 127, 129
70406601 .....	111, 115, 121, 123, 127, 129
70406701 .....	111, 115, 121, 123, 127
Fuse Bracket	
70306901 .....	111, 115, 121, 123, 127
70313601 .....	111, 115, 121, 123, 127, 129
70313602 .....	111, 115, 121, 123, 127, 129
Fuse Cover	
70313301 .....	113, 117, 121, 123, 127, 129
Fuse Holder	
M413544P .....	111, 115, 121, 123, 127, 129
44155601P..... 111, 115, 121, 123, 127, 129	
Fuse Holder Body	
70329401P..... 111, 115, 121, 123, 127, 129	
Fuse Holder Cap	
70329501 .....	111, 115, 121, 123, 127, 129

---

## G

Gas Burner	
70229801P..... 93	
Gas Disconnect Harness	
70342101..... 109	

---

70440501 .....	109
Gas Valve	
44154501P .....	97
44154502P .....	97
Gas Valve Bracket	
70233301 .....	101, 103
Gas Valve Coil	
70260101 .....	101, 103
Gas Valve Cover	
70233401 .....	93, 101, 103
70425001 .....	93
Gas Valve Harness	
70184001 .....	101, 103
Gas Valve Harness Assembly	
M413650 .....	101, 103
Gasket	
70392701P .....	89
Graphic Overlay	
70279101 .....	19
70279201 .....	19
70279202 .....	19
70462601 .....	19
70462602 .....	19
70462603 .....	19
70468201 .....	19
Ground Lug Connector	
M411283..... 127, 129	

---

## H

Handle	
M412208 .....	117, 123
44287601 .....	55
44292101 .....	55
70268001 .....	129
Handle Bar	
70399501B .....	57
70399502B .....	57
Harness Assembly	
M412997 .....	97, 107
Heater Cable Set Assembly	
70167901 .....	105, 125
70168001 .....	105, 125
Heater Element	
70034401P .....	105
70034402P .....	105
70034403P .....	105
70034414P .....	105
70034415P .....	105
70034416P .....	105
High Voltage Lead	
70323601 .....	109
High Voltage Suppression Cable	
44239701 .....	109
Hole Plug	
44024202 .....	121, 123

---

## I

ICM Reset Label	
70411001..... 117	

N/A items do not appear in index.

Idler Bracket	
70443301 .....	83
Idler Wheel Assembly	
70050401P.....	83
Igniter Cover	
70159601 .....	93
Ignition Control	
70458601P.....	113
70483201P.....	117
Ignition Control Harness	
44136601P.....	109
44186701 .....	109
Ignition Control Kit	
70492501 .....	113
70492601 .....	117
Instruction Label	
70418101 .....	61, 63
Insulator	
M413862 .....	113, 117, 121, 123

---

## J

Jumper Assembly	
70139001 .....	125
Jumper Cable Assembly	
M413933 .....	125
M414121 .....	125
Jumper Calibration Assembly	
70211703P .....	33, 35
Jumper Calibration Wire	
70324603 .....	15, 17, 21, 31, 39, 41, 47, 49, 51
Jumper Configuration Assembly	
M413507 .....	109, 119, 125
M413510 .....	109, 119, 125
Jumper Harness Assembly	
M413505 .....	109, 119, 125
M413506 .....	109, 125
M413508 .....	109, 119, 125
M413509 .....	125
Jumper Strip	
M400869 .....	105
Jumper Wire	
70260201 .....	125
Junction Box Harness	
70315801 .....	109, 119, 125

---

## K

Key	
70144101 .....	89
70155601 .....	65
70155602 .....	71
Kickplate	
70117605 .....	67
70117606 .....	67

---

## L

Label	
70286601 .....	65
70286602 .....	65

N/A items do not appear in index.

70289802 .....	65
70414001 .....	65
Latch Mounting Bracket	
70119801 .....	15, 17
70184501 .....	23, 31, 33, 35, 39, 41, 47, 49
Light	
801431 .....	15
Limit Thermostat	
M409219 .....	93
M410220 .....	105
M411307 .....	89
70299001 .....	93
Lint Drawer Front Assembly	
70323001 .....	71
70323002 .....	71
Lint Drawer Front Kit	
70322901P .....	71
70322902P .....	71
Lint Drawer Gasket	
70117901P .....	65, 67
70300201P .....	65, 67
Lint Drawer Handle	
70320801 .....	71
70320802 .....	71
Lint Drawer Handle Plate	
70323201 .....	71
Lint Frame Gasket	
70333101 .....	71
70333103 .....	71
Lint Panel and Studs Assembly	
70322906 .....	71
70323004 .....	71
Lint Panel Gasket	
70289101P .....	87
Lint Screen Assembly	
70290601 .....	71
70301201 .....	71
Lint Screen Bracket	
70026901 .....	71
Lock Shim	
70342401 .....	71
70342402 .....	71
Lock, Key and Nut Kit	
44089301P .....	65
44089302P .....	71
Lower Card Reader Harness	
70420101P .....	31
Lower Front Panel	
70303909B .....	63
70303909DG .....	63
70303909LG .....	63
70303910DG .....	63
70303910LG .....	63
70303911B .....	63
70303911DG .....	63
70341207B .....	63
70341207DG .....	63
70341207LG .....	63
70341208DG .....	63
70341208LG .....	63
70341209B .....	63
70341209DG .....	63
70391207 .....	63
70391208 .....	63
70391209 .....	63
70391405 .....	63

70391406 .....	63
Lower Front Panel Assembly	
70391201*P .....	63
70391202P .....	63
70391203*P .....	63
70391204 .....	63
70391205* .....	63
70391206P .....	63
70391401*P .....	63
70391402P .....	63
70391403*P .....	63
70391404P .....	63
70454502 .....	63
Lower Front Panel Assembly Kit	
70485402 .....	63
Lower Stove Cover	
70333501 .....	105
L.P. Conversion Kit	
M4707P3 .....	97
M4880P3 .....	97
L.P. Valve	
44154504 .....	101, 103
70457302P .....	101, 103
L.P. Valve Conversion Kit	
M4734P3 .....	101, 103

---

## M

Main Harness	
70346001P .....	15, 17, 21, 23, 31, 39, 41
70346002P .....	33, 35, 39, 41
70419901P .....	31
70441401 .....	17, 19, 21, 23, 39, 41, 47, 49, 51
Male Tab Terminal	
00177 .....	15, 17, 113, 117, 121, 123
Manual Reset Thermostat	
70186301 .....	93
70397101 .....	93
Membrane Switch	
510036P .....	21, 23, 31, 33, 35
Moisture Sensor Harness Assembly	
70448901 .....	91
Moisture Sensor Test Wires	
70468901 .....	91
Motor Capacitor	
M410296 .....	85
70211401 .....	85
70211502 .....	85
70413101 .....	85
70413201 .....	85
70435701 .....	85
70435702 .....	85
Motor Channel	
70261701 .....	83
Motor Conduit Mounting Bracket	
70321701 .....	83, 89
Motor Contactor Harness	
44142601P .....	109, 119, 125
70320201 .....	109, 119, 125
Motor Mount Bracket	
70127301 .....	83
70312001 .....	83
Motor Pulley	
70284201 .....	83

70284203 .....	83
70284204 .....	83
70284208 .....	83
Mounting Bracket	
70179001 .....	19
Mounting Plate	
70208801 .....	23, 31, 41, 49
Mounting Switch Base	
M412186 .....	129
M412187P .....	117, 123

---

## N

Nameplate	
B12389801 .....	65
44046801 .....	65
44062901 .....	65
44129906 .....	65
44129908 .....	65
70289201 .....	65
70289801 .....	65
70521201 .....	65, 73
Nameplate Overlay	
44144401 .....	57
70411401 .....	57
Network Board Assembly	
201341 .....	43
210016P .....	37
Network Capacitor Assembly	
M413863 .....	109, 119, 125
Network Capacitor Harness Assembly	
M413878 .....	109, 119
44143401P .....	109, 119
44152001 .....	125
70286501 .....	125
Network Controller Kit	
NK220 .....	39, 41
Network Retrofit Kit	
NK207 .....	39, 41
Network Wire Harness Assembly	
44088501P .....	43
800217 .....	37
Nut	
M400022 .....	77, 89
M400034 .....	77, 89
M400035 .....	91
M412986 .....	75, 77, 83
M414215 .....	57
Q6163 .....	105
21899 .....	79
23951 .....	59
24205 .....	15, 17
27222 .....	83
29786 .....	15, 21, 29, 33, 89
29787 .....	17, 19, 31
29796 .....	83
430576 .....	79
44071201 .....	57
44087101 .....	71
44088801 .....	65, 71
56156 .....	83
70030401 .....	79
70054 .....	15, 17, 23, 31, 35, 51
70288801 .....	79

N/A items do not appear in index.

N.G. Valve		73
44154503 .....	101, 103	73
70457301P .....	101, 103	17
N.G. Valve Conversion Kit		17
M4733P3.....	101, 103	15
<hr/>		
<b>O</b>		
Opto Coupler		65
200674P.....	25	73
Orifice Adapter		73
70435901P .....	97	73
Orifice Holder Bracket		73
70248901 .....	97	73
Orifice Keeper Bracket		73
70249001 .....	97	73
O-Ring		65
431482 .....	101, 103	33
Output Bracket		33
44223101 .....	51	73
Output Harness		33
44186101 .....	51	73
Overlay		35
44147801 .....	33	35
70114601 .....	65	31
70114701 .....	73	31
70115201 .....	73	73
70115301 .....	73	73
70115401 .....	65	73
70129501 .....	21	73
70129601 .....	21	73
70129701 .....	21	73
70129801 .....	21	73
70136301 .....	73	21
70136401 .....	73	21
70136501 .....	73	21
70136601 .....	73	23
70137101 .....	73	23
70184101 .....	33	73
70184102 .....	33	73
70184201 .....	35	51
70235101 .....	35	51
70243801 .....	65	51
70257801 .....	21	51
70257802 .....	21	51
70258101 .....	21	51
70258102 .....	21	51
70258201 .....	73	21
70261101 .....	21	51
70261102 .....	21	17
70261301 .....	21	73
70275401 .....	23	73
70283301 .....	21	17
70283401 .....	21	51
70285001 .....	73	21
70286701 .....	23	21
70286801 .....	23	21
70299901 .....	73	73
70300001 .....	73	73
70304201 .....	23	73
70304301 .....	73	23
70321001 .....	21	21
70325301 .....	73	51
70335801 .....	23	65
70336001 .....	23	65
70351501 .....	23	65

N/A items do not appear in index.

70509501 .....	65
70509801 .....	23
70509901 .....	21
70510001 .....	21
70510101 .....	21
70510201 .....	21
70510301 .....	21
70510401 .....	21
70511101 .....	23
70511201 .....	23
70511301 .....	21
70511401 .....	23
70511501 .....	73
70523501 .....	65
70525901 .....	51
<hr/>	
<b>P</b>	
Panel Clip M406494 .....	65
Panel Latch 70399201 .....	71
Panel Latch Kit 70399201P .....	71
Panel Locator 56079 .....	17, 31
PC Board Standoff 210098 .....	45
Pin 70071401 .....	59
Pipe 70262601 .....	97, 103
Pipe Clip 70203701 .....	93
Pipe Nipple 431486 .....	97
70139601 .....	103
70210201 .....	101
Pipe Tee 70267501 .....	97
Plug M400985 .....	111, 115, 121, 123
Pop Rivet M400003 .....	15, 17, 23, 33, 35, 39, 41, 47, 49, 65
44166601 .....	67
70058501 .....	59, 79, 97, 113, 117, 121, 123, 127, 129
70058502 .....	111, 115, 121, 123, 127, 129
70126301 .....	57, 67
70126401 .....	67
70412601 .....	57
Porcelain Touch-Up Paint 122P4P .....	81
215P4P .....	81
370P4P .....	81
Power Distribution Block Cover 44014901P .....	127, 129
Power Harness 70316101P .....	109, 119
70316201 .....	109, 119
70332201 .....	109, 119
70347701P .....	109, 119
70357401 .....	125
70357501 .....	125
70438901 .....	109, 119
70439001 .....	109, 119
70439301 .....	125
70439401 .....	125
70439501 .....	109, 119
70445501 .....	109, 119
Pushbutton 44018801 .....	69
Pushbutton Switch M413431 .....	115
70413301 .....	21, 23, 29, 31, 33, 65, 67
<hr/>	
<b>R</b>	
Rear Bearing Shim 70355001 .....	77
Rear Cylinder Bearing Housing 70013901 .....	77
Rear Cylinder Channel 70257101 .....	75
70257102 .....	75
70305201 .....	75
70305202 .....	75
Rear Cylinder Channel Plate 70257201 .....	75
70305301 .....	75
Rear Cylinder Seal 70013701P .....	77, 79
70013703 .....	77, 79
Rear Cylinder Seal Support 70506402 .....	77, 79
70506403 .....	77, 79
Rear Panel 70301701 .....	79
70339401 .....	79
70339402 .....	79
Rear Stabilizer Bracket 70200301 .....	89
Rear Valve Cover 70282401 .....	97
Relay 70210901P .....	119, 125
Replacement Gas Valve Kit M4970P3 .....	97
M4972P3 .....	97
Rocker Switch 44099601 .....	31
70455101 .....	15, 17
70461301 .....	17
Roller Bearing Assembly 70298701P .....	79
Roller Seal 70443601 .....	79
Roller Shaft 70249501 .....	79
<hr/>	
<b>S</b>	
Screw M400044 .....	59
M400661 .....	57
M402917 .....	113, 117, 121, 123, 127, 129
M405188 .....	65
M411072 .....	87, 113, 117, 121, 123, 127, 129
M412985 .....	83

N/A items do not appear in index.

05161 .....	93
23222 .....	83, 89, 101, 103
33562 .....	113, 117, 121, 127, 129
38272 .....	113, 117
39733 .....	127, 129
430497 .....	31, 75, 79, 83, 87, 89, 93, 95, 97, 101, 103, 105, 113, 117, 121, 123, 127, 129
430648 .....	83
430756 .....	57
430757 .....	57
431484 .....	101, 103
431539 .....	83
44083001 .....	113, 117
501086 .....	111, 115, 121, 123, 127, 129
501524 .....	15, 17, 21, 23, 31, 33, 35, 39, 41, 47, 49, 51
51780 .....	89, 111, 113, 115, 117, 121, 123, 127, 129
51782 .....	117, 123
51783 .....	113, 117, 121, 123
52909 .....	37, 43
61199 .....	57
62588 .....	75
70033502 .....	59, 67
70069901 .....	67
70126101 .....	89
70182601 .....	67
70247701 .....	79
70275801 .....	65, 67
70407301 .....	59
70442101 .....	59
Shadow Box Clip M400972 .....	65, 67
Sheet Metal Edge Gasket 70015707 .....	79
70015708 .....	79
70015711 .....	79
70015712 .....	79
Side Panel 70231801DG .....	79
70231801LG .....	79
70231801*P .....	79
70301801DG .....	79
70301801LG .....	79
70301801*P .....	79
Sleeve 44050601 .....	19
Slip Ring Assembly 44222701 .....	91
Slip Ring Holder 44224401 .....	91
Slot Card Plate Assembly 44089501 .....	23, 31, 41, 49
Snap Bushing M400770 .....	97, 127, 129
M402542 .....	111, 115, 121, 123, 129
M405340 .....	127, 129
70178701 .....	111, 115, 121, 123, 127, 129
Solenoid Valve DIN Connector 70370301P .....	107
Spark Electrode 70032801P .....	93
70466501P .....	93
Spray Paint 297P4 .....	81
298P4P .....	81
Spud Adapter 70223501 .....	101, 103
Standoff 211/00119/00 .....	19
Steam Coil 70369101P .....	107
Steam Configuration Harness 70322401P .....	119
Steam Stove Limit Bypass Harness 70389901 .....	119
Steam Valve F8322902 .....	107
Steam Valve Coil M412258 .....	107
70205701P .....	107
Steam Valve Rebuild Kit 70351021P .....	107
Stove Back 70371501 .....	93
70375201 .....	93
Stove Grill 70214901 .....	105
Stove Limit Bypass Harness 70316601 .....	119, 125
Stove Limit Harness 70316501 .....	93
Stove Limits Harness 70316501 .....	93
Stove Limits Kit M4903P3 .....	93
Stove Top and Sides 70306001 .....	93
70333401 .....	93
Street Elbow H86070034 .....	97, 101, 103
Support Bearing 70448701 .....	77
Switch 431159 .....	79
70411901 .....	95
Switch Bracket 70356301 .....	95

---

## T

Tee 70071801 .....	97, 101, 103
Temperature Knob 44104601 .....	15, 17
Temperature Selector Bracket 70350201 .....	15
Temperature Selector Switch 511711 .....	15, 17
Temperature Selector Switch Bracket 70391701 .....	17
Terminal Block M413865 .....	127, 129
430642 .....	113, 117, 121, 123
Terminal Block Shield 70333001 .....	113, 117, 121, 123
Terminating Resistor 210162 .....	45
Thermistor M414704 .....	89

N/A items do not appear in index.

---

Thermistor Cover	
70346301 .....	89
Thermostat Cover	
M414477 .....	93
Top Panel	
70302001 .....	79
70339501 .....	79
Top Panel Assembly	
70357701 .....	79
70357801 .....	79
Transformer	
M414228P.....	113, 117, 121, 123, 127
M414229P.....	113, 117, 121, 123, 127, 129
M414230P.....	113, 121
M414312P.....	113, 121
44074401 .....	121, 123, 127, 129
Trunnion and Seal Kit	
M4960P3.....	75
M4962P3.....	75
Trunnion and Wire Assembly	
70454601 .....	75
Tube	
70281601 .....	97
70281602 .....	97
70281603 .....	101, 103
Tumbler Dolly Kit	
M4379P4.....	67

---

## **U**

Upper Card Reader Harness	
70420001P.....	31
Upper Front Panel	
70304005B.....	61
70304005DG.....	61
70304009 .....	61
70304010 .....	61
70341305B.....	61
70341305DG.....	61
70341310 .....	61
Upper Front Panel Assembly	
70304004LG .....	61
70304006W.....	61
70304007 .....	61
70341307 .....	61
70391301*P .....	61
70391302P.....	61
70391303P.....	61
70391304 .....	61
70391305 .....	61
70391501*P .....	61
70391502P.....	61
70391503P.....	61
70391504 .....	61
70454501 .....	61
70525301DG.....	61
70525401W.....	61
Upper Front Panel Assembly Kit	
70485401 .....	61
USB Gateway Kit	
NK330 .....	39, 41
USB IR Interface Kit	
203346 .....	39, 41, 47, 49, 51

## **V**

Valve Bracket and Cover Kit	
M4746P3 .....	101, 103
Valve Coil	
F8514801 .....	107
Valve Coil Bracket	
70260601 .....	101, 103
Valve Rebuild Kit	
F8379502 .....	107
Valve Support Bracket	
70457701 .....	101, 103

---

## **W**

Warning Label	
M410892 .....	65, 67
Washer	
M400080 .....	75
M400991 .....	77, 89
70261401 .....	79
70265901 .....	83
70270301 .....	83
70292801 .....	29
70409301 .....	57
70411301 .....	75, 77
Wire Clip	
70347601 .....	111, 115, 121, 123
70366201 .....	31, 89, 111, 115, 121, 123
Wire Guard	
201595P .....	25
Wireless Network Kit	
NK301 .....	39, 41

---

N/A items do not appear in index.

## Notes