


Washer-Extractor

Cabinet Hardmount

Refer to Page 5 for Model Numbers

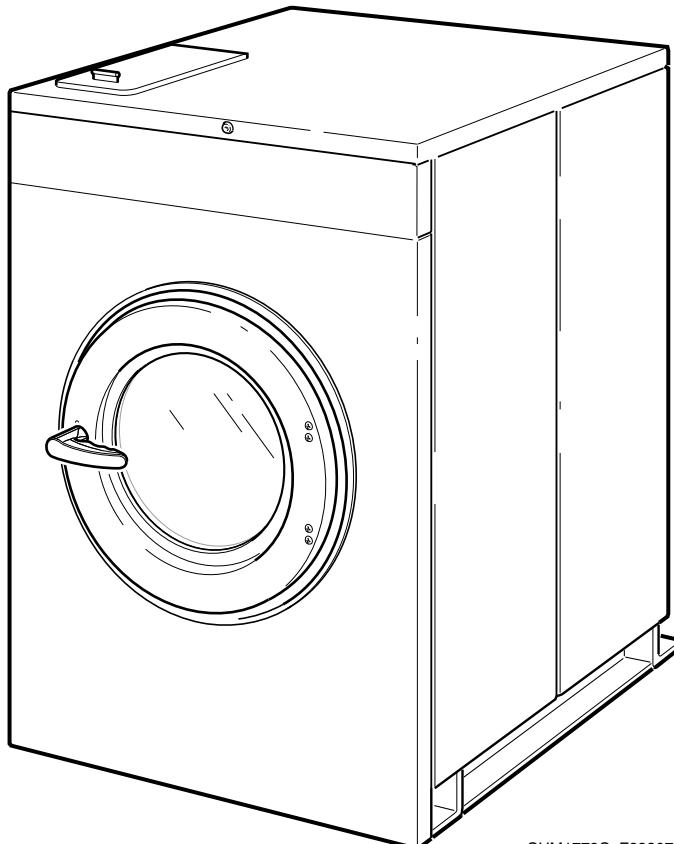

CHM1772C_F8330701

Table of Contents

Title	Page
Parts Ordering Information.....	3
Serial Plate Location	3
Model Identification	5
Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold.....	6
Product Overview for M4, Galaxy 200 and Quantum Standard.....	8
Decals	10
Control Module - 2 Speed OPL Models	12
Control Module - F-Speed Design 1 OPL Models.....	14
Control Module - Design 2 and 3 OPL Models (Drawing 1 of 2).....	16
Control Module - Design 2 and 3 OPL Models (Drawing 2 of 2).....	18
Control Module - 2 Speed Vend Models	20
Control Module - F-Speed Design 1 Vend Models	22
Control Module - F-Speed Design 2 and 3 Vend Models (Drawing 1 of 2).....	24
Control Module - F-Speed Design 2 and 3 Vend Models (Drawing 2 of 2).....	26
Flush Mount Coin Meter Assembly - Single Drop	28
Flush Mount Coin Meter Assembly - Dual Drop.....	30
Electronic Coin Meter Assemby	32
Card Reader - HY Models.....	34
Optional Coin Box	36
Front Panels and Control Panel - Coin Models.....	38
Front Panel and Control Panel - Card Reader and OPL Models	40
Control Panel Overlays - Coin and Card Ready Models.....	42
Control Panel Overlays - OPL Models	44
Panels (Drawing 1 of 2)	46
Panels (Drawing 2 of 2)	48
Door - 20 Pound Models	50
Door - 30 Pound Models	52
Door - 40 and 60 Pound Models	54
Door Lock.....	56
Shell Front and Basket - Design 1 Models.....	58
Trunnion - Design 1 Models	60
Shell and Frame - Design 1 Models.....	62
Shell Front and Basket - Design 2 and 3 Models	64
Bearing Housing - 20 and 30 Pound Design 2 and 3 Models	66
Bearing Housing - 40 and 60 Pound Design 2 and 3 Models	68
Shell and Frame - Design 2 and 3 Models.....	70
Drain Plumbing - Design 1 Models	72
Drain Plumbing - Design 2 and 3 Models	74
Drain Valve Assembly - 20 and 30 Pound Models.....	76
Drain Valve Assembly - 40 and 60 Pound Models.....	78
Steam Filter (Optional) and Water Supply Hose	80

© Copyright 2015, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Fill Plumbing Assembly (Drawing 1 of 2)	82
Fill Plumbing Assembly (Drawing 2 of 2)	84
Double Check Valve	86
Motor Mount Pulley and Belt - Design 1 Models.....	88
Motor, Pulley and Belt (Drawing 1 of 2)	90
Motor, Pulley and Belt (Drawing 2 of 2)	92
Motor - Design 1 Models.....	94
Electric Heat Option	96
Steam Heat Option	98
Parts Index	101

Parts Ordering Information

If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.


For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin

+32 56 41 20 54 Wevelgem, Belgium

Serial Plate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on serial plate(s) as shown.

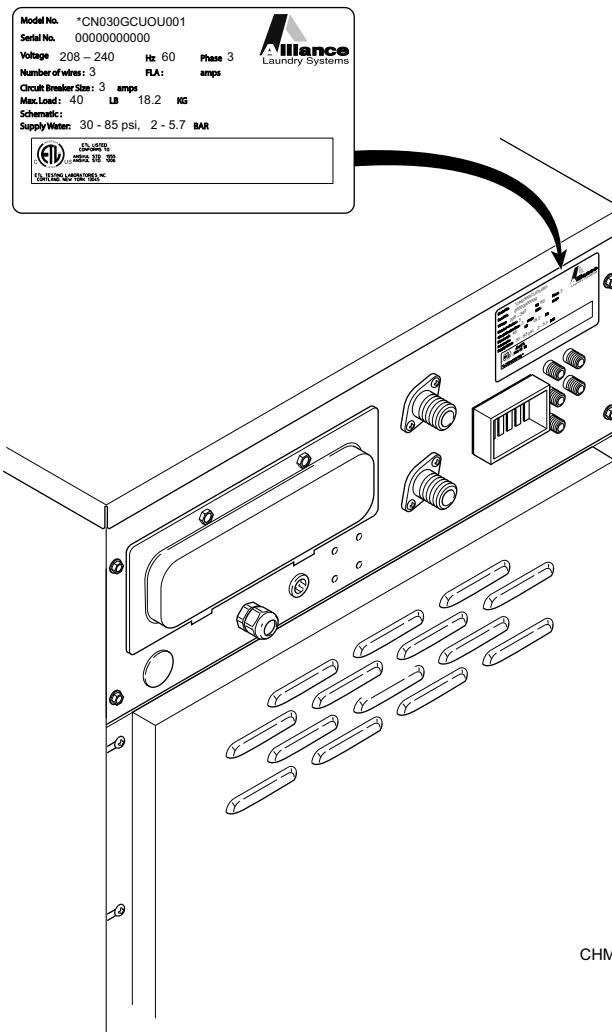

CHM3025P_F8330701



Notes

Model Identification


Information in this manual is applicable to these washer-extractor models:

CCN020HNF	HCN020HC2	HCU020HC2	SCB040HNF	UCB040HNF
CCN020HNV	HCN020HCF	HCU020HEF	SCB040HNV	UCB040HNV
CCN030HNF	HCN020HD2	HCU020HL2	SCL020HN2	UCL020HN2
CCN030HNV	HCN020HDF	HCU020HN2	SCL020HNF	UCL020HNF
CCN040HNF	HCN020HEF	HCU020HNF	SCL020HNV	UCL020HNV
CCN040HNV	HCN020HN2	HCU020HNV	SCL030HN2	UCL030HN2
CCN060HNF	HCN020HNF	HCU020HX2	SCL030HNF	UCL030HNF
CCN060HNV	HCN020HNV	HCU020HXF	SCL030HNV	UCL030HNV
HCB040HCF	HCN020HXF	HCU030HC2	SCL040HN2	UCL040HN2
HCB040HNF	HCN020HY2	HCU030HE2	SCL040HNF	UCL040HNF
HCB040HNV	HCN020HYF	HCU030HL2	SCL040HNV	UCL040HNV
HCL020HDF	HCN030HC2	HCU030HLF	SCL060HN2	UCL060HN2
HCL020HN2	HCN030HCF	HCU030HN2	SCL060HNF	UCL060HNF
HCL020HNF	HCN030HD2	HCU030HNF	SCL060HNV	UCL060HNV
HCL020HNV	HCN030HDF	HCU030HNV	SCN020HN2	UCN020HN2
HCL030HCF	HCN030HEF	HCU030HX2	SCN020HNF	UCN020HNF
HCL030HDF	HCN030HN2	HCU030HXF	SCN020HNV	UCN020HNV
HCL030HE2	HCN030HNF	HCU040HC2	SCN030HN2	UCN030HN2
HCL030HEF	HCN030HNV	HCU040HLF	SCN030HNF	UCN030HNF
HCL030HLF	HCN030HXF	HCU040HN2	SCN030HNV	UCN030HNV
HCL030HN2	HCN030HY2	HCU040HNF	SCN040HN2	UCN040HN2
HCL030HNF	HCN030HYF	HCU040HNV	SCN040HNF	UCN040HNF
HCL030HNV	HCN040HC2	HCU040HX2	SCN040HNV	UCN040HNV
HCL040HC2	HCN040HCF	HCU040HXF	SCN060HN2	UCN060HN2
HCL040HCF	HCN040HD2	HCU060HC2	SCN060HNF	UCN060HNF
HCL040HDF	HCN040HDF	HCU060HL2	SCN060HNV	UCN060HNV
HCL040HE2	HCN040HEF	HCU060HLF	SCU020HN2	UCU020HN2
HCL040HEF	HCN040HN2	HCU060HN2	SCU020HNF	UCU020HNF
HCL040HN2	HCN040HNF	HCU060HNF	SCU030HN2	UCU020HNV
HCL040HNF	HCN040HNV	HCU060HNV	SCU030HNF	UCU030HN2
HCL040HNV	HCN040HXF	HCU060HX2	SCU040HN2	UCU030HNF
HCL060HC2	HCN040HY2	HCU060HXF	SCU040HNF	UCU030HNV
HCL060HCF	HCN040HYF	HCZ020HN2	SCU060HN2	UCU040HN2
HCL060HDF	HCN060HC2	HCZ030HNV	SCU060HNF	UCU040HNF
HCL060HN2	HCN060HCF	ICN020HNF	SCU060HNV	UCU040HNV
HCL060HNF	HCN060HDF	ICN020HNV	SCZ020HN2	UCU060HN2
HCL060HNV	HCN060HEF	ICN030HNF		UCU060HNF
	HCN060HN2	ICN030HNV		UCU060HNV
	HCN060HNF	ICN040HNF		UCZ020HNF
	HCN060HNV	ICN040HNV		UCZ030HN2
	HCN060HXF	ICN060HNF		UCZ030HNF
	HCN060HY2	ICN060HNV		YCW020HNV
	HCN060HYF			YCW030HNV
				YCW040HNV
				YCW060HNV


Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold

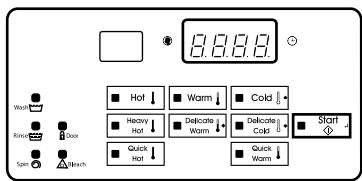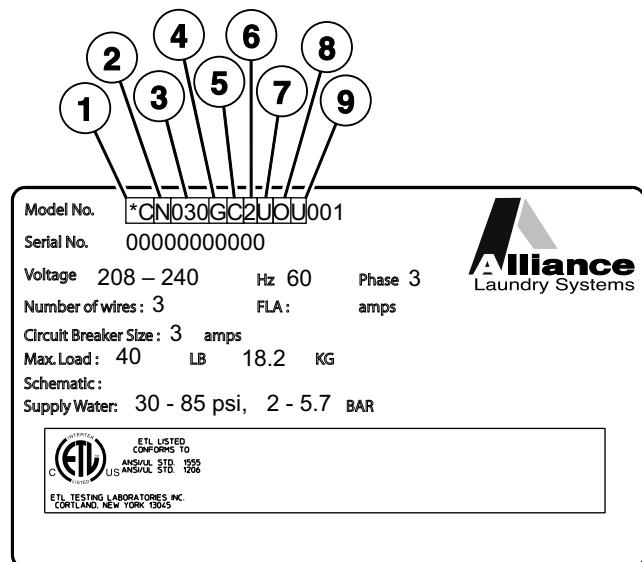


Galaxy 400 Coin

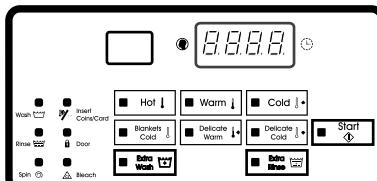


Galaxy 600 Coin (Domestic)

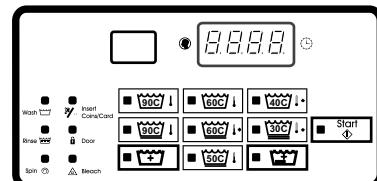


Galaxy 600 Coin (International)

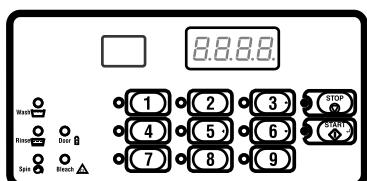


M9/Galaxy 400 OPL/Quantum Silver OPL

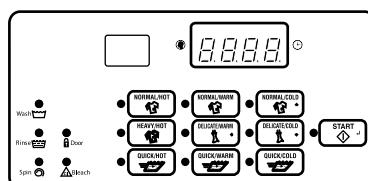


Quantum Silver Coin (Domestic)

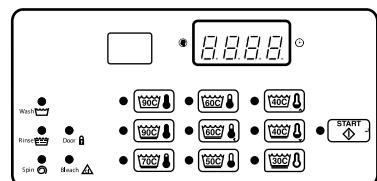

Quantum Silver Coin (International)



M30/Quantum Gold OPL

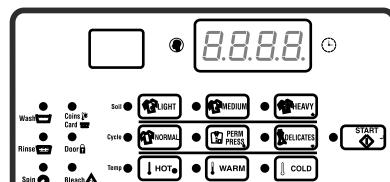



Quantum Gold

CHM3217P_F8330701

Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Product Family	CC HC IC NC SC UC YC
2	-	Market	B (Brazil CE) N (Domestic ETL(c)) L (International ETL(c)) U (International CE) D (Daiwa) W (WRAS CE) Y (Australia) Z (No Agency International)
3	-	Capacity (Pounds)	020 030 040 060 080 125
4	-	Control	G J L H K W
5	-	Actuation	C (Drop Coin Meter) D (Digital Coin Meter) E (Electronic World Drop) L (Prep for Remote/Central Pay) N (Non-Coin OPL) X (Prep for Coin Meter) Y (Prep for Card Reader)
6	-	Speed	2 (2 Speed) F (F-Speed) V (V-Speed)
7	-	Voltage	B (120/60/1/2) C (380-415/50/3/4) F (440-480/60/3/3) J (200/50/3/3) N (440-480/50/60/3) O (208/220-240/60/3/3) P (380-415/50/60/3) Q (200-208/220-240/50/60/3) R (380-415/440-480/50/60/3) X (200-208/220-240/50/60/1/3) Y (208/220-240/60/1/2)
8	-	Side Panel	U (Standard) 1 (Stainless Steel)
9	-	Design	1 2 3

Product Overview for M4, Galaxy 200 and Quantum Standard

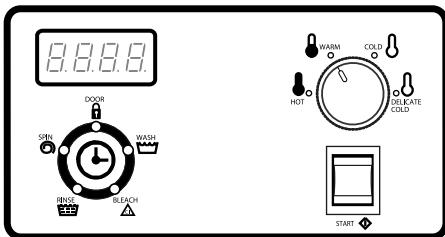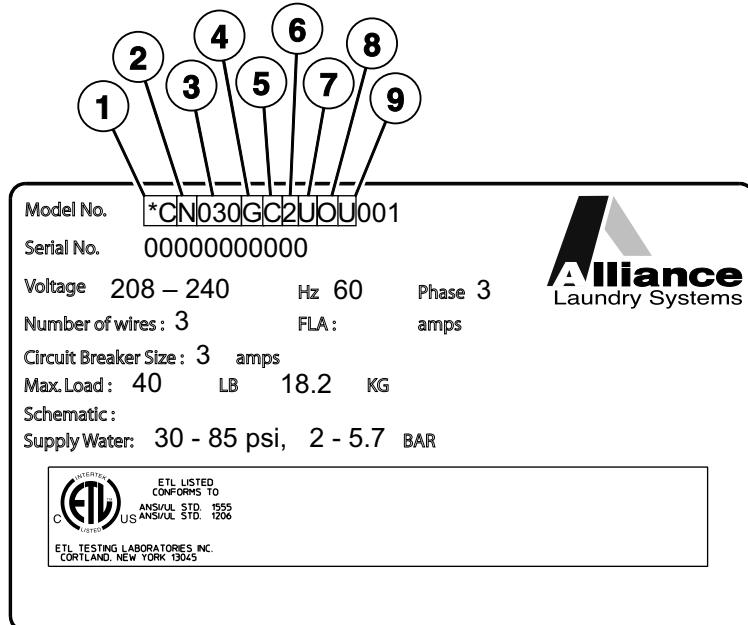


M4/Galaxy 200/Quantum Standard

CHM3218P_F8330701

Product Overview for M4, Galaxy 200 and Quantum Standard

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Product Family	CC HC IC NC SC UC YC
2	-	Market	B (Brazil CE) N (Domestic ETL(c)) L (International ETL(c)) U (International CE) D (Daiwa) W (WRAS CE) Y (Australia) Z (No Agency International)
3	-	Capacity (Pounds)	020 030 040 060 080 125
4	-	Control	G J L H K W
5	-	Actuation	C (Drop Coin Meter) D (Digital Coin Meter) E (Electronic World Drop) L (Prep for Remote/Central Pay) N (Non-Coin OPL) X (Prep for Coin Meter) Y (Prep for Card Reader)
6	-	Speed	2 (2 Speed) F (F-Speed) V (V-Speed)
7	-	Voltage	B (120/60/1/2) C (380-415/50/3/4) F (440-480/60/3/3) J (200/50/3/3) N (440-480/50/60/3) O (208/220-240/60/3/3) P (380-415/50/60/3) Q (200-208/220-240/50/60/3) R (380-415/440-480/50/60/3) X (200-208/220-240/50/60/1/3) Y (208/220-240/60/1/2)
8	-	Side Panel	U (Standard) 1 (Stainless Steel)
9	-	Design	1 2 3

Decals

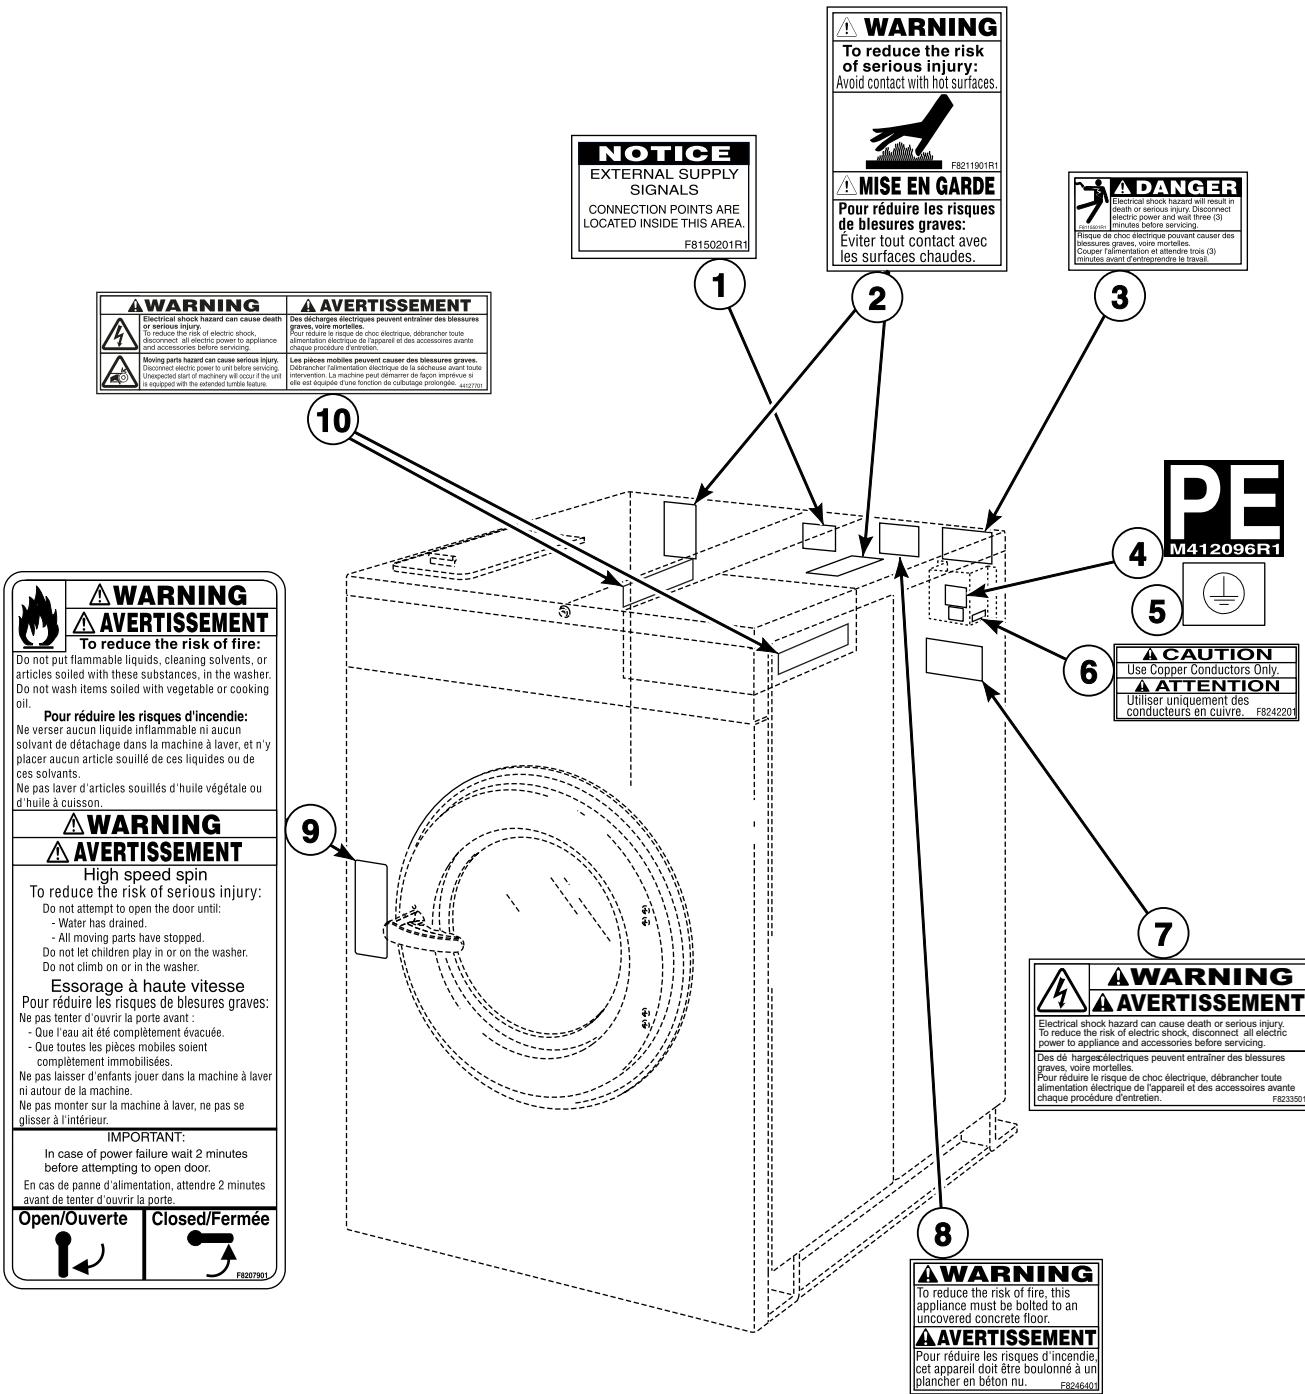


CHM3027P_F8330701

Decals

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8150201	External Supply Connection Decal	
2	F8211901	Hot Surface Warning Plate	
3	F8115501	Electric Shock Danger Label	
4	M412096	Earth Terminal Sticker	
5	F230739	Ground Decal	
6	F8242201	Use Copper Conductors Only Caution Label	
7	F8233501	Warning Label	
8	F8246401	Mount on Concrete Warning Label	
9	F8207901	Warning Label	
10	44127701	Warning Label	

Control Module - 2 Speed OPL Models

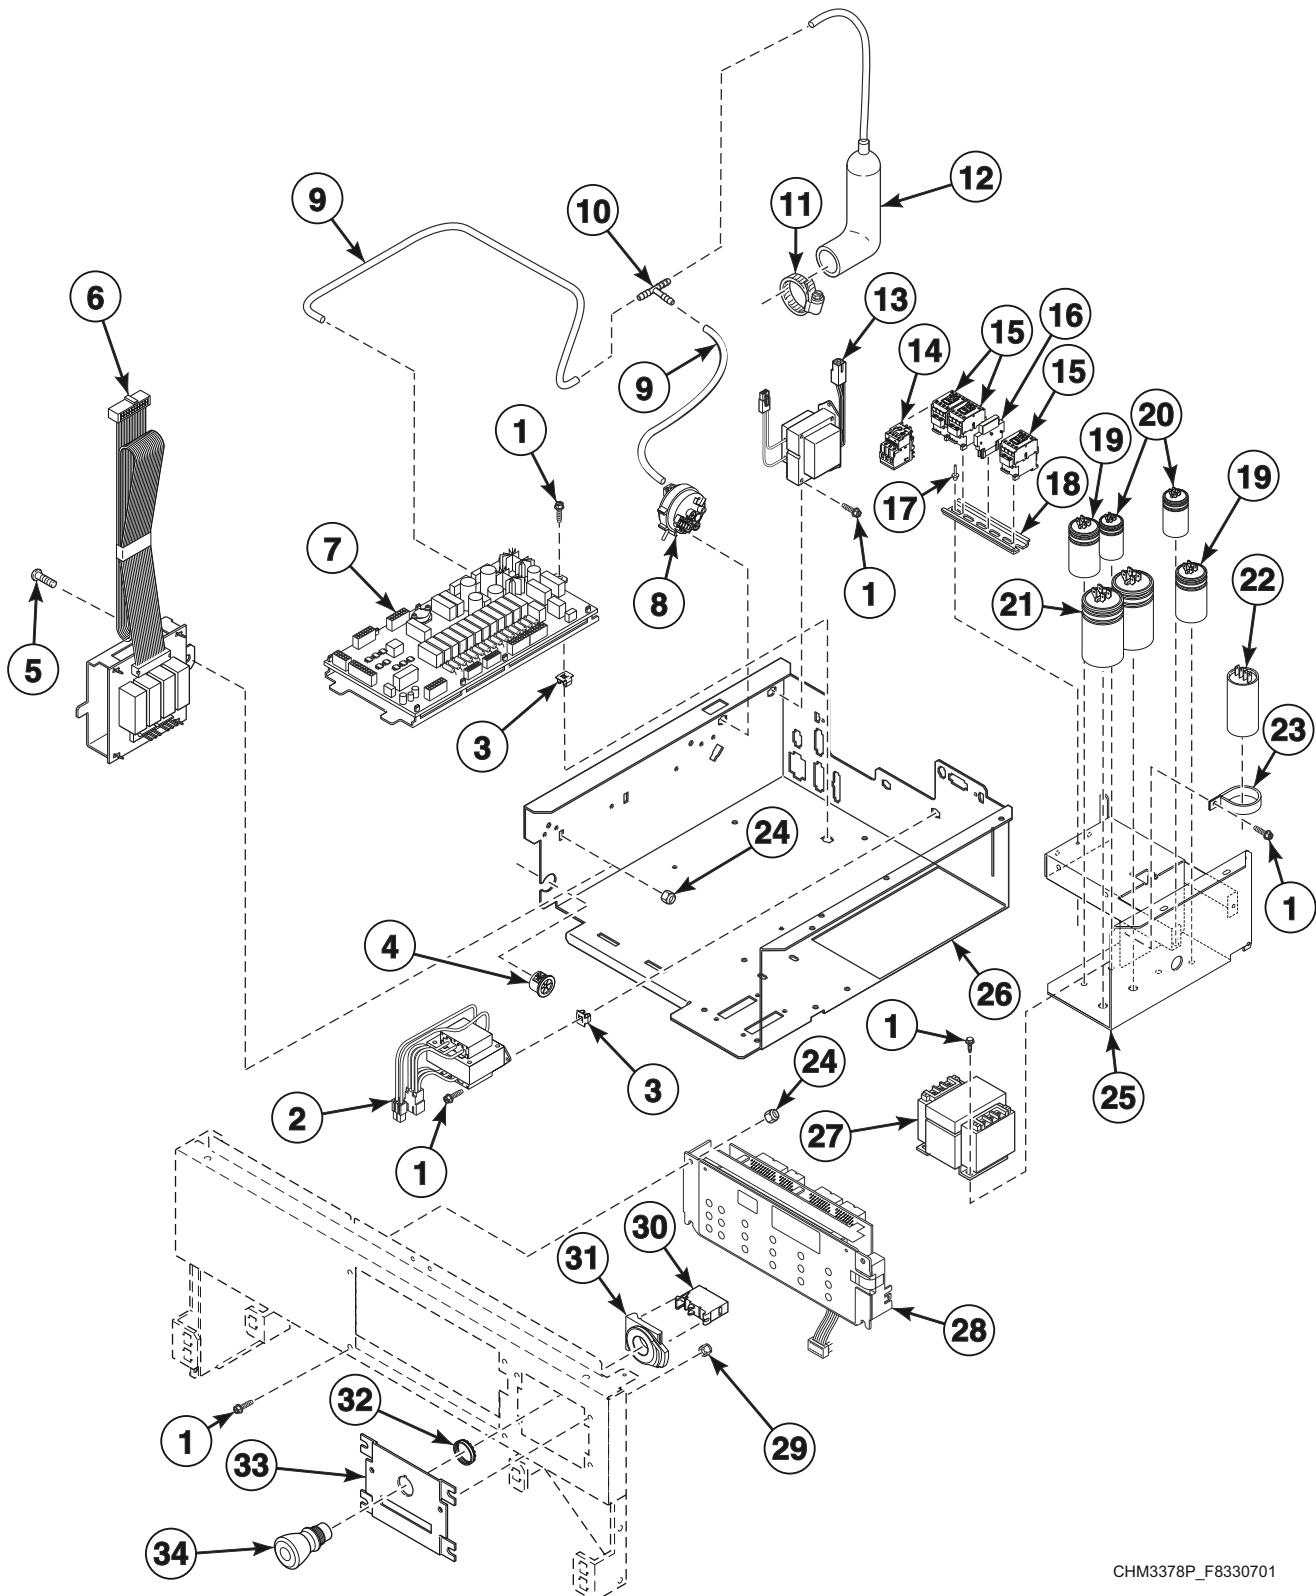


CHM3378P_F8330701

Control Module - 2 Speed OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F802840P	Temperature Harness	Prep for steam
	F802842P	Temperature Harness	Electric and steam heat
	F8028701	Output/Logic Harness	
	F8060501	Emergency Stop Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 6, 13, F8191201P External Supply Harness and screws
	203346	USB IR Interface Kit	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8028219P	Temperature Configuration Harness	
1	F8206901	Screw	
2	803527P	Transformer	
3	70030501	Expansion Clip	
4	44071501	Snap Bushing	
5	F430903	Screw	
6	F8189401P	Auxiliary Control Assembly	
7	F980P3	Control Assembly Kit	Includes item 10 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
8	F8223001P	Water Pressure Switch	
9	F8153901	Tubing	
10	F8246601	Tee	
11	F200222	Hose Clamp	No. 12
12	F020014200	Air Trap Hose	
13	201616P	Transformer	External supply
14	F8176101P	Overload Contactor	
15	F330177P	Contactor	
16	F330186P	Interlock Contactor	
17	70058501	Pop Rivet	
18	F8200101	DIN Rail	
19	F8411901	Capacitor	50 MFD; 20 pound models Y-voltage, 1 used; 40 pound models Y-voltage, 2 used
	F370221	Capacitor	100 MFD; 20 pound models B-voltage, 1 used
20	F8411701	Capacitor	20 MFD; 30 pound models Y-voltage, 4 used; 40 pound models Y-voltage, 2 used
	F8411801	Capacitor	25 MFD; 20 pound models Y-voltage, 2 used
21	F370218P	Capacitor	160 MFD; 40 pound models Y-voltage, 2 used
	F370220	Capacitor	130 MFD; 20 pound models B-voltage, 2 used; 30 pound models Y-voltage, 1 used
22	F340002	Motor Switch	50 Amp
23	F0340722-00	Switch Clamp	
24	F430232	Nut	
25	F8199601	Capacitor Tray Assembly	20 pound models; B and Y-voltage
	F8199901	Capacitor Tray Assembly	All other models; B and Y-voltage
	F8343401	Contactor Tray Assembly	C, F, J and O-voltage
26	F8205901	Control Tray Assembly	
27	F360157P	Transformer	B-voltage
28	F997P3	Control Kit	HCN, HCZ, SCN, SCZ, UCN and UCZ models
	F998P3	Control Kit	HCL, HCU, SCL, SCU, UCL and UCU models
29	F431017	Nut	
30	F8069501	Contact Switch	
31	F200233401P	Contact Block Switch	Includes item 30 and F8538101 Contact Base
	F8538101	Contact Base	
32	24205	Nut	
33	F8201301	Emergency Stop Plate	
34	F200233500	Emergency Stop Pushbutton	

Control Module - F-Speed Design 1 OPL Models

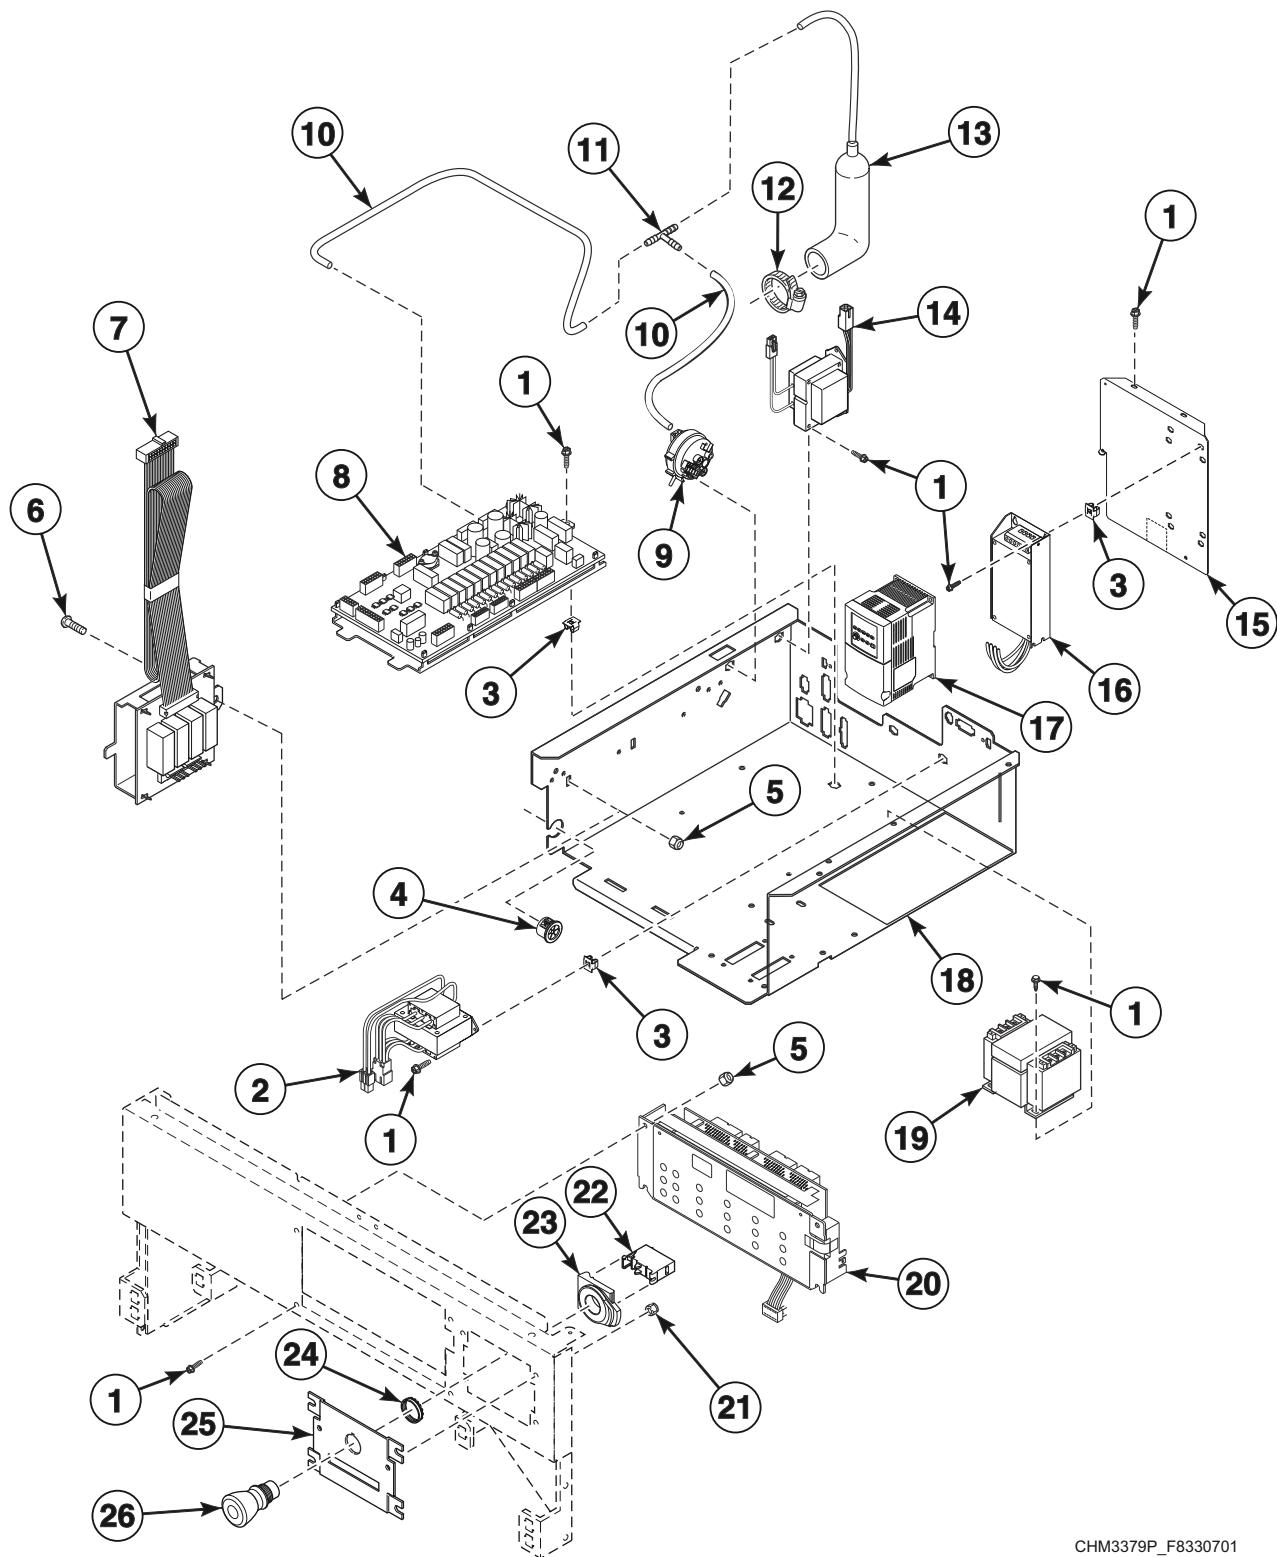


CHM3379P_F8330701

Control Module - F-Speed Design 1 OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8060501	Emergency Stop Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 8, 15, F8191201P External Supply Harness and screws
	203346	USB IR Interface Kit	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8261501P	Control Tray Harness	
1	F8206901	Screw	
2	803527P	Transformer	
3	70030501	Expansion Clip	
4	44071501	Snap Bushing	
5	F430232	Nut	
6	F430903	Screw	
7	F8189401P	Auxiliary Control Assembly	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F200222	Hose Clamp	No. 12
13	F020014200	Air Trap Hose	
14	201616P	Transformer	External supply
15	F8195803	Support Bracket	
16	F8053901P	EMI Filter	240 Volt; International models
	F8053902	EMI Filter	480 Volt; International models
17	F8169401	PowerFlex 40 Drive	20 pound models; Models through 2/28/10; Q and X-voltage
	F8169402	PowerFlex 40 Drive	20 pound models; Models through 2/28/10; N, P and R-voltage
	F8169403	PowerFlex 40 Drive	30 pound models; Models through 2/28/10; Q and X-voltage
	F8169404	PowerFlex 40 Drive	30 pound models; Models through 2/28/10; N, P and R-voltage
	F8169405	PowerFlex 40 Drive	40 pound models; Models through 3/8/10; Q and X-voltage
	F8169406	PowerFlex 40 Drive	40 pound models; Models through 3/8/10; N, P and R-voltage
	F8169407	PowerFlex 40 Drive	60 pound models; Models through 3/8/10; Q and X-voltage
	F8169408	PowerFlex 40 Drive	60 pound models; Models through 3/8/10; N, P and R-voltage
	F8169434	PowerFlex 40 Drive	20 pound models; Models starting 3/1/10; Q and X-voltage
	F8169435	PowerFlex 40 Drive	20 pound models; Models starting 3/1/10; N, P and R-voltage
	F8169436	PowerFlex 40 Drive	30 pound models; Models starting 3/1/10; Q and X-voltage
	F8169437	PowerFlex 40 Drive	30 pound models; Models starting 3/1/10; N, P and R-voltage
	F8169438	PowerFlex 40 Drive	40 pound models; Models starting 3/9/10; Q and X-voltage
	F8169439	PowerFlex 40 Drive	40 pound models; Models starting 3/9/10; N, P and R-voltage
	F8169440	PowerFlex 40 Drive	60 pound models; Models starting 3/9/10; Q and X-voltage
	F8169441	PowerFlex 40 Drive	60 pound models; Models starting 3/9/10; N, P and R-voltage
18	F8205902	Control Tray Assembly	20 and 30 pound models
	F8205903	Control Tray Assembly	40 and 60 pound models
19	F360157P	Transformer	B-voltage
20	F997P3	Control Kit	HCN, SCN and UCN F-speed models
	F998P3	Control Kit	HCL, HCU, SCL, SCU, UCL and UCU F-speed models
21	F431017	Nut	
22	F8069501	Contact Switch	
23	F200233401P	Contact Block Switch	Includes item 22 and F8538101 Contact Base
	F8538101	Contact Base	
24	24205	Nut	
25	F8201301	Emergency Stop Plate	
26	F200233500	Emergency Stop Pushbutton	

Control Module - Design 2 and 3 OPL Models (Drawing 1 of 2)

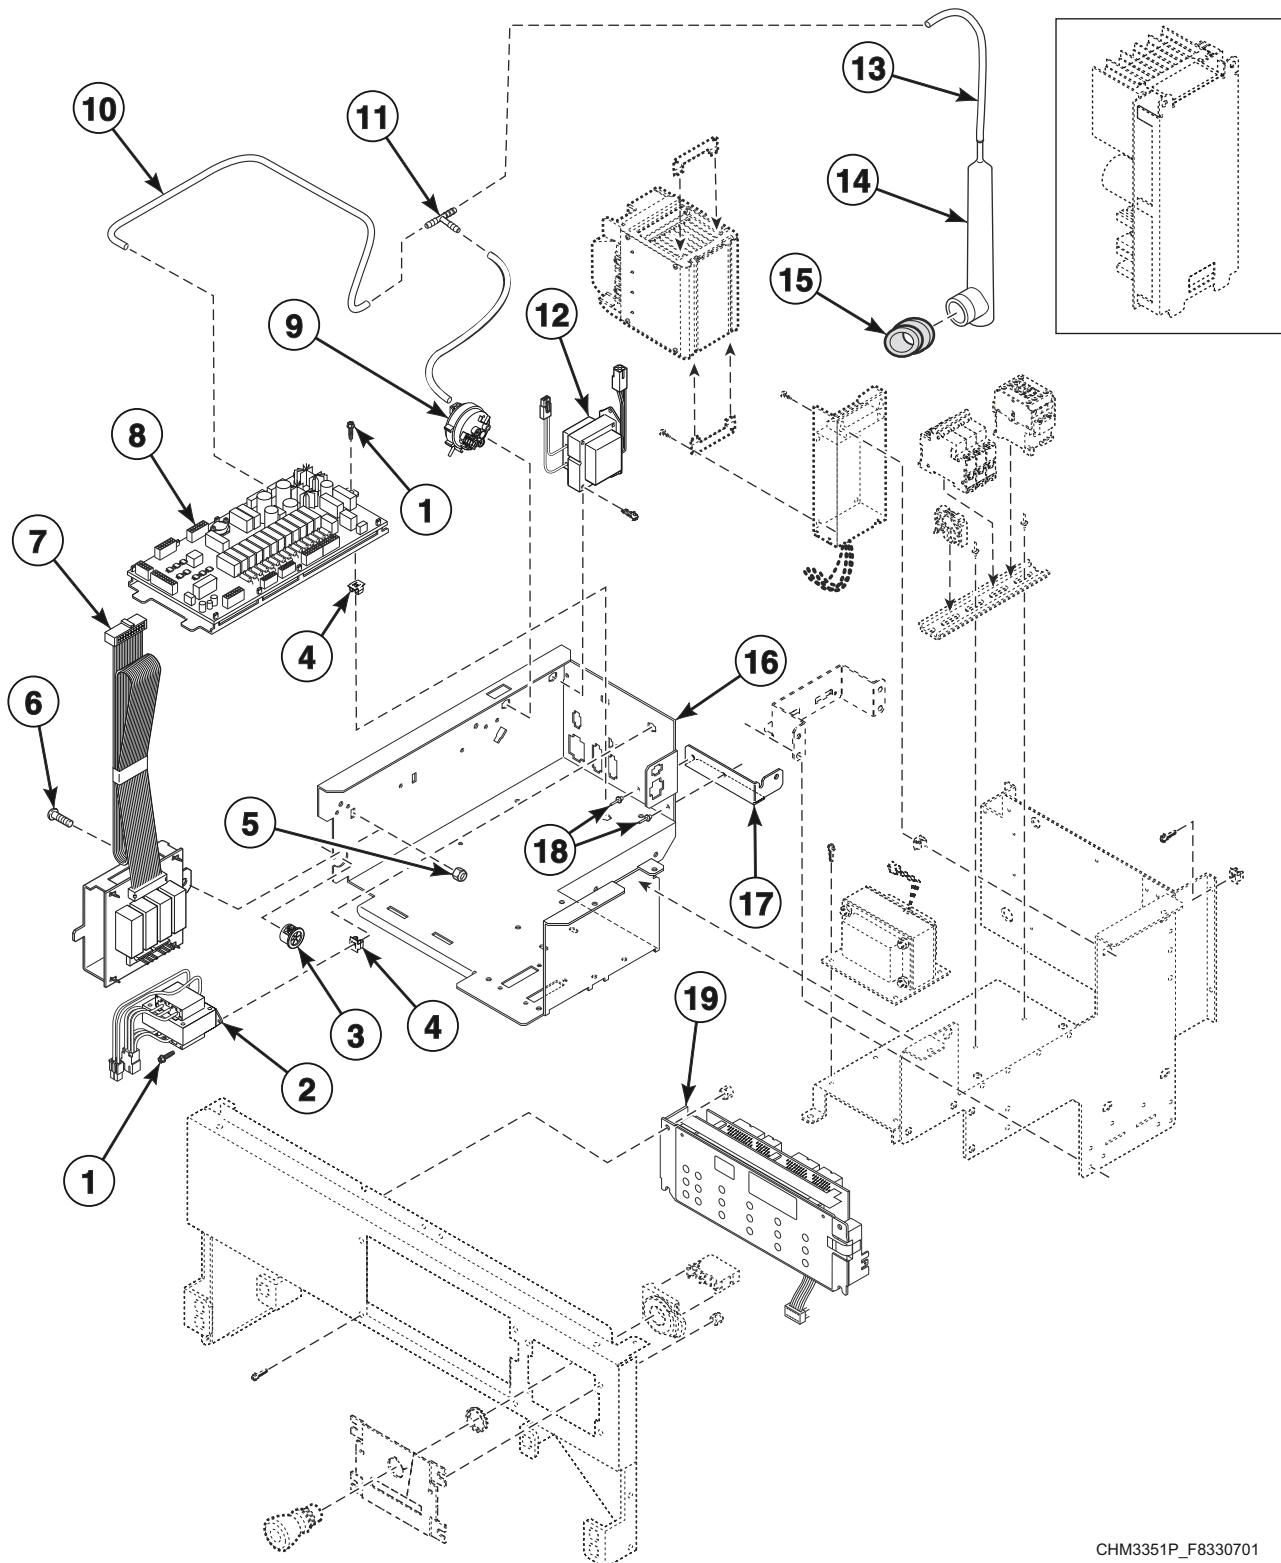


CHM3351P_F8330701

Control Module - Design 2 and 3 OPL Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8060501	Emergency Stop Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 8, 15, F8191201P External Supply Harness and screws
	203346	USB IR Interface Kit	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8261501P	Control Tray Harness	
1	F8206901	Screw	
2	803527P	Transformer	
3	44071501	Snap Bushing	
4	70030501	Expansion Clip	
5	F430232	Nut	
6	F430903	Screw	
7	F8189401P	Auxiliary Control Assembly	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8404401	Water Pressure Switch	Electric heat
10	F8153901	Tubing	
11	F8246601	Tee	Electric heat
	F8431001	Hose Barb Connector	
12	201616P	Transformer	External supply
13	F8405301	Hose	
14	30907	Pressure Bulb	
15	F8433001	Grommet	
16	F8359701	Control Tray Assembly	20 and 30 pound models
	F8359703	Control Tray Assembly	40 and 60 pound models
17	F8375201	Tray Support Bracket	
18	70058501	Pop Rivet	
19	F120P3	Front End Control Kit	HCN and UCN F-speed models; Includes F8028701 Output/Logic Harness
	F121P3	Front End Control Kit	HCB, HCL, HCU, UCB, UCL, UCU and UCZ F-speed models; Includes F8028701 Output/Logic Harness
	F115P3	Front End Control Kit	HCN and UCN V-speed models; Includes F8028701 Output/Logic Harness
	F116P3	Front End Control Kit	HCB, HCL, HCZ, UCB, UCL and UCU V-speed models; Includes F8028701 Output/Logic Harness
	F8549008	Front End Control	CC and IC V-speed models
	F8549018	Front End Control	CC and IC F-speed models
	F8549009P	Front End Control	YC V-speed models

Control Module - Design 2 and 3 OPL Models (Drawing 2 of 2)

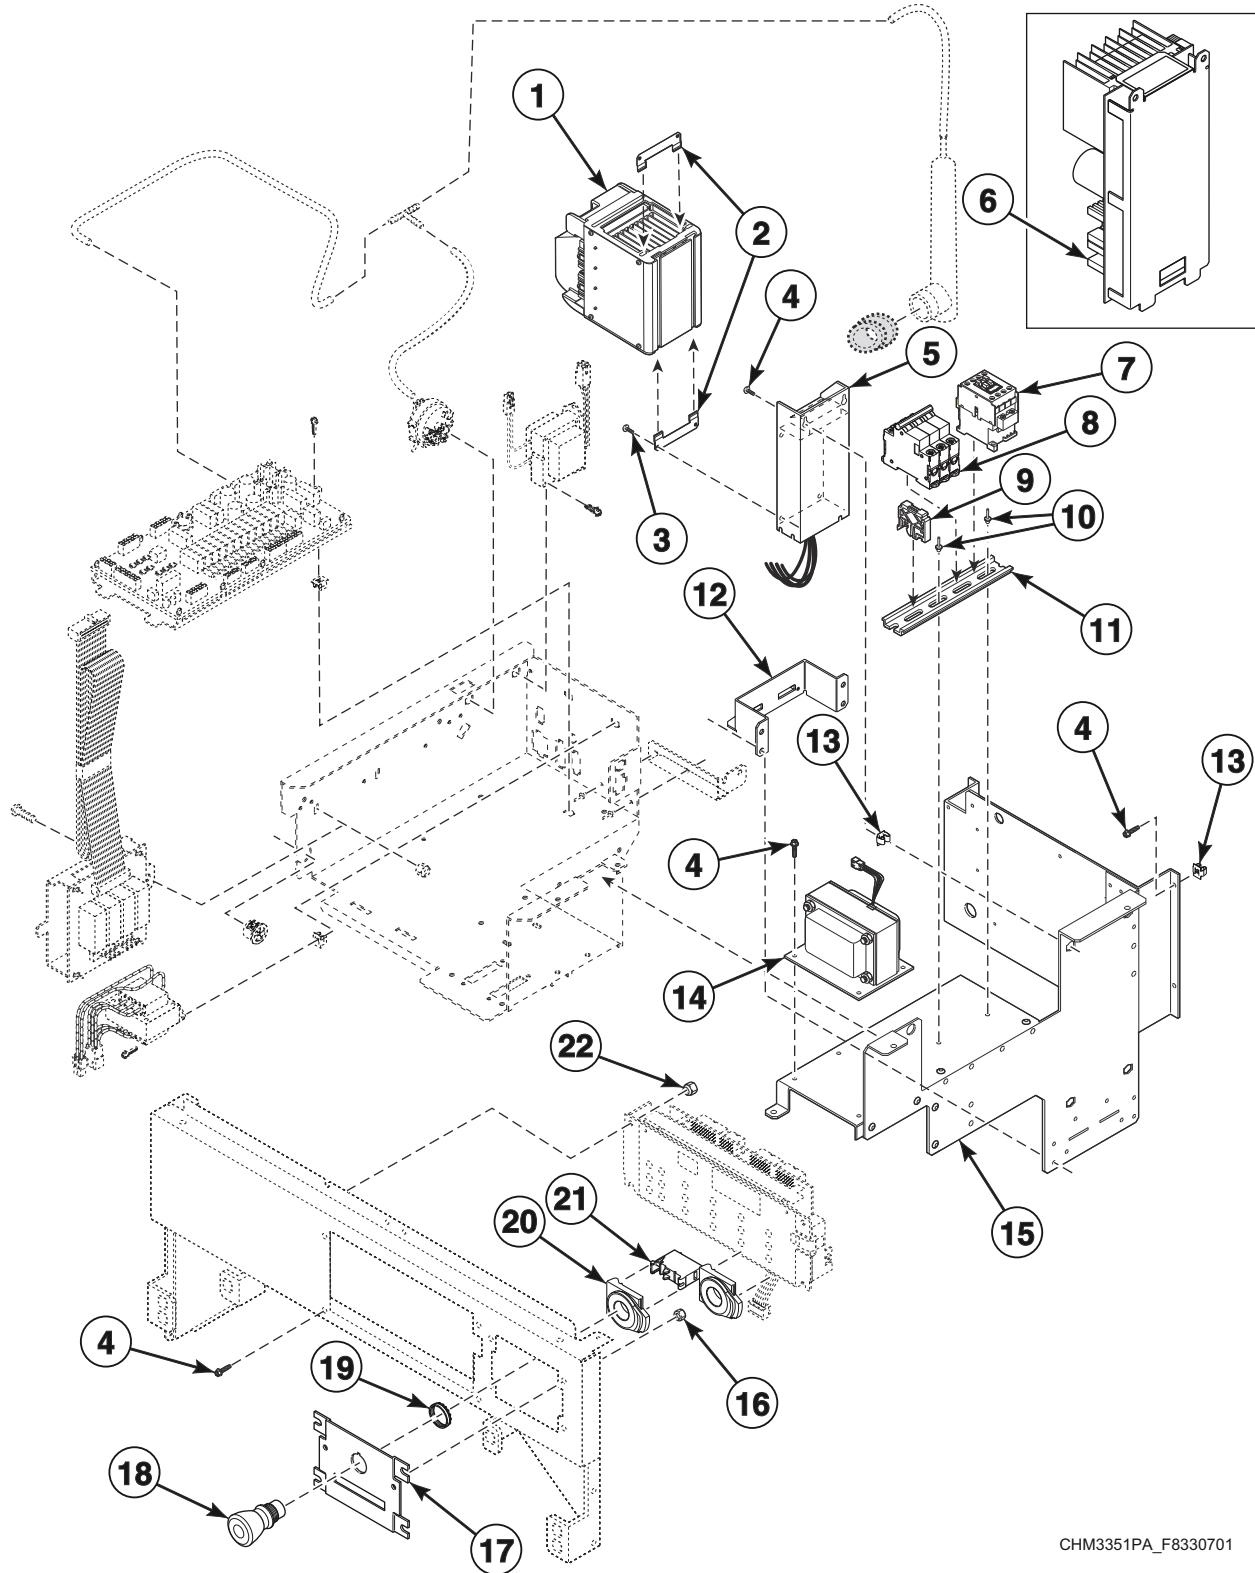


CHM3351PA F8330701

Control Module - Design 2 and 3 OPL Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8303601P	Drive Assembly	N and P-voltage; 5 hp
	F8204701P	Drive Assembly	60 pound models; Q and X-voltage; 3 hp
2	F8322401	Drive Mounting Bracket	Use with item 1
3	503688	Screw	
4	F8206901	Screw	
5	F8053901P	EMI Filter	240 Volt; International models
	F8053902	EMI Filter	480 Volt; International models
6	F8327301P	Drive Assembly	20 , 30 and 40 pound models; B, Q and X-voltage; 2 hp
7	F330177P	Contactor	
8	70256901P	Circuit Breaker	Electric heat models
9	F8449801	End Stop	
10	70058501	Pop Rivet	
11	F8385301	DIN Rail	
12	F8310101	Lower Drive Mounting Bracket	Use with item 6
13	70030501	Expansion Clip	
14	F8401301	Transformer	
15	F8359801	Drive Tray Assembly	20 pound models
	F8359802	Drive Tray Assembly	30 pound models
	F8359803	Drive Tray Assembly	40 and 60 pound models
16	F431017	Nut	
17	F8201301	Emergency Stop Plate	
18	F200233500	Emergency Stop Pushbutton	
19	24205	Nut	
20	F200233401P	Contact Block Switch	Includes item 21 and F8538101 Contact Base
	F8538101	Contact Base	
21	F8069501	Contact Switch	
22	F430232	Nut	

Control Module - 2 Speed Vend Models

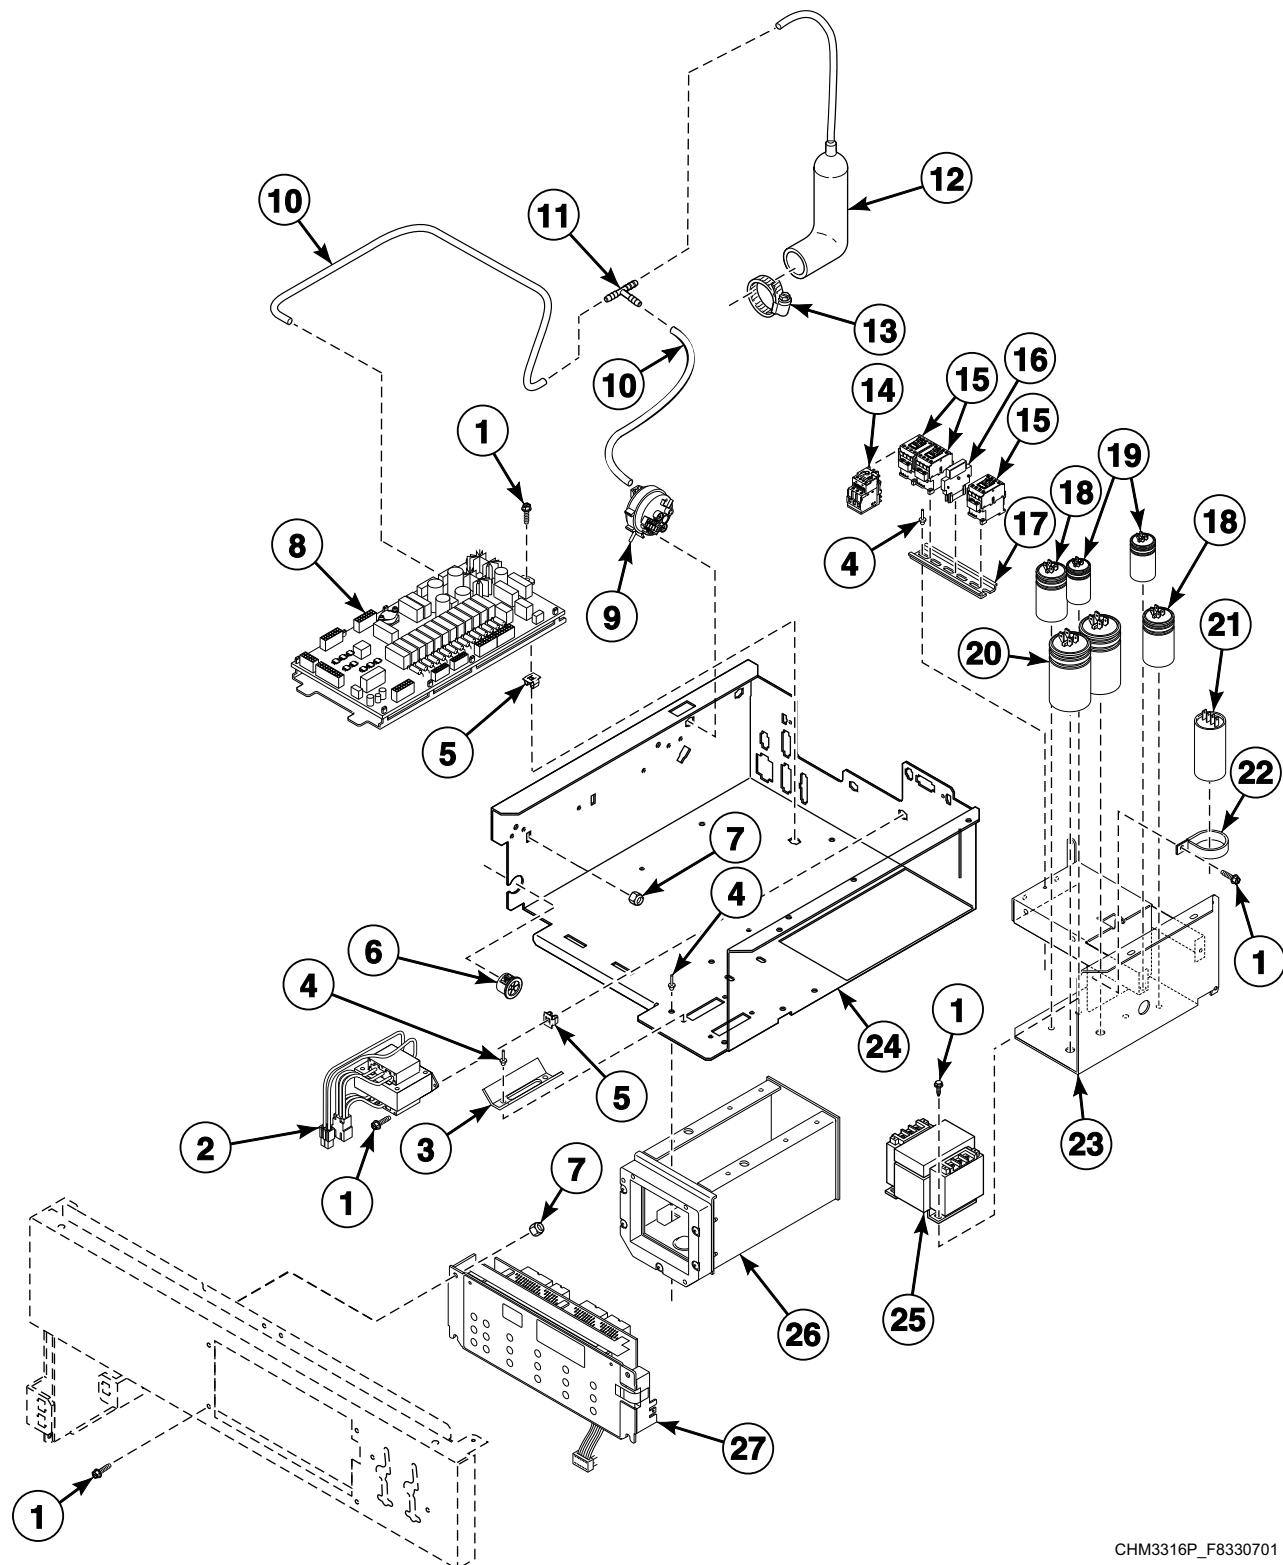


CHM3316P_F8330701

Control Module - 2 Speed Vend Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	203346	USB IR Interface Kit	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8191201P	External Supply Harness	
	F8028219P	Temperature Configuration Harness	
	F937P3	External Supply Kit	Includes items 1, 10, 24, F8191201P External Supply Harness and screws
1	F8206901	Screw	
2	803527P	Transformer	
3	F8170801	Coin Chute	
4	70058501	Pop Rivet	
5	70030501	Expansion Clip	
6	44071501	Snap Bushing	
7	F430232	Nut	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F020014200	Air Trap Hose	
13	F200222	Hose Clamp	No. 12
14	F8176101P	Overload Contactor	
15	F330177P	Contactor	
16	F330186P	Interlock Contactor	
17	F8200101	DIN Rail	
18	F8411901	Capacitor	50 MFD; 20 pound models Y-voltage, 1 used; 40 pound models Y-voltage, 2 used
	F370221	Capacitor	100 MFD; 20 pound models B-voltage, 1 used
19	F8411701	Capacitor	20 MFD; 30 pound models Y-voltage, 4 used; 40 pound models Y-voltage, 2 used
	F8411801	Capacitor	25 MFD; 20 pound models Y-voltage, 2 used
20	F370218P	Capacitor	160 MFD; 40 pound models Y-voltage, 2 used
	F370220	Capacitor	130 MFD; 20 pound models B-voltage, 2 used; 30 pound models Y-voltage, 1 used
21	F340002	Motor Switch	50 Amp
22	F0340722-00	Switch Clamp	
23	F8199601	Capacitor Tray Assembly	20 pound models; B and Y-voltage
	F8199901	Capacitor Tray Assembly	All other models; B and Y-voltage
	F8343401	Contactor Tray Assembly	C, F, J and O-voltage
24	F8205902	Control Tray Assembly	20 and 30 pound models; Includes items 3 and 25
	F8205903	Control Tray Assembly	40 and 60 pound models; Includes items 3 and 25
25	F360157P	Transformer	B-voltage
26	F8182501	Coin Vault Assembly	20 and 30 pound models
	F8182601	Coin Vault Assembly	40 and 60 pound models
27	F996P3	Control Kit	HCL and HCN models

Control Module - F-Speed Design 1 Vend Models

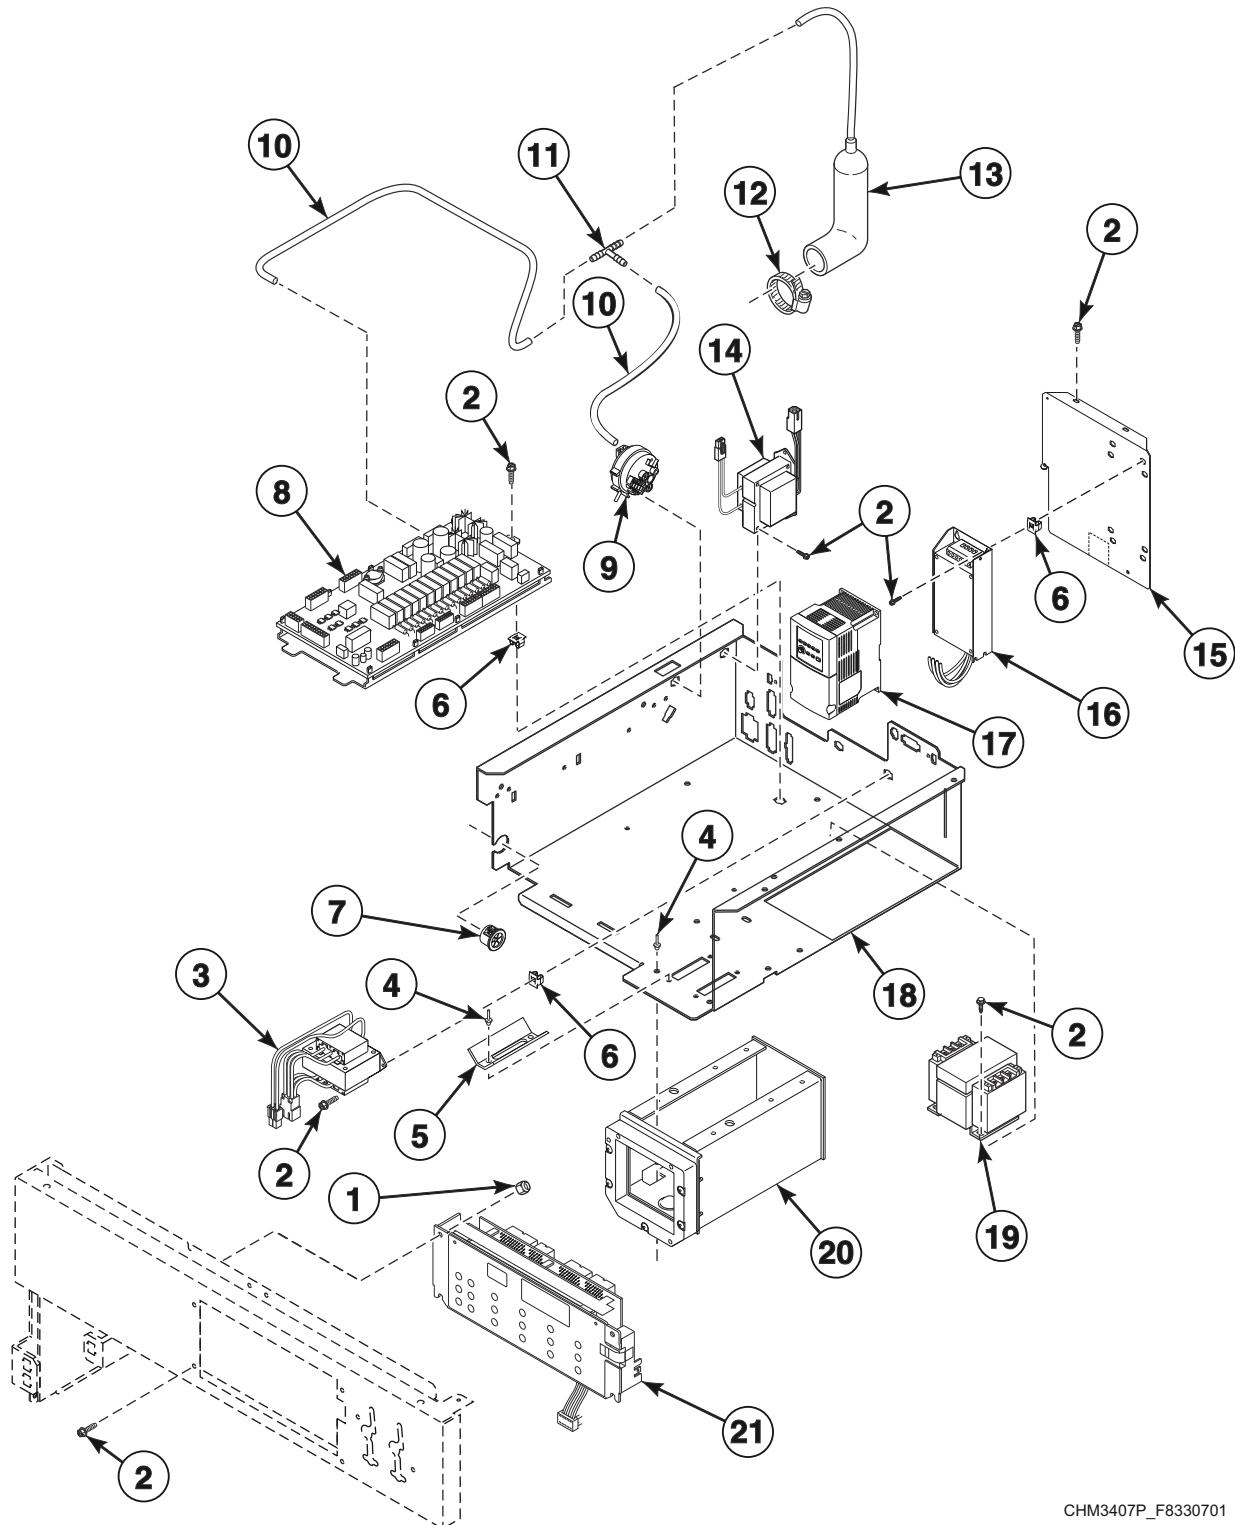


CHM3407P_F8330701

Control Module - F-Speed Design 1 Vend Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	203346	USB IR Interface Kit	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8191201P	External Supply Harness	
	F8261501P	Control Tray Harness	40 and 60 pound models
	F937P3	External Supply Kit	Includes items 1, 10, 24, F8191201P External Supply Harness and screws
1	F430232	Nut	
2	F8206901	Screw	
3	803527P	Transformer	
4	70058501	Pop Rivet	
5	F8170801	Coin Chute	
6	70030501	Expansion Clip	
7	44071501	Snap Bushing	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F200222	Hose Clamp	No. 12
13	F020014200	Air Trap Hose	
14	201616P	Transformer	
15	F8195803	Support Bracket	
16	F8053901P	EMI Filter	240 Volt; International model
	F8053902	EMI Filter	480 Volt; International model
17	F8169401	PowerFlex 40 Drive	20 pound models; Models through 2/28/10; Q and X-voltage
	F8169402	PowerFlex 40 Drive	20 pound models; Models through 2/28/10; N, P and R-voltage
	F8169403	PowerFlex 40 Drive	30 pound models; Models through 2/28/10; Q and X-voltage
	F8169404	PowerFlex 40 Drive	30 pound models; Models through 2/28/10; N, P and R-voltage
	F8169405	PowerFlex 40 Drive	40 pound models; Models through 3/8/10; Q and X-voltage
	F8169406	PowerFlex 40 Drive	40 pound models; Models through 3/8/10; N, P and R-voltage
	F8169407	PowerFlex 40 Drive	60 pound models; Models through 3/8/10; Q and X-voltage
	F8169408	PowerFlex 40 Drive	60 pound models; Models through 3/8/10; N, P and R-voltage
	F8169434	PowerFlex 40 Drive	20 pound models; Models starting 3/1/10; Q and X-voltage
	F8169435	PowerFlex 40 Drive	20 pound models; Models starting 3/1/10; N, P and R-voltage
	F8169436	PowerFlex 40 Drive	30 pound models; Models starting 3/1/10; Q and X-voltage
	F8169437	PowerFlex 40 Drive	30 pound models; Models starting 3/1/10; N, P and R-voltage
	F8169438	PowerFlex 40 Drive	40 pound models; Models starting 3/9/10; Q and X-voltage
	F8169439	PowerFlex 40 Drive	40 pound models; Models starting 3/9/10; N, P and R-voltage
	F8169440	PowerFlex 40 Drive	60 pound models; Models starting 3/9/10; Q and X-voltage
	F8169441	PowerFlex 40 Drive	60 pound models; Models starting 3/9/10; N, P and R-voltage
18	F8205902	Control Tray Assembly	20 and 30 pound models; Includes items 5 and 19
	F8205903	Control Tray Assembly	40 and 60 pound models; Includes items 5 and 19
19	F360157P	Transformer	B-voltage
20	F8182501	Coin Vault Assembly	20 and 30 pound models
	F8182601	Coin Vault Assembly	40 and 60 pound models
21	F996P3	Control Kit	

Control Module - F-Speed Design 2 and 3 Vend Models (Drawing 1 of 2)

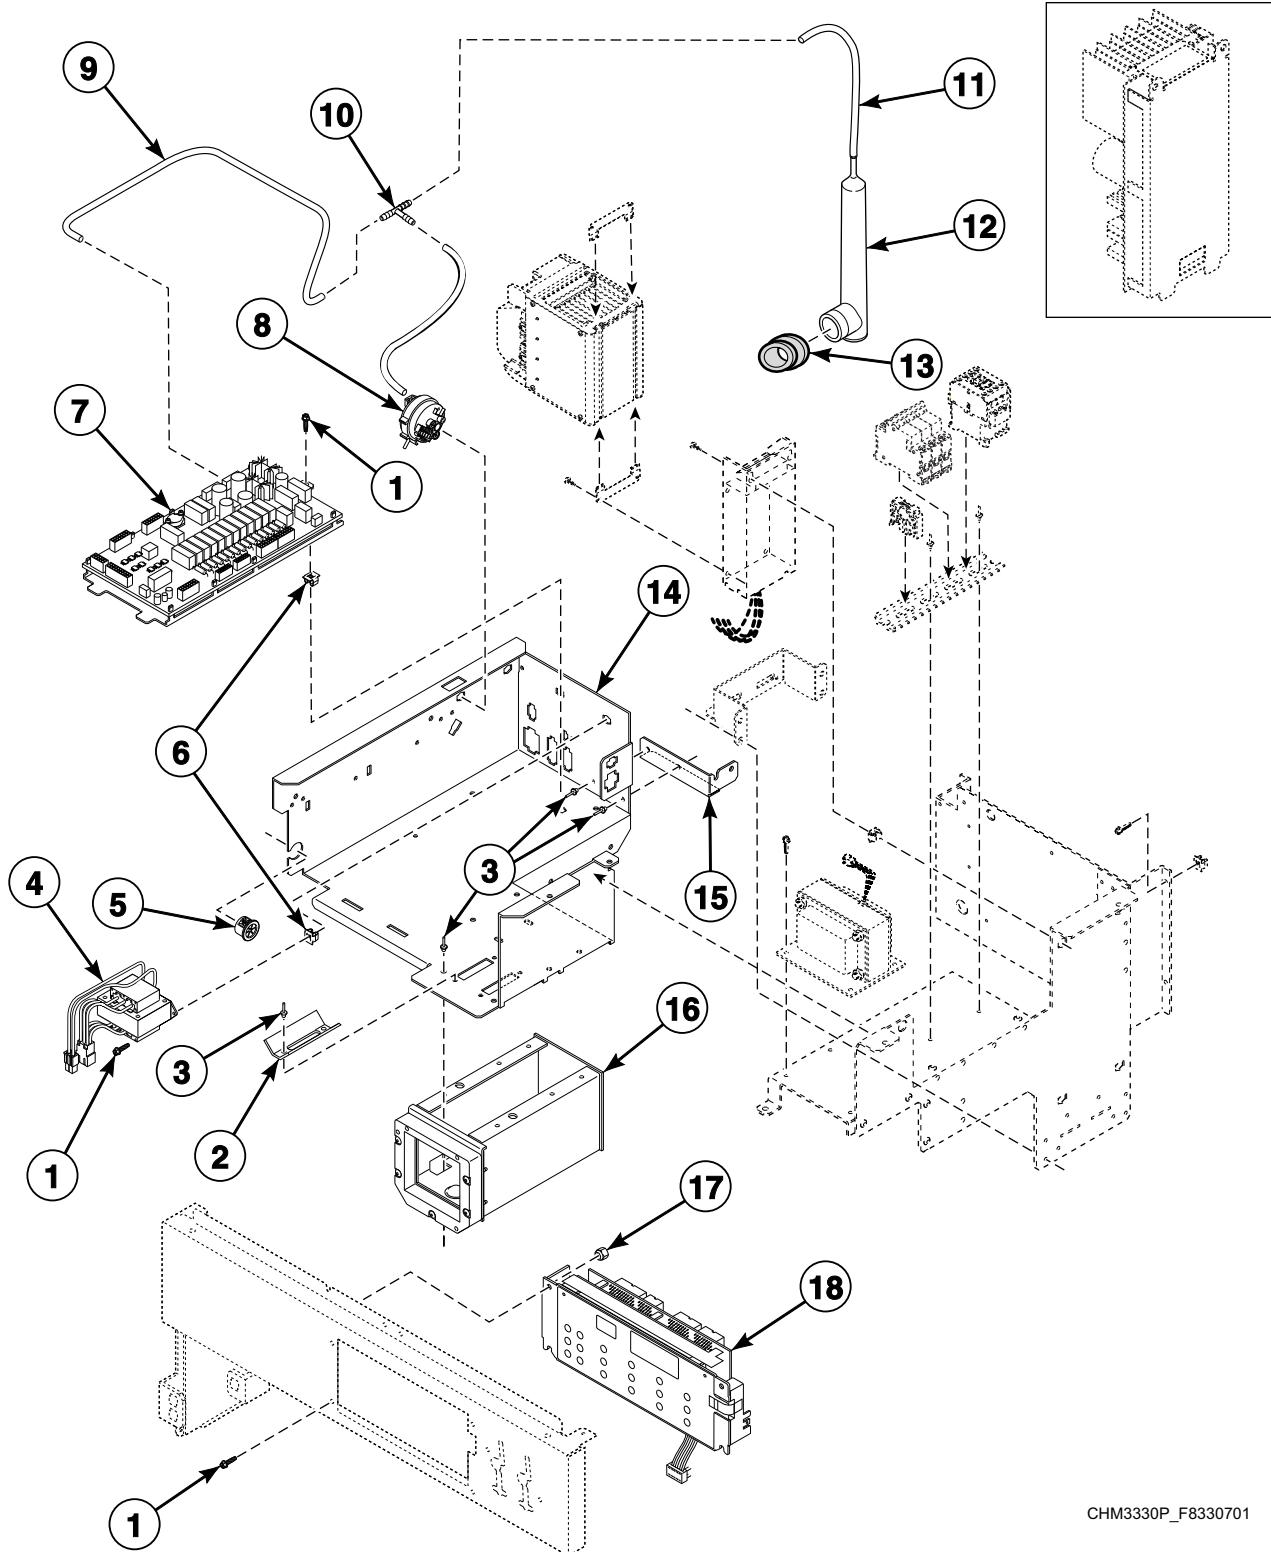


CHM3330P_F8330701

Control Module - F-Speed Design 2 and 3 Vend Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	203346	USB IR Interface Kit	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 9, F8191201P External Supply Harness and screws
1	F8206901	Screw	
2	F8170801	Coin Chute	
3	70058501	Pop Rivet	
4	803527P	Transformer	
5	44071501	Snap Bushing	
6	70030501	Expansion Clip	
7	F980P3	Control Assembly Kit	Includes item 10 and F8108001 Output Assembly
8	F8404401	Water Pressure Switch	
9	F8153901	Tubing	
10	F8246601	Tee	Electric heat
	F8431001	Hose Barb Connector	All other models
11	F8405301	Hose	
12	30907	Pressure Bulb	
13	F8433001	Grommet	
14	F8359602	Control Tray Assembly	20 and 30 pound models; Design 2; Includes item 2
	F8359707	Control Tray Assembly	20 and 30 pound models; Design 3
	F8359604	Control Tray Assembly	40 and 60 pound models; Includes item 2
15	F8375201	Tray Support Bracket	
16	F8182501	Coin Vault Assembly	20 and 30 pound models; Design 2
	F8182601	Coin Vault Assembly	All other models
17	F431017	Nut	
18	F118P3	Front End Control Kit	Includes F8028701 Output/Logic Harness

Control Module - F-Speed Design 2 and 3 Vend Models (Drawing 2 of 2)

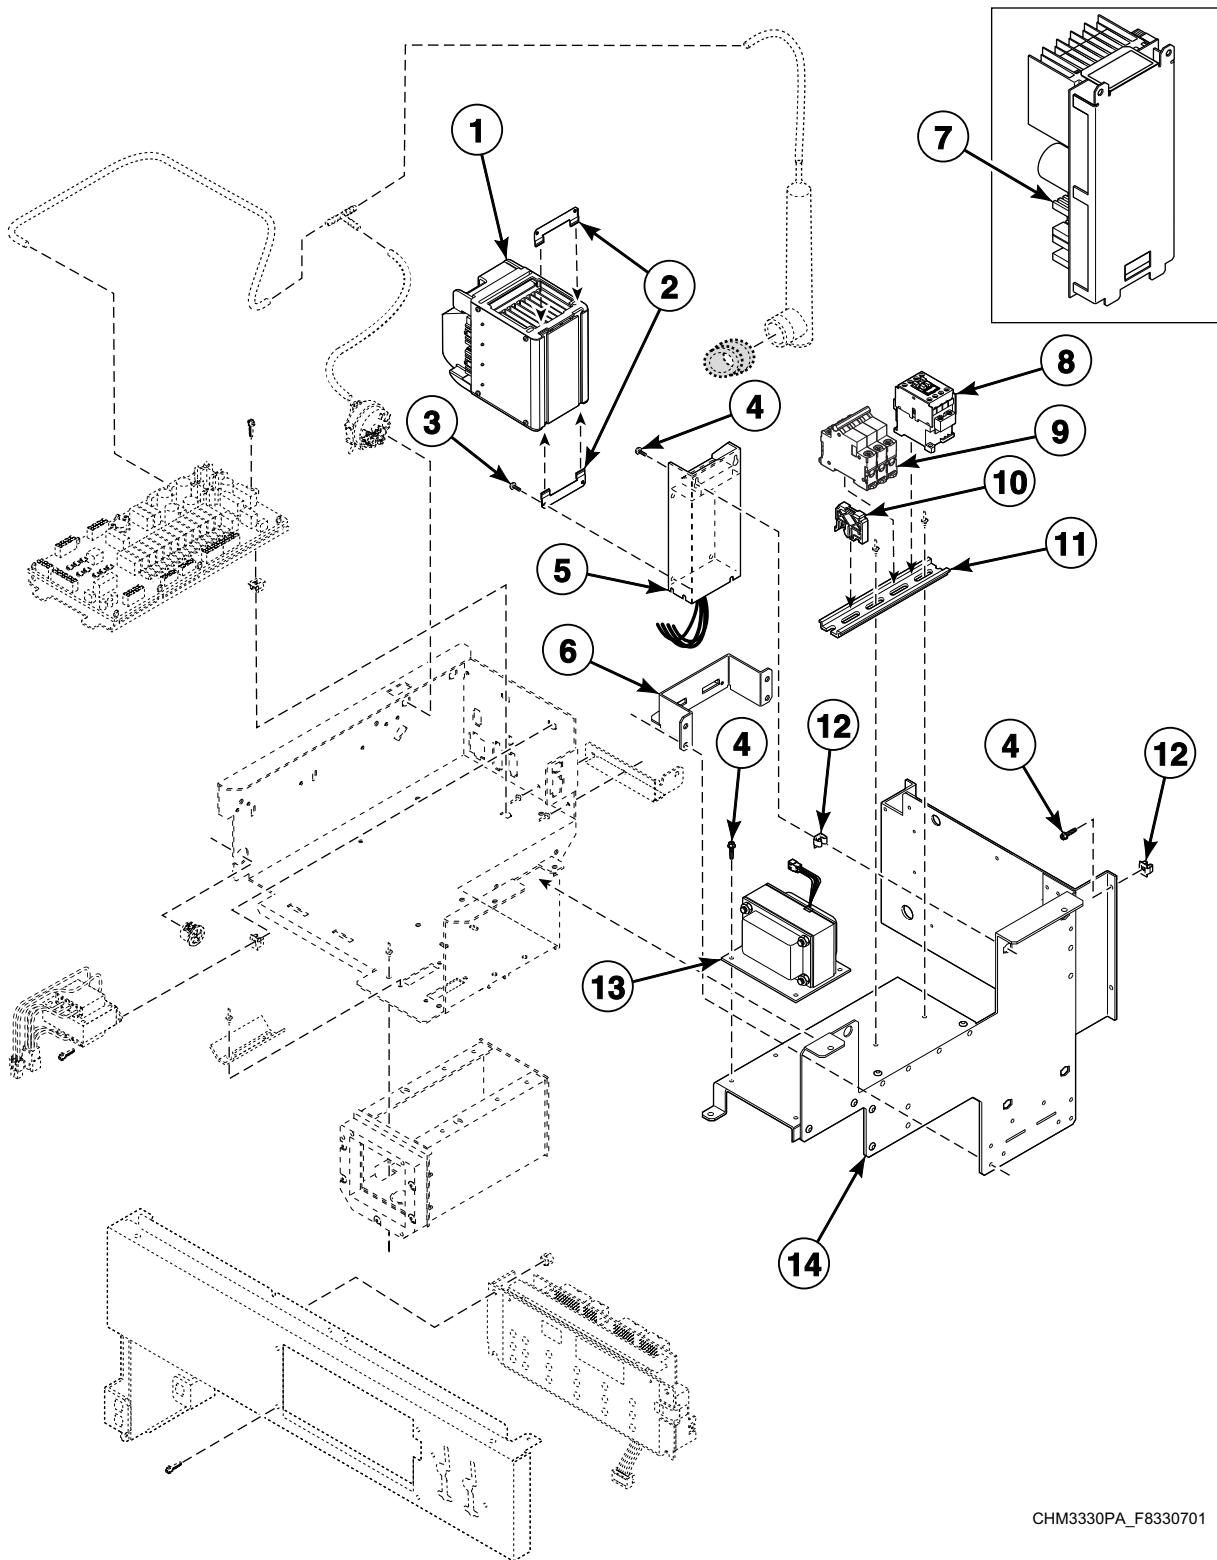


CHM3330PA_F8330701

Control Module - F-Speed Design 2 and 3 Vend Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	203346	USB IR Interface Kit	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes item 4, F8191201P External Supply Harness and screws
1	F8303601P	Drive Assembly	N and P-voltage; 5 hp
	F8204701P	Drive Assembly	60 pound models; Q and X-voltage; 3 hp
2	F8322401	Drive Mounting Bracket	Use with item 1
3	503688	Screw	
4	F8206901	Screw	
5	F8053901P	EMI Filter	240 Volt; International models
	F8053902	EMI Filter	480 Volt; International models
6	F8310101	Lower Drive Mounting Bracket	Use with item 7
7	F8327301P	Drive Assembly	20 , 30 and 40 pound models; B and Q-voltage; 2 hp
8	F330177P	Contactor	
9	70256901P	Circuit Breaker	Electric heat
10	70121001	End Stop	
11	F8385301	DIN Rail	
12	70030501	Expansion Clip	
13	F8401301	Transformer	
14	F8359801	Drive Tray Assembly	20 pound models
	F8359802	Drive Tray Assembly	30 pound models
	F8359803	Drive Tray Assembly	40 and 60 pound models

Flush Mount Coin Meter Assembly - Single Drop

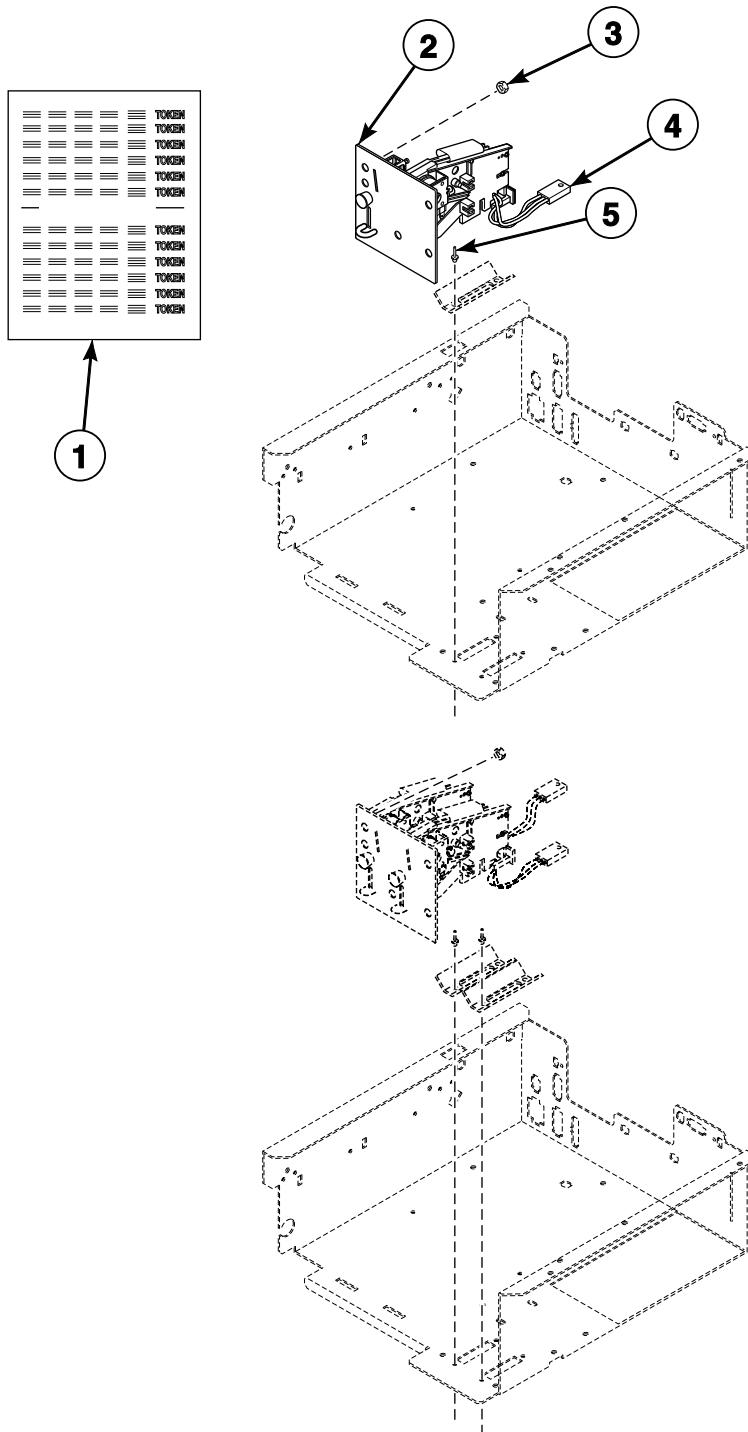


CHM3088P_F8330701

Flush Mount Coin Meter Assembly - Single Drop

REF	PART NO.	DESCRIPTION	COMMENTS
	F200010000P	Coin Meter Assembly	U.S. \$.25; Includes items 2 and 3
	F200010006	Coin Meter Assembly	.800 token; Includes items 2 and 3
	F200010007	Coin Meter Assembly	.880 token; Includes items 2 and 3
	F200010009	Coin Meter Assembly	.990 token; Includes items 2 and 3
	F200010011	Coin Meter Assembly	Jeton WH121 token; Includes items 2 and 3
	F200010012	Coin Meter Assembly	Jeton .08 token; Includes items 2 and 3
1	38725	Coin Identification Paper	
2	38464P	Coin Drop Assembly	Canada .25
	N/A	Coin Drop Assembly	Australia .20
	N/A	Coin Drop Assembly	Belgium 5 franc
	N/A	Coin Drop Assembly	Denmark 2 krone
	N/A	Coin Drop Assembly	United Kingdom 20 pence
	N/A	Coin Drop Assembly	France 2 franc
	N/A	Coin Drop Assembly	Hong Kong 5 dollar
	N/A	Coin Drop Assembly	Italy 500 lirraiget
	N/A	Coin Drop Assembly	Japan 100 yen
	N/A	Coin Drop Assembly	Korea 500 won
	N/A	Coin Drop Assembly	South Africa 2 rand
	N/A	Coin Drop Assembly	Spain 100 peseta
	N/A	Coin Drop Assembly	Thailand 10 baht
	N/A	Coin Drop Assembly	.886 token
	N/A	Coin Drop Assembly	1.000 token
	N/A	Coin Drop Assembly	Jeton 08 token
	70441601P	Coin Drop	U.S. \$.25
	N/A	Coin Drop Assembly	.800 token
	38462P	Coin Drop Assembly	Token; 118-1; .880 diameter x .079 thick; Brass
	38463	Coin Drop Assembly	Token; 118-5; .990 diameter x .081 thick; Silver
	N/A	Coin Drop Assembly	Jeton WH121 token
	N/A	Coin Meter	Jeton .08 token
3	685846	Nut	
4	200674P	Opto Coupler	
5	70058501	Pop Rivet	

N/A = Part no longer available

Flush Mount Coin Meter Assembly - Dual Drop

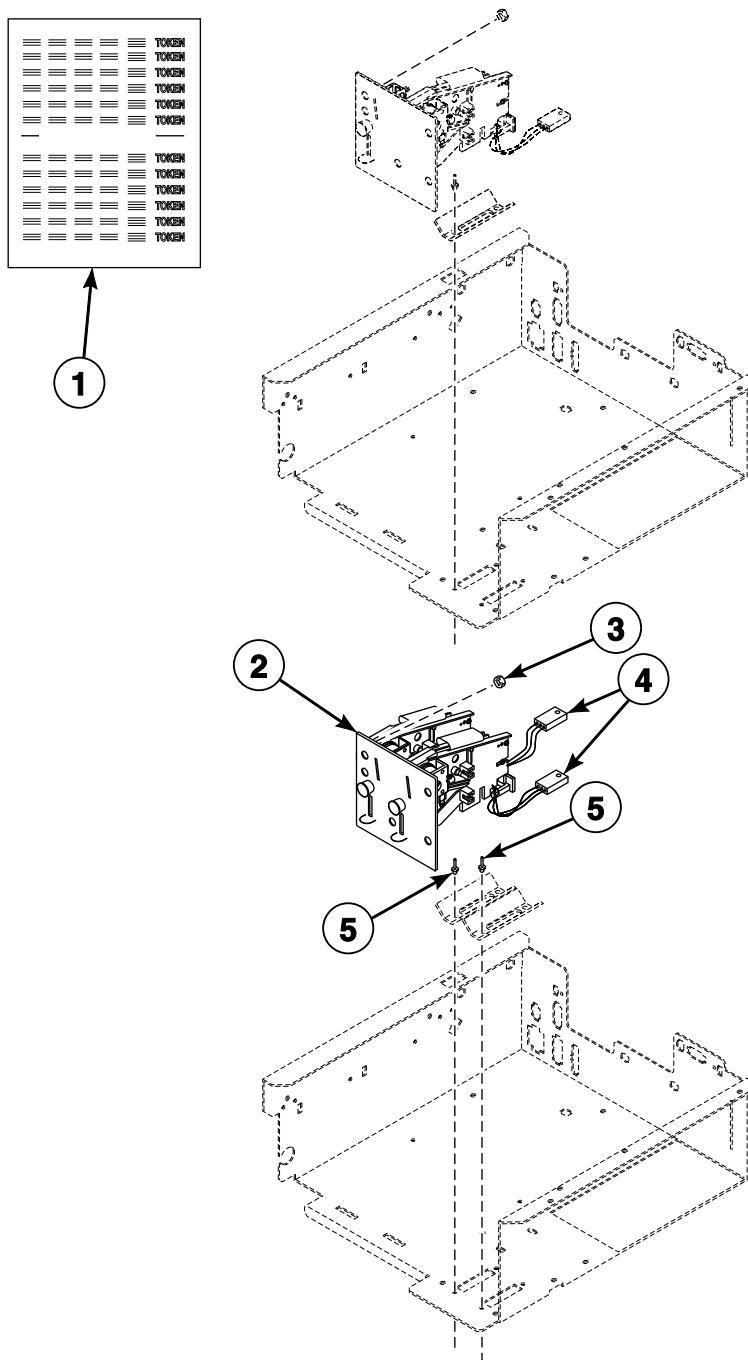


CHM3088PA_F8330701

Flush Mount Coin Meter Assembly - Dual Drop

REF	PART NO.	DESCRIPTION	COMMENTS
	F200010001	Coin Meter Assembly	Australia .20 and 1.00; Includes items 2 and 3
	F200010002	Coin Meter Assembly	100 and 500 yen; Includes items 2 and 3
	F200010003	Coin Meter Assembly	Canada .25 and 1.00; Includes items 2 and 3
	F200010004	Coin Meter Assembly	New Zealand .20 and 1.00; Includes items 2 and 3
	F200010005	Coin Meter Assembly	U.S. \$.25 and \$1.00; Includes items 2 and 3
	F200010008	Coin Meter Assembly	.50 and 2.00 euro; Includes items 2 and 3
	F200010010	Coin Meter Assembly	10 and 50 Taiwan; Includes items 2 and 3
1	38725	Coin Identification Paper	
2	N/A	Coin Meter	10 and 50 Taiwan
	N/A	Coin Meter	Belgium 5 and 20 franc
	N/A	Coin Meter	Denmark 1 and 5 krone
	N/A	Coin Meter	Denmark 5 and 10 krone
	38472	Coin Drop Assembly	United Kingdom 20 pence and 1 pound
	N/A	Coin Meter	.20 and .50 euro
	210195	Coin Drop Assembly	.20 and 1.00 euro
	210196	Coin Drop Assembly	.50 and 1.00 euro
	N/A	Coin Meter	2 and 5 franc
	N/A	Coin Meter	2 and 10 franc
	39157	Coin Drop Assembly	Israel 1 and 5 shekel
	38521	Coin Drop Assembly	Korea 100 and 500 won
	N/A	Coin Meter	Spain 100 and 500 peseta
	N/A	Coin Drop Assembly	Australia .20 and 1.00
	N/A	Coin Drop Assembly	Japan 100 and 500 yen
	N/A	Coin Drop Assembly	Canada .25 and 1.00
	N/A	Coin Drop Assembly	New Zealand .20 and 1.00
	70256402P	Coin Drop	U.S. \$.25 and \$1.00
	F0160737-00	Coin Meter	.50 and 2.00 euro
	70281102	Coin Drop Assembly	Taiwan 10 and 50 dollar
	N/A	Coin Meter	Taiwan 5 and 10 dollar
3	685846	Nut	
4	200674P	Opto Coupler	
5	70058501	Pop Rivet	

N/A = Part no longer available

Electronic Coin Meter Assembly

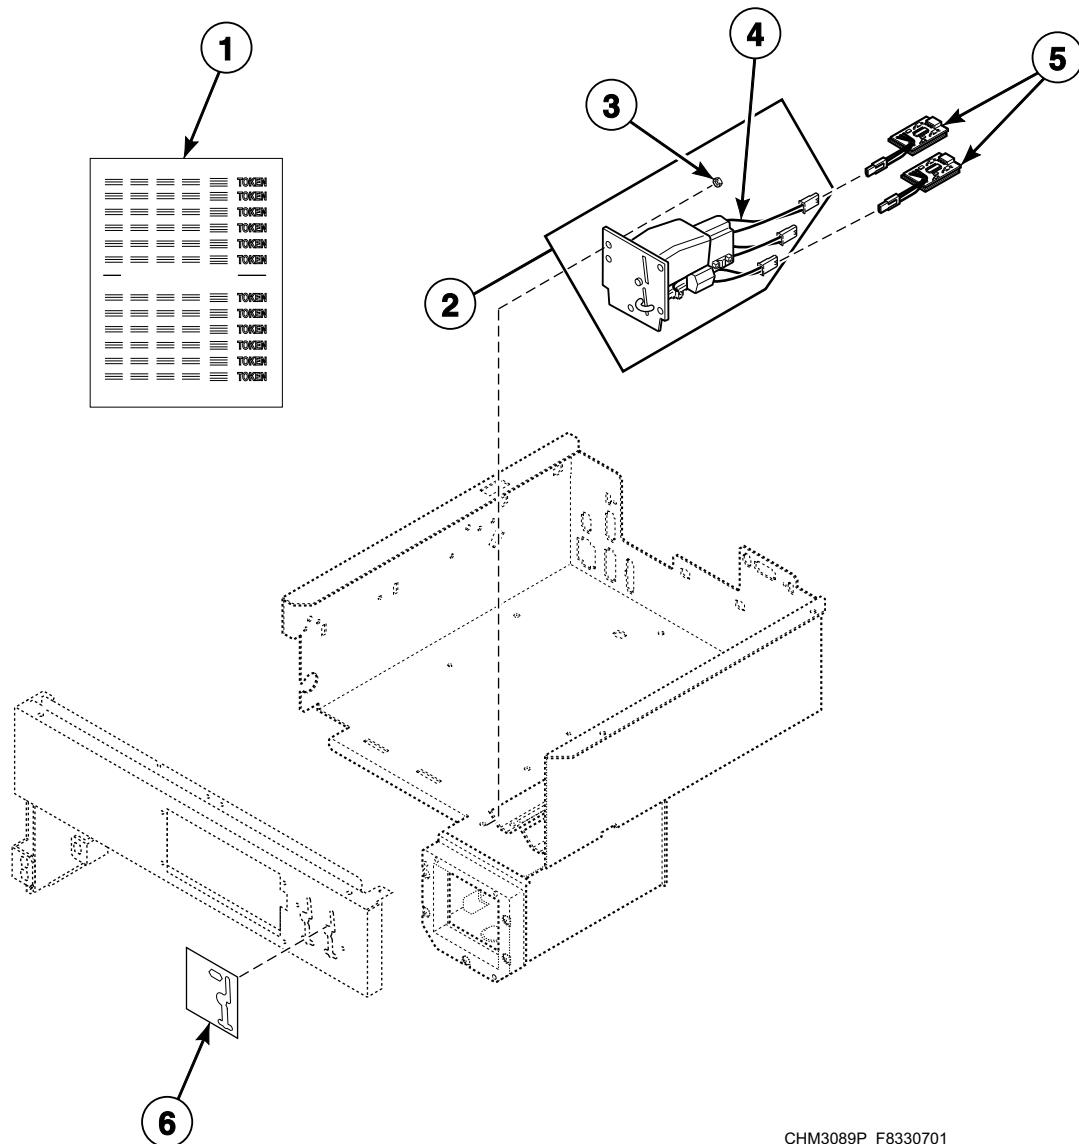


CHM3089P_F8330701

Electronic Coin Meter Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
	CK500	Electronic Coin Drop Kit	Includes item 2
1	38725	Coin Identification Paper	
2	F200021600P	Coin Meter Assembly	U.S., Canada, Japan and Taiwan; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021601	Coin Meter Assembly	Australia, New Zealand, Hong Kong, South Korea and Malaysia; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021602	Coin Meter Assembly	United Kingdom and euro; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021603	Coin Meter Assembly	Denmark, Norway and euro; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021604	Coin Meter Assembly	U.S., Mexico and Ecuador; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021605	Coin Meter Assembly	Euro, Latvia and Lithuania; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F8238601	Coin Meter Assembly	China, Russia and Malaysia; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
3	685846	Nut	
4	CK115	Electronic Coin Drop Kit	U.S. and Canada; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	CK113	Electronic Coin Drop Kit	Japan and Taiwan; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294105P	Electronic Coin Drop Assembly	Australia, New Zealand, Hong Kong, South Korea and Malaysia
	CK099	Electronic Coin Drop Kit	Australia, New Zealand, Hong Kong, South Korea and Malaysia; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294103P	Electronic Coin Drop Assembly	United Kingdom and euro
	CK100	Electronic Coin Drop Kit	United Kingdom and euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294104	Electronic Coin Drop Assembly	Denmark, Norway and euro
	CK101	Electronic Coin Drop Kit	Denmark, Norway and euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294106	Electronic Coin Drop Assembly	U.S., Mexico and Ecuador
	CK110	Electronic Coin Drop Kit	U.S., Mexico and Ecuador; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294107	Electronic Coin Drop Assembly	Euro, Latvia and Lithuania
	CK103	Electronic Coin Drop Kit	Euro, Latvia and Lithuania; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294109	Electronic Coin Drop Assembly	Singapore, China, Russia and Malaysia
	CK106	Electronic Coin Drop Kit	Singapore, China, Russia and Malaysia; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294111	Electronic Coin Drop Assembly	Euro
	CK109	Electronic Coin Drop Kit	Euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294119	Electronic Coin Drop Assembly	Thailand
	CK119	Electronic Coin Drop Kit	Thailand; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
5	F8034701P	Pulse Expander Assembly	
6	70295301	Overlay	Gray

Card Reader - HY Models

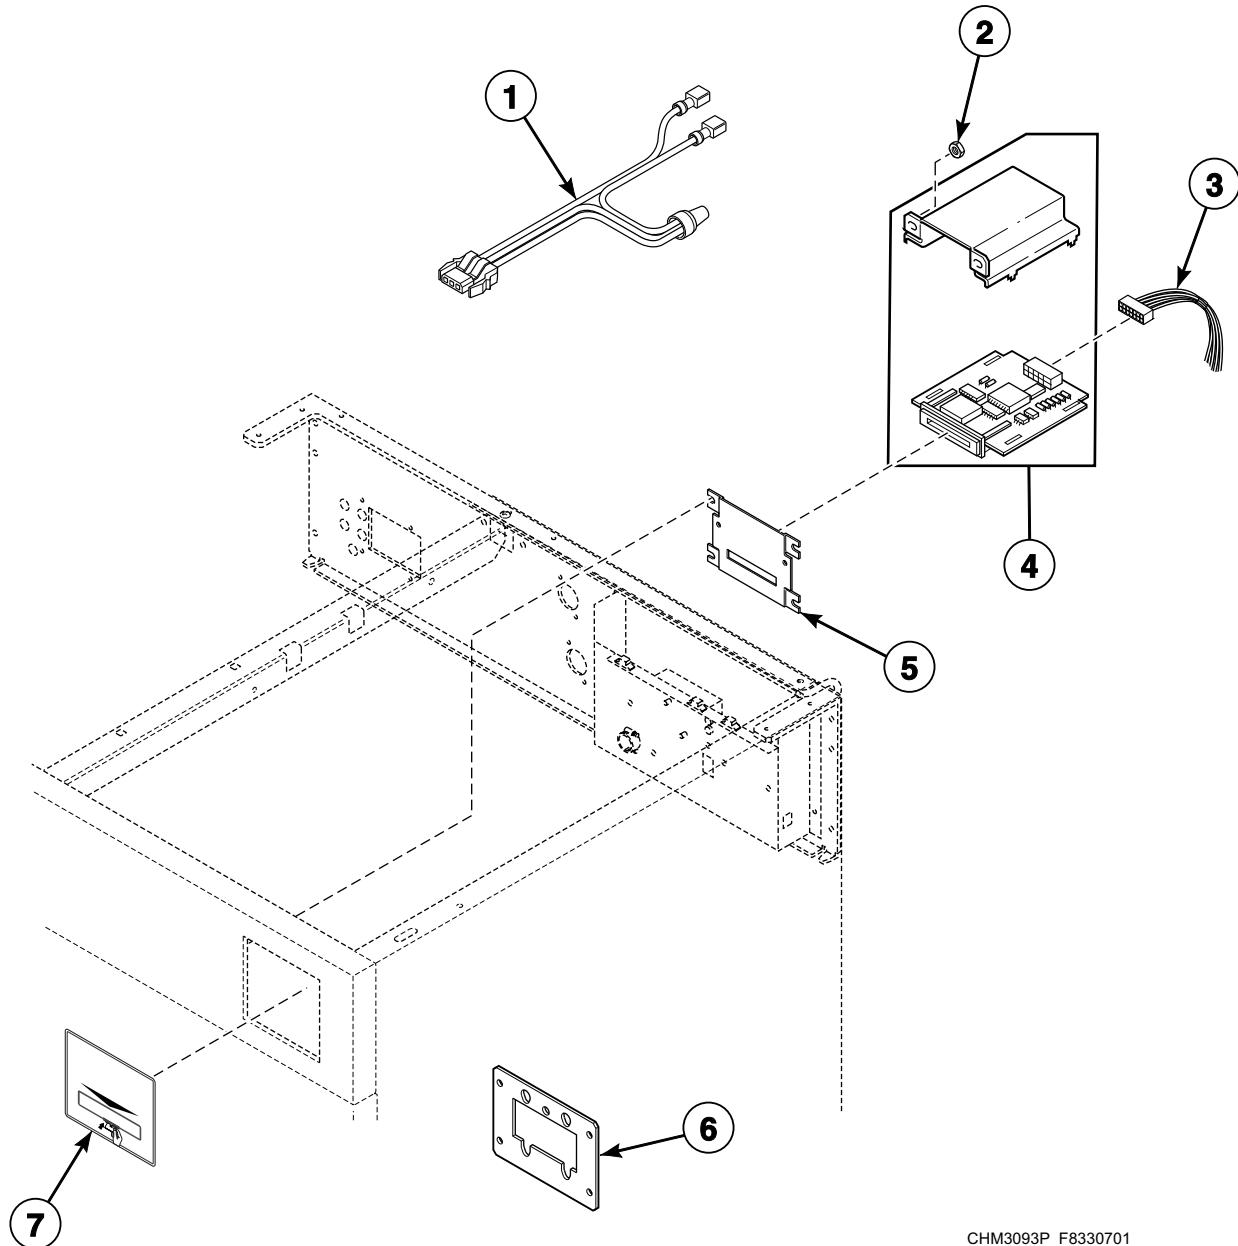


CHM3093P_F8330701

Card Reader - HY Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F631973-2	Harness	Access
2	F430174	Screw	
3	F141887	Card Reader Harness	
4	510068P	Card Reader and Bracket Assembly	
5	F8201501	Card Plate Assembly	
6	70208801	Mounting Plate	
7	70334301	Card Reader Overlay	

Optional Coin Box

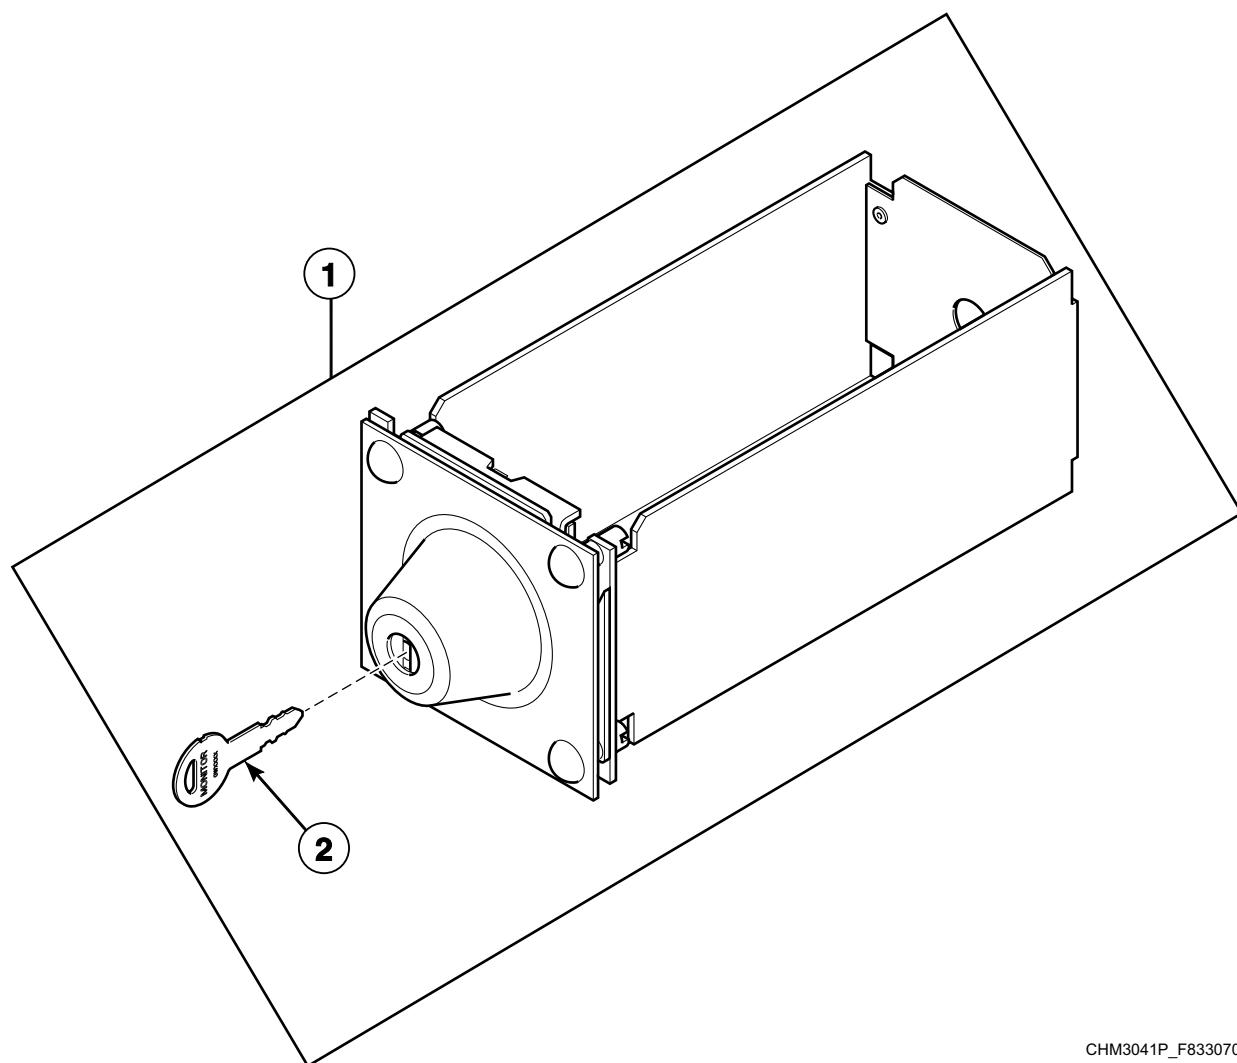


CHM3041P_F8330701

Optional Coin Box

REF	PART NO.	DESCRIPTION	COMMENTS
1	F160672	Coin Box	20 and 30 pound models; Design 1 and 2; GW0023
	F8182001	Coin Drawer Assembly	20 and 30 pound models Design 3; 40 and 60 pound models
2	F160420	Key	GW0023

Front Panels and Control Panel - Coin Models

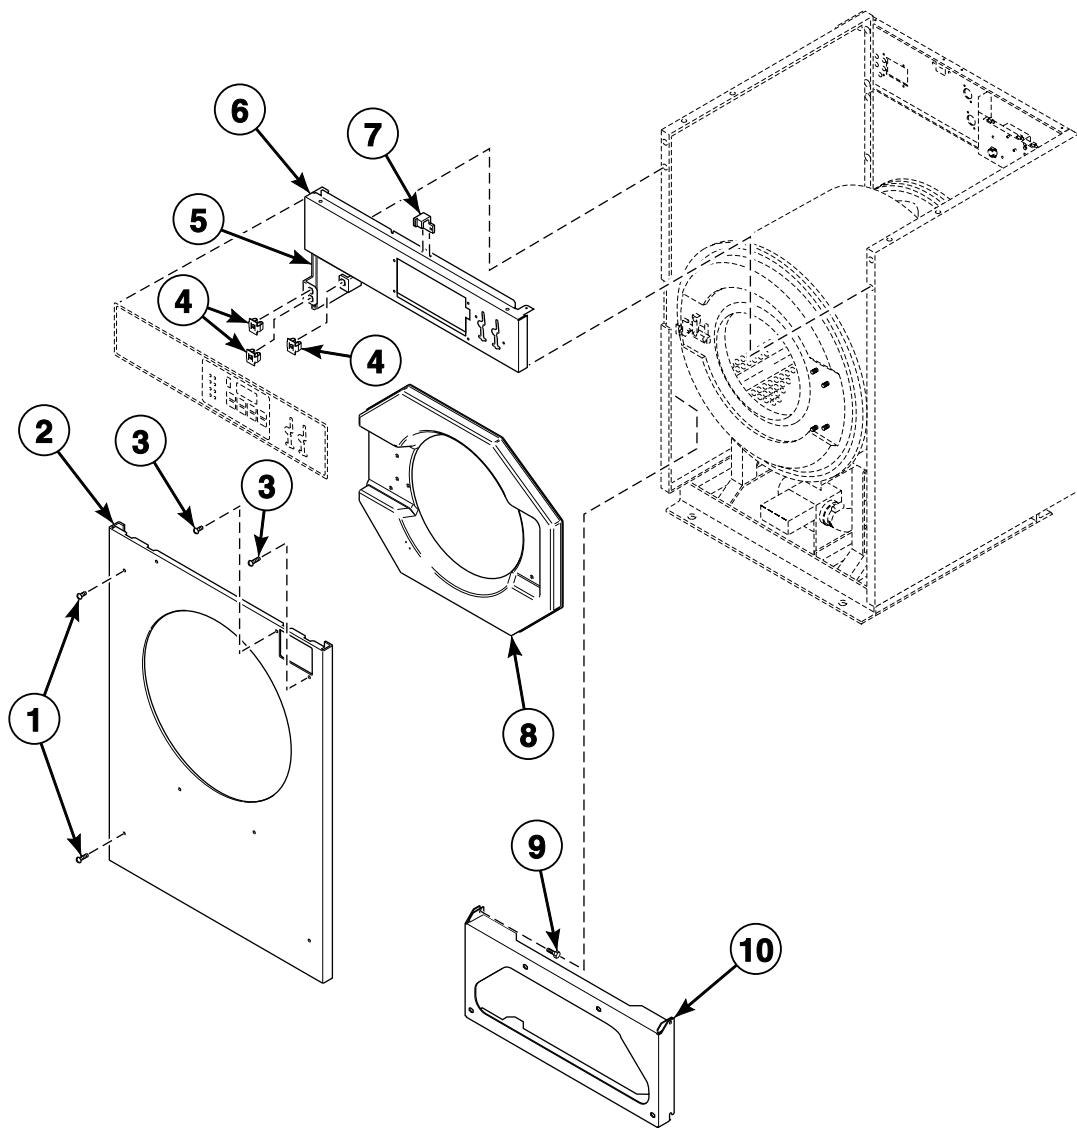


CHM3196P_F8330701

Front Panels and Control Panel - Coin Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8117601	Screw	
2	F8171301	Front Panel	20 pound models; Design 1 and 2; Stainless steel
	F8492301	Front Panel	20 pound models; Design 3; Stainless steel; Vertical brush
	F8492307	Front Panel	20 pound models; Design 3; Stainless steel; Horizontal brush
	F8173001	Front Panel	30 pound models; Design 1 and 2; Stainless steel
	F8173003	Front Panel	30 pound models; Design 3; Stainless steel; Vertical brush
	F8173009	Front Panel	30 pound models; Design 3; Stainless steel; Horizontal brush
	F8173101P	Front Panel	40 pound models; Stainless steel; Vertical brush
	F8173107	Front Panel	40 pound models; Design 3; Stainless steel; Horizontal brush
	F8173201P	Front Panel	60 pound models; Stainless steel; Vertical brush
	F8173207	Front Panel	60 pound models; Design 3; Stainless steel; Horizontal brush
3	801019	Screw	
4	70030501	Expansion Clip	
5	F8186702	Gusset Plate	
6	F8038502	Control Panel Assembly	20 pound models
	F8038602	Control Panel Assembly	30 pound models
	F8038702	Control Panel Assembly	40 pound models
	F8038802	Control Panel Assembly	60 pound models
7	F8201001	Top Cover Latch	
8	F170416-2	Door Bezel	20 pound models; Pantone 403; Models through 1/10/10
	F170416-3	Door Bezel	20 pound models; Gray; Models starting 1/11/10
	F170417-2	Door Bezel	30 pound models; Pantone 403; Models through 1/10/10
	F170417-3	Door Bezel	30 pound models; Gray; Models starting 1/11/10
	F0170426-10	Door Bezel	40 and 60 pound models; Pantone 403; Models through 1/10/10
	F0170426-30	Door Bezel	40 and 60 pound models; Gray; Models starting 1/11/10
9	F430174	Screw	
10	F8173801	Front Cabinet Brace	20 pound models
	F8173901	Front Cabinet Brace	30 pound models
	F8174001	Front Cabinet Brace	40 pound models
	F8174101	Lower Cabinet Brace	60 pound models

Front Panel and Control Panel - Card Reader and OPL Models

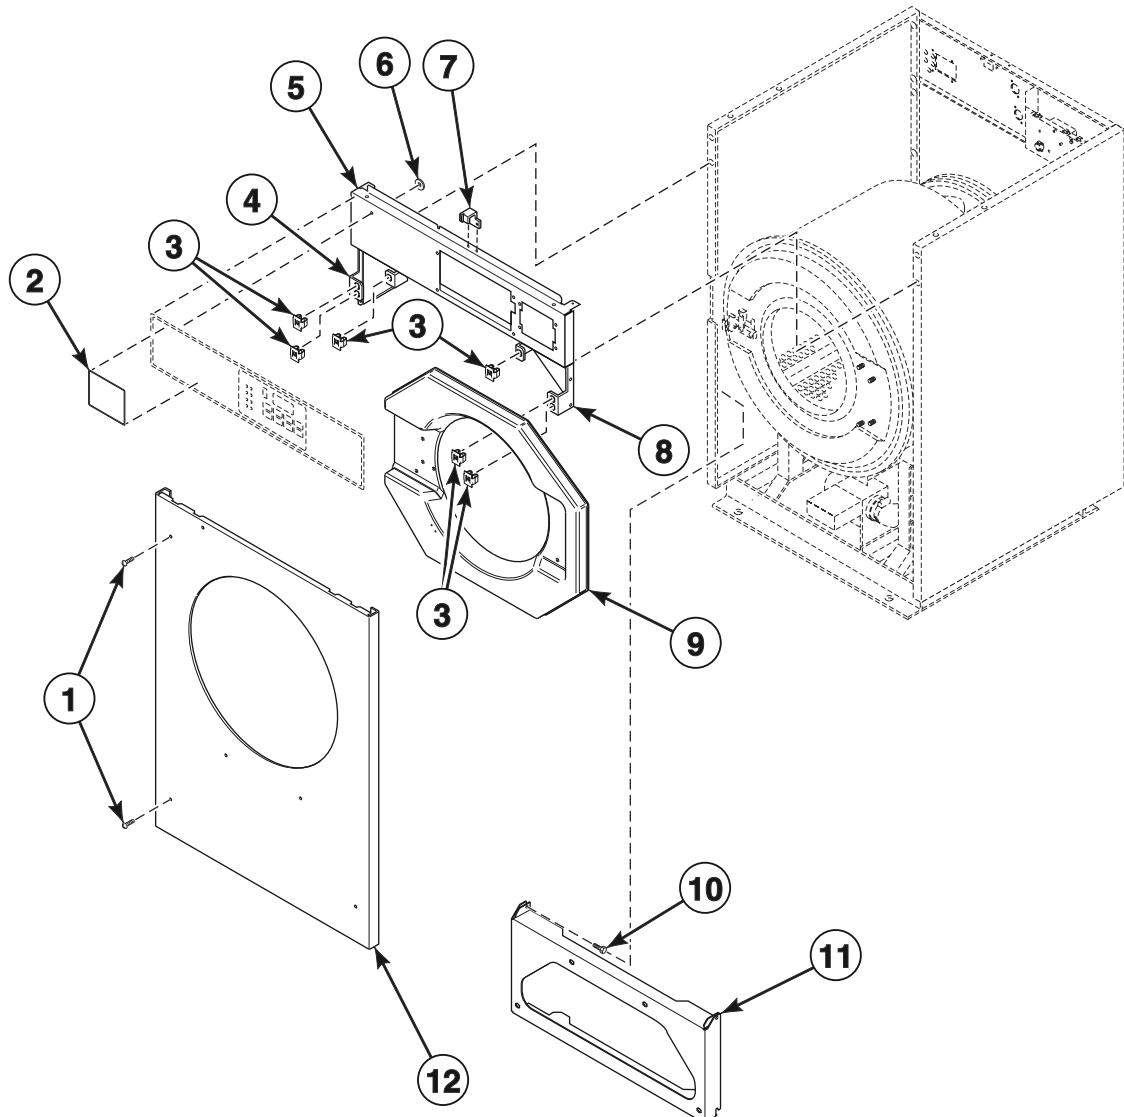


CHM3370P_F8330701

Front Panel and Control Panel - Card Reader and OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8117601	Screw	
2	F443101	Logo	20 and 30 pound UC models starting 8/14/2014
	F443101	Logo	40 and 60 pound UC models starting 8/14/2014
3	70030501	Expansion Clip	
4	F8186702	Gusset Plate	Left
5	F8038504	Control Panel Assembly	20 pound HC and SC models; UC models through 8/13/2014
	F8038506	Control Panel Assembly	20 pound UC models starting 8/14/2014
	F8038604	Control Panel Assembly	30 pound HC and SC models; UC models through 8/13/2014
	F8038606	Control Panel Assembly	30 pound UC models starting 8/14/2014
	F8038704	Control Panel Assembly	40 pound HC and SC models; UC models through 8/13/2014
	F8038706	Control Panel Assembly	40 pound UC models starting 8/14/2014
	F8038804	Control Panel Assembly	60 pound HC and SC models; UC models through 8/13/2014
	F8038806	Control Panel Assembly	60 pound UC models starting 8/14/2014
6	M400977	Nut	
7	F8201001	Top Cover Latch	
8	F8186701	Gusset Plate	Right
9	F170416-2	Door Bezel	20 pound HC and UCZ models; Pantone 403; Models through 1/10/10
	F170416-3	Door Bezel	20 pound HC and UCZ models; Gray; Models starting 1/11/10
	F170416-1	Door Bezel	All other 20 pound models; Black
	F170417-3	Door Bezel	30 pound HC and UCZ models; Gray
	F170417-1	Door Bezel	All other 30 pound models; Black
	F0170426-10	Door Bezel	40 and 60 pound HC models; Pantone 403; Models through 1/10/10
	F0170426-30	Door Bezel	40 and 60 pound HC models; Gray; Models starting 1/11/10
	F0170426-00	Door Bezel	All other 40 and 60 pound models; Black
10	F430174	Screw	
11	F8173801	Front Cabinet Brace	20 pound models
	F8173901	Front Cabinet Brace	30 pound models
	F8174001	Front Cabinet Brace	40 pound models
	F8174101	Lower Cabinet Brace	60 pound models
12	F8171302P	Front Panel	20 pound models; Design 1 and 2; Stainless steel
	F8492302	Front Panel	20 pound HC, SC and UC models; Design 3; Stainless steel; Vertical brush
	F8492308	Front Panel	20 pound HC, SC and UC models; Design 3; Stainless steel; Horizontal brush
	F8173002P	Front Panel	30 pound HC, SC and UC models; Design 1 and 2; Stainless steel; Vertical brush
	F8173008	Front Panel	30 pound HC, SC and UC models; Design 3; Stainless steel; Horizontal brush
	F8173102P	Front Panel	40 pound HC, SC and UC models; Stainless steel; Vertical brush
	F8173108	Front Panel	40 pound HC, SC and UC models; Design 3; Stainless steel; Horizontal brush
	F8173202P	Front Panel	60 pound HC, SC and UC models; Stainless steel; Vertical brush
	F8173208	Front Panel	60 pound HC, SC and UC models; Design 3; Stainless steel; Horizontal brush
	F8492306	Front Panel	20 pound CC, IC and YC models; Stainless steel; Vertical Brush
	F8492304	Front Panel	20 pound CC, IC and YC models; Black
	F8492310	Front Panel	20 pound CC, IC and YC models; Design 3; Stainless steel; Horizontal brush
	F8173005	Front Panel	30 pound CC, IC and YC models; Stainless steel; Vertical brush
	F8173007	Front Panel	30 pound CC, IC and YC models; Black
	F8173011	Front Panel	30 pound CC, IC and YC models; Design 3; Stainless steel; Horizontal brush
	F8173104	Front Panel	40 pound CC, IC and YC models; Stainless steel; Vertical brush
	F8173106	Front Panel	40 pound CC, IC and YC models; Black
	F8173110	Front Panel	40 pound CC, IC and YC models; Design 3; Stainless steel; Horizontal brush
	F8173204	Front Panel	60 pound CC, IC and YC models; Stainless steel; Vertical brush
	F8173206	Front Panel	60 pound CC, IC and YC models; Black
	F8173210	Front Panel	60 pound CC, IC and YC models; Design 3; Stainless steel; Horizontal brush

Control Panel Overlays - Coin and Card Ready Models

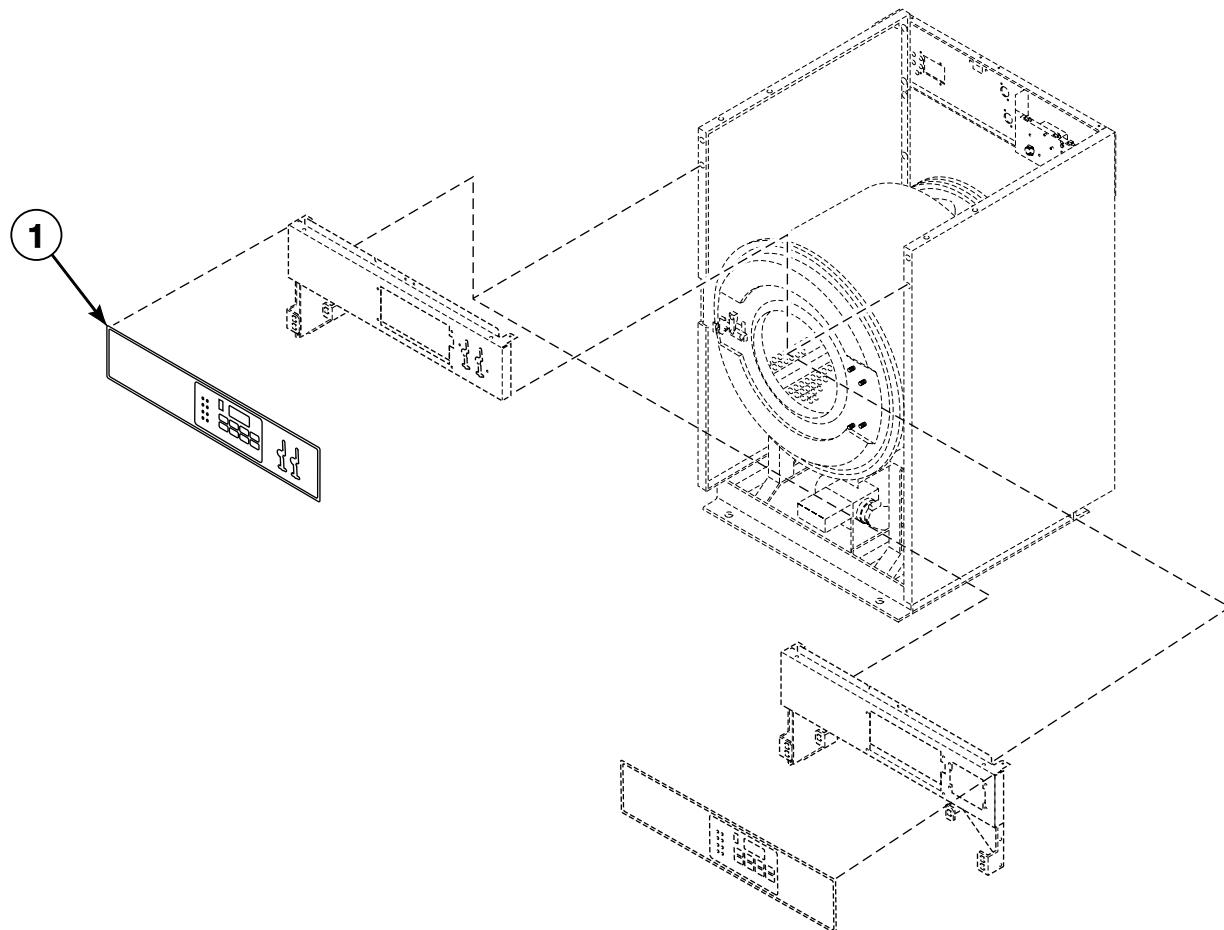


CHM3124P_F8330701

Control Panel Overlays - Coin and Card Ready Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8294001	Control Panel Overlay	20 pound models; Design 1; Single coin drop
	F8294002	Control Panel Overlay	20 pound models; Design 1; Dual coin drop
	F8294003	Control Panel Overlay	20 pound models; Design 1; Card ready
	F8294101	Control Panel Overlay	30 pound models; Design 1; Single coin drop
	F8294102	Control Panel Overlay	30 pound models; Design 1; Dual coin drop
	F8294103	Control Panel Overlay	30 pound models; Design 1; Card ready
	F8294201	Control Panel Overlay	40 pound models; Design 1; Single coin drop
	F8294202	Control Panel Overlay	40 pound models; Design 1; Dual coin drop
	F8294203	Control Panel Overlay	40 pound models; Design 1; Card ready
	F8294301	Control Panel Overlay	60 pound models; Design 1; Single coin drop
	F8294302	Control Panel Overlay	60 pound models; Design 1; Dual coin drop
	F8294303	Control Panel Overlay	60 pound models; Design 1; Card ready
	F8443901	Control Panel Overlay	20 pound models; Design 2 and 3; Single coin drop
	F8443902	Control Panel Overlay	20 pound models; Design 2 and 3; Dual coin drop
	F8443903	Control Panel Overlay	20 pound models; Design 2 and 3; Card ready
	F8444001	Control Panel Overlay	30 pound models; Design 2 and 3; Single coin drop
	F8444002	Control Panel Overlay	30 pound models; Design 2 and 3; Dual coin drop
	F8444003	Control Panel Overlay	30 pound models; Design 2 and 3; Card ready
	F8444101	Control Panel Overlay	40 pound models; Design 2; Single coin drop
	F8444102	Control Panel Overlay	40 pound models; Design 2; Dual coin drop
	F8444103	Control Panel Overlay	40 pound models; Design 2; Card ready
	F8444201	Control Panel Overlay	60 pound models; Design 2; Single coin drop
	F8444202	Control Panel Overlay	60 pound models; Design 2; Dual coin drop
	F8444203	Control Panel Overlay	60 pound models; Design 2; Card ready

Control Panel Overlays - OPL Models

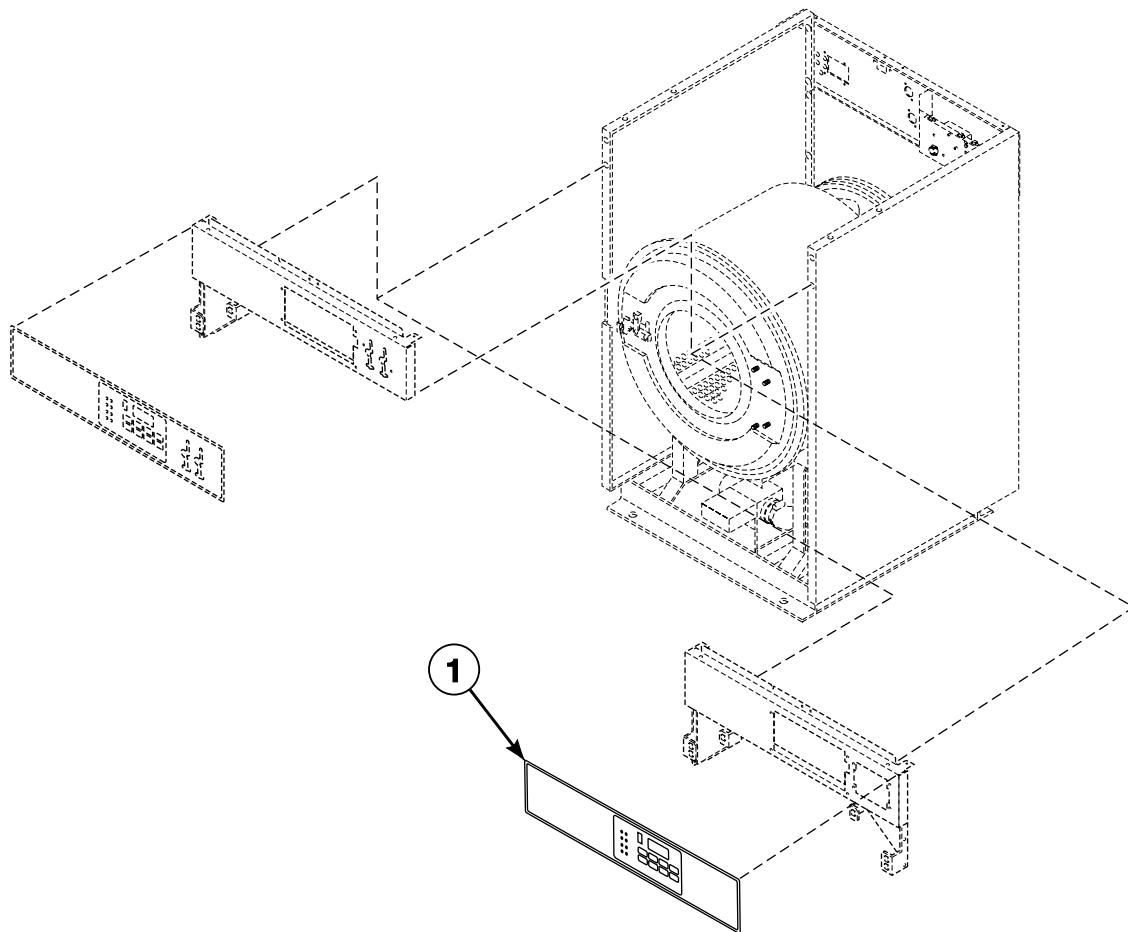


CHM3124PA_F8330701

Control Panel Overlays - OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8551401	Control Panel Overlay	CC models
	F8551701	Control Panel Overlay	IC models
	F8224301	Control Panel Overlay	HC 20 pound models; Design 1
	F8224401	Control Panel Overlay	HC 30 pound models; Design 1
	F8224501	Control Panel Overlay	HC 40 pound models; Design 1
	F8224601	Control Panel Overlay	HC 60 pound models; Design 1
	F8443701	Control Panel Overlay	HC models; Design 2 and 3
	F8294501	Control Panel Overlay	SC 20 pound models
	F8294601	Control Panel Overlay	SC 30 pound models
	F8294701	Control Panel Overlay	SC 40 pound models
	F8294801	Control Panel Overlay	SC 60 pound models
	F8224801	Control Panel Overlay	UC 20 pound models through 8/13/2014
	F8224901	Control Panel Overlay	UC 30 pound models
	F8225001	Control Panel Overlay	UC 40 pound models
	F8225101	Control Panel Overlay	UC 60 pound models
	F8532201	Control Panel Overlay	UC models starting 8/14/2014
	F8586801	Control Panel Overlay	Model YCW020HNV
	F8586901	Control Panel Overlay	Model YCW040HNV
	F8587001	Control Panel Overlay	Model YCW060HNV
	F8588201	Name Plate	Model YCW030HNV

Panels (Drawing 1 of 2)

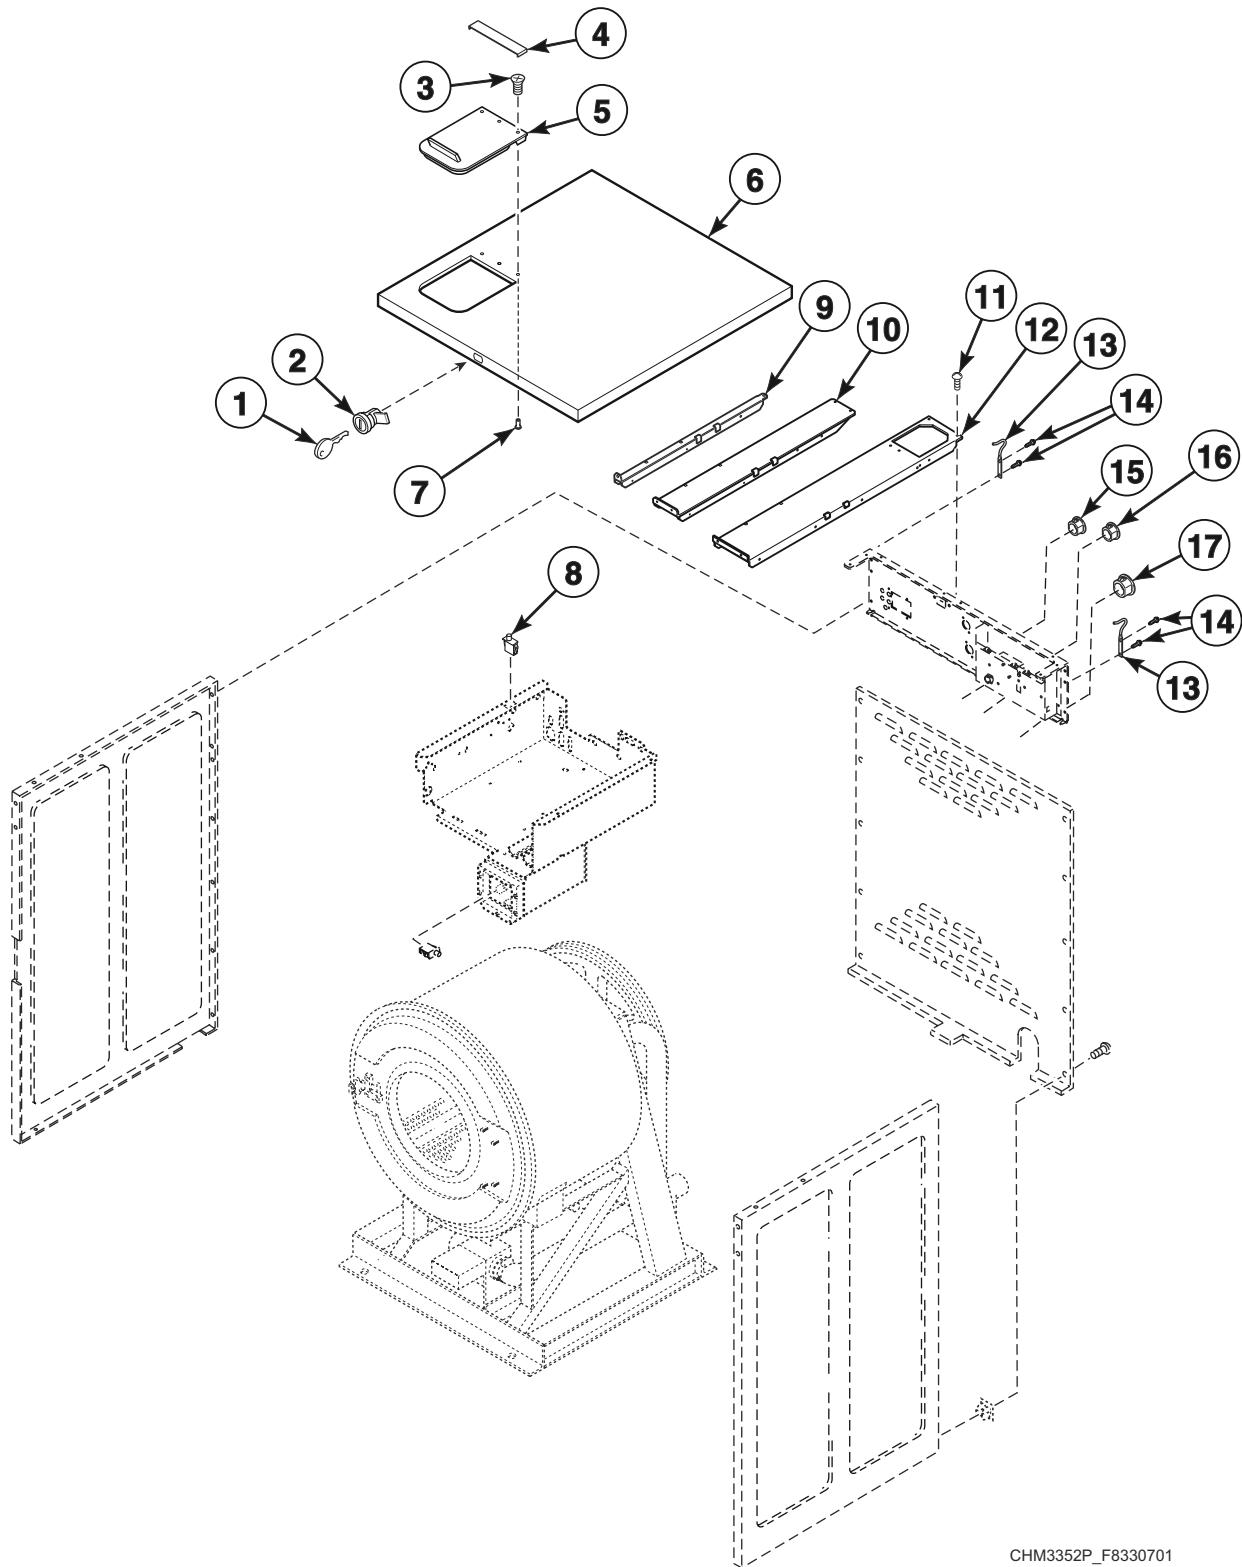


CHM3352P_F8330701

Panels (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	70155603	Key	RL003
2	44089303P	Panel Lock	
3	F8230601	Screw	
4	F8091701	Lid Clamp	CC, HC, IC and SC models; UC models through 8/13/2014
	F8091702	Lid Clamp	UC models starting 8/14/2014
5	F8048101	Dispenser Lid	Gray
6	F8040201	Top Cover	20 pound models
	F8017401	Top Cover	30 pound models
	F8040301	Top Cover	40 pound models
	F8040401P	Top Cover	60 pound models
7	F8230501	Bolt	
8	70413301	Pushbutton Switch	
9	F8043501	Top Cabinet Brace	20 pound models
10	F8043701	Top Cabinet Brace	30 pound models
11	F430174	Screw	
12	F8043801	Top Cabinet Brace	40 pound models
	F8043901	Top Cabinet Brace	60 pound models
13	F8258601	Top Cover Hinge	
14	F8206901	Screw	
15	M400985	Plug	Design 2 and 3
16	F8223901	Plug	Design 2 and 3
17	F8223801	Hole Plug	Design 2 and 3

Panels (Drawing 2 of 2)

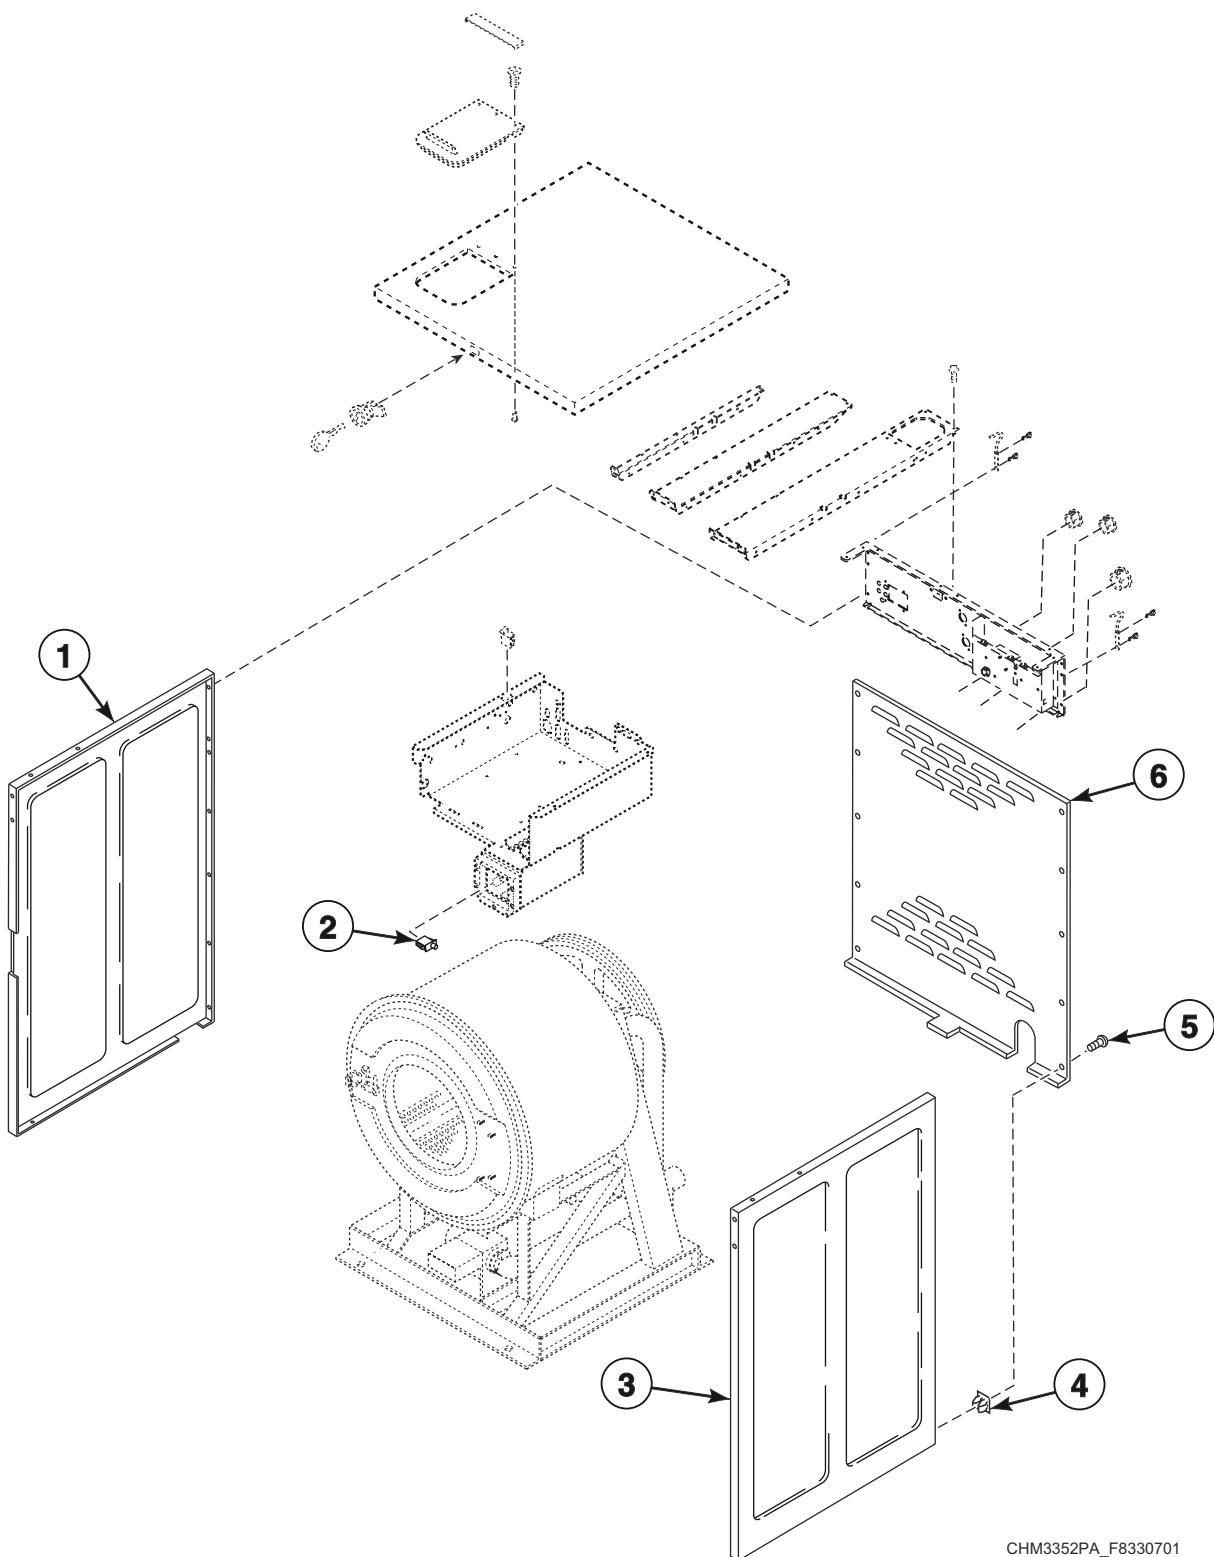


CHM3352PA_F8330701

Panels (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8042902P	Left Side Panel	20 pound models; Design 1; Vinyl
	F8043102P	Left Side Panel	30 pound models; Design 1; Vinyl
	F8043202P	Left Side Panel	40 pound models; Design 1; Vinyl
	F8043302P	Left Side Panel	60 pound models; Design 1; Vinyl
	F8399202	Left Side Panel	20 pound models; Design 2; Stainless steel
	F8399302	Left Side Panel	30 pound models; Design 2 and 3; Stainless steel
	F8399402	Left Side Panel	40 pound models; Design 2; Stainless steel
	F8399502P	Left Side Panel	60 pound models; Design 2; Vinyl
	F8399504	Left Side Panel	60 pound models; Design 2; Stainless steel
	F8492402	Left Side Panel	20 pound models; Design 3; Vinyl
2	F8492404	Left Side Panel	20 pound models; Design 3; Stainless steel
	70413301	Pushbutton Switch	Vend models
3	F8042901P	Right Side Panel	20 pound models; Design 1; Vinyl
	F8043101P	Right Side Panel	30 pound models; Design 1; Vinyl
	F8043201P	Right Side Panel	40 pound models; Design 1; Vinyl
	F8043301P	Right Side Panel	60 pound models; Design 1; Vinyl
	F8399201	Right Side Panel	20 pound models; Design 2; Stainless steel
	F8399301	Right Side Panel	30 pound models; Design 2 and 3; Stainless steel
	F8399401	Right Side Panel	40 pound models; Design 2; Stainless steel
	F8399501	Right Side Panel	60 pound models; Design 2; Vinyl
	F8399503	Right Side Panel	60 pound models; Design 2; Stainless steel
	F8492401	Right Side Panel	20 pound models; Design 3; Vinyl
4	F8492403	Right Side Panel	20 pound models; Design 3; Stainless steel
	70030501	Expansion Clip	
5	F8206901	Screw	
6	F8176201P	Rear Panel	20 pound models; Design 1
	F8176301	Rear Panel	30 pound models; Design 1
	F8177701P	Rear Panel	40 pound models; Design 1
	F8177501P	Rear Panel	60 pound models; Design 1
	F8362401	Rear Panel	20 pound models; Design 2
	F8352801	Rear Panel	30 pound models; Design 2 and 3
	F8365201	Rear Panel	40 pound models; Design 2
	F8367101	Rear Panel	60 pound models; Design 2
	F8492501	Rear Panel	20 pound models; Design 3

Door - 20 Pound Models

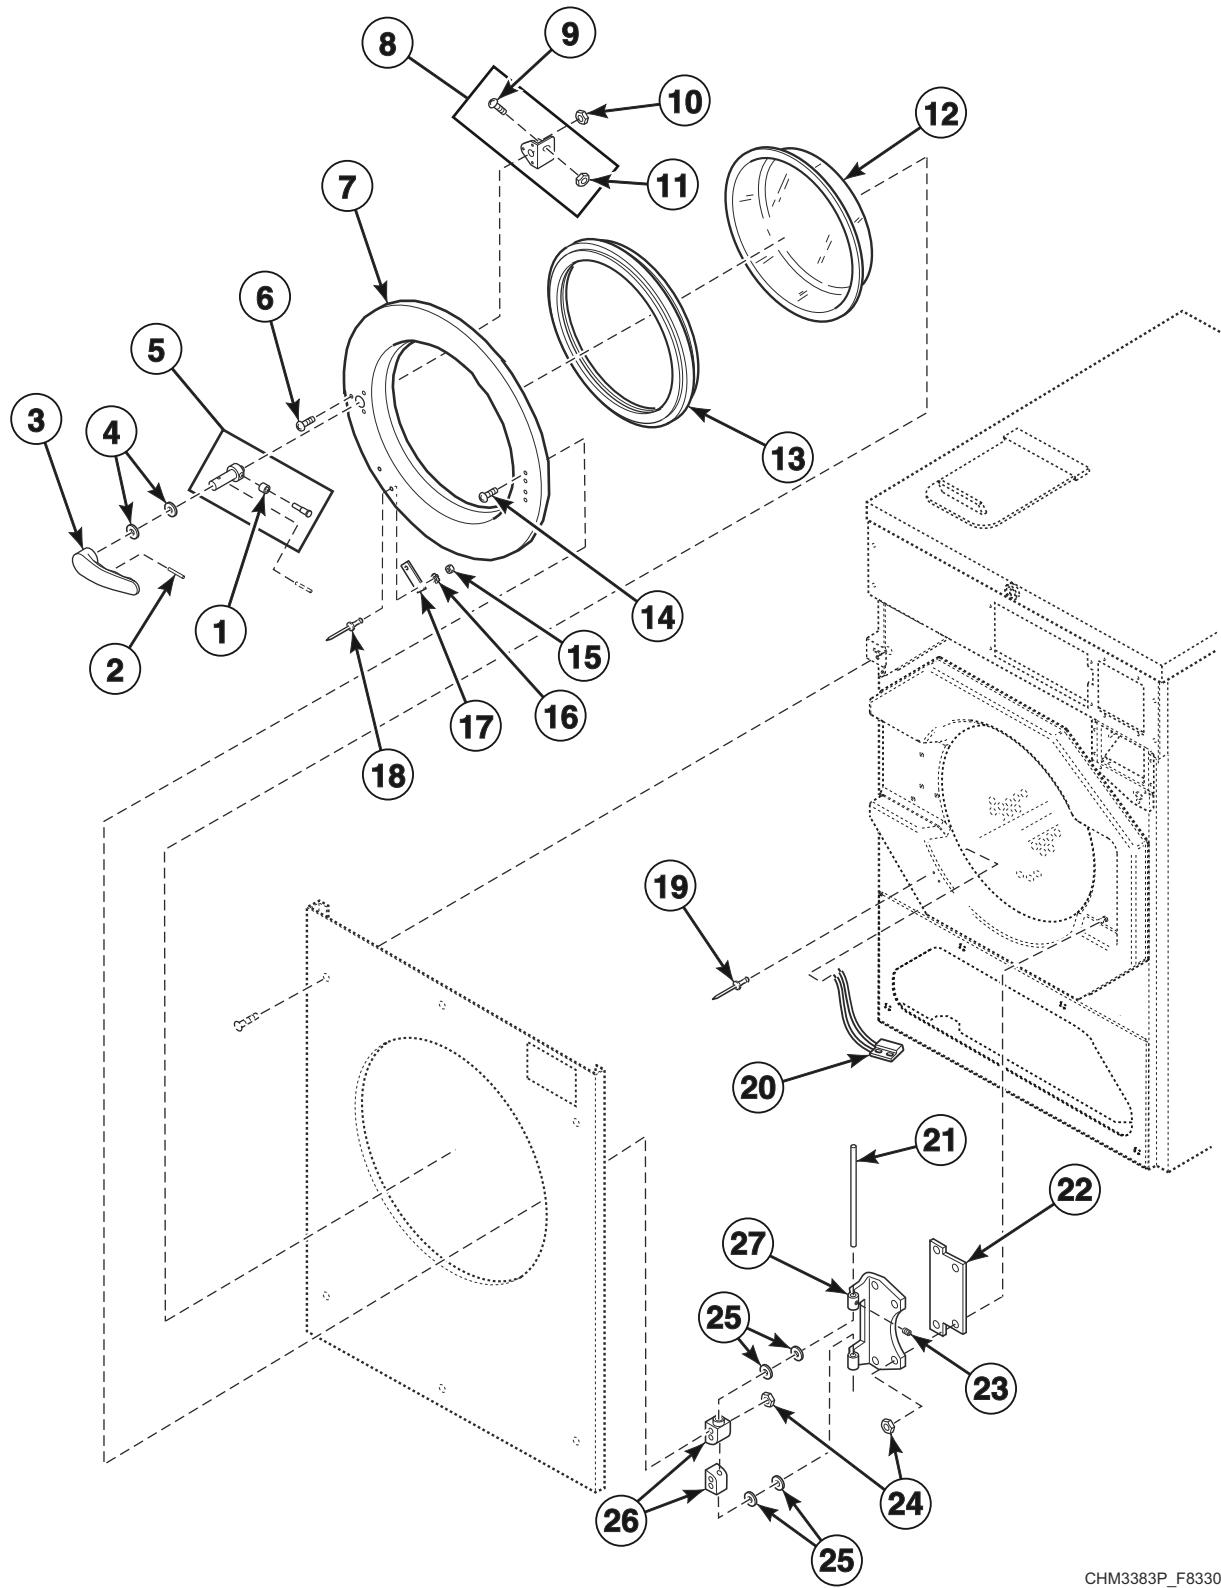


CHM3383P_F8330701

Door - 20 Pound Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8187210	Door Assembly	CC and IC models; Includes items 1-14, 16, 17 and 20-27
	F8187211	Door Assembly	CC and IC models; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187205	Door Assembly	SC models; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187202	Door Assembly	SC models; UC models through 8/13/14; Includes items 1-14, 16, 17 and 20-27
	F8187208	Door Assembly	UC models starting 8/14/14; Includes items 1-14, 16, 17 and 20-27
	F8187209	Door Assembly	UC models starting 8/14/14; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187203	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27
	F8187204	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Black
	F8187206	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187207	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Chrome/Black
1	F8221701	Bearing Sleeve	
2	F431222	Spring Pin	
3	F8199502	Door Handle	CC and IC models; Black
	F8199501	Door Handle	HC models; Gray
	F8544701	Door Handle	HC models; Chrome
	F8199401P	Door Handle	SC models; UC models through 8/13/2014; Black
	F8435501	Door Handle	UC models starting 8/14/2014
4	F431916	Washer	
5	F8221401	Door Latch Arm Assembly	
6	F8535501	Screw	
	F8508101	Bolt	Polished
7	F0602431-02	Door	
	F8507501	Door	Chrome
8	F8567501	Door Handle Spacer Kit	Includes items 9 and 11
9	F430532	Screw	
10	F430232	Nut	
11	F431041	Nut	
12	F290205P	Door Glass Kit	CC, IC, SC and UC models
	F8341701	Door Glass	HC models
13	F200000202	Door Gasket	CC, IC, SC and UC models; HC models starting 10/13/2014; Black
	F200000200	Door Gasket	HC models through 10/12/2014; Gray
14	F430974	Bolt	
	F8508101	Bolt	Polished
15	F431022	Nut	
16	F431113	Washer	
17	F8390801	Magnet	
18	F431223	Pop Rivet	
19	F8245101	Blind Rivet	
20	F8066802	Reed Switch Assembly	
21	F602813-2	Rod	
22	F200131000	Door Hinge Shim	
23	F430536	Screw	
24	F430215	Nut	
25	F431929	Washer	
26	F150271	Door Mount	
27	F190216P	Door Hinge	

Door - 30 Pound Models

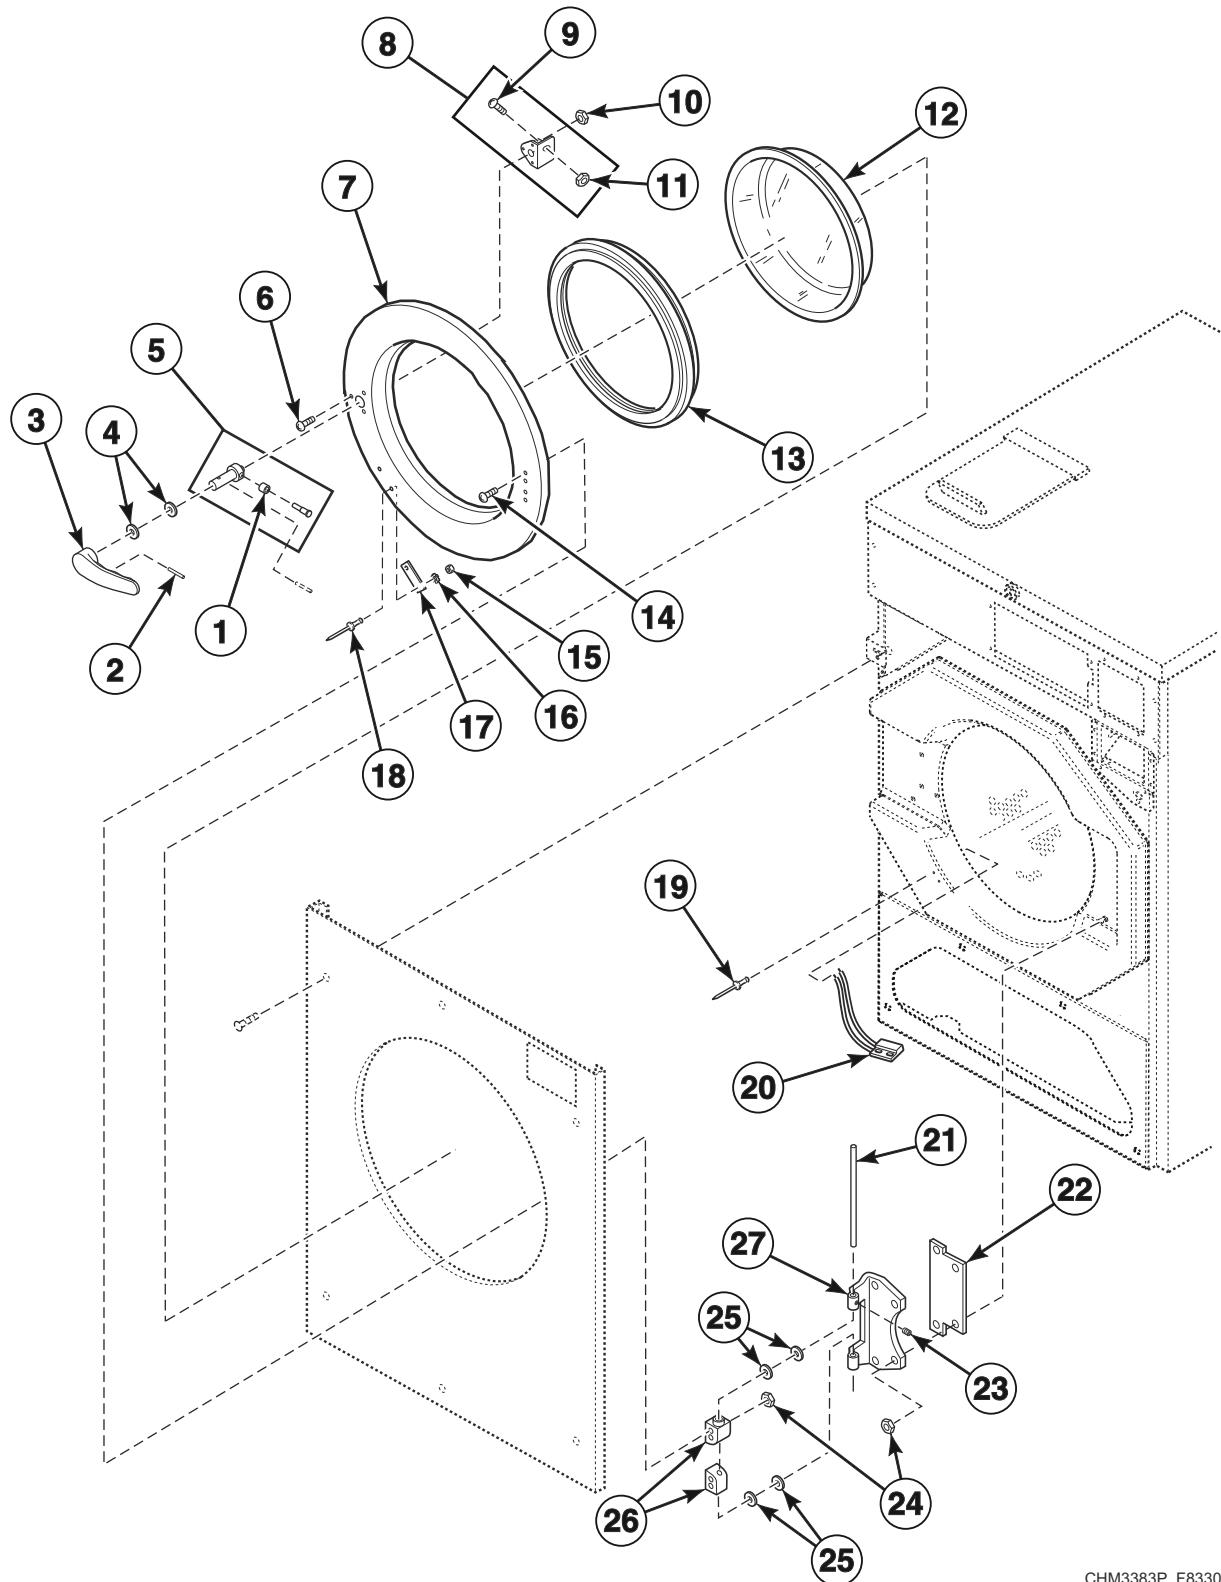


CHM3383P_F8330701

Door - 30 Pound Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8187310	Door Assembly	CC and IC models; Includes items 1-14, 16, 17 and 20-27
	F8187311	Door Assembly	CC and IC models; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187305	Door Assembly	SC models; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187302	Door Assembly	SC models; UC models through 8/13/14; Includes items 1-14, 16, 17 and 20-27; Black
	F8187308	Door Assembly	UC models starting 8/14/2014; Includes items 1-14, 16, 17 and 20-27
	F8187309	Door Assembly	UC models; Models starting 8/14/2014; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187303	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27
	F8187304	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Black
	F8187306	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187307	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Chrome/Black
1	F8221701	Bearing Sleeve	
2	F431222	Spring Pin	
3	F8199502	Door Handle	CC and IC models; Black
	F8199501	Door Handle	HC models; Gray
	F8544701	Door Handle	HC models; Chrome
	F8199401P	Door Handle	SC models; UC models through 8/13/2014; Black
	F8435501	Door Handle	UC models starting 8/14/2014
4	F431916	Washer	
5	F8221401	Door Latch Arm Assembly	
6	F8535501	Screw	
	F8508101	Bolt	Polished
7	F0602837-02	Door	
	F8507601	Door	Chrome
8	F8567501	Door Handle Spacer Kit	Includes items 9 and 11
9	F430533	Screw	
10	F430232	Nut	
11	F431041	Nut	
12	F8485301P	Door Glass	CC, IC, SC and UC models
	F8485302	Door Glass	HC models
13	F8111601	Door Gasket	HC models through 10/12/2014; Gray
	F8111602	Door Gasket	CC, IC, SC and UC models; HC models starting 10/13/2014; Black
14	F430974	Bolt	
	F8508101	Bolt	Polished
15	F431022	Nut	
16	F431113	Washer	
17	F8390801	Magnet	
18	F431223	Pop Rivet	
19	F8245101	Blind Rivet	
20	F8066802	Reed Switch Assembly	
21	F602813-2	Rod	
22	F200131000	Door Hinge Shim	
23	F430536	Screw	
24	F430215	Nut	
25	F431929	Washer	
26	F150271	Door Mount	
27	F190216P	Door Hinge	

Door - 40 and 60 Pound Models

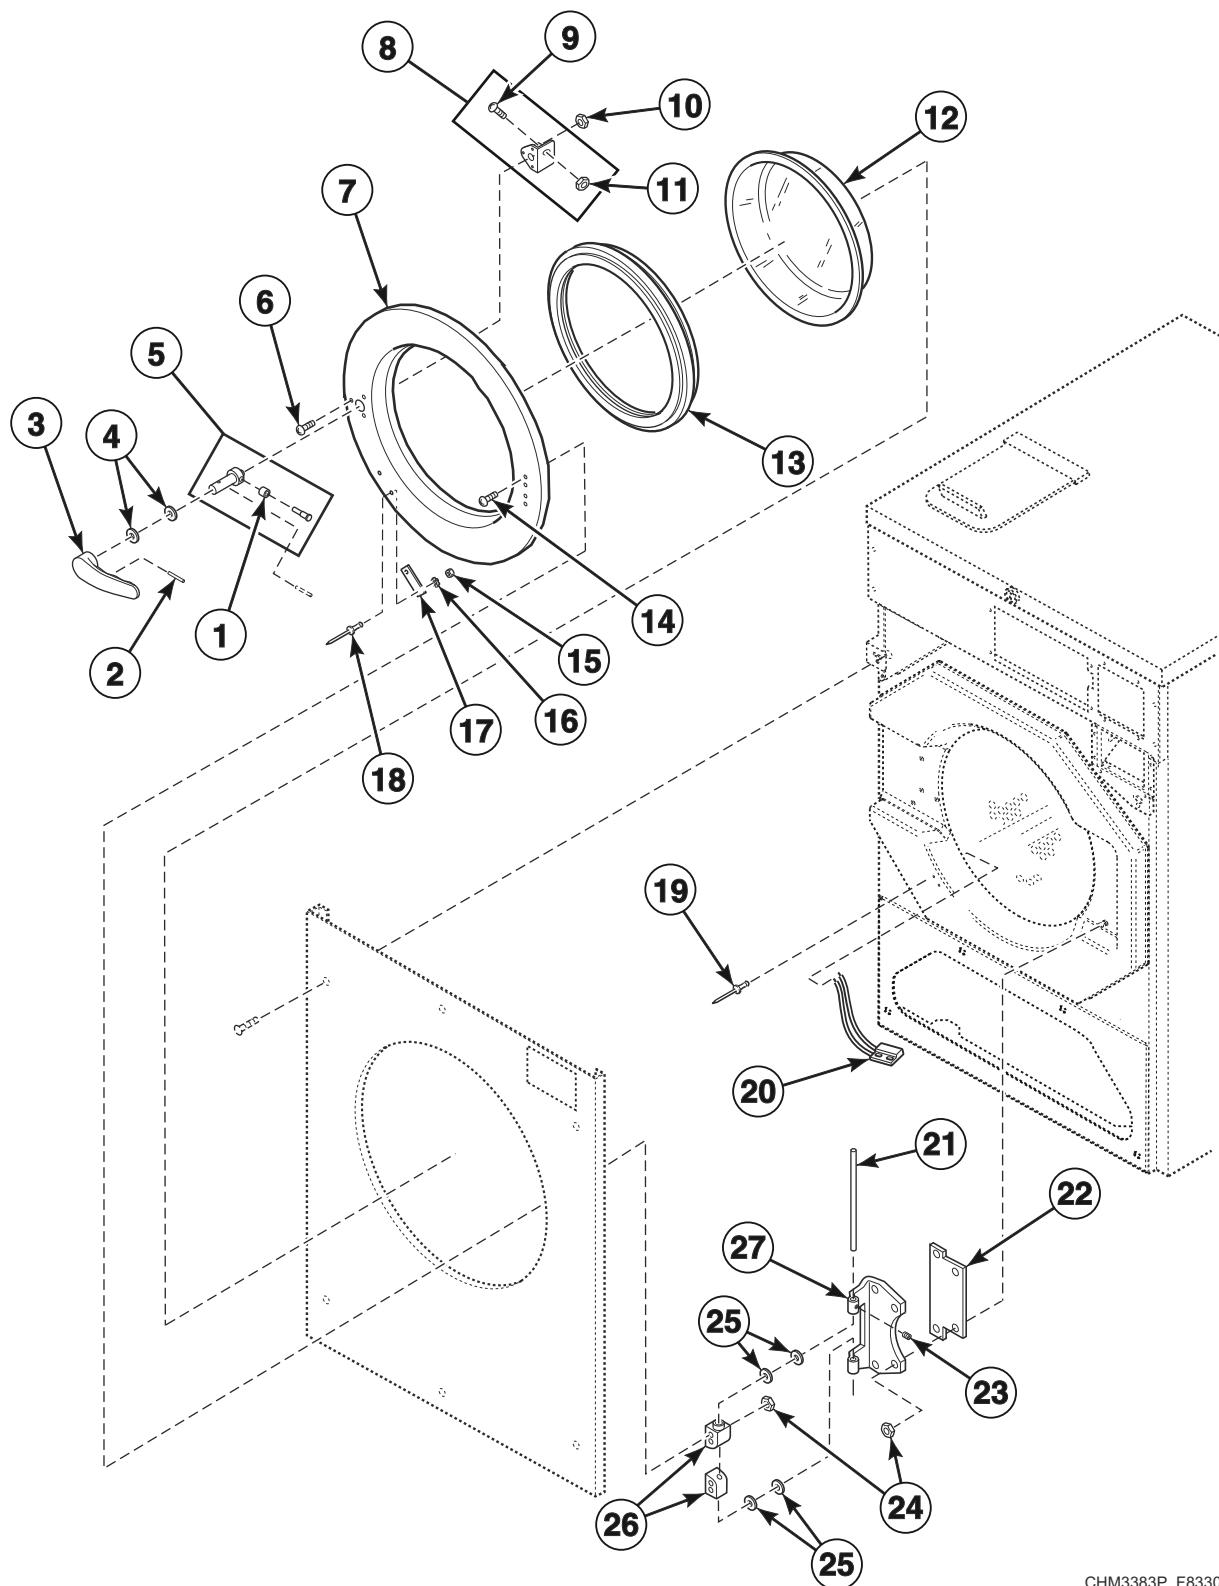


CHM3383P_F8330701

Door - 40 and 60 Pound Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8187410	Door Assembly	CC and IC models; Includes items 1-14, 16, 17 and 20-27
	F8187411	Door Assembly	CC and IC models; Chrome; Includes items 1-14, 16, 17 and 20-27
	F8187405	Door Assembly	SC models; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187402	Door Assembly	SC models; UC models through 8/13/14; Includes items 1-14, 16, 17 and 20-27; Black
	F8187408	Door Assembly	UC models starting 8/14/14; Includes items 1-14, 16, 17 and 20-27
	F8187409	Door Assembly	UC models starting 8/14/14; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187403	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27
	F8187404	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Black
	F8187406	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Chrome
	F8187407	Door Assembly	HC models; Includes items 1-14, 16, 17 and 20-27; Chrome/Black
1	F8221701	Bearing Sleeve	
2	F431222	Spring Pin	
3	F8199401P	Door Handle	SC models; UC models through 8/13/2014; Black
	F8435501	Door Handle	UC models starting 8/14/2014
	F8199502	Door Handle	CC and IC models; Black
	F8199501	Door Handle	HC models; Gray
	F8544701	Door Handle	HC models; Chrome
4	F431916	Washer	
5	F8221401	Door Latch Arm Assembly	
6	F8535501	Screw	
	F8508101	Bolt	Polished
7	F602842-2	Door	
	F8507701	Door	Chrome
8	F8567501	Door Handle Spacer Kit	Includes items 9 and 11
9	F430533	Screw	
10	F430232	Nut	
11	F431041	Nut	
12	F8485401P	Door Glass	CC, IC, SC and UC models
	F8485402	Door Glass	HC models
13	F170124	Door Gasket	HC models through 10/12/2014; Gray
	F8111502	Door Gasket	CC, IC, SC and UC models; HC models starting 10/13/2014; Black
14	F430974	Bolt	
	F8508101	Bolt	Polished
15	F431022	Nut	
16	F431113	Washer	
17	F8390801	Magnet	
18	F431223	Pop Rivet	
19	F8245101	Blind Rivet	
20	F8066802	Reed Switch Assembly	
21	F602813-3	Rod	
22	F200131000	Door Hinge Shim	
23	F430536	Screw	
24	F430215	Nut	
25	F431929	Washer	
26	F150271	Door Mount	
27	F190216P	Door Hinge	

Door Lock

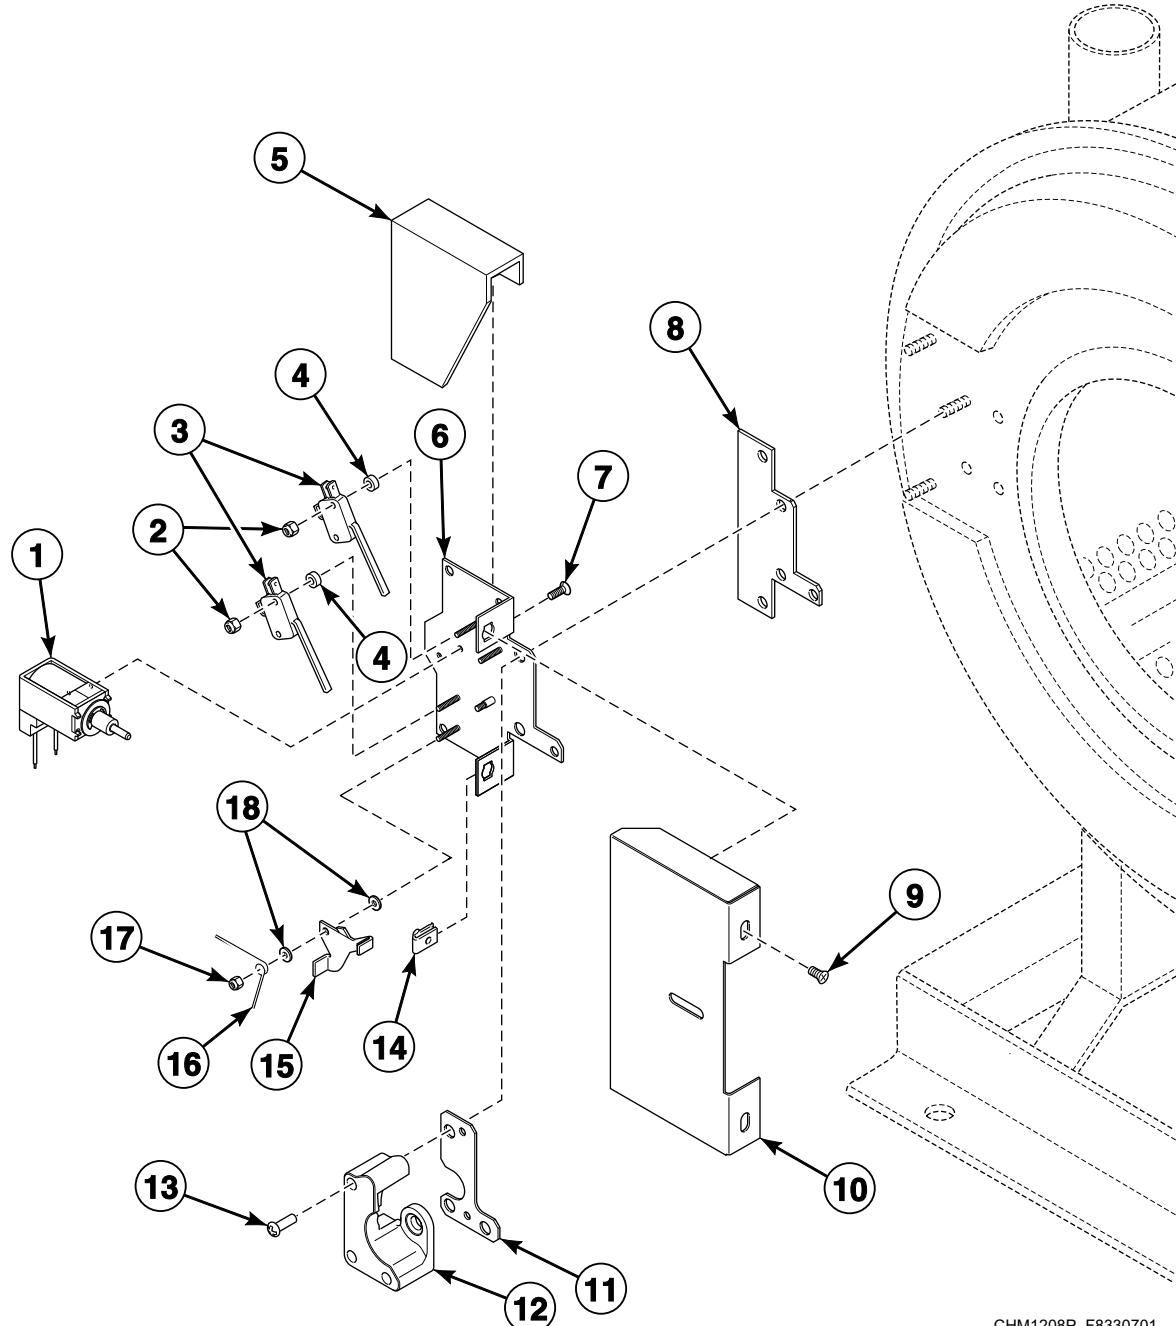


CHM1208P_F8330701

Door Lock

REF	PART NO.	DESCRIPTION	COMMENTS
	F8197101	Door Lock Assembly	Includes F8339902 External Door Lock Harness; Models through 10/31/10
	F8340501	Door Lock Assembly	Includes F8340001 External Door Lock Harness; Models starting 11/1/10
	N/A	External Door Lock Harness	Includes F8224201 Solenoid; Models through 10/31/10; Order F977P3 Door Lock Solenoid Replacement Kit
	F8340001	External Door Lock Harness	Models starting 11/1/10
1	F977P3	Door Lock Solenoid Replacement Kit	Includes F8340101 Solenoid
2	F430225	Nut	
3	F200203200	Door Lock Microswitch	
4	F431901	Spacer	
5	F320200	Door Lock Splash Shield	
6	F8223201	Door Lock Plate Assembly	Models through 10/31/10
	F8223202	Door Lock Plate Assembly	Models starting 11/1/10
7	F430977	Screw	
8	F8059701	Door Lock Plate Shim	Models through 9/25/09
	F8344401	Door Lock Plate Shim	Models starting 9/26/09
9	F430956	Screw	
10	F8245001	Door Lock Cover	
11	F8484401	Shim	Models through 9/9/14 with F8567501 Door Handle Spacer
12	F8223601	Door Lock Catch	Models through 10/31/10
	F8344501	Door Lock Catch	Models starting 11/1/10
13	F8270701	Bolt	
14	F430264	Nut	
15	F8223401	Door Lock Switch Lever	
16	F8070301	Torsion/Door Lock Spring	
17	F430232	Nut	
18	F431902	Washer	

N/A = Part no longer available

Shell Front and Basket - Design 1 Models

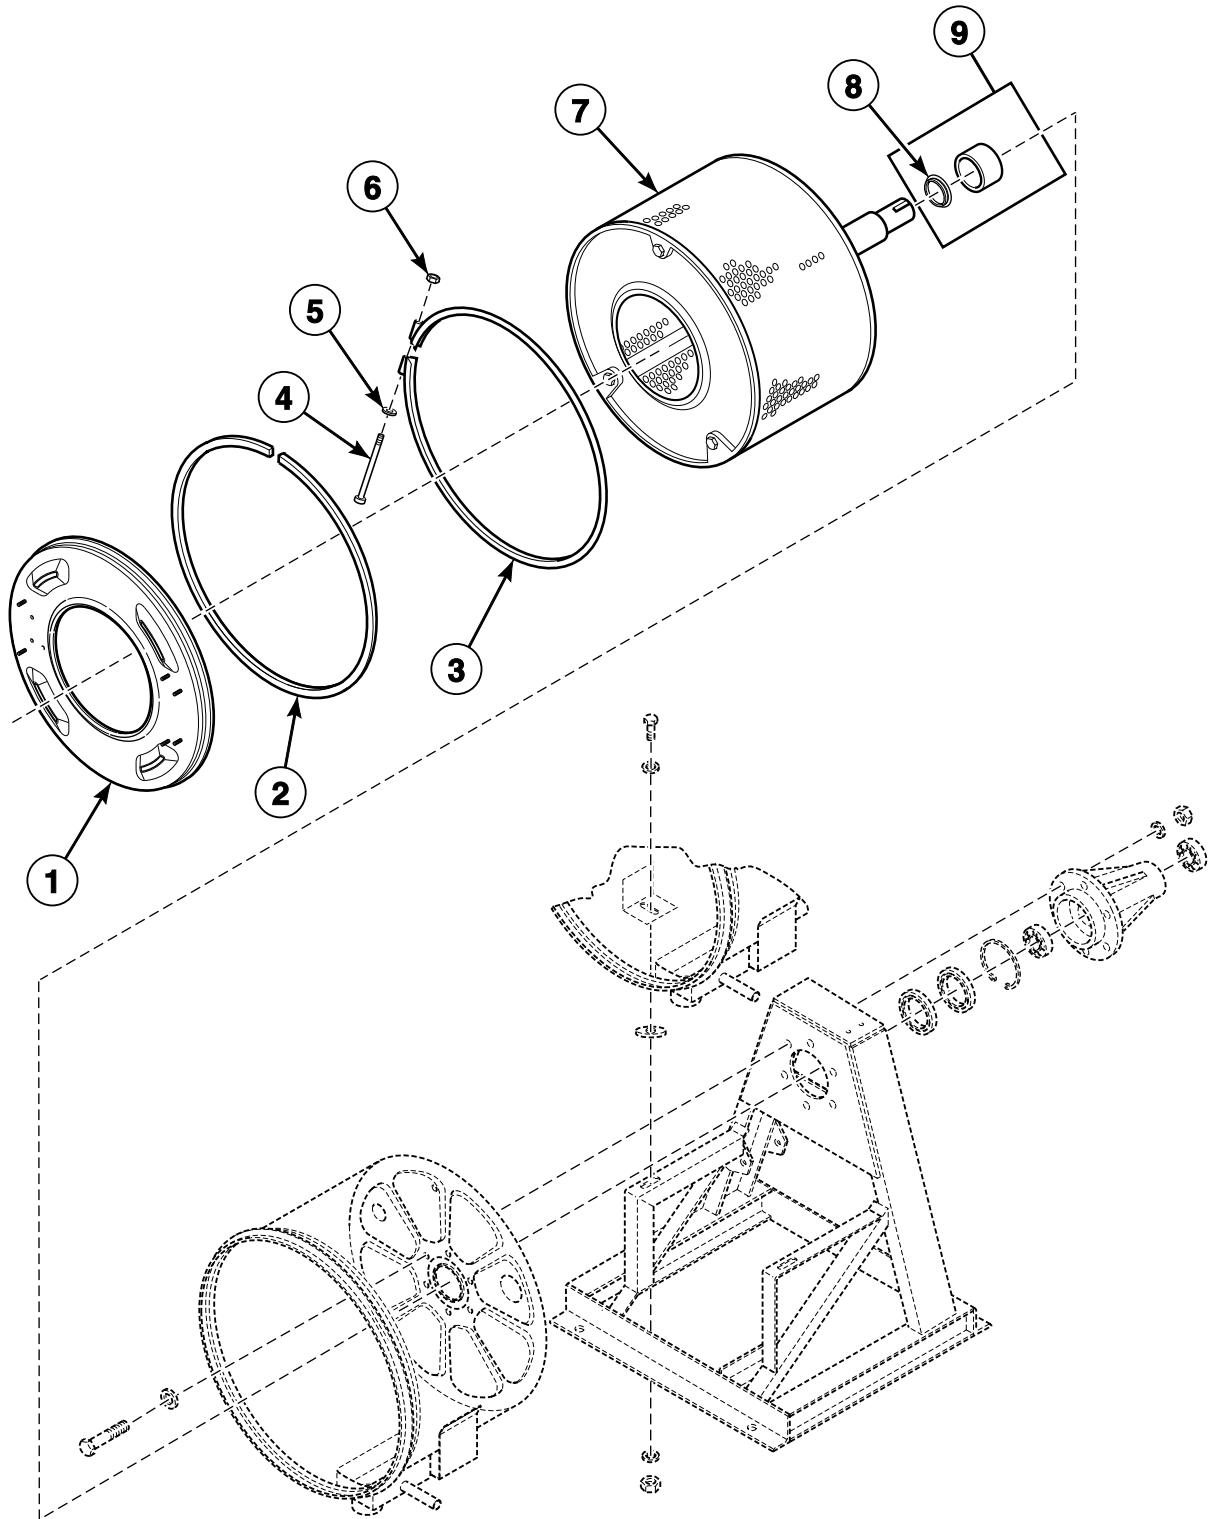


CHM3153P_F8330701

Shell Front and Basket - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
	389P4	Basket Tool Kit	Purchase; Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits; Requires F460129P Bearing Puller Tool
	390P4-1	Basket Rental Tool Kit	Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits; Requires F460129P Bearing Puller Tool
	F460129P	Bearing Puller Tool	
1	F8229401	Shell Front Assembly	20 pound models
	F8229501	Shell Front Assembly	30 pound models
	F8229601	Shell Front Assembly	40 pound models
	F8229701	Shell Front Assembly	60 pound models
2	F8513501	Shell Front Gasket Kit	
3	F8537801	Shell Band Kit	20 pound models
	F8388002	Clamp Ring Assembly	30 pound models
	F741701	Shell Band Kit	40 pound models
	F8537804	Shell Band Kit	60 pound models
4	F430518	Screw	
5	F430317	Washer	
6	F430215	Nut	
7	F935P3	Pressfit Upgrade Kit	20 pound models; Models through 3/31/10; Includes items 8, 9, F8347801 Basket Assembly and F747001 Trunnion Kit
	F936P3	Pressfit Upgrade Kit	30 pound models; Models through 3/31/10; Includes items 8, 9, F8347901 Basket Assembly and F747002 Trunnion Kit
	F938P3	Pressfit Upgrade Kit	40 pound models; Models through 3/31/10; Includes items 8, 9, F8336301 Basket Assembly and F747003 Trunnion Kit
	F939P3	Pressfit Upgrade Kit	60 pound models; Models through 3/31/10; Includes items 8, 9, F8336501 Basket Assembly and F747005 Trunnion Kit
	F8347801P	Basket Assembly	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9
	F8347901P	Basket Assembly	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9
	F8391701P	Basket Assembly	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9
	F8502801	Basket Assembly	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9
8	F8336801	Excluder Seal	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8336901	Excluder Seal	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337001	Excluder Seal	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337101	Excluder Seal	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
9	F8312001P	Shaft Seal Sleeve	20 pound models; Models that have not been upgraded with F935P3 Pressfit Upgrade Kit or models through 3/31/10
	F8312004P	Shaft Seal Sleeve	30 pound models; Models that have not been upgraded with F936P3 Pressfit Upgrade Kit or models through 3/31/10
	F8312006P	Shaft Seal Sleeve	40 pound models; Models that have not been upgraded with F938P3 Pressfit Upgrade Kit or models through 3/31/10
	F8343901P	Shaft Seal Sleeve Kit	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes item 8
	F8343904P	Shaft Seal Sleeve Kit	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes item 8
	F8343906P	Shaft Seal Sleeve Kit	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes item 8
	F8343909P	Shaft Seal Sleeve Kit	60 pound models; Includes item 8

Trunnion - Design 1 Models

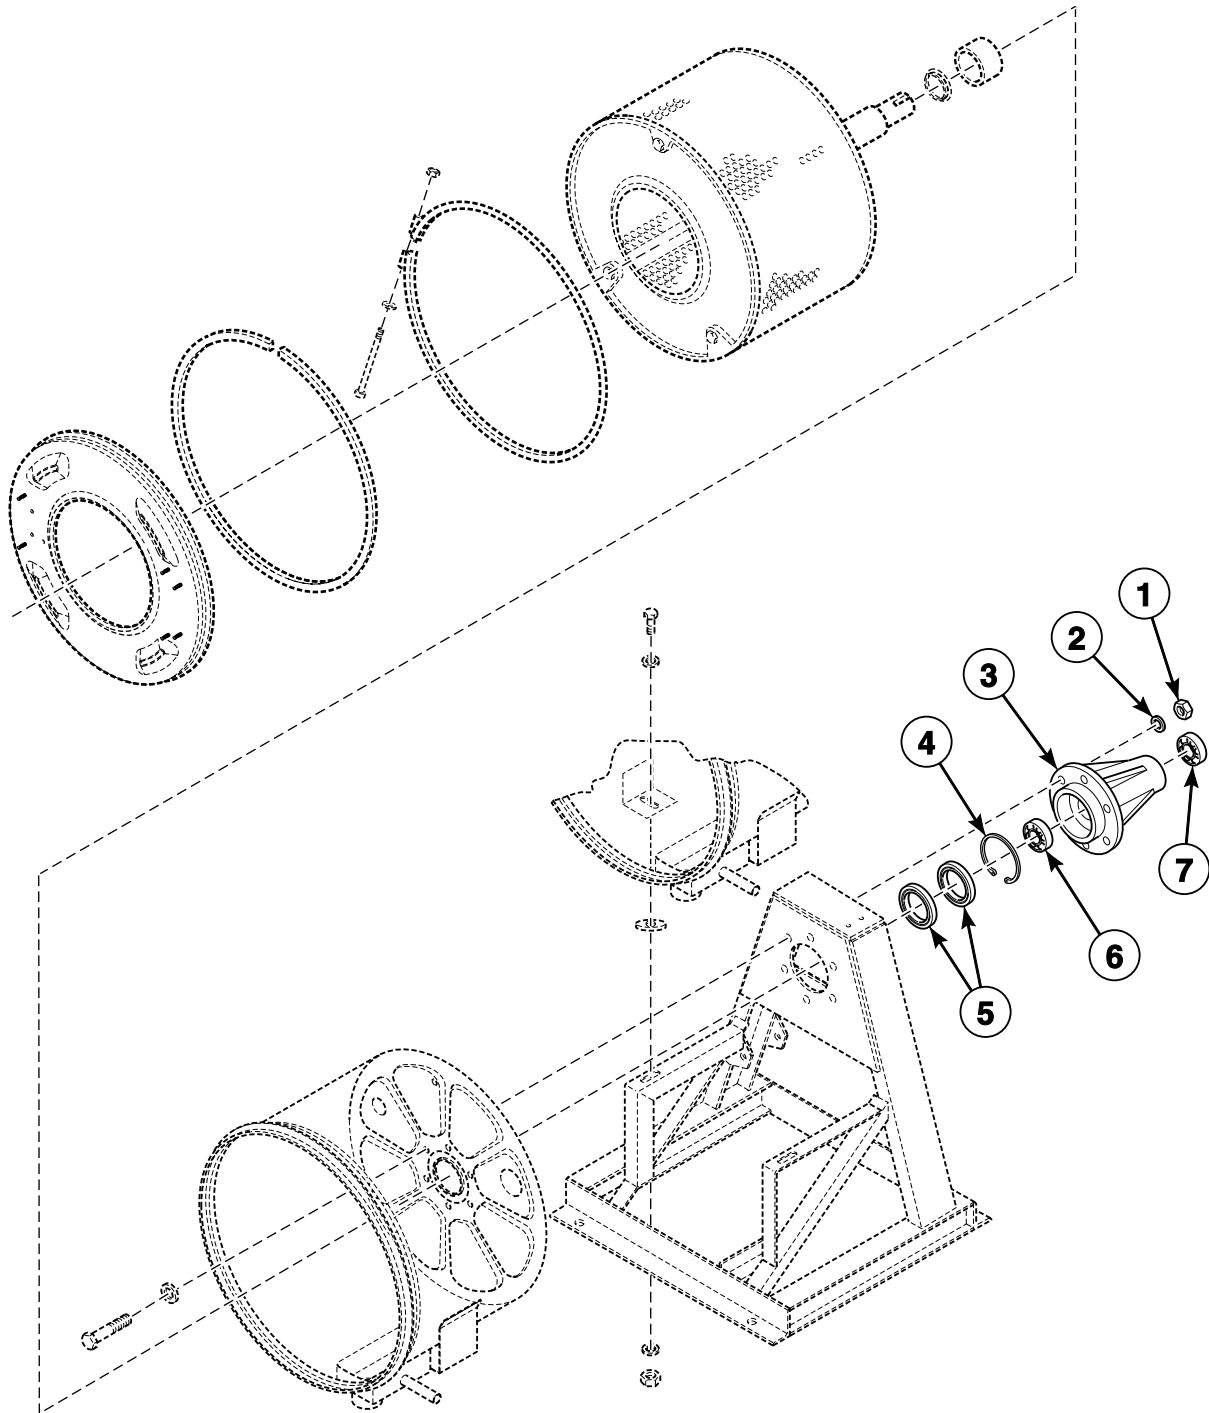


CHM3153PA_F8330701

Trunnion - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430239	Nut	20 pound models
	F430240	Nut	All other models
2	F431128	Washer	20 pound models
	F431131	Washer	All other models
3	F747001	Trunnion Kit	20 pound models; Includes items 1, 2, 4-7, F430949 Screw, F792000 Shell Front Basket Kit, F812P3 Hardware Kit, F8283401 Adhesive and F8345201 Bearing Housing
	F747002	Trunnion Kit	30 pound models; Includes items 1, 2, 4-7, F430949 Screw, F792000 Shell Front Basket Kit, F812P3 Hardware Kit, F8283401 Adhesive and F8345101 Bearing Housing
	F747003	Trunnion Kit	40 pound models; Includes items 1, 2, 4-7, F430949 Screw, F792000 Shell Front Basket Kit, F812P3 Hardware Kit, F8283401 Adhesive and F8335801 Bearing Housing
	F747005	Trunnion Kit	60 pound models; Includes items 1, 2, 4-7, F430949 Screw, F792000 Shell Front Basket Kit, F812P3 Hardware Kit, F8283401 Adhesive and F8337901 Bearing Housing
4	F8344901	Retaining Ring	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8345001	Retaining Ring	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337801	Retaining Ring	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337901	Retaining Ring	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
5	F8203801	Triple Lip Seal	20 pound models
	F8203802	Triple Lip Seal	30 pound models
	F8203803	Triple Lip Seal	40 pound models
	F8203806	Triple Lip Seal	60 pound models
6	F100137P	Bearing	6308 2RS C3; Front; 20 and 40 pound models
	F100123P	Bearing	6309 2RS C3; Front; 30 pound models
	F100135	Bearing	6313 2RS C3; Front; 60 pound models
7	F100136P	Bearing	6307 2RS C3; Rear; 20 pound models
	F100108	Bearing	6208 2RS C3; Rear; 30 pound models
	F100134	Bearing	6310 2RS C3; Rear; 40 and 60 pound models

Shell and Frame - Design 1 Models

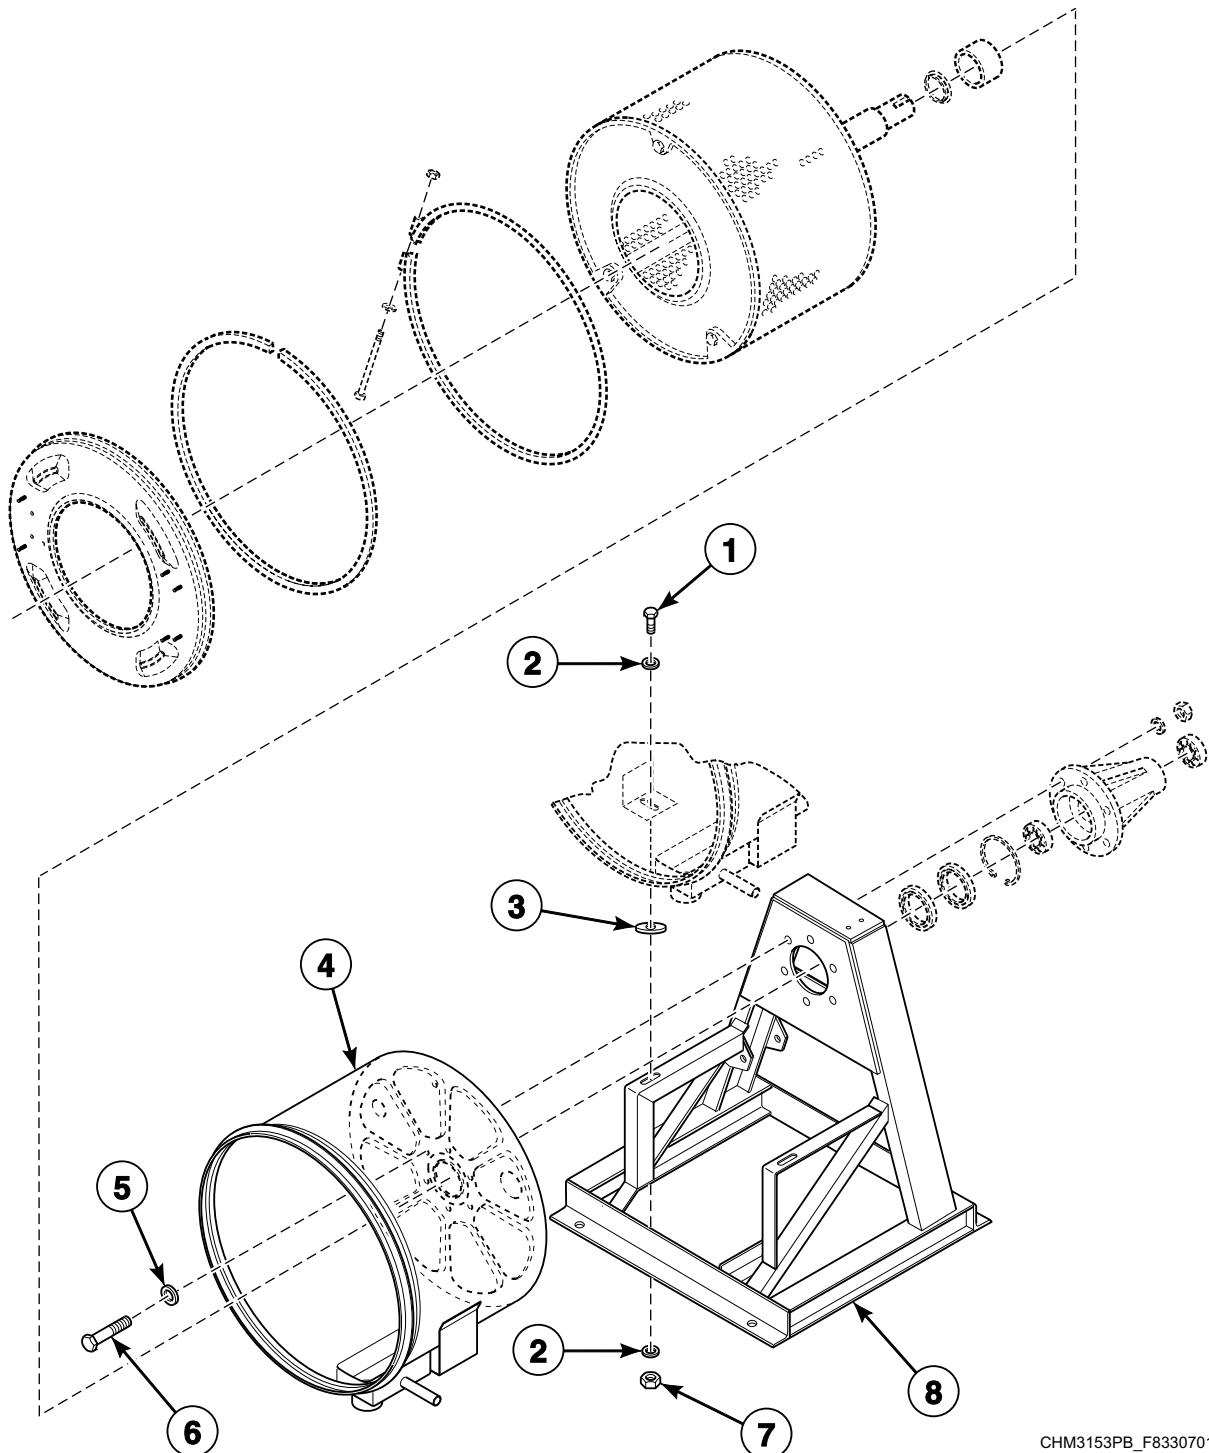


CHM3153PB_F8330701

Shell and Frame - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430942	Screw	
2	M400081	Washer	
3	F430303	Washer	
4	F8179201	Shell Weldment	20 pound vend models; Standard
	F8179202	Shell Weldment	20 pound OPL models; Electric and steam heat
	F8179203	Shell Weldment	20 pound OPL models; Standard
	F8179301	Shell Weldment	30 pound vend models; Standard
	F8179302	Shell Weldment	30 pound OPL models; Electric and steam heat
	F8179303	Shell Weldment	30 pound OPL models; Standard
	F8179401	Shell Weldment	40 pound vend models; Standard
	F8179402	Shell Weldment	40 pound OPL models; Electric and steam heat
	F8179403	Shell Weldment	40 pound OPL models; Standard
	F8179501	Shell Weldment	60 pound vend models; Standard
	F8179502	Shell Weldment	60 pound OPL models; Electric and steam heat
	F8179503	Shell Weldment	60 pound OPL models; Standard
5	F431128	Washer	20 pound models
	F431131	Washer	All other models
6	F430949	Screw	20 pound models
	F8442702	Screw	All other models
7	F430218	Nut	
8	F8195901	Frame Weldment	20 pound models
	F8196001	Frame Weldment	30 pound models
	F8196101	Frame Weldment	40 pound models
	F8199101	Frame Weldment	60 pound models

Shell Front and Basket - Design 2 and 3 Models

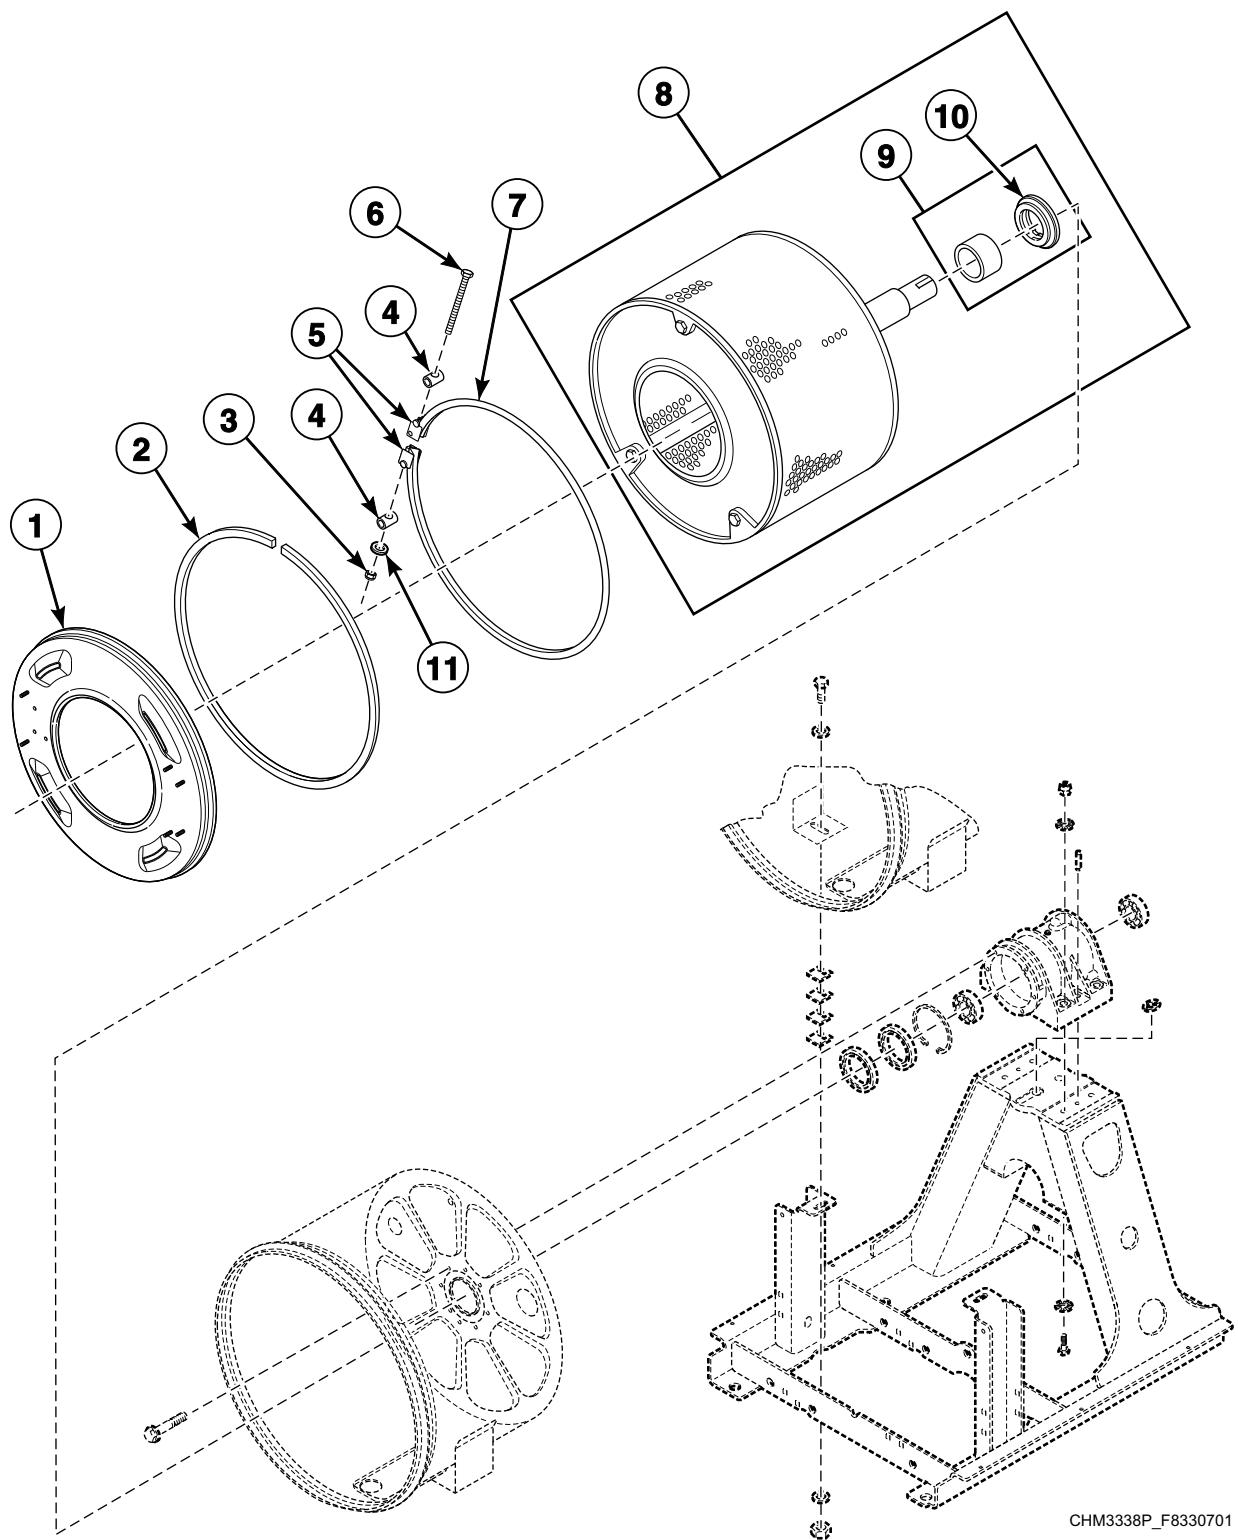


CHM3338P_F8330701

Shell Front and Basket - Design 2 and 3 Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F980204341	Basket and Bearing Assembly	20 pound models; Viton; Includes item 8 and F8271602 Bearing Housing Assembly
	F980204342	Basket and Bearing Assembly	30 pound models; Viton; Includes item 8 and F8271702 Bearing Housing Assembly
	F980204343	Basket and Bearing Assembly	40 pound models; Viton; Includes item 8 and F8271802 Bearing Housing Assembly
	F980204344	Basket and Bearing Assembly	60 pound models; Viton; Includes item 8 and F8271902 Bearing Housing Assembly
	389P4	Basket Tool Kit	Purchase; Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits; Requires F460129P Bearing Puller Tool
	390P4-1	Basket Rental Tool Kit	Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits; Requires F460129P Bearing Puller Tool
	F460129P	Bearing Puller Tool	
	F8388001	Clamp Ring Assembly	20 pound models; Includes items 5 and 7
	F8388002	Clamp Ring Assembly	30 pound models; Includes items 5 and 7
	F741701	Shell Band Kit	40 pound models; Includes items 5 and 7
	F8388004	Clamp Ring Assembly	60 pound models; Includes items 5 and 7
1	F8229401	Shell Front Assembly	20 pound models
	F8229501	Shell Front Assembly	30 pound models
	F8229601	Shell Front Assembly	40 pound models
	F8229701	Shell Front Assembly	60 pound models
2	F8513501	Shell Front Gasket Kit	
3	F430218	Nut	
4	F8302701	Pin	
5	F8302401	Clamp Ring Bracket	
6	800462	Screw	
7	F8537801	Shell Band Kit	20 pound models
	F8537802	Shell Band Kit	30 pound models
	F741701	Shell Band Kit	40 pound models
	F8537804	Shell Band Kit	60 pound models
8	F8391301P	Basket Assembly	20 pound models; Standard; Includes items 9 and 10
	F8391303	Basket Assembly	20 pound models; Viton
	F8391501P	Basket Assembly	30 pound models; Standard; Includes items 9 and 10
	F8391503	Basket Assembly	30 pound models; Viton
	F8391701P	Basket Assembly	40 pound models; Standard; Includes items 9 and 10
	F8391703	Basket Assembly	40 pound models; Viton
	F8502801	Basket Assembly	60 pound models; Replaces F8391901 Basket Assembly; Standard; Includes items 9 and 10
	F8502804	Basket Assembly	60 pound models; Viton
9	F8343901P	Shaft Seal Sleeve Kit	20 pound models; Includes item 10
	F8343904P	Shaft Seal Sleeve Kit	30 pound models; Includes item 10
	F8343906P	Shaft Seal Sleeve Kit	40 pound models; Includes item 10
	F8343909P	Shaft Seal Sleeve Kit	60 pound models; Includes item 10; Use with F8391901 Basket Assembly
	F8343914	Shaft Seal Sleeve	60 pound models; Use with F8502801 Basket Assembly
10	F8336802	Excluder Seal	20 pound models; Viton
	F8336801	Excluder Seal	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8336902	Excluder Seal	30 pound models; Viton
	F8336901	Excluder Seal	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337002	Excluder Seal	40 pound models; Viton
	F8337001	Excluder Seal	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8527701	Excluder Seal	60 pound models; Viton
	F8337101	Excluder Seal	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10; Use with F8391901 Basket Assembly
	F8337101	Excluder Seal	60 pound models; Use with F8502801 Basket Assembly
11	M400081	Washer	


Bearing Housing - 20 and 30 Pound Design 2 and 3 Models

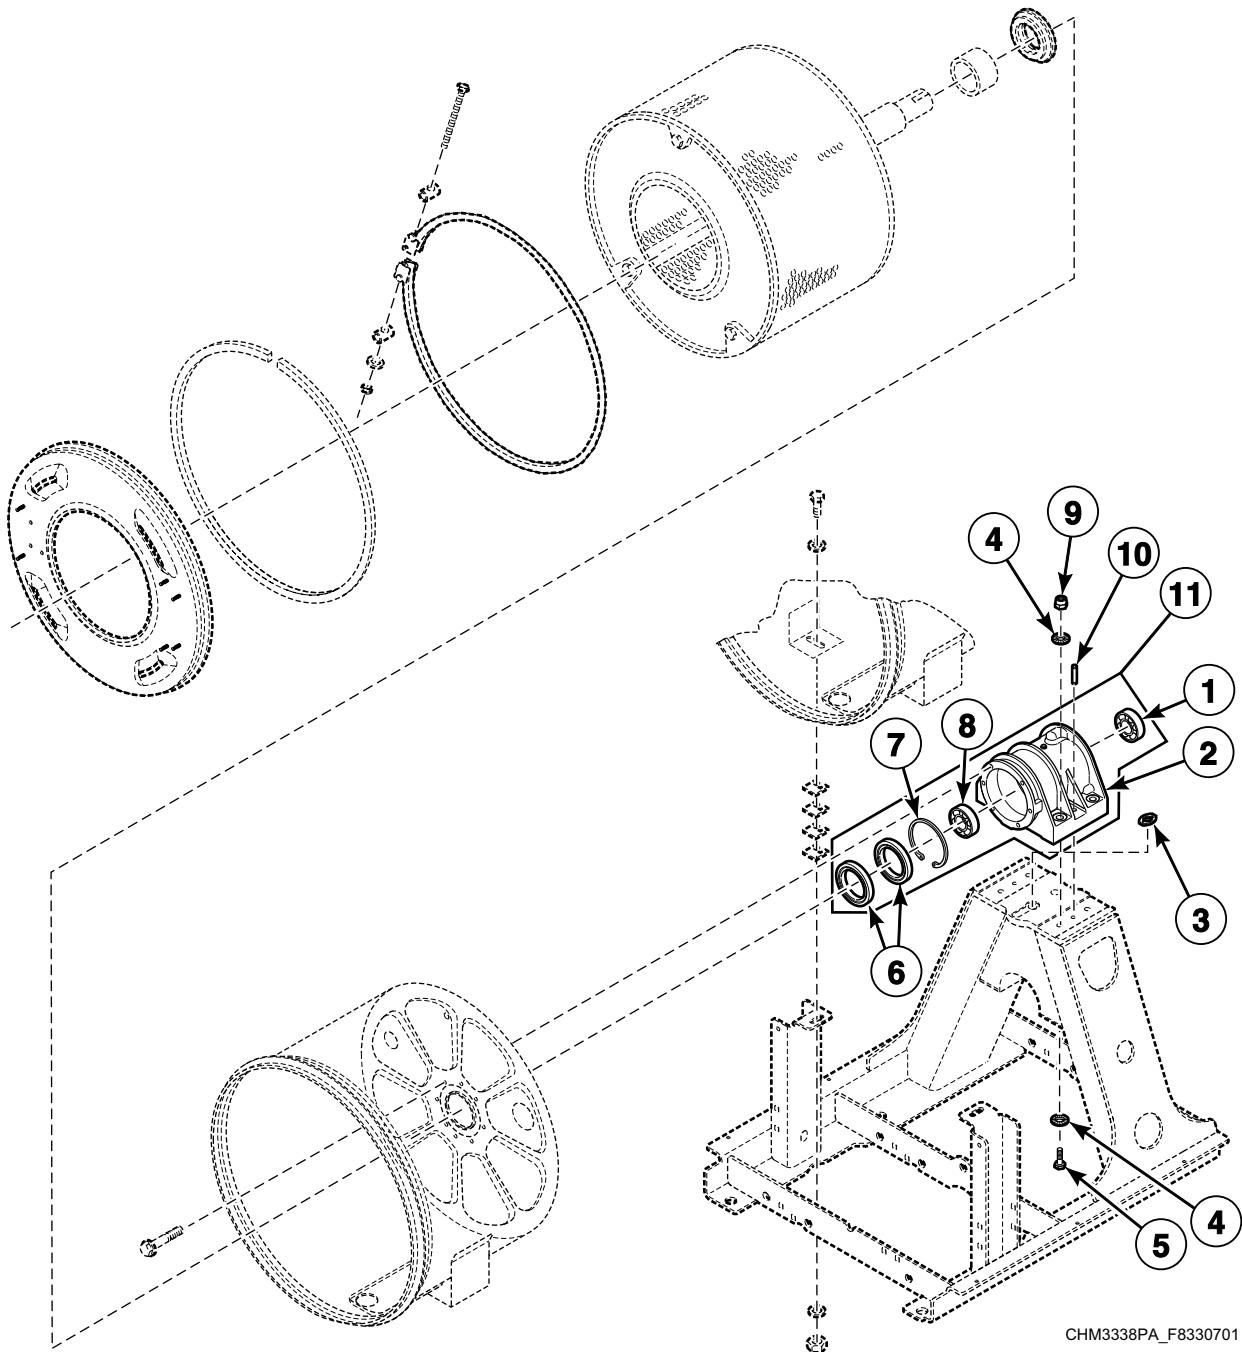

Bearing Housing - 20 and 30 Pound Design 2 and 3 Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F980204341	Basket and Bearing Assembly	20 pound models; Viton; Includes item 11 and F8391303 Bearing Housing Assembly
	F980204342	Basket and Bearing Assembly	30 pound models; Viton; Includes item 11 and F8391503 Bearing Housing Assembly
1	F100137P	Bearing	6308 2RS C3; Front; 20 pound models
	F100123P	Bearing	6309 2RS C3; Front; 30 pound models
2	F8247902	Bearing Housing	20 pound models
	F8246802	Bearing Housing	30 pound models
3	F8350301	Seal Scupper Pad	
4	F8366601	Washer	20 pound models
	F430339	Washer	30 pound models
5	F8368701	Screw	20 pound models
	F8368801	Screw	30 pound models
6	F8203801	Triple Lip Seal	20 pound models; Standard
	F8203813	Triple Lip Seal	20 pound models; Viton
	F8203802	Triple Lip Seal	30 pound models; Standard
	F8203814	Triple Lip Seal	30 pound models; Standard
7	F8344901	Retaining Ring	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8345001	Retaining Ring	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
8	F100136P	Bearing	6307 2RS C3; Rear; 20 pound models
	F100108	Bearing	6208 2RS C3; Rear; 30 pound models
9	F8387601	Nut	20 pound models
	F8387701	Nut	30 pound models
10	F8388101	Dowel Pin	20 pound models
	F8388201	Dowel Pin	30 pound models
11	F8271601P	Bearing Housing Assembly	20 pound models; Standard
	F8271602	Bearing Housing Assembly	20 pound models; Viton
	F8271701P	Bearing Housing Assembly	30 pound models; Standard
	F8271702	Bearing Housing Assembly	30 pound models; Viton

Bearing Housing - 40 and 60 Pound Design 2 and 3 Models

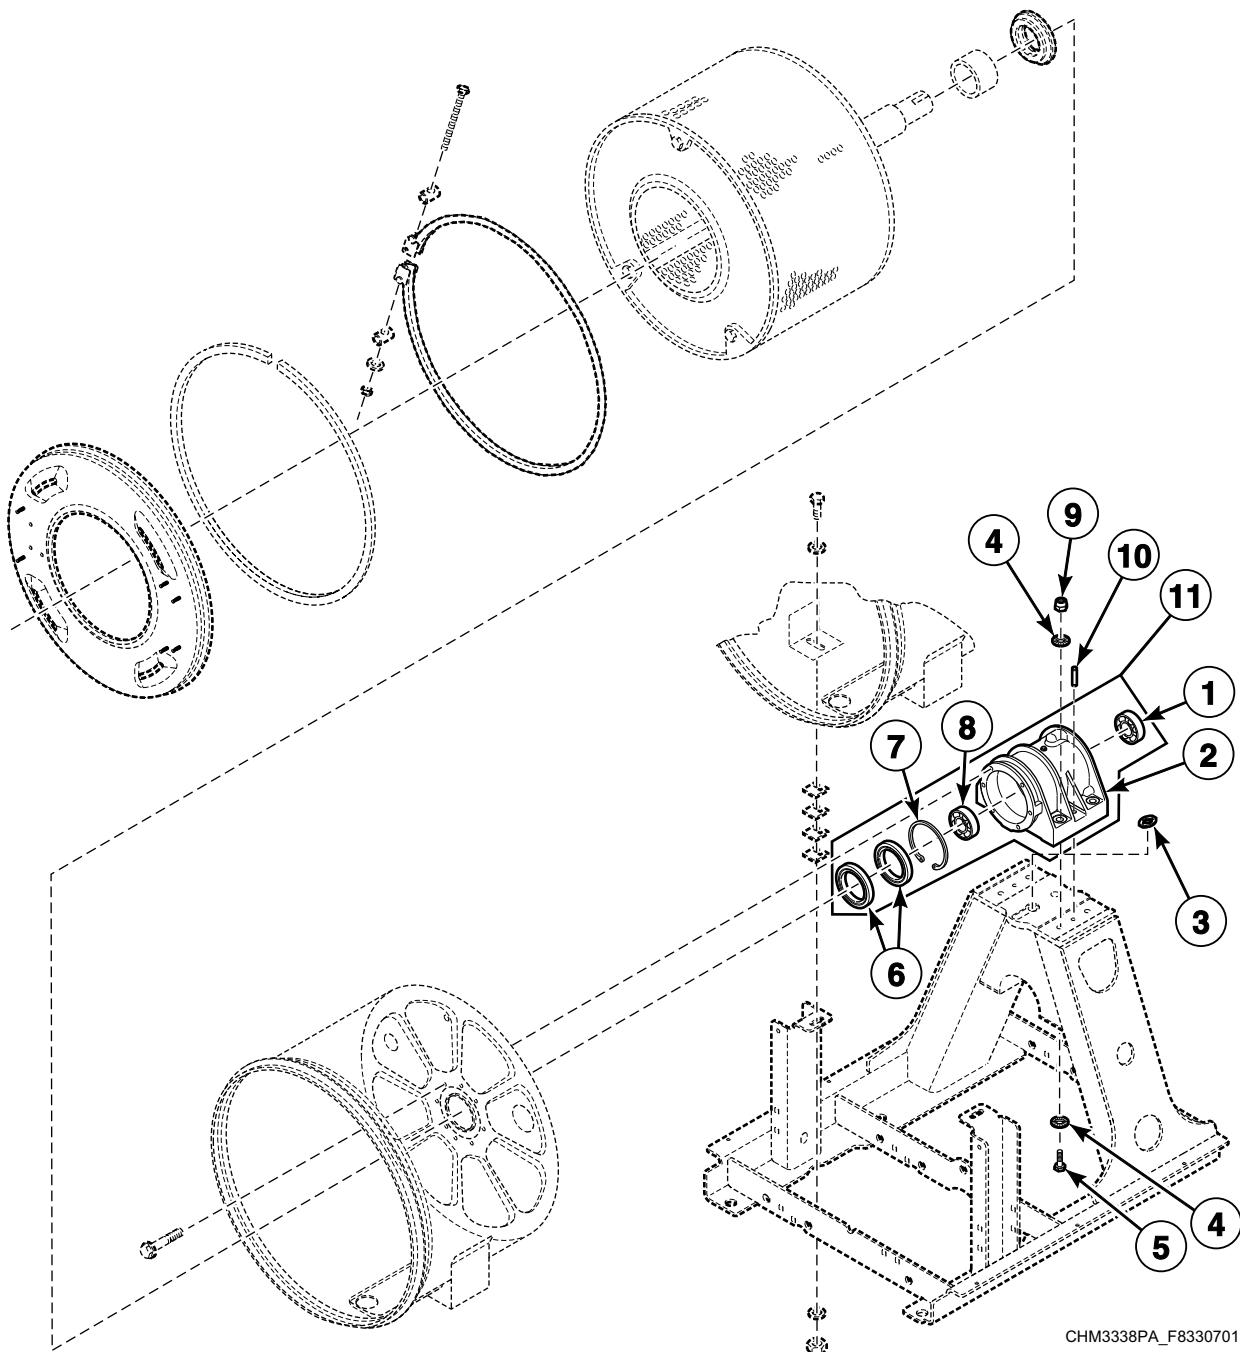


CHM3338PA_F8330701

Bearing Housing - 40 and 60 Pound Design 2 and 3 Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F980204343	Basket and Bearing Assembly	40 pound models; Viton; Includes item 11 and F8391703 Bearing Housing Assembly
	F980204344	Basket and Bearing Assembly	60 pound models; Viton; Includes item 11 and F8502804 Bearing Housing Assembly
1	F100137P	Bearing	6308 2RS C3; Front; 40 pound models
	F100135	Bearing	6313 2RS C3; Front; 60 pound models
2	F8249902	Bearing Housing	40 pound models
	F8250902	Bearing Housing	60 pound models
3	F8350302	Seal Scupper Pad	40 pound models
	F8350303	Seal Scupper Pad	60 pound models
4	F430339	Washer	
5	F8368801	Screw	
6	F8203803	Triple Lip Seal	40 pound models; Standard
	F8203815	Triple Lip Seal	40 pound models; Viton
	F8203806	Triple Lip Seal	60 pound models; Standard
	F8203808	Radial Seal	60 pound models; Viton
7	F8337801	Retaining Ring	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337901	Retaining Ring	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
8	F100134	Bearing	6310 2RS C3; Rear
9	F8387701	Nut	
10	F8388201	Dowel Pin	
11	F8271801P	Bearing Housing Assembly	40 pound models; Standard
	F8271802	Bearing Housing Assembly	40 pound models; Viton
	F8271901P	Bearing Housing Assembly	60 pound models; Standard
	F8271902	Bearing Housing Assembly	60 pound models; Viton


Shell and Frame - Design 2 and 3 Models

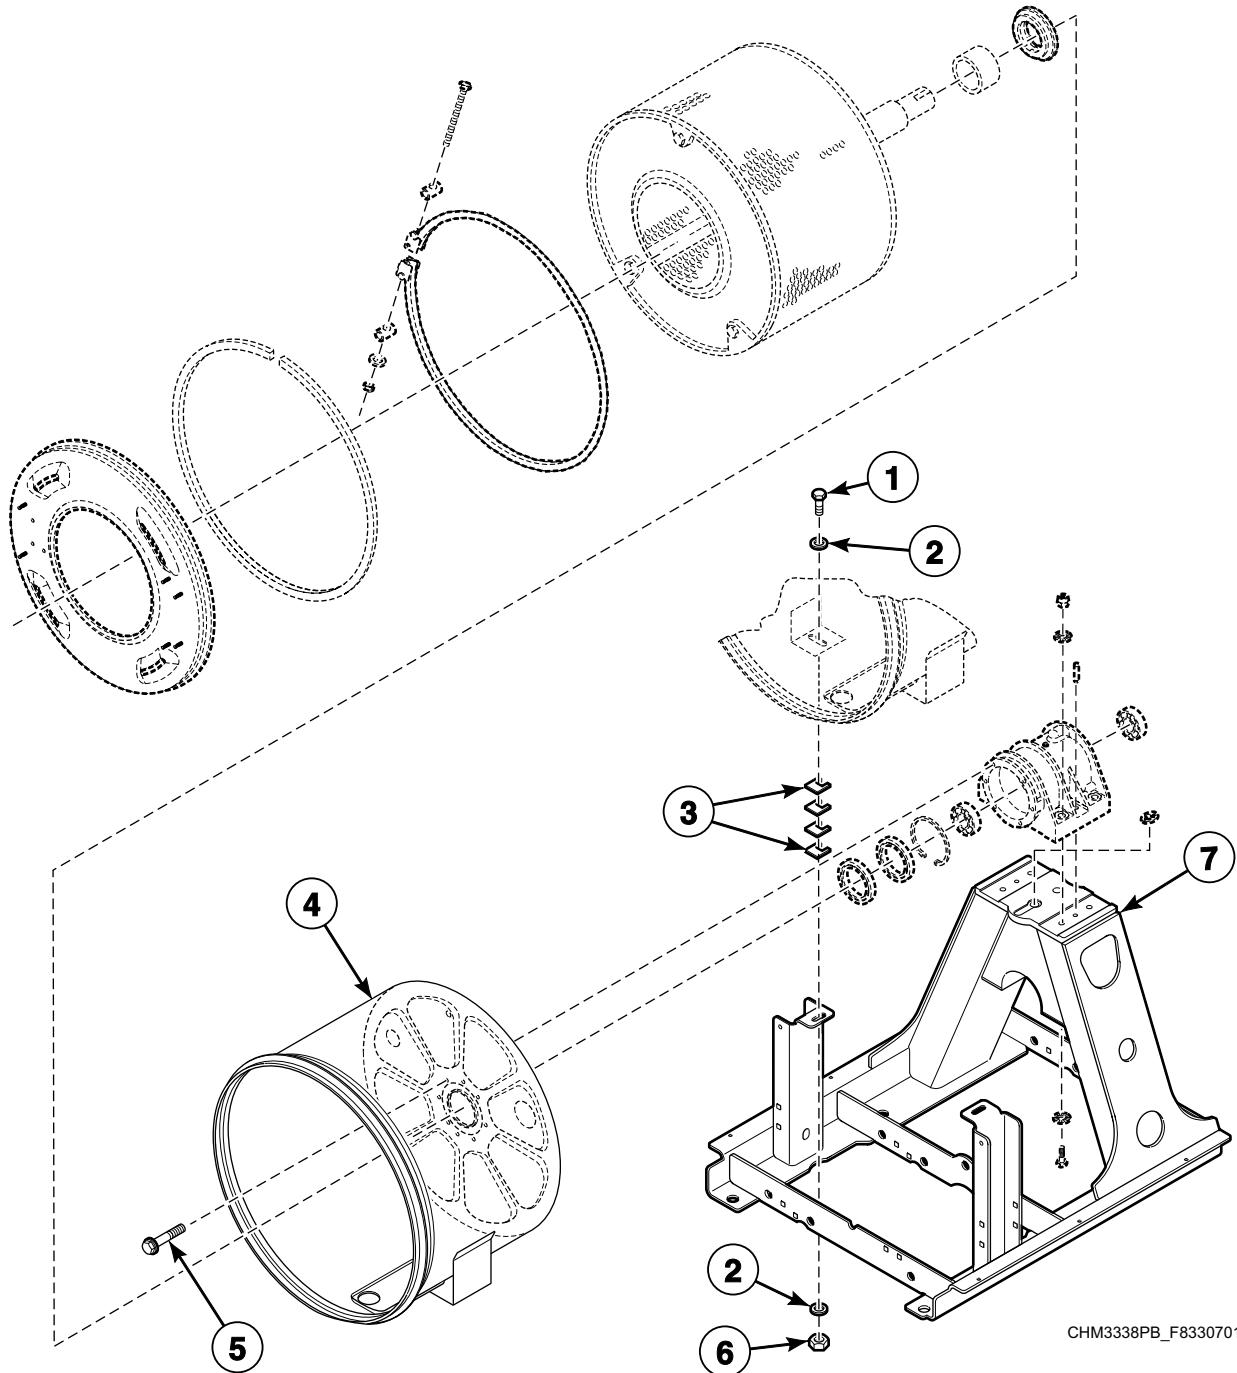

Shell and Frame - Design 2 and 3 Models

REF	PART NO.	DESCRIPTION	COMMENTS
	1111P	Concrete Kit	5/8 inch
	F8498101	Concrete Epoxy Kit	
	F8433301	Frame Template	20 pound models
	F8433401	Frame Template	30 pound models
	F8433501	Frame Template	40 pound models
	F8433601	Frame Template	60 pound models
1	H88213996	Screw	
2	M400081	Washer	
3	F8402701	Washer	
4	F8360601	Shell Weldment	20 pound vend models; Standard
	F8360602	Shell Weldment	20 pound OPL models; Electric and steam heat
	F8360603	Shell Weldment	20 pound OPL models; Standard
	F8360701	Shell Weldment	30 pound vend models; Standard
	F8360702	Shell Weldment	30 pound OPL models; Electric and steam heat
	F8360703	Shell Weldment	30 pound OPL models; Standard
	F8360801	Shell Weldment	40 pound vend models; Standard
	F8360802	Shell Weldment	40 pound OPL models; Electric and steam heat
	F8360803	Shell Weldment	40 pound OPL models; Standard
	F8360901	Shell Weldment	60 pound vend models; Standard
	F8360902	Shell Weldment	60 pound OPL models; Electric and steam heat
	F8360903	Shell Weldment	60 pound OPL models; Standard
5	F8442702	Screw	20 pound models
6	44087301	Nut	
7	F8247002	Frame Weldment	20 pound models
	F8248002	Frame Weldment	30 pound models
	F8249001	Frame Weldment	40 pound models
	F8250002	Frame Weldment	60 pound models

Drain Plumbing - Design 1 Models

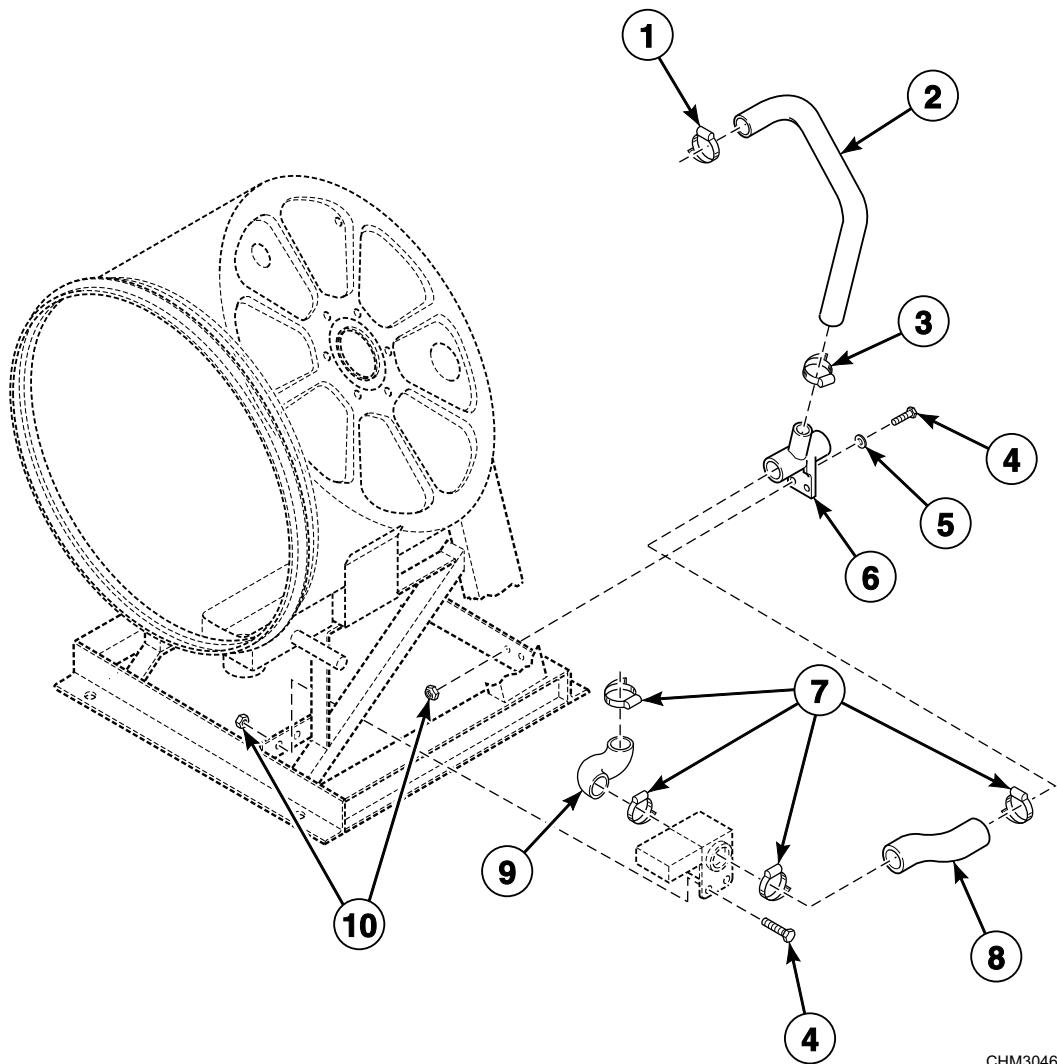


CHM3046P_F8330701

Drain Plumbing - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200213	Hose Clamp	No. 40
2	F150308	Overflow Hose	20 and 30 pound models
	F0200238-00	Overflow Hose	40 pound models
	F8337701	Overflow Hose	40 pound models; Electric heat
	F150417	Overflow Hose	60 pound models
3	F200215	Hose Clamp	40 pound models
	F200213	Hose Clamp	No. 40; All other models
4	F430107	Screw	
5	F430317	Washer	
6	F150318	Drain Connect Tee	20 and 30 pound models
	F150398	Drain Tee	40 and 60 pound models
7	F200213	Hose Clamp	No. 40; 20 and 30 pound models
	F200201	Hose Clamp	No. 56; 40 and 60 pound models
8	F8233101	Drain Hose	Rear; 20 pound models
	F8233102	Drain Hose	Rear; 30 pound models
	F8231901	Drain Hose	Rear; 40 pound models
	F8231902	Drain Hose	Rear; 60 pound models
9	F8233001	Drain Hose	Front; 20 and 30 pound models
	F8232901	Drain Hose	Front; 40 and 60 pound models
10	F430215	Nut	

Drain Plumbing - Design 2 and 3 Models

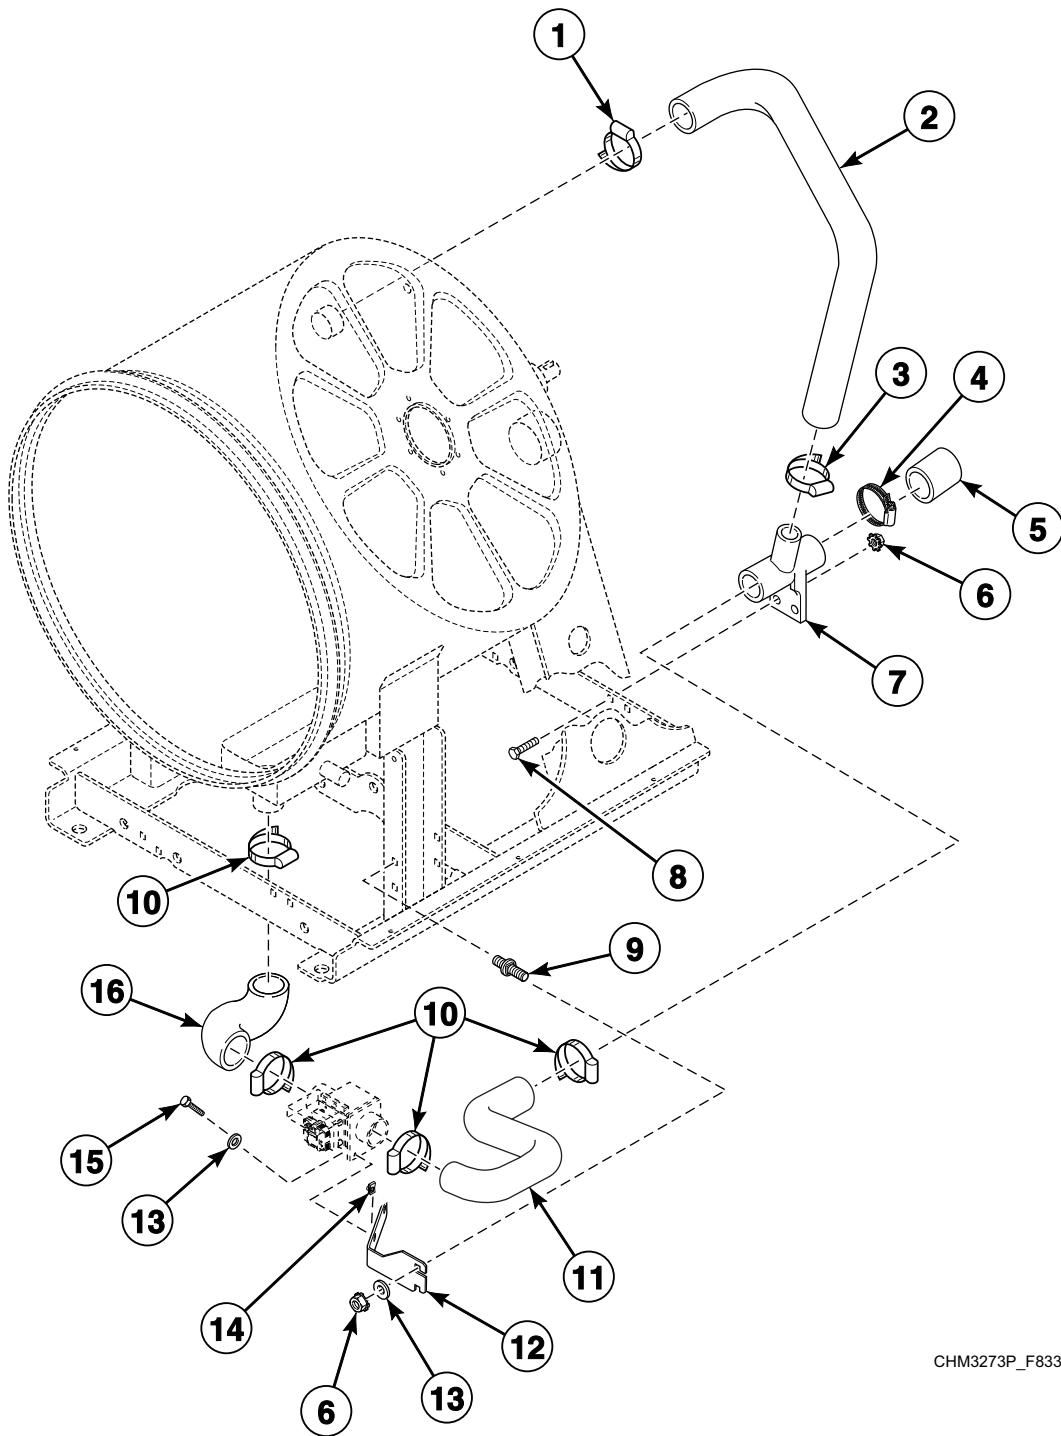


CHM3273P_F8330701

Drain Plumbing - Design 2 and 3 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200213	Hose Clamp	No. 40
2	F8367901	Overflow Hose	20 pound models
	F8368001	Overflow Hose	30 pound models
	F8367201	Overflow Hose	40 and 60 pound models
3	F200215	Hose Clamp	No. 28; 20 and 30 pound models
	F200213	Hose Clamp	No. 40; 40 and 60 pound models
4	F200201	Hose Clamp	No. 56; 40 and 60 pound models
5	F200165100	Drain Hose	40 and 60 pound models
6	44087201	Nut	
7	F150318	Drain Connect Tee	20 and 30 pound models
	F150398	Drain Tee	40 and 60 pound models
8	F430522	Bolt	20 and 30 pound models
	F8402801	Bolt	40 and 60 pound models
9	70334702	Stud	
10	F200213	Hose Clamp	No. 40; 20 and 30 pound models
	F200201	Hose Clamp	No. 56; 40 and 60 pound models
11	F8365601	Rear Drain Hose	20 pound models
	F8365602	Rear Drain Hose	30 pound models
	F8231904	Rear Drain Hose	40 pound models
	F8231905	Rear Drain Hose	60 pound models
12	F8365401	Bracket	20 pound models
	F8365402	Bracket	30 pound models
	F8434601	Bracket	40 pound models
	F8434701	Bracket	60 pound models
13	M405535	Washer	
14	70030401	Nut	
15	202175	Screw	
16	F8261302	Drain Hose	20 and 30 pound models
	F8261303	Drain Hose	Electric heat
	F8232901	Drain Hose	40 and 60 pound models
	F8464701	Drain Hose	40 and 60 pound models; Electric heat

Drain Valve Assembly - 20 and 30 Pound Models

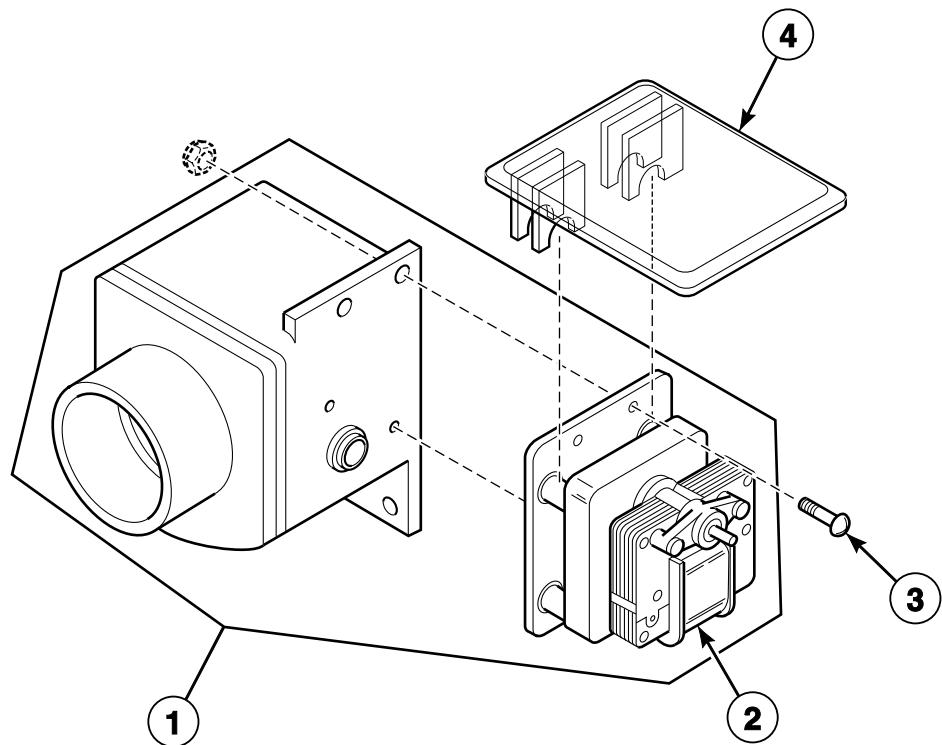


CHM2450P_F8330701

Drain Valve Assembly - 20 and 30 Pound Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	803292	Gravity Drain Valve	220 Volt
2	F380933P	Drain Valve Motor	Round shaft; 220 Volt
	G159764P	Drain Valve Motor and Gear Box Assembly	Keyed shaft; 220 Volt
3	F200182700	Bolt	
4	F200133600	Drain Valve Cover	

Drain Valve Assembly - 40 and 60 Pound Models


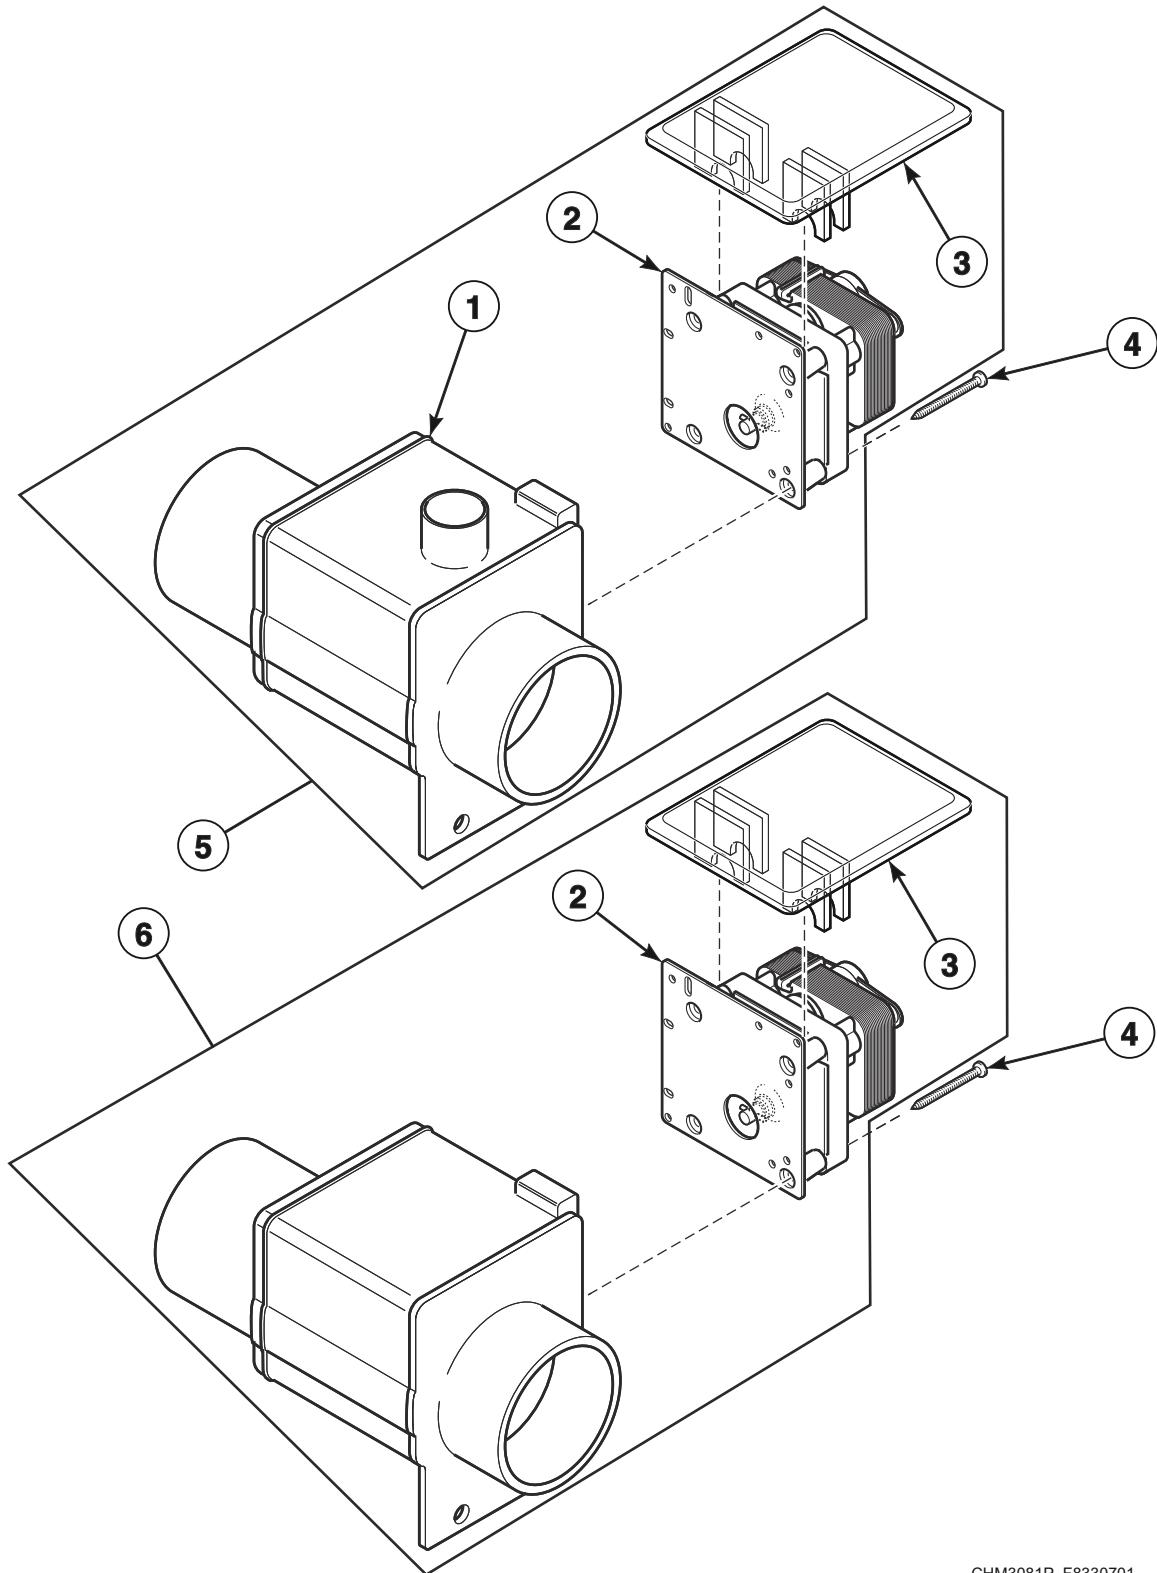


CHM3081P_F8330701

Drain Valve Assembly - 40 and 60 Pound Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8562001	Drain Seal Kit	Use with F8406307 Drain Valve
1	F8406303	Drain Valve	240 Volt; Design 1; Electric and steam heat
2	F380933P	Drain Valve Motor	Round shaft; 220 Volt
	G159764P	Drain Valve Motor and Gear Box Assembly	Keyed shaft; 220 Volt
3	F200133600	Drain Valve Cover	
4	F200182700	Bolt	
5	F200166400	Drain Valve Kit	220 Volt; Design 1; Electric and steam heat
	F200166402	Drain Valve Kit	240 Volt; Design 1; Standard
6	F8577201	Drain Valve Kit	240 Volt; Design 2 and 3

Steam Filter (Optional) and Water Supply Hose

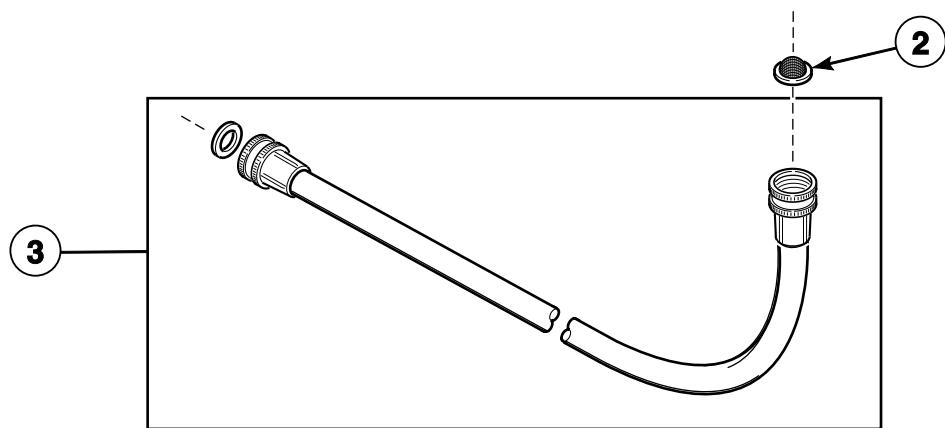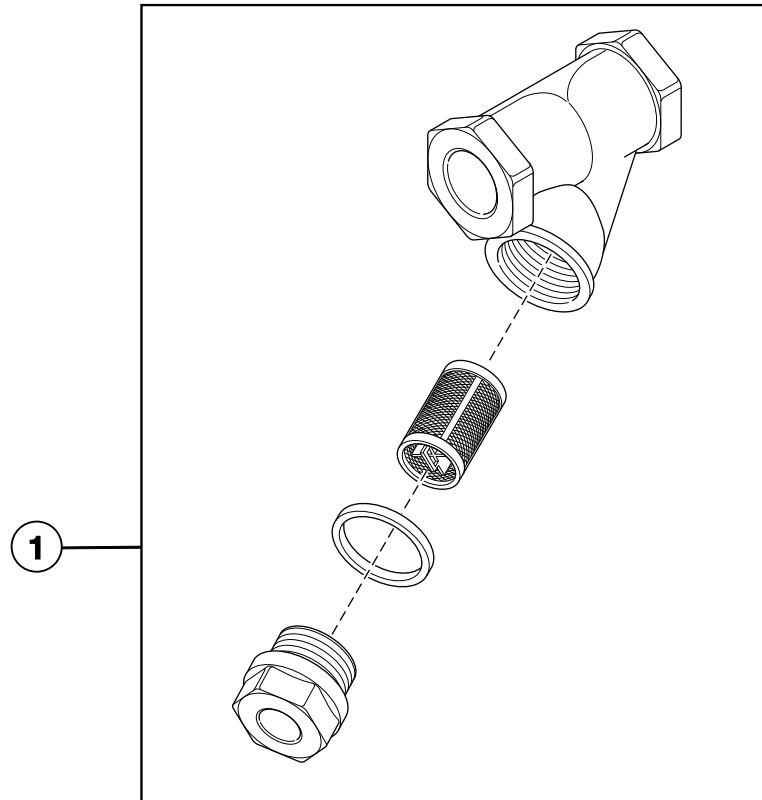


CHM3049P_F8330701

Steam Filter (Optional) and Water Supply Hose

REF	PART NO.	DESCRIPTION	COMMENTS
1	F270307	Steam Filter	1/2 inch
	F270308	Steam Filter	3/4 inch
2	803615	Washer	Filter
3	F200116	Water Hose	3/8 inch; Standard thread
	F200108P	Water Hose	1/2 inch; Standard or metric thread
	F8544601	Fill Hose Kit	Metric thread


Fill Plumbing Assembly (Drawing 1 of 2)

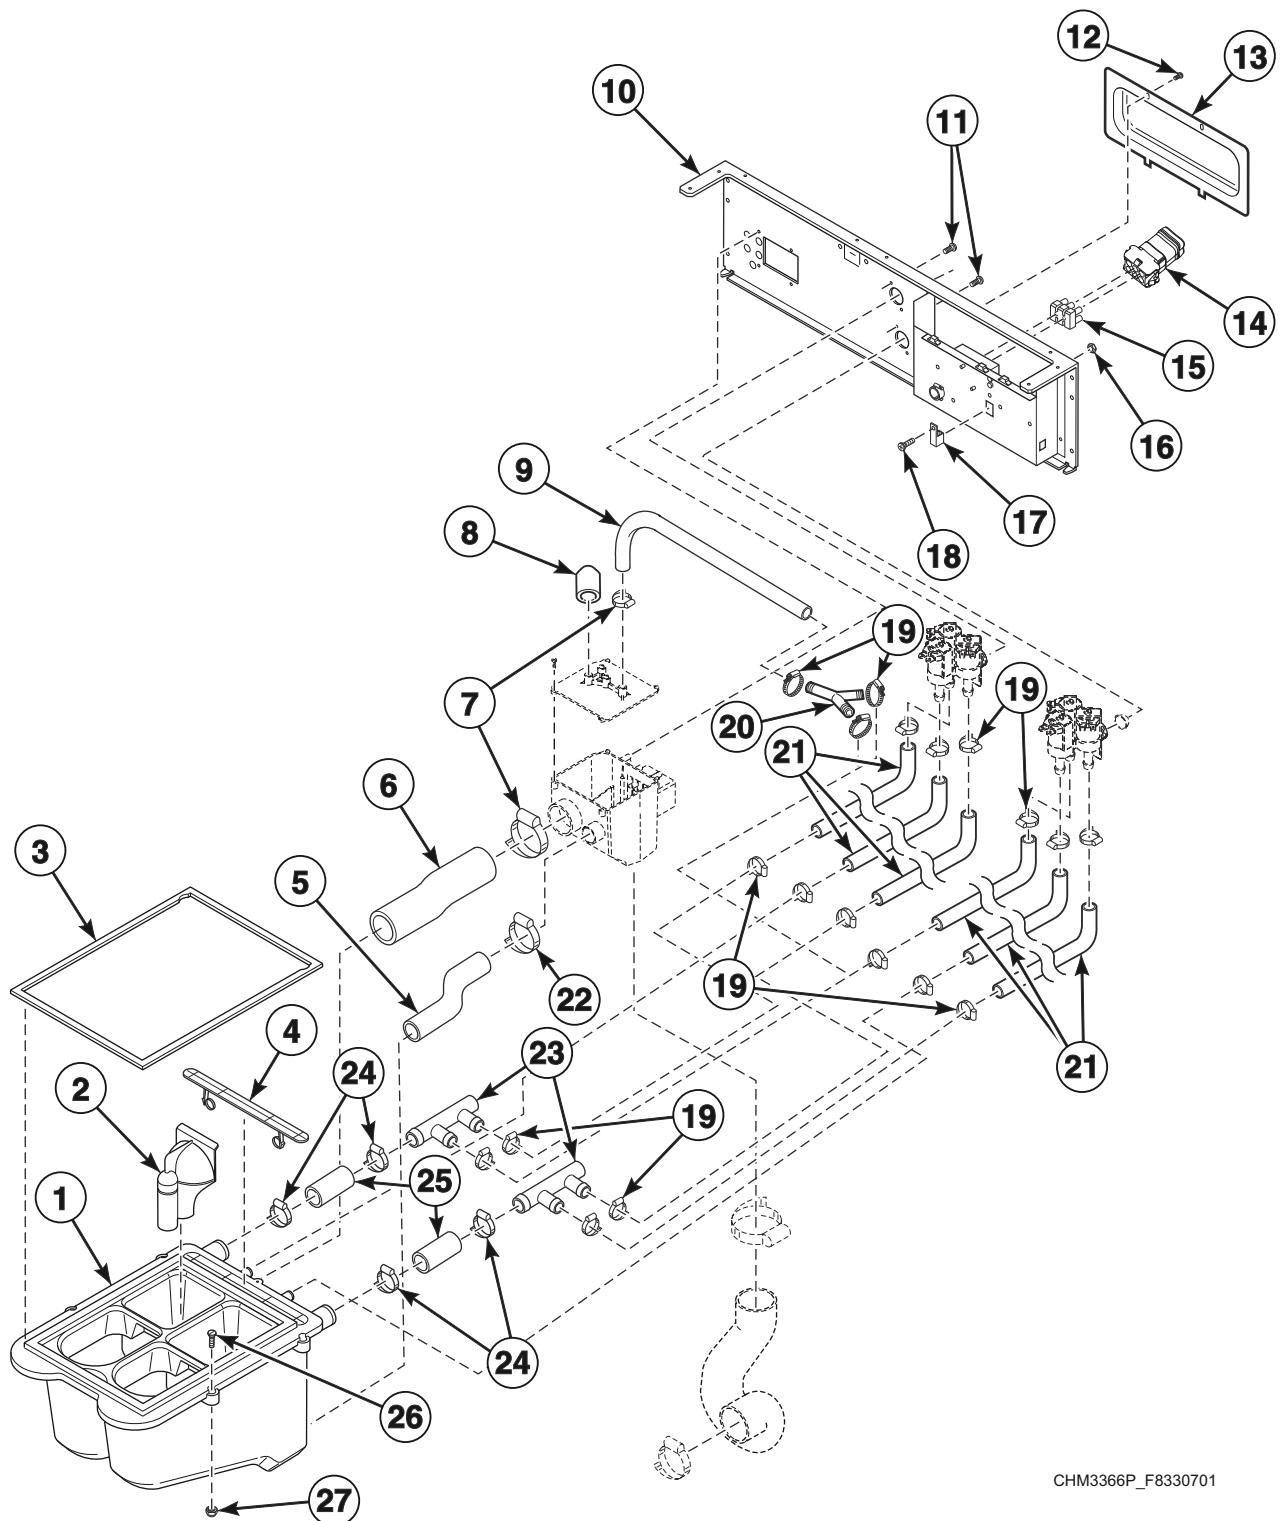

Fill Plumbing Assembly (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8047401	Dispenser Assembly	Models through 10/15/12
	F8047402	Dispenser Assembly	Models starting 10/16/12
2	F8047901	Siphon Cover	
3	F8308301	Dispenser Gasket	
4	F8047801	Access Cover	
5	F8043401	Dispenser Overflow Hose	20 pound models
	F8043403	Dispenser Overflow Hose	30 pound models
	F8043404	Dispenser Overflow Hose	40 pound models
	F8043405	Supply Overflow Hose	60 pound models
6	F8042801	Vacuum Supply Hose	20 pound models
	F8042803	Vacuum Supply Hose	30 pound models
	F8042804	Vacuum Supply Hose	40 pound models
	F8042805	Vacuum Supply Hose	60 pound models
7	F200213	Hose Clamp	No. 40
8	F8197701	Cap	
9	F0200244-01	Vacuum Breaker Hose	60 pound models
	F0200244-02	Vacuum Breaker Hose	All other models
10	F8039901	Valve Panel	20 pound models; Design 1
	F8017501	Valve Panel	30 pound models; Design 1
	F8039601	Valve Panel	40 pound models; Design 1
	F8039801	Valve Panel	60 pound models; Design 1
	F8398701	Valve Panel	20 pound models; Design 2 and 3
	F8398801	Valve Panel	30 pound models; Design 2 and 3
	F8398901	Valve Panel	40 pound models; Design 2
	F8399001	Valve Panel	60 pound models; Design 2
11	F8230301	Screw	
12	F8206901	Screw	
13	F8177001	Terminal Tray Cover	
14	F8454401	Filter	B, N and P-voltage
	F8454601	Harness	B, N and P-voltage
15	430642	Terminal Block	Includes screws
16	F430232	Nut	
17	M411283	Ground Lug Connector	
18	F430909	Screw	
19	36801	Hose Clamp	No. 8; Design 1
20	F422816	Y Connector	Design 1
21	F8232004	Hose	20 pound models
	F8232001	Hose	30 pound models
	F8232002	Hose	40 and 60 pound models
22	20211	Hose Clamp	No. 17
23	F8333201	Manifold	
24	F200222	Hose Clamp	No. 12
25	F606816-1	Hose	
26	F8535601	Screw	
27	F0431807-00	Nut	

Fill Plumbing Assembly (Drawing 2 of 2)

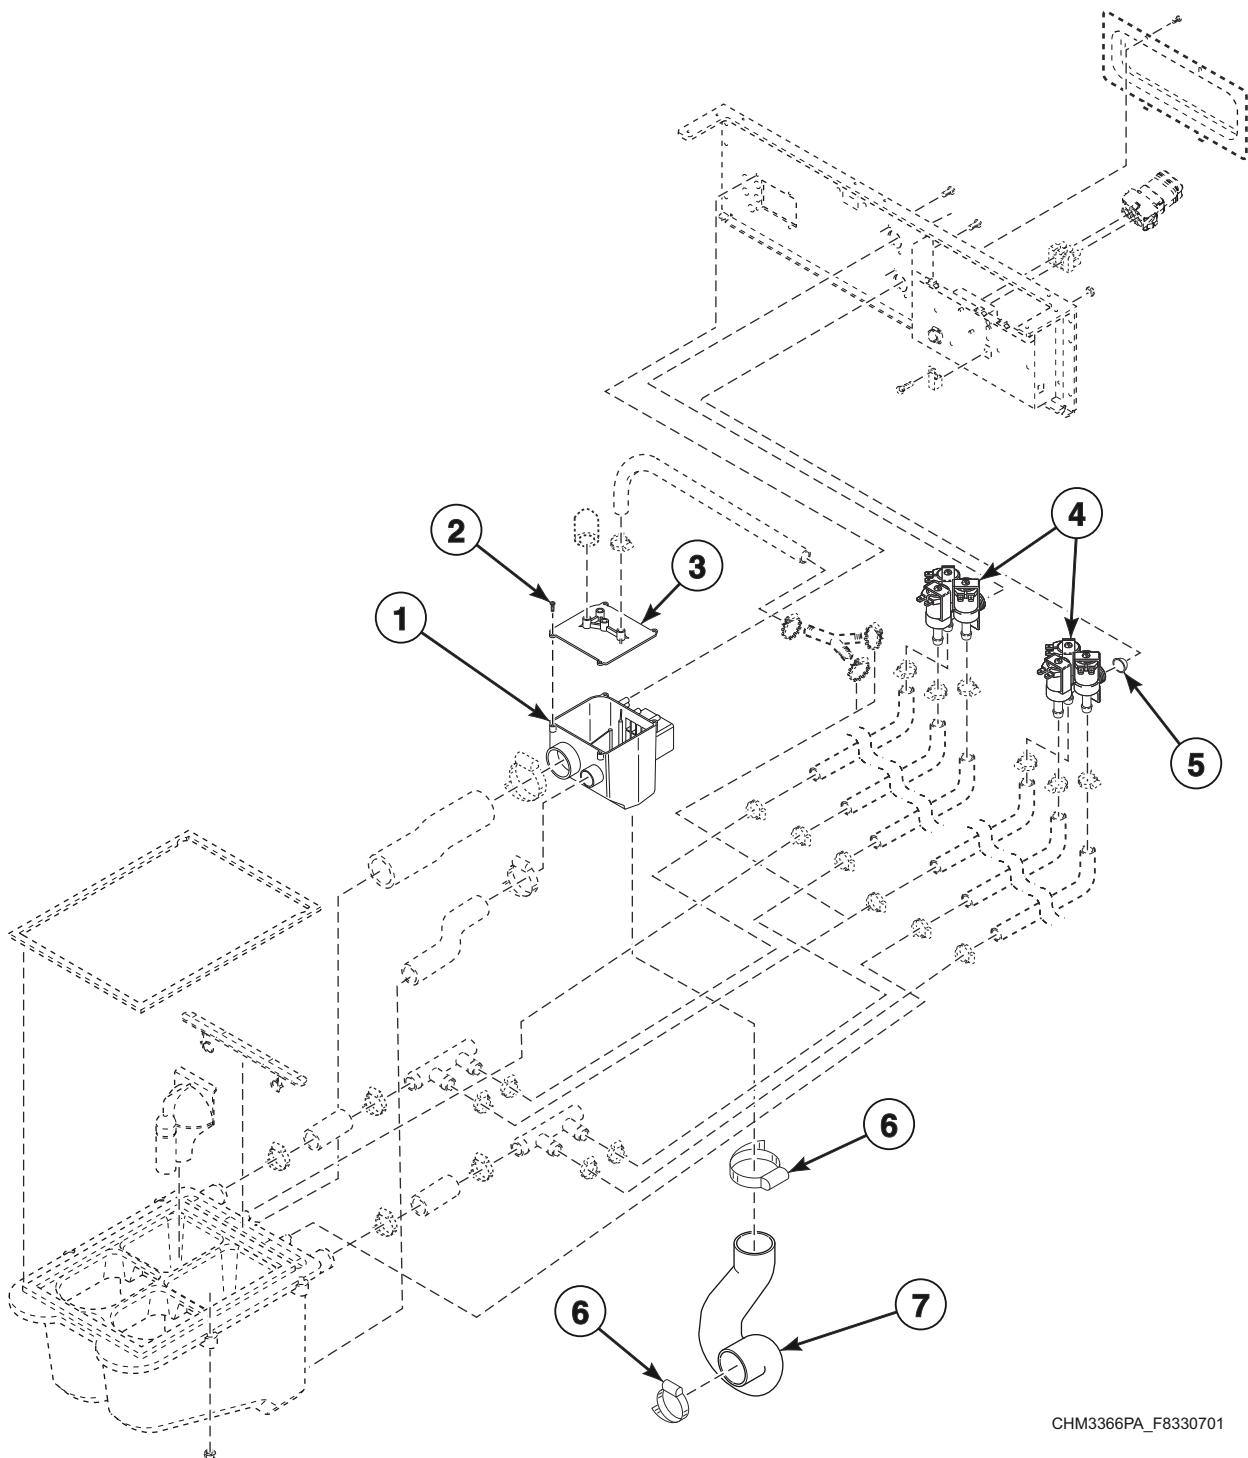


CHM3366PA_F8330701

Fill Plumbing Assembly (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	G582P3	Diaphragm and Guide Kit	Use with F8286401P 3-Way Valve and F8286402P 3-Way Valve
1	F8048601	Vacuum Breaker Assembly	Includes items 2 and 3
2	800548	Screw	
3	F8439301	Vacuum Breaker Cover	
4	F8286401P	3-Way Valve	240 Volt/50 or 60 Hertz; U.S.
	F8286402P	3-Way Valve	240 Volt/50 or 60 Hertz; Metric
5	803615	Washer	Filter
6	F200213	Hose Clamp	No. 40
7	F8042201	P-Trap Hose	20 pound models
	F8042202	P-Trap Hose	30 and 40 pound models
	F8042301	P-Trap Hose	60 pound models

Double Check Valve

WRAS Compliant Models

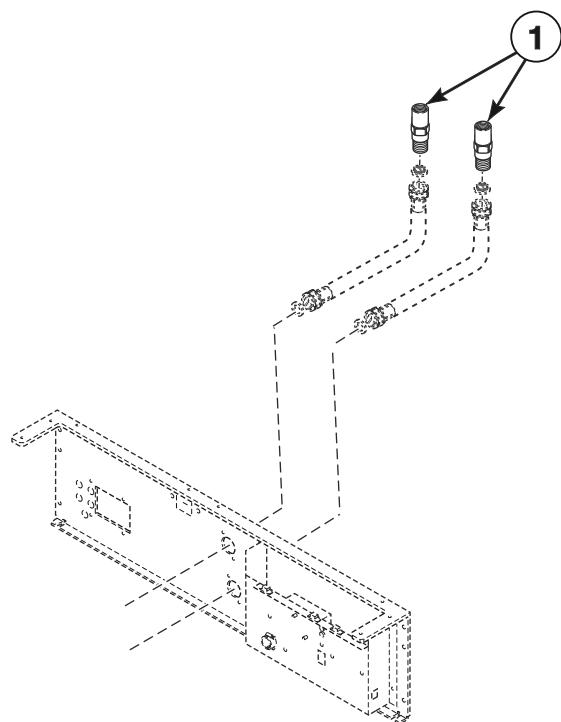


CHM3393P_F8330701

Double Check Valve

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8301201	Double Check Valve	

Motor Mount Pulley and Belt - Design 1 Models

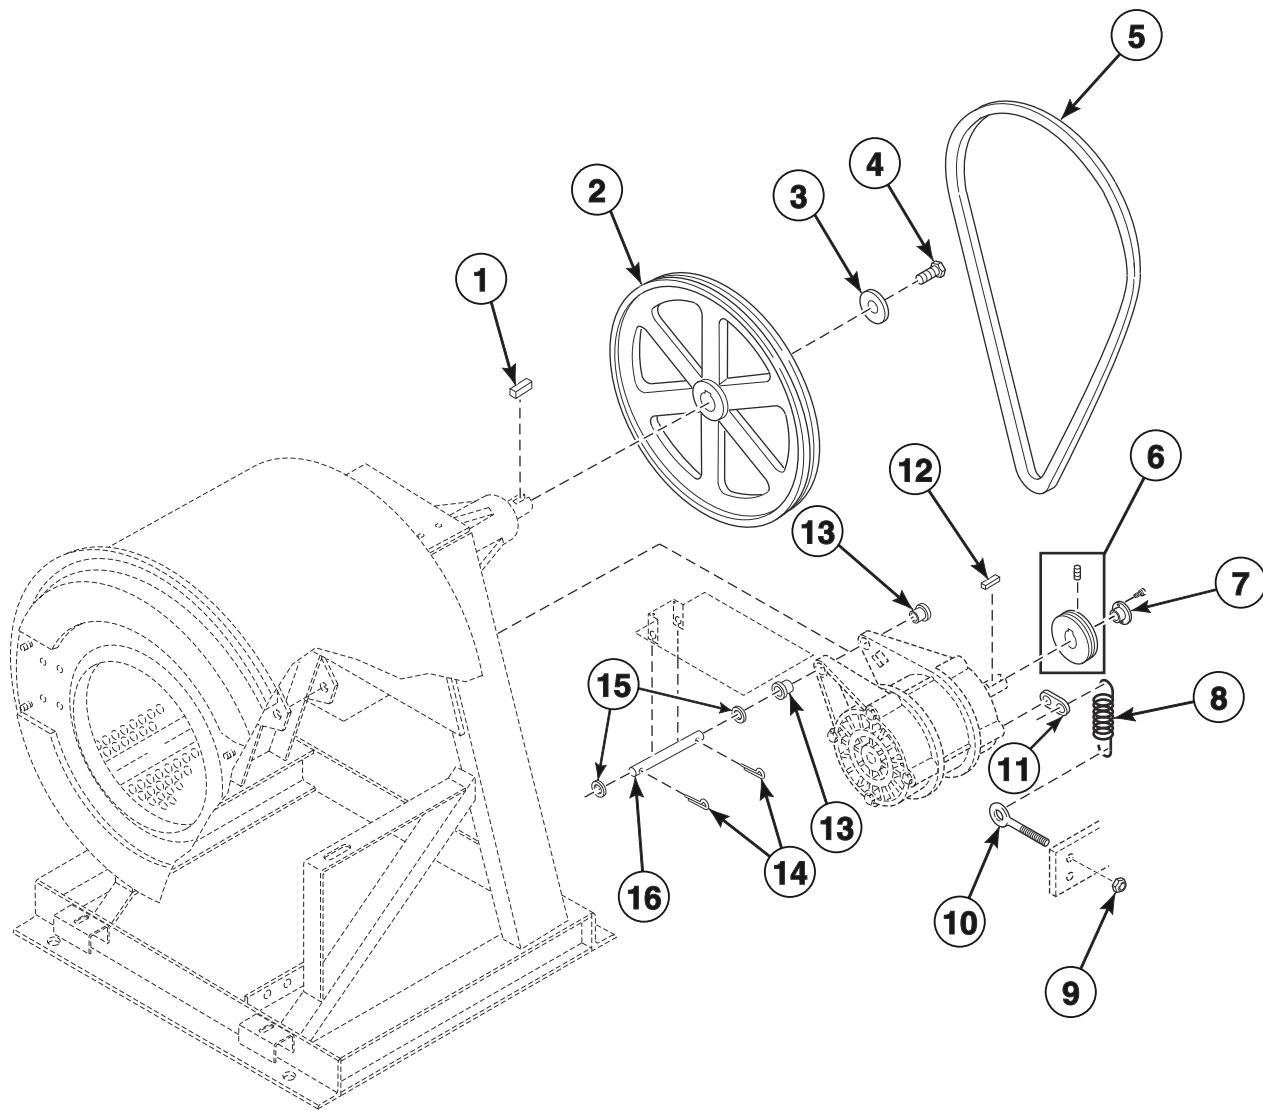


CHM3050P_F8330701

Motor Mount Pulley and Belt - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430801	Key	
2	F280170	Sheave Pulley	20 pound models; 13V1800
	F280172	Sheave Pulley	30 pound models; 13V2200
	F280197	Pulley	40 pound models; 23V2200
	F200299700	Basket Pulley	60 pound models; X-voltage
	F280173	Pulley	60 pound models; All other voltages; 23V2400
3	F431115	Washer	
4	F8574001	Screw	
5	F280343	Belt	3V730; 20 pound 2 speed models; C and F-voltage
	F280337	Belt	3V710; 20 pound 2 speed models; B, O and Y-voltage
	F280370	Belt	690J4; 20 pound F and V-speed models; X-voltage
	F280321	Belt	3V800; 30 pound 2 speed models; C, F, O and Y-voltage
	F280368P	Belt	785J4; 30 pound F and V-speed models; X-voltage
	F280341	Belt	3V850; 40 pound 2 speed models; C-voltage
	F280342	Belt	3V830; 40 pound 2 speed models; F, O and Y-voltage
	F280369P	Belt	820J6; 40 pound F and V-speed models; X-voltage
	F280373	Belt	3V90.65; 60 pound 2 speed models; C-voltage
	F280304	Belt	3V900; 60 pound 2 speed models; F, O and Y-voltage
	F280366P	Belt	870J6; 60 pound F and V-speed models; R and X-voltage
6	F280427P	Pulley	1GR3V3.15JA; Requires JA bushing; 20 pound 2 speed models; C-voltage
	F280170	Sheave Pulley	1GR3V2.65; 20 pound 2 speed models; B, O and Y-voltage
	H87520334	Sheave	1GR3V3.35JA; Requires JA bushing; 30 pound 2 speed models; C-voltage
	F280284	Pulley	1GR3V2.9; 30 pound 2 speed models; F and O-voltage
	F280281	Motor Pulley	1GR3V3.0; 30 pound 2 speed models; Y-voltage
	F280172	Sheave Pulley	1GRV3V22.00; 30 pound 2 speed models; C, F, O and Y-voltage
	F280105P	Pulley	2GR3V3.35SH; Requires SH bushing; 40 pound 2 speed models; C-voltage
	F0280385-00	Sheave	2GR3V3.00; 40 and 60 pound 2 speed models; F, O and Y-voltage
	F280422P	Pulley	2GR3V3.365SH; Requires SH bushing; 60 pound 2 speed models; C-voltage
	F280287P	Sheave Kit	F and V-speed models; X-voltage
	F280173	Pulley	60 pound 2 speed models; F and O-voltage
7	H87529111P	Bushing	JA 5/8; 20 and 30 pound models; C-voltage
	F280298P	Pulley Bushing	JA 7/8; F and V-speed models; Q, R and X-voltage
	M412995P	Bushing	SH 7/8; 40 and 60 pound models; C-voltage
8	F310148	Tension Spring	40 and 60 pound models; X-voltage
	F310124	Extension Spring	40 and 60 pound models except X-voltage; All other models
9	F430218	Nut	
10	F430537	Screw	40 and 60 pound models; X-voltage
11	F633374	Spring Clip	
12	F430801	Key	30 pound models
	F430802	Key	All other models
13	F200186100	Motor Support Bushing	
14	F430401	Cotter Pin	
15	901690	Washer	
16	F602844	Motor Support Rod	20 pound models; 30 pound models except X-voltage
	F603059	Motor Support Rod	30 pound models X-voltage; 40 pound models
	F603897	Motor Support Rod	60 pound models

Motor, Pulley and Belt (Drawing 1 of 2)

20 Pound Models with N and P-Voltage, 30, 40 and 60 Pound Models

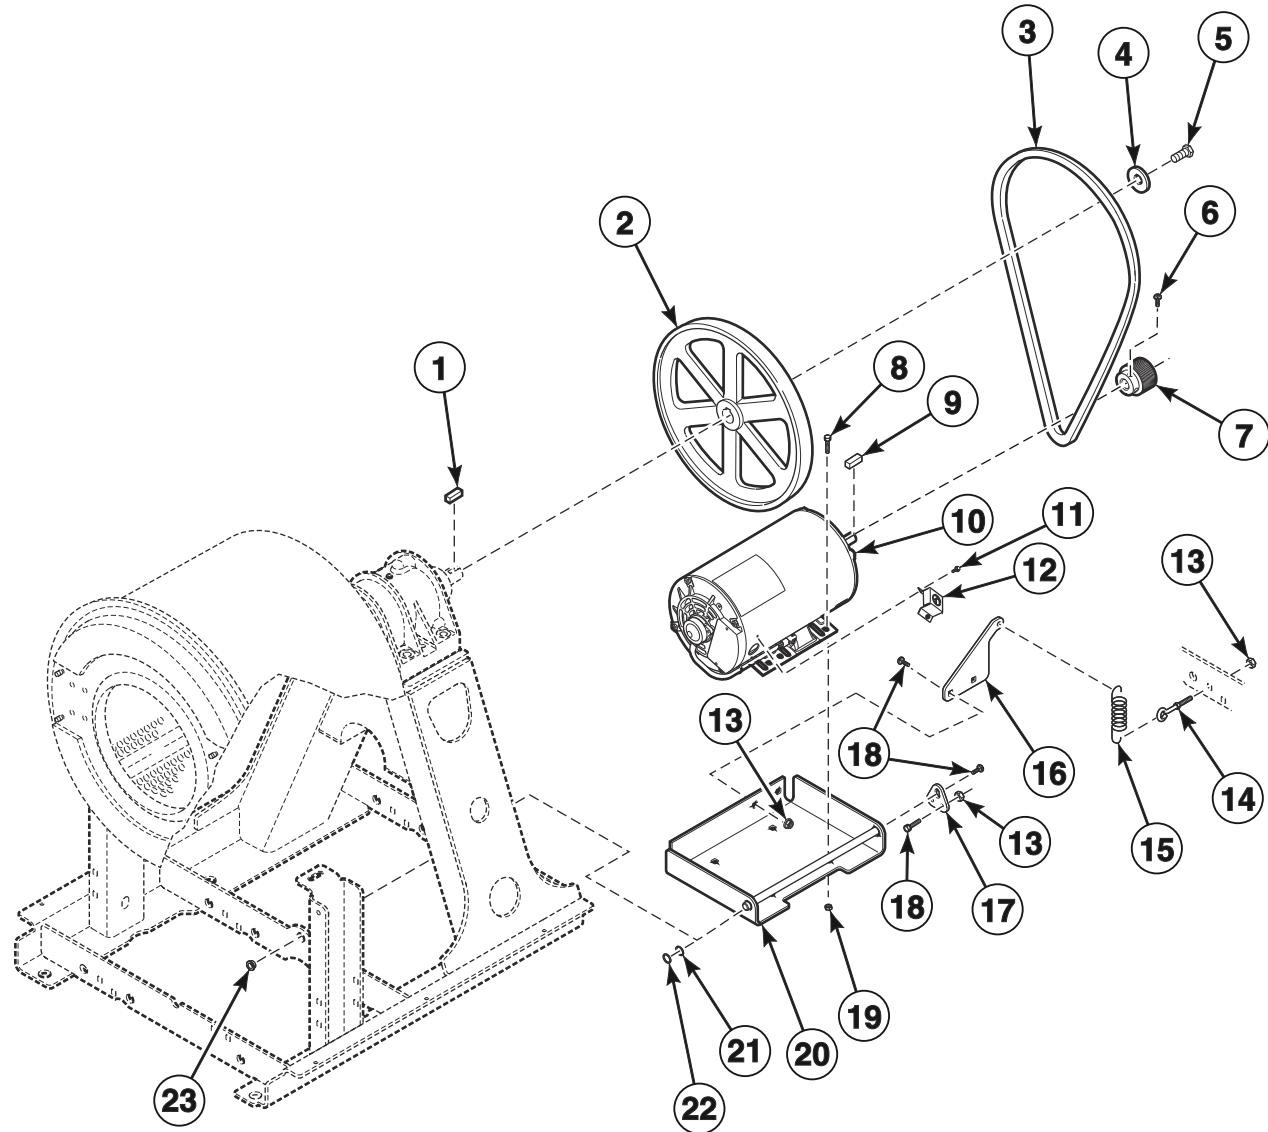


CHM3385P_F8330701

Motor, Pulley and Belt (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F8562501	Motor Isolation Kit	20 and 30 pound models; Includes F8535001 Motor Plate and F8535201 Isolator; Use with 2 hp motor
	F8396601	Motor Harness	30 and 40 pound models with N and P-voltage; 20 and 60 pound models
	F8384901	Motor Harness	30 and 40 pound models; Q and X-voltage
1	F430801	Key	
2	F150270	Basket Pulley	20 pound models
	F150269	Basket Pulley	30 and 40 pound models
	F200299700	Basket Pulley	60 pound models
3	F200201700P	Belt	20 pound models; N and P-voltage
	F8382801	Belt	20 pound models; B, Q and X-voltage
	F8382803	Belt	30 pound models
	F8382804	Belt	40 pound models
	F8382805	Belt	60 pound models
4	F431115	Washer	
5	F8574001	Screw	
6	M400077	Screw	
7	F8362501	Motor Pulley	
8	800461	Screw	
9	H8752006H	Key	
10	F8335001P	Motor	20, 30 and 40 pound models
	F8335101P	Motor	60 pound models
11	23222	Screw	
12	70321701	Motor Conduit Mounting Bracket	
13	44087201	Nut	
14	F8351902	Eye Bolt	
15	F310124	Extension Spring	
16	F8363901	Spring Plate	
17	F8441101	Motor Rod Plate	
18	F8402801	Bolt	
19	F8387601	Nut	
20	F8441601	Motor Bracket Weldment	20 and 30 pound models
	F8562502	Motor Isolation Kit	40 and 60 pound models; Includes F8535002 Motor Plate and F8535201 Isolator; Use with 2 and 3 hp motor
21	F8451601	Spacer	
22	F8441901	O-Ring	
23	F8333301	Flanged Bushing	

Motor, Pulley and Belt (Drawing 2 of 2)

20 Pound Models with B, Q and X-Voltage

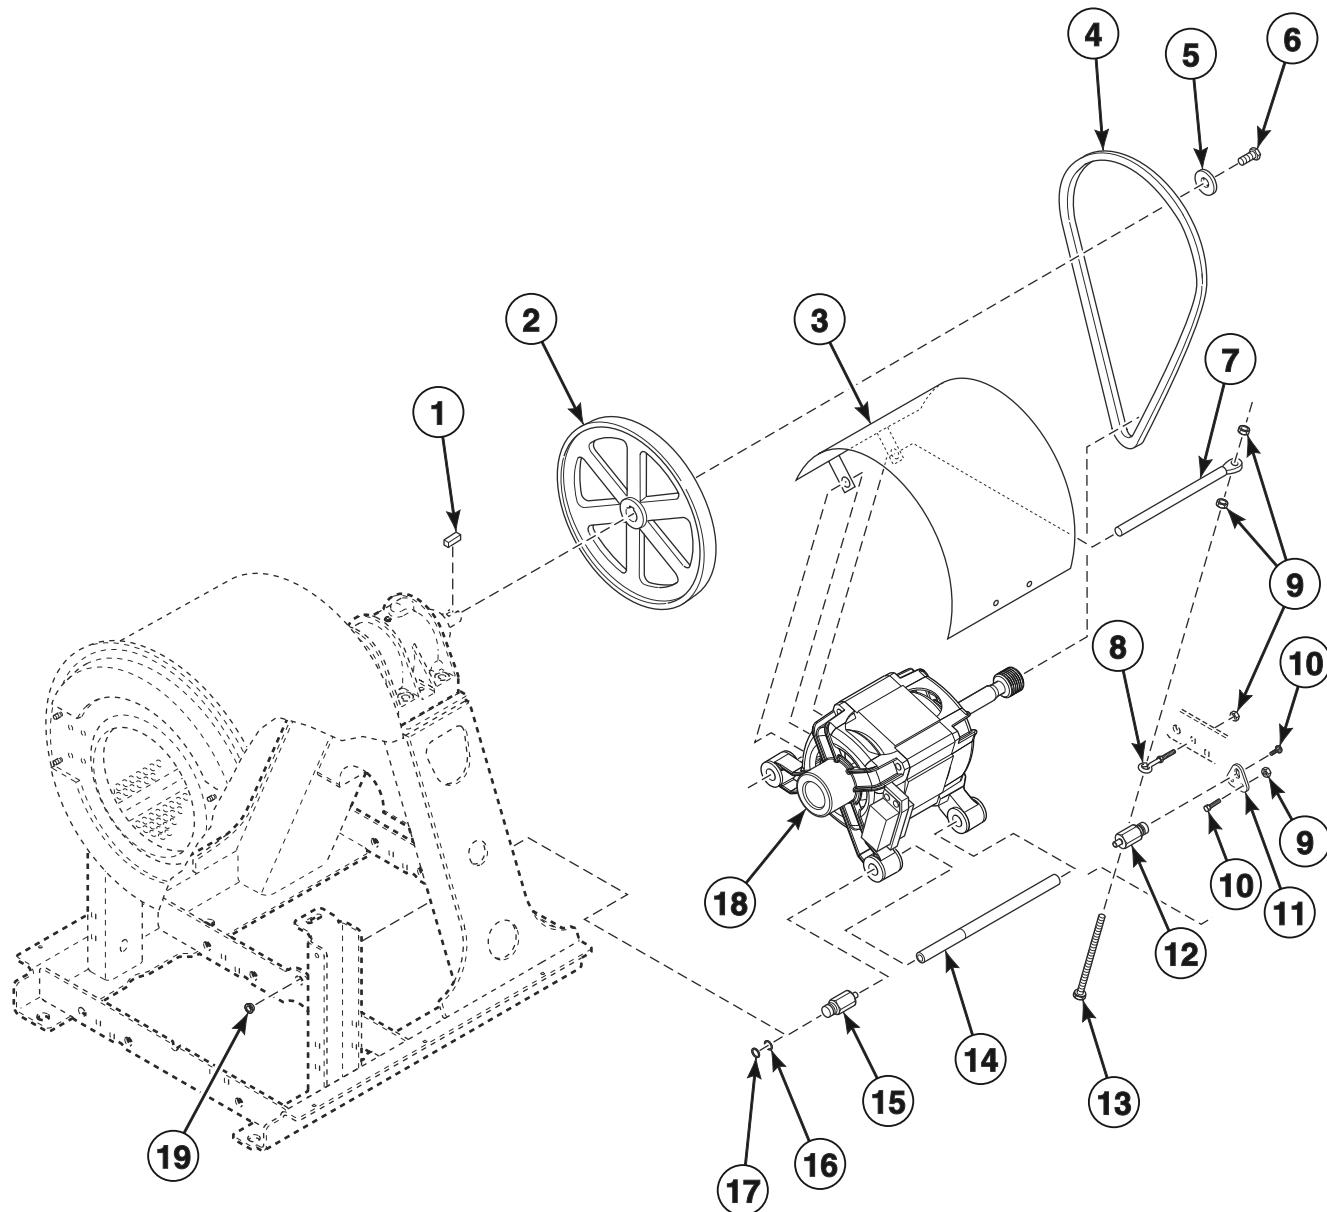


CHM3377P_F8330701

Motor, Pulley and Belt (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F8562504	Motor Isolation Kit	Includes F8387104 Motor Rod Adapter and F8535201 Isolator
	F8384801	Motor Harness	
1	F430801	Key	
2	F150270	Basket Pulley	
3	F200216900	Motor Drip Shield	
4	F8382801	Belt	
5	F431115	Washer	
6	F8574001	Screw	
7	F8361301	Spring Mount Rod	
8	F8404501	Eye Bolt	
9	44087201	Nut	
10	F8402801	Bolt	
11	F8441101	Motor Rod Plate	
12	F8387101	Motor Rod Extension	
13	F8406601	Screw	
14	801062	Motor Mount Rod	
15	F8387102	Motor Rod Extension	
16	F8441901	O-Ring	
17	F8333301	Flanged Bushing	
18	801194P	Induction Motor	Includes pulley
19	F8451601	Spacer	

Motor - Design 1 Models

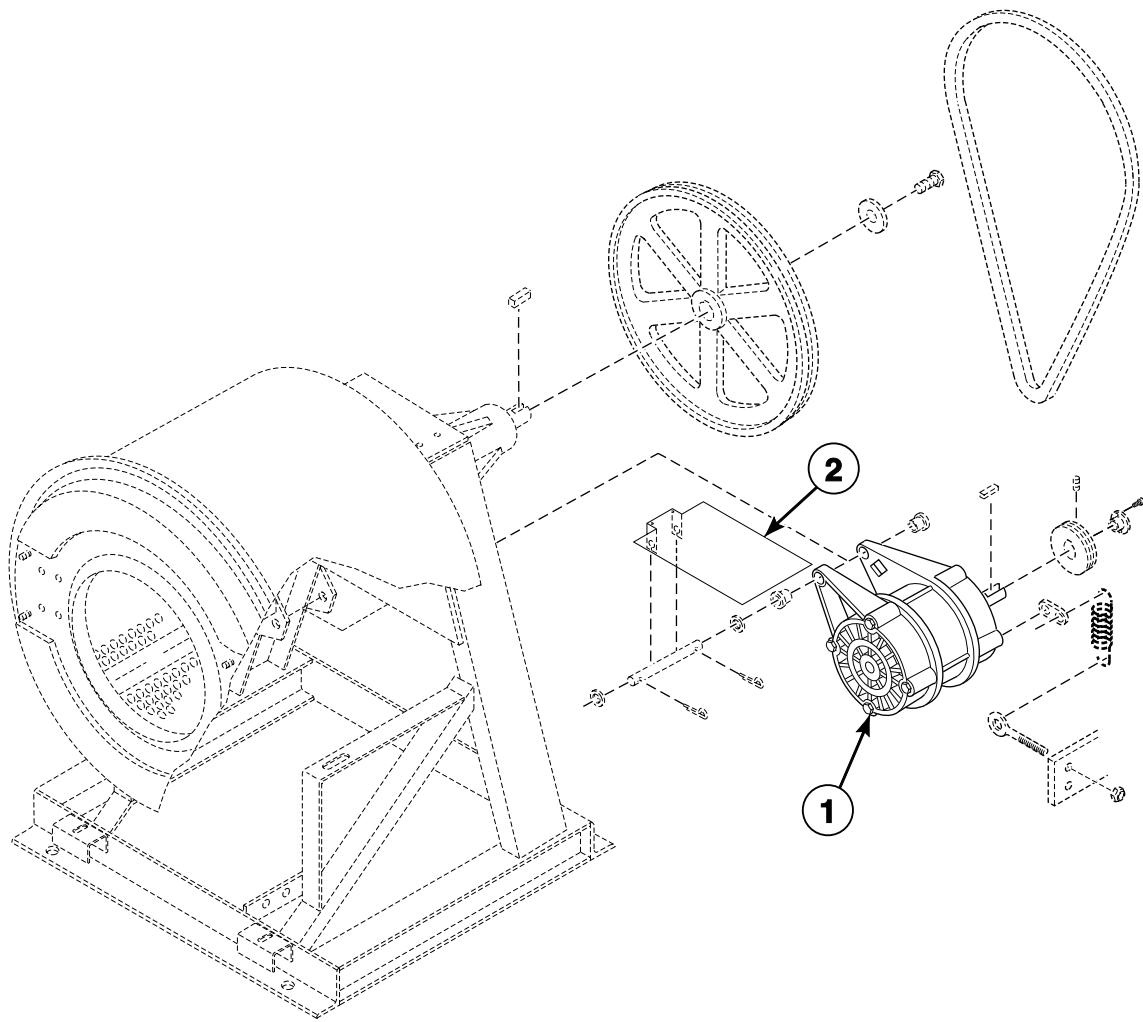


CHM3050PC_F8330701

Motor - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8329601P	Motor	20 pound 2 speed models; Replaces F220110 Motor; B-voltage; Includes motor support bushing
	F8329401P	Motor	20 pound 2 speed models; Replaces F022032500P and F220325-H Motors; C and F-voltage; Includes motor support bushing
	F8329301P	Motor	20 pound 2 speed models; Replaces F022039600 and F220396-H Motors; J, K and O-voltage; Includes motor support bushing
	F8328901P	Motor Conversion Kit	20 pound F and V-speed models; Replaces F220393 Motor; X-voltage; Includes motor support bushing; **
	F022012800P	Motor	20 pound 2 speed models; Use with F220128-H Motor; Y-voltage; Includes F200186100 Motor Support Bushing
	F8411501	Motor Conversion Kit	20 pound 2 speed models; Models through 6/2009; Y-voltage; Replaces F022012800P Motor
	F8329501P	Motor	20 pound 2 speed models; Models starting 5/2009; Models converted with F8411501 Motor Conversion Kit; Y-voltage
	F8329801P	Motor	30 pound 2 speed models; Replaces F022038800 and F220388-H Motors; C and F-voltage; Includes motor support bushing
	F8329701P	Motor	30 pound 2 speed models; Replaces F022038700 and F220387-H Motors; J, K and O-voltage; Includes motor support bushing
	F8329001P	Motor Conversion Kit	30 pound F and V-speed models; Replaces F220395 Motor; X-voltage; Includes motor support bushing; **
	F8329001	Motor	30 pound F and V-speed models; Models that have been converted with F8329001P Motor Conversion Kit or models starting 3/3/10; X-voltage; Includes motor support bushing
	F8329901P	Motor	30 pound 2 speed models; Replaces F022012400 and F220124-H Motors; Y-voltage; Includes motor support bushing
	F8330101P	Motor	40 pound 2 speed models; Replaces F022032600 and F220326-H Motors; C and F-voltage; Includes motor support bushing
	F8330001P	Motor	40 pound 2 speed models; Replaces F0220321-00 Motor on models through 7/25/10; All other models starting 7/26/10; O-voltage; Includes motor support bushing
	F8330201P	Motor	40 pound 2 speed models; Replaces F0220120-01P Motor on models through 12/31/10; All other models starting 1/1/11; Y-voltage; Includes motor support bushing
	F8329101P	Motor Conversion Kit	40 pound F and V-speed models; Replaces F220394 Motor; X-voltage; Includes motor support bushing; **
	F8329101	Motor	40 pound F and V-speed models; Models that have been converted with F8329101P Motor Conversion Kit or models starting 6/21/10; X-voltage; Includes motor support bushing
	F8330301P	Motor	60 pound 2 speed models; Replaces F022032200 Motor; O-voltage; Includes motor support bushing
	F8329201P	Motor Conversion Kit	60 pound F and V-speed models; Replaces F220234 Motor; X-voltage; Includes motor support bushing; **
	F8329201	Motor	60 pound F and V-speed models; Models that have been converted with F8329201P Motor Conversion Kit or models starting 9/16/10; X-voltage; Includes motor support bushing
2	F200216900	Motor Drip Shield	20 and 30 pound 2 speed models; 40 pound 2 speed models except Y-voltage; 60 pound F and V-speed models
	F200280700	Motor Drip Shield	40 pound models Y-voltage; 60 pound 2 speed models

**** NOTE: AC drive parameters must be compatible with the motor and motor pulley. Please request the AC drive parameter illustration for parameter verification when ordering a motor.**

Electric Heat Option

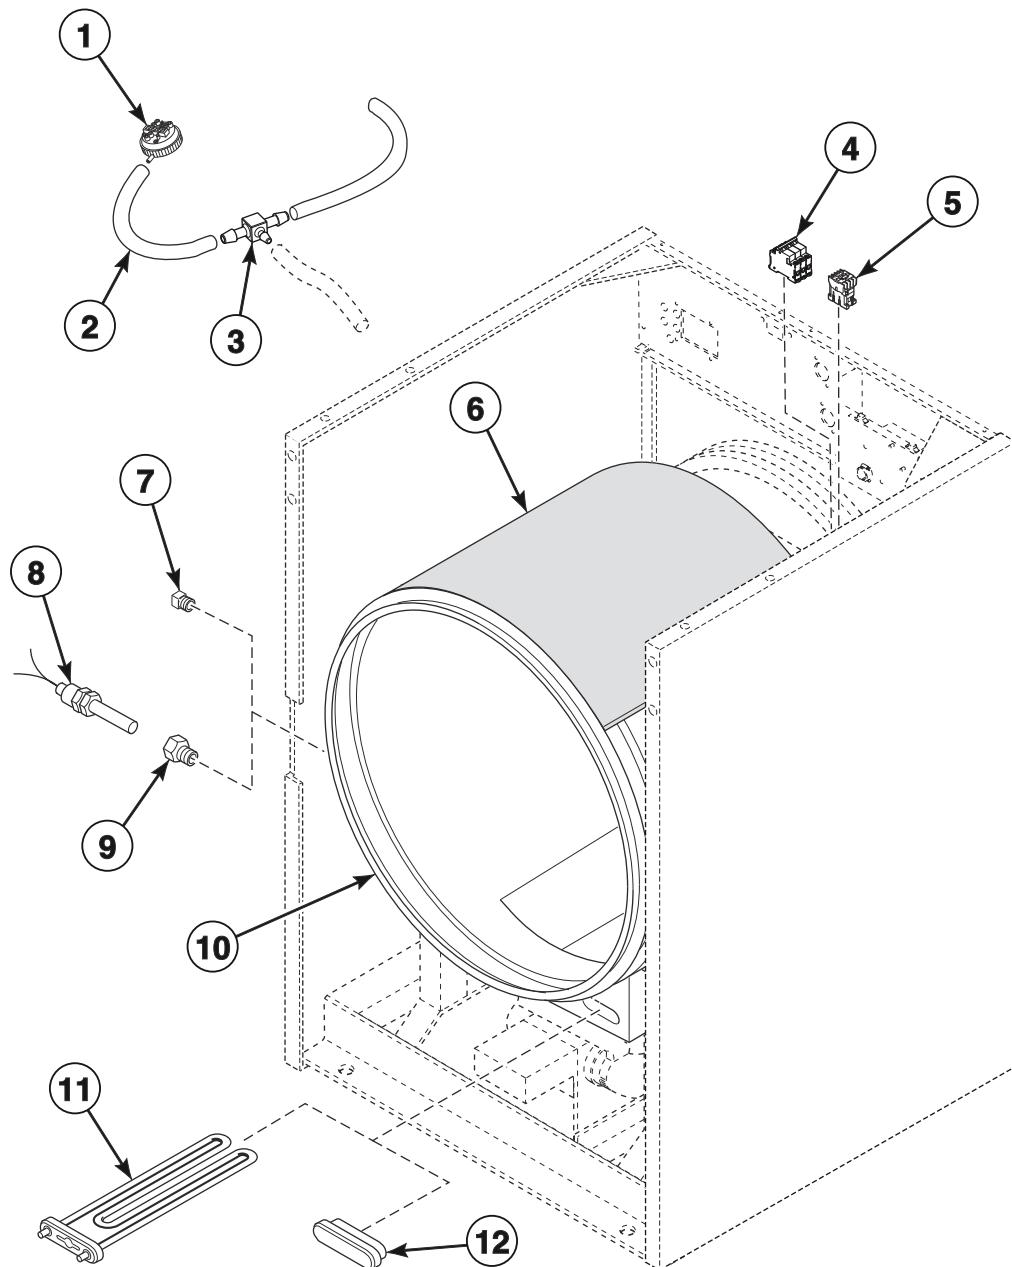


CHM3406P_F8330701

Electric Heat Option

REF	PART NO.	DESCRIPTION	COMMENTS
	F8056001	Jumper Wire	P-voltage models require 5; N-voltage models require 3
1	F8223001P	Water Pressure Switch	Heat safety; Design 1
	F8404401	Water Pressure Switch	Design 2
2	F8153901	Tubing	
3	F8246601	Tee	
4	70256901P	Circuit Breaker	
5	F330188P	Contactor	
6	F410300	Pipe Insulation	
7	F421507	Plug	Design 1
	F200202600	Plug	Design 2
8	F370609	Thermistor Sensor	
9	F421936	Reducer Bushing	Design 1
10	F8179602	Shell Weldment	Design 1
	F8179202	Shell Weldment	20 pound OPL models; Design 1
	F8179302	Shell Weldment	30 pound OPL models; Design 1
	F8179402	Shell Weldment	40 pound OPL models; Design 1
	F8179502	Shell Weldment	60 pound OPL models; Design 1
	F8360602	Shell Weldment	20 pound models; Design 2 and 3
	F8360702	Shell Weldment	30 pound models; Design 2 and 3
	F8360802	Shell Weldment	40 pound models; Design 2
	F8360902	Shell Weldment	60 pound models; Design 2
11	F360205P	Element	2.6 kW; 3 used in 20 and 30 pound models; 6 used in 40 and 60 pound models
12	F360202	Heating Element Plug	

Steam Heat Option

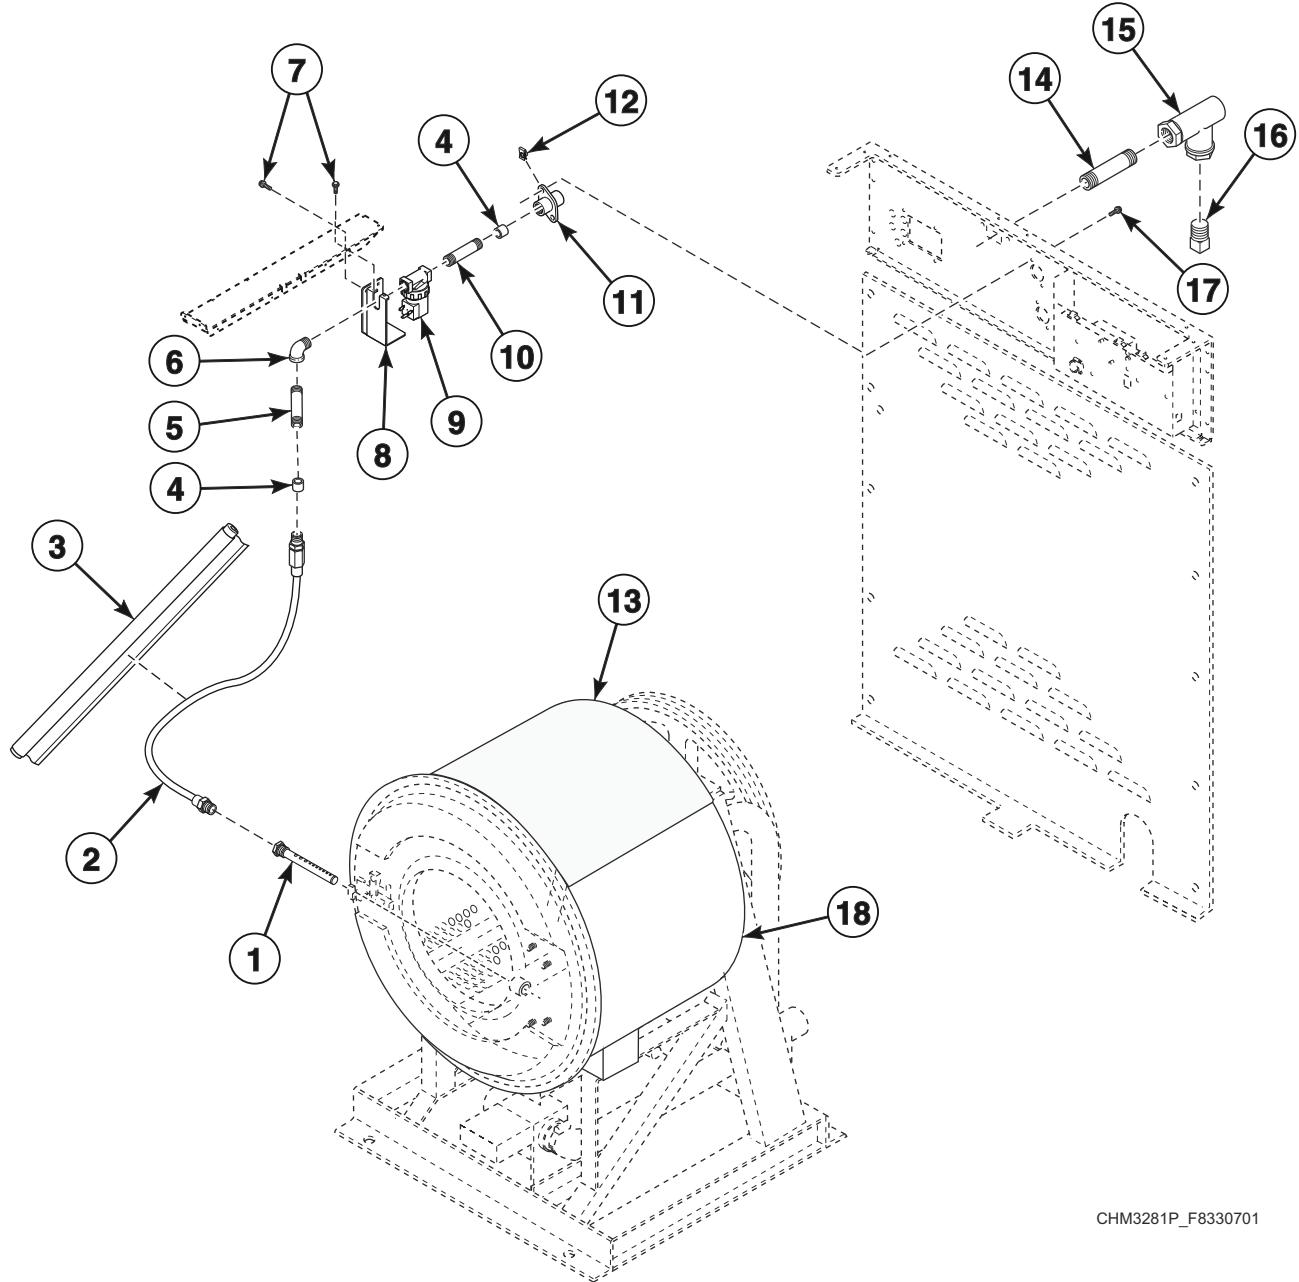

CHM3281P_F8330701

Steam Heat Option

REF	PART NO.	DESCRIPTION	COMMENTS
	F953P3	Steam Heat Kit	Design 2 and 3; Includes items 1-4, 6, 8-11, 15-17, 70139601 Nipple, F421703 Elbow, 430497 Screw, 431486 Nipple, F8025201 Washer, F8211503 Steam Assembly, labels and harness
	F380984P	Steam Valve Repair Kit	Use with item 9
	F8382301	DIN Valve Adapter Kit	Design 2 and 3; Use with F8322801P Valve
	F8379501P	Valve Kit	Use with F8322801P Valve
	F8514601	Coil	Use with F8322801P Valve
1	F8368201	Steam Injector Tube Assembly	
2	F200197	Steam Hose	
3	F8233700	Pipe Insulation	Design 2 and 3
4	F8116301	Coupling	Design 2 and 3; 60 pound models 2 required
5	F8110601	Nipple	60 pound models
6	H86070034	Street Elbow	
7	F8206901	Screw	
8	F8490301	Steam Bracket	
9	F8521501	DIN Valve Kit	220 Volt; Design 1
	F8322801P	Valve	Design 2 and 3; Replaces F380787P Steam Valve on Design 1 models; Includes F8382301 DIN Valve Adapter Kit and F8514601 Coil
10	70263801	Pipe Nipple	
11	F8154501	Coupling	Design 1
	F8362701	Coupling	Design 2 and 3
12	70030401	Nut	
13	F410300	Pipe Insulation	Design 1
14	431486	Pipe Nipple	
15	F270307	Steam Filter	
16	F420409	Plug	
17	20253	Screw	
18	F8360602	Shell Weldment	20 pound models
	F8360702	Shell Weldment	30 pound models
	F8360802	Shell Weldment	40 pound models
	F8360902	Shell Weldment	60 pound models

Notes

Parts Index

A

Access Cover	
F8047801	83
Air Trap Hose	
F020014200	13, 15, 21, 23
Auxiliary Control Assembly	
F8189401P	13, 15, 17

B

Basket and Bearing Assembly	
F980204341	65, 67
F980204342	65, 67
F980204343	65, 69
F980204344	65, 69
Basket Assembly	
F8347801P	59
F8347901P	59
F8391301P	65
F8391303	65
F8391501P	65
F8391503	65
F8391701P	59, 65
F8391703	65
F8502801	59, 65
F8502804	65
Basket Pulley	
F150269	91
F150270	91, 93
F200299700	89, 91
Basket Rental Tool Kit	
390P4-1	59, 65
Basket Tool Kit	
389P4	59, 65
Bearing	
F100108	61, 67
F100123P	61, 67
F100134	61, 69
F100135	61, 69
F100136P	61, 67
F100137P	61, 67, 69
Bearing Housing	
F8246802	67
F8247902	67
F8249902	69
F8250902	69
Bearing Housing Assembly	
F8271601P	67
F8271602	67
F8271701	67
F8271702	67
F8271801P	69
F8271802	69
F8271901P	69
F8271902	69
Bearing Puller Tool	
F460129P	59, 65
Bearing Sleeve	
F8221701	51, 53, 55

Belt

F200201700P	91
F280304	89
F280321	89
F280337	89
F280341	89
F280342	89
F280343	89
F280366P	89
F280368P	89
F280369P	89
F280370	89
F280373	89
F8382801	93
F8382803	91
F8382804	91
F8382805	91
8382801	91

Blind Rivet

F8245101	51, 53, 55
----------------	------------

Bolt

F200182700	77, 79
F430522	75
F430974	51, 53, 55
F8230501	47
F8270701	57
F8402801	75, 91, 93
F8508101	51, 53, 55

Bracket

F8365401	75
F8365402	75
F8434601	75
F8434701	75

Bushing

H87529111P	89
M412995P	89

C

Cap

F8197701	83
----------------	----

Capacitor

F370218P	13, 21
F370220	13, 21
F370221	13, 21
F8411701	13, 21
F8411801	13, 21
F8411901	13, 21

Capacitor Tray Assembly

F8199601	13, 21
F8199901	13, 21

Card Plate Assembly

F8201501	35
----------------	----

Card Reader and Bracket Assembly

510068P	35
---------------	----

Card Reader Harness

F141887	35
---------------	----

Card Reader Overlay

70334301	35
----------------	----

Circuit Breaker

70256901P	19, 27, 97
-----------------	------------

N/A items do not appear in index.

Clamp Ring Assembly	
F8388001	65
F8388002	59, 65
F8388004	65
Clamp Ring Bracket	
F8302401	65
Coil	
F8514601	99
Coin Box	
F160672	37
Coin Chute	
F8170801	21, 23, 25
Coin Drawer Assembly	
F8182001	37
Coin Drop	
70256402P	31
70441601P	29
Coin Drop Assembly	
210195	31
210196	31
38462P	29
38463	29
38464P	29
38472	31
38521	31
39157	31
70281102	31
Coin Identification Paper	
38725	29, 31, 33
Coin Meter	
F0160737-00	31
Coin Meter Assembly	
F200010000P	29
F200010001	31
F200010002	31
F200010003	31
F200010004	31
F200010005	31
F200010006	29
F200010007	29
F200010008	31
F200010009	29
F200010010	31
F200010011	29
F200010012	29
F200021600P	33
F200021601	33
F200021602	33
F200021603	33
F200021604	33
F200021605	33
F8238601	33
Coin Vault Assembly	
F8182501	21, 23, 25
F8182601	21, 23, 25
Concrete Epoxy Kit	
F8498101	71
Concrete Kit	
1111P	71
Contact Base	
F8538101	13, 15, 19
Contact Block Switch	
F200233401	19
F200233401P	13, 15
Contact Switch	
F8069501	13, 15, 19
Contactor	
F330177P	13, 19, 21, 27
F330188P	97
Contactor Tray Assembly	
F8343401	13, 21
Control Assembly Kit	
F980P3	13, 15, 17, 21, 23, 25
Control Kit	
F996P3	21, 23
F997P3	13, 15
F998P3	13, 15
Control Panel Assembly	
F8038502	39
F8038504	41
F8038506	41
F8038602	39
F8038604	41
F8038606	41
F8038702	39
F8038704	41
F8038706	41
F8038802	39
F8038804	41
F8038806	41
Control Panel Overlay	
F8224301	45
F8224401	45
F8224501	45
F8224601	45
F8224801	45
F8224901	45
F8225001	45
F8225101	45
F8294001	43
F8294002	43
F8294003	43
F8294101	43
F8294102	43
F8294103	43
F8294201	43
F8294202	43
F8294203	43
F8294301	43
F8294302	43
F8294303	43
F8294501	45
F8294601	45
F8294701	45
F8294801	45
F8443701	45
F8443901	43
F8443902	43
F8443903	43
F8444001	43
F8444002	43
F8444003	43
F8444101	43
F8444102	43
F8444103	43
F8444201	43
F8444202	43
F8444203	43
F8532201	45
F8551401	45
F8551701	45
F8586801	45
F8586901	45
F8587001	45

N/A items do not appear in index.

Control Tray Assembly		53
F8205901	13	
F8205902	15, 21, 23	
F8205903	15, 21, 23	
F8359602	25	
F8359604	25	
F8359701	17	
F8359703	17	
F8359707	25	
Control Tray Harness		
F8261501P	15, 17, 23	
Cotter Pin		
F430401	89	
Coupling		
F8116301	99	
F8154501	99	
F8362701	99	
D		
Diaphragm and Guide Kit		
G582P3	85	
DIN Rail		
F8200101	13, 21	
F8385301	19, 27	
DIN Valve Adapter Kit		
F8382301	99	
DIN Valve Kit		
F8521501	99	
Dispenser Assembly		
F8047401	83	
F8047402	83	
Dispenser Gasket		
F8308301	83	
Dispenser Lid		
F8048101	47	
Dispenser Overflow Hose		
F8043401	83	
F8043403	83	
F8043404	83	
Door		
F0602431-02	51	
F0602837-02	53	
F602842-2	55	
F8507501	51	
F8507601	53	
F8507701	55	
Door Assembly		
F8187202	51	
F8187203	51	
F8187204	51	
F8187205	51	
F8187206	51	
F8187207	51	
F8187208	51	
F8187209	51	
F8187210	51	
F8187211	51	
F8187302	53	
F8187303	53	
F8187304	53	
F8187305	53	
F8187306	53	
F8187307	53	
F8187308	53	
F8187309		53
F8187310		53
F8187311		53
F8187402		55
F8187403		55
F8187404		55
F8187405		55
F8187406		55
F8187407		55
F8187408		55
F8187409		55
F8187410		55
F8187411		55
Door Bezel		
F0170426-00	41	
F0170426-10	39, 41	
F0170426-30	39, 41	
F170416-1	41	
F170416-2	39, 41	
F170416-3	39, 41	
F170417-1	41	
F170417-2	39	
F170417-3	39, 41	
Door Gasket		
F170124	55	
F200000200	51	
F200000202	51	
F8111502	55	
F8111601	53	
F8111602	53	
Door Glass		
F8341701	51	
F8485301P	53	
F8485302	53	
F8485401P	55	
F8485402	55	
Door Glass Kit		
F290205P	51	
Door Handle		
F8199401P	51, 53, 55	
F8199501	51, 53, 55	
F8199502	51, 53, 55	
F8435501	51, 53, 55	
F8544701	51, 53, 55	
Door Handle Spacer Kit		
F8567501	51, 53, 55	
Door Hinge		
F190216P	51, 53, 55	
Door Hinge Shim		
F200131000	51, 53, 55	
Door Latch Arm Assembly		
F8221401	51, 53, 55	
Door Lock Assembly		
F8197101	57	
F8340501	57	
Door Lock Catch		
F8223601	57	
F8344501	57	
Door Lock Cover		
F8245001	57	
Door Lock Microswitch		
F200203200	57	
Door Lock Plate Assembly		
F8223201	57	
F8223202	57	

N/A items do not appear in index.

Door Lock Plate Shim		33
F8059701	57	
F8344401	57	
Door Lock Solenoid Replacement Kit		33
F977P3	57	
Door Lock Splash Shield		33
F320200	57	
Door Lock Switch Lever		33
F8223401	57	
Door Mount		51, 53, 55
F150271		
Double Check Valve		33
F8301201	87	
Dowel Pin		33
F8388101	67	
F8388201	67, 69	
Drain Connect Tee		33, 75
F150318		
Drain Hose		33
F200165100	75	
F8231901	73	
F8231902	73	
F8232901	73, 75	
F8233001	73	
F8233101	73	
F8233102	73	
F8261302	75	
F8261303	75	
F8464701	75	
Drain Seal Kit		33
F8562001	79	
Drain Tee		33, 75
F150398		
Drain Valve		33
F8406303	79	
Drain Valve Cover		33
F200133600	77, 79	
Drain Valve Kit		33
F200166400	79	
F200166402	79	
F8577201	79	
Drain Valve Motor		33
F380933P	77, 79	
Drain Valve Motor and Gear Box Assembly		33
G159764P	77, 79	
Drive Assembly		33
F8204701P	19, 27	
F8303601P	19, 27	
F8327301P	19, 27	
Drive Mounting Bracket		33
F8322401	19, 27	
Drive Tray Assembly		33
F8359801	19, 27	
F8359802	19, 27	
F8359803	19, 27	
Eye Bolt		33
F8351902	91	
F8404501	93	

E

Earth Terminal Sticker		11
M412096		
Electric Shock Danger Label		11
F8115501		
Electronic Coin Drop Assembly		33
70294103P		

N/A items do not appear in index.

F

Fill Hose Kit		81
F8544601		
Filter		83
F8454401		

Flanged Bushing	
F8333301	91, 93
Frame Template	
F8433301	71
F8433401	71
F8433501	71
F8433601	71
Frame Weldment	
F8195901	63
F8196001	63
F8196101	63
F8199101	63
F8247002	71
F8248002	71
F8249001	71
F8250002	71
Front Cabinet Brace	
F8173801	39, 41
F8173901	39, 41
F8174001	39, 41
Front End Control	
F8549008	17
F8549009P	17
F8549018	17
Front End Control Kit	
F115P3	17
F116P3	17
F118P3	25
F120P3	17
F121P3	17
Front Panel	
F8171301	39
F8171302P	41
F8173001	39
F8173002P	41
F8173003	39
F8173005	41
F8173007	41
F8173008	41
F8173009	39
F8173011	41
F8173101P	39
F8173102P	41
F8173104	41
F8173106	41
F8173107	39
F8173108	41
F8173110	41
F8173201P	39
F8173202P	41
F8173204	41
F8173206	41
F8173207	39
F8173208	41
F8173210	41
F8492301	39
F8492302	41
F8492304	41
F8492306	41
F8492307	39
F8492308	41
F8492310	41
Fuse	
802493	13, 15, 17, 21, 23

G

Gravity Drain Valve	
803292	77
Grommet	
F8433001	17, 25
Ground Decal	
F230739	11
Ground Lug Connector	
M411283	83
Gusset Plate	
F8186701	41
F8186702	39, 41

H

Harness	
F631973-2	35
F8454601	83
Heating Element Plug	
F360202	97
Hole Plug	
F8223801	47
Hose	
F606816-1	83
F8232001	83
F8232002	83
F8232004	83
F8405301	17, 25
Hose Barb Connector	
F8431001	17, 25
Hose Clamp	
F200201	73, 75
F200213	73, 75, 83, 85
F200215	73, 75
F200222	13, 15, 21, 23, 83
20211	83
36801	83
Hot Surface Warning Plate	
F8211901	11

I

Induction Motor	
801194P	93
Interlock Contactor	
F330186P	13, 21

J

Jumper Configuration Assembly	
M413507	13, 15, 17, 21, 23, 25, 27
Jumper Harness Assembly	
M413506	13, 15, 17, 21, 23, 25, 27
Jumper Wire	
F8056001	97

N/A items do not appear in index.

K

Key

F160420.....	37
F430801.....	89, 91, 93
F430802.....	89
H8752006H.....	91
70155603.....	47

L

Left Side Panel

F8042902P.....	49
F8043102P.....	49
F8043202P.....	49
F8043302P.....	49
F8399202.....	49
F8399302.....	49
F8399402.....	49
F8399502P.....	49
F8399504.....	49
F8492402.....	49
F8492404.....	49

Lid Clamp

F8091701.....	47
F8091702.....	47

Logo

F443101.....	41
--------------	----

Lower Cabinet Brace

F8174101.....	39, 41
---------------	--------

Lower Drive Mounting Bracket

F8310101.....	19, 27
---------------	--------

M

Machine Size Configuration Harness

F8028101P.....	13, 15, 17, 21, 23, 25, 27
F8028103P.....	13, 15, 17, 21, 23, 25, 27
F8028104P.....	13, 15, 17, 21, 23, 25, 27
F8028105P.....	13, 15, 17, 21, 23, 25, 27

Magnet

F8390801.....	51, 53, 55
---------------	------------

Manifold

F8333201.....	83
---------------	----

Motor

F022012800P.....	95
F8329001.....	95
F8329101.....	95
F8329201.....	95
F8329301P.....	95
F8329401P.....	95
F8329501P.....	95
F8329601P.....	95
F8329701P.....	95
F8329801P.....	95
F8329901P.....	95
F8330001P.....	95
F8330101P.....	95
F8330201P.....	95
F8330301P.....	95
F8335001P.....	91
F8335101P.....	91

Motor Bracket Weldment

F8441601	91
----------------	----

Motor Conduit Mounting Bracket

70321701	91
----------------	----

Motor Conversion Kit

F8328901P	95
F8329001P	95
F8329101P	95
F8329201P	95
F8411501.....	95

Motor Drip Shield

F200216900	93, 95
F200280700	95

Motor Harness

F8384801	93
F8384901	91
F8396601	91

Motor Isolation Kit

F8562501	91
F8562502	91
F8562504	93

Motor Mount Rod

801062	93
--------------	----

Motor Pulley

F280281	89
F8362501	91

Motor Rod Extension

F8387101	93
F8387102	93

Motor Rod Plate

F8441101.....	91, 93
---------------	--------

Motor Support Bushing

F200186100	89
------------------	----

Motor Support Rod

F602844	89
F603059	89
F603897	89

Motor Switch

F340002	13, 21
---------------	--------

Mount on Concrete Warning Label

F8246401	11
----------------	----

Mounting Plate

70208801	35
----------------	----

N

Name Plate

F8588201	45
----------------	----

Nipple

F8110601.....	99
---------------	----

Nut

F0431807-00.....	83
F430215.....	51, 53, 55, 59, 73
F430218.....	63, 65, 89
F430225.....	57
F430232.....	13, 15, 17, 19, 21, 23, 51, 53, 55, 57, 83
F430239.....	61
F430240.....	61
F430264.....	57
F431017.....	13, 15, 19, 25
F431022.....	51, 53, 55
F431041.....	51, 53, 55
F8387601.....	67, 91
F8387701.....	67, 69

N/A items do not appear in index.

M400977	41
24205	13, 15, 19
44087201	75, 91, 93
44087301	71
685846	29, 31, 33
70030401	75, 99
<hr/>	
O	
Opto Coupler	
200674P.....	29, 31
O-Ring	
F8441901.....	91, 93
Output/Logic Harness	
F8028701.....	13, 15, 17, 21, 23, 25, 27
Overflow Hose	
F0200238-00.....	73
F150308.....	73
F150417.....	73
F8337701.....	73
F8367201.....	75
F8367901.....	75
F8368001.....	75
Overlay	
70295301	33
Overload Contactor	
F8176101P	13, 21
<hr/>	
P	
Panel Lock	
44089303P.....	47
Pin	
F8302701.....	65
Pipe Insulation	
F410300.....	97, 99
F8233700.....	99
Pipe Nipple	
431486	99
70263801	99
Plug	
F200202600.....	97
F420409.....	99
F421507.....	97
F8223901.....	47
M400985	47
Pop Rivet	
F431223	51, 53, 55
70058501	13, 17, 19, 21, 23, 25, 29, 31
PowerFlex 40 Drive	
F8169401.....	15, 23
F8169402.....	15, 23
F8169403.....	15, 23
F8169404.....	15, 23
F8169405.....	15, 23
F8169406.....	15, 23
F8169407.....	15, 23
F8169408.....	15, 23
F8169434.....	15, 23
F8169435.....	15, 23
F8169436.....	15, 23
F8169437.....	15, 23
F8169438.....	15, 23
F8169439.....	15, 23
<hr/>	
F8169440	15, 23
F8169441	15, 23
Pressfit Upgrade Kit	
F935P3.....	59
F936P3.....	59
F938P3.....	59
F939P3.....	59
Pressure Bulb	
30907	17, 25
P-Trap Hose	
F8042201	85
F8042202	85
F8042301	85
Pulley	
F280105P	89
F280173	89
F280197	89
F280284	89
F280422P	89
F280427P	89
Pulley Bushing	
F280298P	89
Pulse Expander Assembly	
F8034701P	33
Pushbutton Switch	
70413301	47, 49
<hr/>	
R	
Radial Seal	
F8203808	69
Rear Drain Hose	
F8231904	75
F8231905	75
F8365601	75
F8365602	75
Rear Panel	
F8176201P	49
F8176301	49
F8177501P	49
F8177701P	49
F8352801	49
F8362401	49
F8365201	49
F8367101	49
F8492501	49
Reducer Bushing	
F421936	97
Reed Switch Assembly	
F8066802	51, 53, 55
Retaining Ring	
F8337801	61, 69
F8337901	61, 69
F8344901	61, 67
F8345001	61, 67
Right Side Panel	
F8042901P	49
F8043101P	49
F8043201P	49
F8043301P	49
F8399201	49
F8399301	49
F8399401	49
F8399501	49
F8399503	49

N/A items do not appear in index.

Rod	F8492401	49
	F8492403	49
	F602813-2	51, 53
	F602813-3	55
<hr/>		
S		
Screw	F430107	73
	F430174	35, 39, 41, 47
	F430518	59
	F430532	51
	F430533	53, 55
	F430536	51, 53, 55
	F430537	89
	F430903	13, 15, 17
	F430909	83
	F430942	63
	F430949	63
	F430956	57
	F430977	57
	F8117601	39, 41
	F8206901	13, 15, 17, 19, 21, 23, 25, 27, 47, 49, 83, 99
	F8230301	83
	F8230601	47
	F8368701	67
	F8368801	67, 69
	F8406601	93
	F8442702	63, 71
	F8535501	51, 53, 55
	F8535601	83
	F8574001	89, 91, 93
	H88213996	71
	202175	75
	20253	99
	23222	91
	503688	19, 27
	800461	91
	800462	65
	800548	85
	801019	39
Seal Scupper Pad	F8350301	67
	F8350302	69
	F8350303	69
Shaft Seal Sleeve	F8312001P	59
	F8312004P	59
	F8312006P	59
	F8343914	65
Shaft Seal Sleeve Kit	F8343901P	59, 65
	F8343904P	59, 65
	F8343906P	59, 65
	F8343909P	59, 65
Sheave	F0280385-00	89
	H87520334	89
Sheave Kit	F280287P	89
Sheave Pulley	F280170	89
	F280172	89
Shell Band Kit	F741701	59, 65
	F8537801	59, 65
	F8537802	65
	F8537804	59, 65
Shell Front Assembly	F8229401	59, 65
	F8229501	59, 65
	F8229601	59, 65
	F8229701	59, 65
Shell Front Gasket Kit	F8513501	59, 65
Shell Weldment	F8179201	63
	F8179202	63, 97
	F8179203	63
	F8179301	63
	F8179302	63, 97
	F8179303	63
	F8179401	63
	F8179402	63, 97
	F8179403	63
	F8179501	63
	F8179502	63, 97
	F8179503	63
	F8179602	97
	F8360601	71
	F8360602	71, 97, 99
	F8360603	71
	F8360701	71
	F8360702	71, 97, 99
	F8360703	71
	F8360801	71
	F8360802	71, 97, 99
	F8360803	71
	F8360901	71
	F8360902	71, 97, 99
	F8360903	71
Shim	F8484401	57
Siphon Cover	F8047901	83
Snap Bushing	44071501	13, 15, 17, 21, 23, 25
Spacer	F431901	57
	F8451601	91, 93
Spring Clip	F633374	89
Spring Mount Rod	F8361301	93
Spring Pin	F431222	51, 53, 55
Spring Plate	F8363901	91
Steam Bracket	F8490301	99
Steam Filter	F270307	81, 99
	F270308	81
Steam Heat Kit	F953P3	99
Steam Hose	F200197	99
Steam Injector Tube Assembly	F8368201	99

N/A items do not appear in index.

Steam Valve Repair Kit	
F380984P	99
Street Elbow	
H86070034	99
Stud	
70334702	75
Supply Overflow Hose	
F8043405	83
Support Bracket	
F8195803	15, 23
Switch Clamp	
F0340722-00.....	13, 21
T	
Tee	
F8246601	13, 15, 17, 21, 23, 25, 97
Temperature Configuration Harness	
F8028219P	13, 21
Temperature Harness	
F802840P	13
F802842P	13
Tension Spring	
F310148	89
Terminal Block	
430642	83
Terminal Tray Cover	
F8177001	83
Thermistor Sensor	
F370609	97
Top Cabinet Brace	
F8043501	47
F8043701	47
F8043801	47
F8043901	47
Top Cover	
F8017401	47
F8040201	47
F8040301	47
F8040401P	47
Top Cover Hinge	
F8258601	47
Top Cover Latch	
F8201001	39, 41
Torsion/Door Lock Spring	
F8070301	57
Transformer	
F360157P	13, 15, 21, 23
F8401301	19, 27
201616P	13, 15, 17, 23
803527P	13, 15, 17, 21, 23, 25
Tray Support Bracket	
F8375201	17, 25
Triple Lip Seal	
F8203801	61, 67
F8203802	61, 67
F8203803	61, 69
F8203806	61, 69
F8203813	67
F8203814	67
F8203815	69
Trunnion Kit	
F747001	61
F747002	61

F747003	61
F747005	61
Tubing	
F8153901	13, 15, 17, 21, 23, 25, 97
U	
USB IR Interface Kit	
203346	13, 15, 17, 21, 23, 25, 27
Use Copper Conductors Only Caution Label	
F8242201	11

V	
Vacuum Breaker Assembly	
F8048601	85
Vacuum Breaker Cover	
F8439301	85
Vacuum Breaker Hose	
F0200244-01	83
F0200244-02	83
Vacuum Supply Hose	
F8042801	83
F8042803	83
F8042804	83
F8042805	83
Valve	
F8322801	99
Valve Kit	
F8379501P	99
Valve Panel	
F8017501	83
F8039601	83
F8039801	83
F8039901	83
F8398701	83
F8398801	83
F8398901	83
F8399001	83
Valve, 3-Way	
F8286401P	85
F8286402P	85

W	
Warning Label	
F8207901	11
F8233501	11
44127701	11
Washer	
F430303	63
F430317	59, 73
F430339	67, 69
F431113	51, 53, 55
F431115	89, 91, 93
F431128	61, 63
F431131	61, 63
F431902	57
F431916	51, 53, 55
F431929	51, 53, 55
F8366601	67
F8402701	71

N/A items do not appear in index.

M400081	63, 65, 71
M405535	75
803615	81, 85
901690	89
Water Hose	
F200108P	81
F200116	81
Water Pressure Switch	
F8223001P	13, 15, 21, 23, 97
F8404401	17, 25, 97

Y

Y Connector	
F422816	83

N/A items do not appear in index.