


Commercial Dryers

Metered and Nonmetered

Refer to Page 5 for Model Numbers

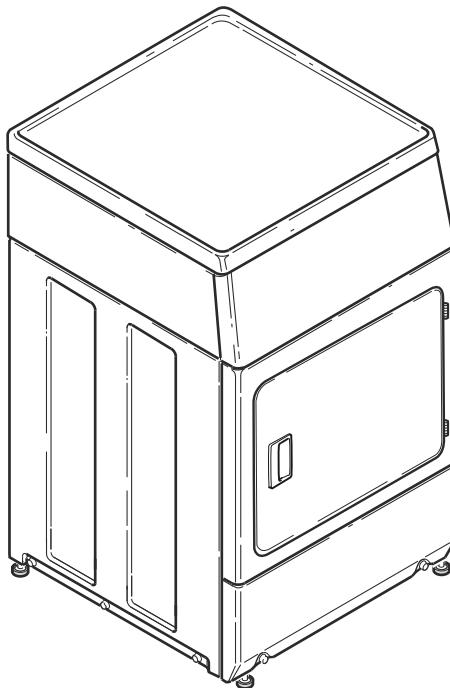

DRY721C_515203

Table of Contents

Title	Page
Parts Ordering Information.....	3
Serial Plate Location	3
Model Identification	5
Control Panel and Controls - Rear Control Coin Drop Models.....	6
Control Panel and Controls - Rear Control Card Models	8
Non-Electronic Coin Drop - Rear Control Models	10
Electronic Coin Drop - Rear Control Models	12
Meter Case - Rear Control Coin Drop Models	14
Cabinet Top - Rear Control Models	16
Control Panel and Controls - 10 Degree Front Control Models	18
Non-Electronic Coin Drop - Front Control Models.....	20
Electronic Coin Drop - Front Control Models	22
Control Cabinet Controls - 10 Degree Front Control Models (Drawing 1 of 2).....	24
Control Cabinet Controls - 10 Degree Front Control Models (Drawing 2 of 2).....	26
Cabinet Top - 10 Degree Front Control Models	28
Control Cabinet - 45 Degree Front Control Models (Drawing 1 of 2).....	30
Control Cabinet - 45 Degree Front Control Models (Drawing 2 of 2).....	32
Loading Door without Window	34
Loading Door with Window	36
Access Panel	38
Front Panel and Seal	40
Motor and Belt.....	42
Exhaust Fan and Idler.....	44
Thermistor	46
Front Bulkhead, Air Duct and Felt Seal.....	48
Cylinder Assembly	50
Rear Bulkhead, Felt Seal and Cylinder Roller	52
Terminal Block - Gas and 1 Phase Electric Models	54
Terminal Block - 3 Phase Electric Models.....	56
Heater Duct Assembly - 3 Phase Electric Models.....	58
Heater Duct and Element Assembly - 1 Phase Electric Models	60
Heater Duct Assembly - Gas Models	62
Gas Valve, Igniter and Gas Conversion Kits	64
Burner Orifice Spuds - For Higher Elevations	66
Cabinet, Exhaust Duct and Base	68
Contactor and Transformer	70
Power Cord	72
Junction Box	74
Junction Box Filter and Harnesses	76
Terminal Block and Terminals	78
Terminals	80

© Copyright 2015, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Motor Connection Block and Tools	82
Wire Harnesses and Wires - Front Control Models (Drawing 1 of 2).....	84
Wire Harnesses and Wires - Front Control Models (Drawing 2 of 2)	86
Wire Harnesses and Wires - Rear Control Models	88
Label Location on Rear of Cabinet	90
Parts Index	93

Parts Ordering Information

If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.


For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin

+32 56 41 20 54 Wevelgem, Belgium

Serial Plate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on serial plate(s) as shown.

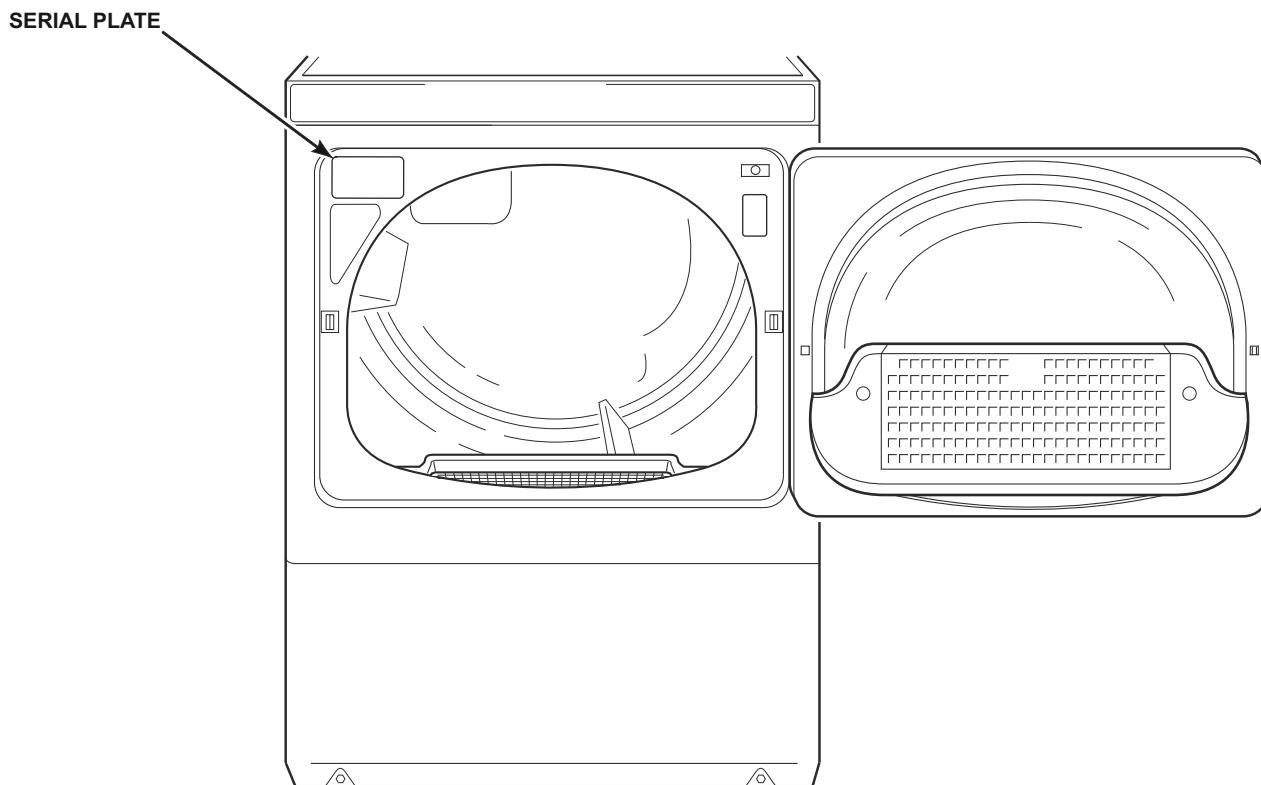

DRY2283P_515203

Notes


Model Identification

Information in this manual is applicable to these dryer models:

BD3NGBGS403UW01	JDEJEAGW303EW01	SDENXAGS433AW01
BD3NGBSS403UN01	JDEJGAGW303EW01	SDENXAGS543DW01
BD3NLBGS403UW01	JDEJGASW303EN01	SDENXRGS433AW01
BD3NLBSS403UN01	JDEJGBGW303EW01	SDENYRGS303NW22
BD3NXAGS403UW01	JDEJGBSW303EN01	SDENYRGS303ZW01
BDGNGBGS303EW01	JDGJEAGW303EW01	SDGNXAGS123DW01
BDGNLBGS303EW01	JDGJGAGW303EW01	SDGNXAGS303AW01
BDGNXAGS303EW01	JDGJGASW303EN01	SDGNXAGS543DW01
HDENEAGS153CW01	JDGJGBGW303EW01	SDGNXRGS303AW01
HDENEAGS173CW01	JDGJGBSW303EN01	SDLNXRGS543NW23
HDENERGS153CW01	ND3NLBGS403NW22	SDLNXRGS543PW01
HDENERGS173CW01	ND3NLBGS403ZW01	
HDENXAGS173CN01	ND3NLBSS403UN01	
HDENXAGW173CN01	ND3NXASS403UN01	
HDENXAGS153CW01	NDENXAGS303UW01	
HDENXAGS173CW01	NDGNXAGS303EW01	
HDENXRGS153CW01	PD3JGBGS403UG01	
HDENXRGS173CW01	PD3JXAGS403UG01	
HDENYAGS153CW01	PDEJGBGS303UG01	
HDENYAGS173CW01	PDEJGBGS543ZG01	
HDENYBGS173CW01	PDGJGBGS303UG01	
HDENYRGS153CW01	PDGJXAGS303UG01	
HDENYRGS173CW01	PDGJXAGS543ZG01	
HDGNEAGS113CW01		
HDGNERGS113CW01		
HDGNXAGS113CN01		
HDGNXAGS123DW01		
HDGNXAGS543DW01		
HDGNXAGW113CN01		
HDGNXAGS113CW01		
HDGNXRGS113CW01		
HDGNYAGS113CW01		
HDGNYBGS113CW01		
HDGNYRGS113CW01		

Control Panel and Controls - Rear Control Coin Drop Models

Models HDENERGS153CW01, HDENERGS173CW01, HDENXRG153CW01, HDENXRG173CW01,
HDGNERGS113CW01, HDGNXRG113CW01, SDENXRG433AW01, SDGNXRG303AW01,
SDLNXRG543NW23 and SDLNXRG543PW01

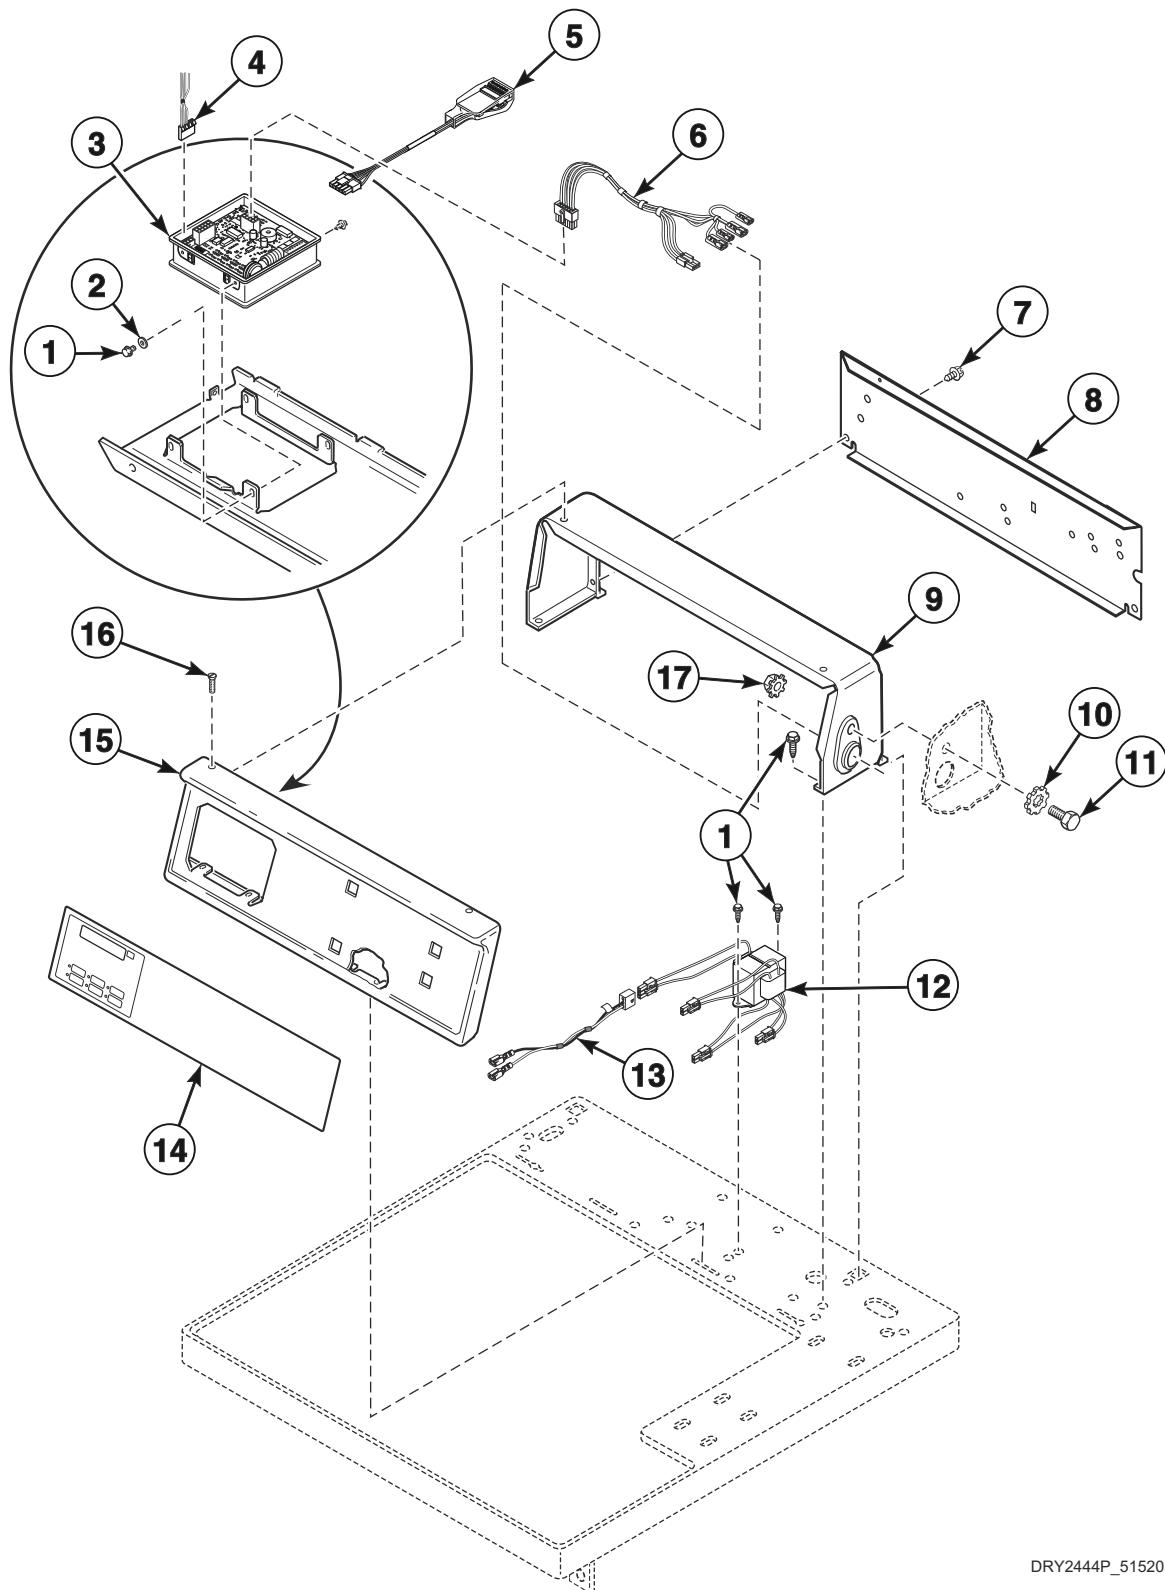


DRY2444P_515203

Control Panel and Controls - Rear Control Coin Drop Models

REF	PART NO.	DESCRIPTION	COMMENTS
	905P3	Security Kit	Hood lock
	203328	Network Retrofit Kit	Wired
	203327	Wireless Network Kit	
	203346	USB IR Interface Kit	
	NK220	Network Controller Kit	Wired
	NK320	Ethernet Gateway Kit	Wireless
	NK330	USB Gateway Kit	Wireless
1	503688	Screw	
2	200608	Washer	
3	514138P	Control Assembly	
4	511478	Central Pay Harness	
5	203361P	Machine ID Control Assembly	Model or serial number is required when ordering
6	202871	Dual Coin Harness Assembly	Coin drop
7	501086	Screw	
8	804886	Hood Back Panel	
9	502567W	Control Hood	White
10	M400017	Washer	
11	02916	Screw	
12	202757	Transformer	Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01, HDGNERGS113CW01 and HDGNXRGS113CW01
13	514071	Transformer Harness	Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGS153CW01 and HDENXRGS173CW01
	804832	Harness	Models HDGNERGS113CW01 and HDGNXRGS113CW01
14	514367	Control Overlay	Models SDENXRGS433AW01 and SDGNXRGS303AW01
	514485	Control Overlay	Models SDLNXRGS543NW23 and SDLNXRGS543PW01
	514654	Control Overlay	Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01, HDGNERGS113CW01 and HDGNXRGS113CW01
15	510067W	Control Panel	White
16	52864	Screw	Phillips head
	35528	Screw	Torx head
17	52566	Nut	

Control Panel and Controls - Rear Control Card Models

Models HDENYRGS153CW01, HDENYRGS173CW01, HDGNYRGS113CW01,
SDENYRGS303NW22 and SDENYRGS303ZW01

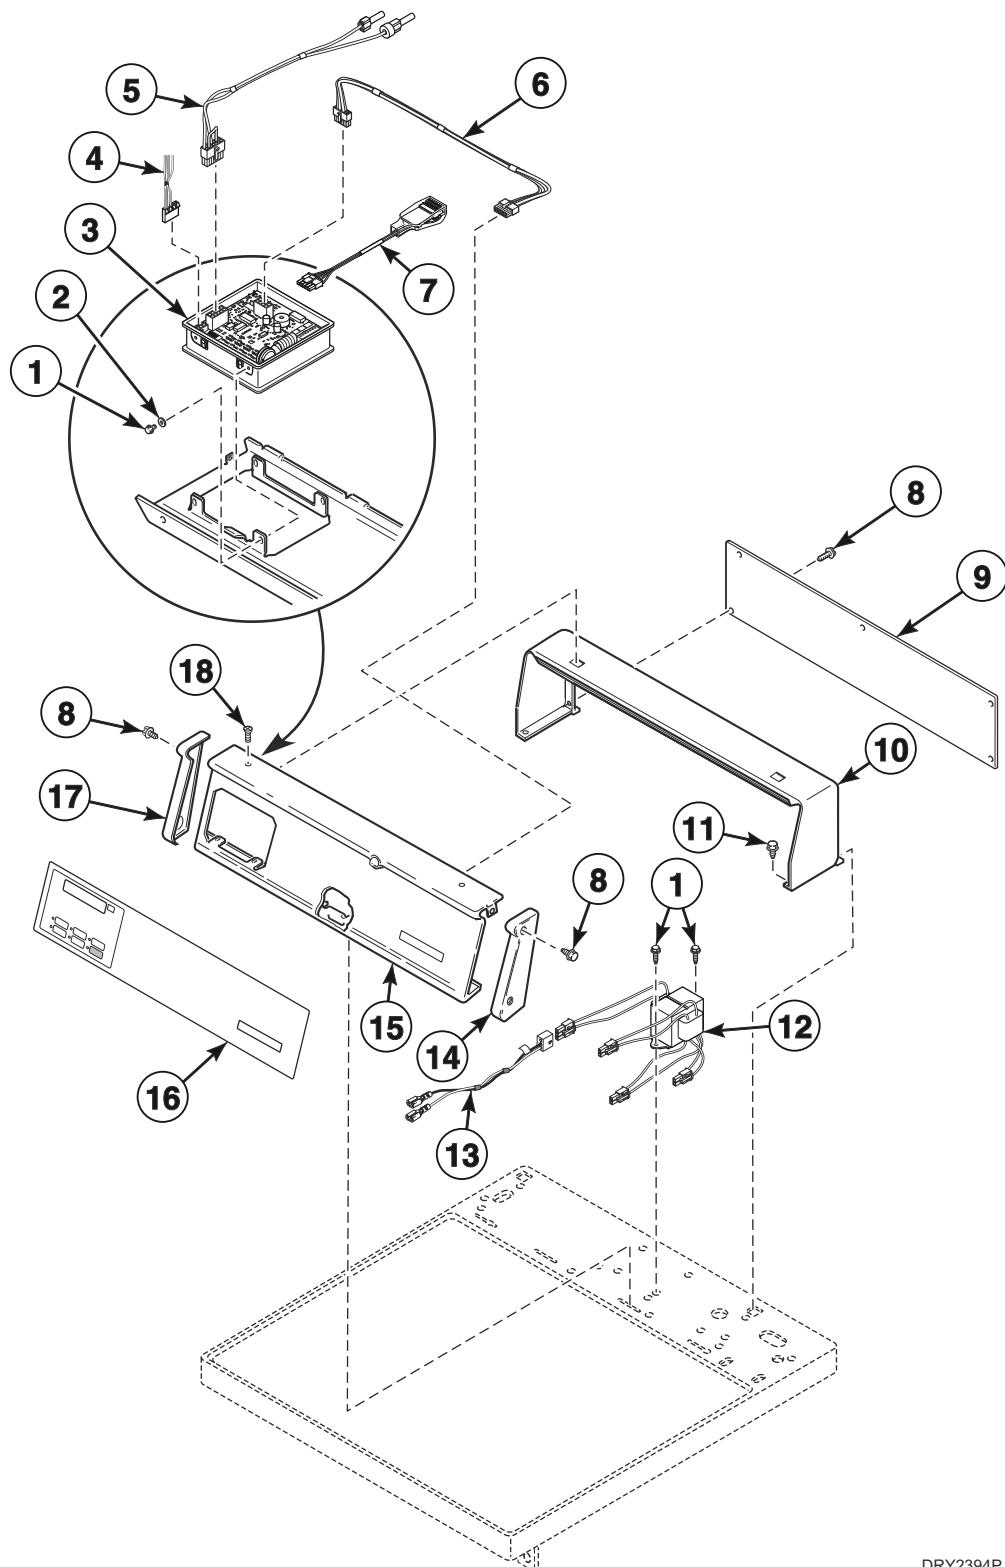


DRY2394P_515203

Control Panel and Controls - Rear Control Card Models

REF	PART NO.	DESCRIPTION	COMMENTS
	905P3	Security Kit	Hood lock
	203327	Wireless Network Kit	
	203328	Network Retrofit Kit	Wired
	203346	USB IR Interface Kit	
	NK220	Network Controller Kit	Wired
	NK320	Ethernet Gateway Kit	Wireless
	NK330	USB Gateway Kit	Wireless
1	503688	Screw	
2	200608	Washer	
3	514138P	Control Assembly	
4	511478	Central Pay Harness	
5	202869	Wiring Harness Assembly	
6	800125P	Card Reader Wire Harness Assembly	
7	203361P	Machine ID Control Assembly	Model or serial number is required when ordering
8	501086	Screw	
9	804884	Rear Panel	
10	511253W	Control Hood	White
11	02916	Screw	
12	202758	Transformer	Models SDENYRGS303NW22 and SDENYRGS303ZW01
	202757	Transformer	All other models; Some models may have jumper wire attached to transformer. Discard jumper wire when replacing transformer
13	514071	Transformer Harness	Models SDENYRGS303NW22 and SDENYRGS303ZW01
	514073	Transformer Harness	Models HDENYRGS153CW01 and HDENYRGS173CW01
	804832	Harness	Model HDGNYRGS113CW01
14	210108W	End Cap	Right
15	511055W	Control Panel	White
16	514368	Control Overlay	Models SDENYRGS303NW22 and SDENYRGSS303ZW01
	514655	Control Overlay	All other models
17	210109W	End Cap	Left
18	52864	Screw	Phillips head
	35528	Screw	Torx head

Non-Electronic Coin Drop - Rear Control Models

Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGSS153CW01, HDENXRGSS173CW01,
HDGNERGS113CW01, HDGNXRGSS113CW01, SDENXRGSS433AW01, SDGNXRGSS303AW01,
SDLNXRGSS543NW23 and SDLNXRGSS543PW01

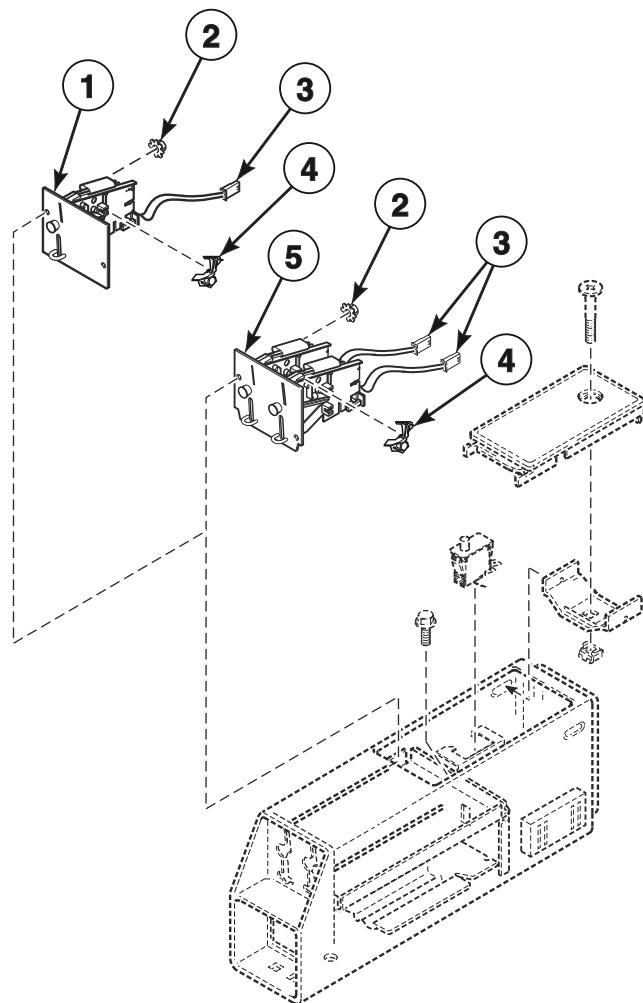


DRY2094P_515203

Non-Electronic Coin Drop - Rear Control Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	38462P	Coin Drop Assembly	Token; 118-1 mzp; .880 diameter x .079 thick; Brass
	38463	Coin Drop Assembly	Token; 118-5 mzp; .990 diameter x .081 thick; Silver
	38464P	Coin Drop Assembly	Canada; .25
	38475	Coin Drop Assembly	Japan; 100 yen
	CK077	Coin Drop Kit	Taiwan; 10 NT
	70441601P	Coin Drop	U.S.; \$.25
	38963P	Coin Drop	Token 118-16 not available; Replacement for 38963P Coin Drop only
	CK114	Coin Drop Assembly	Singapore; Old 1.00
	CK123	Coin Drop Assembly	Singapore; New 1.00
	29786	Nut	
3	200674P	Opto Coupler	
4	201595P	Wire Guard	Anti-stringing security device; Add to coin drops beginning January 2005
5	70441602	Coin Drop Assembly	Canada; .25 and 1.00
	38467	Coin Drop Assembly	Australia; .20 and 1.00
	38472	Coin Drop Assembly	England; 20 pence and 1 pound
	38519	Coin Drop Assembly	Japan; 100 and 500 yen
	38521	Coin Drop Assembly	Korea; 100 and 500 won
	70482401	Coin Drop Assembly	New Zealand; 1.00 and 2.00
	39157	Coin Drop Assembly	Israel; 1 and 5 shekel

Electronic Coin Drop - Rear Control Models

Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01,
HDGNERGS113CW01, HDGNXRGS113CW01, SDENXRGS433AW01, SDGNXRGS303AW01,
SDLNXRGS543NW23 and SDLNXRGS543PW01

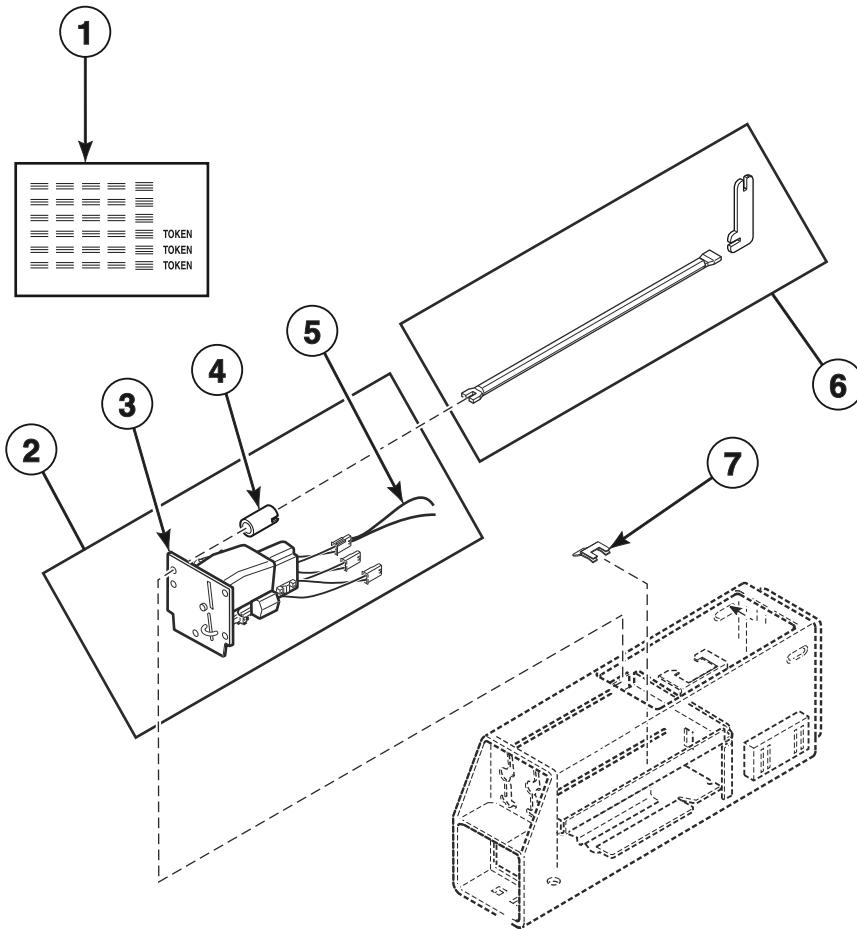


DRY2095P_515203

Electronic Coin Drop - Rear Control Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	38725	Coin Identification Paper	For use with items 2 and 3
2	CK115	Electronic Coin Drop Kit	Includes items 3-5; United States and Canada coins
	CK099	Electronic Coin Drop Kit	Includes items 3-5; Australia, New Zealand, Hong Kong and South Korea coins
	CK100	Electronic Coin Drop Kit	Includes items 3-5; Euro and Great Britain coins
	CK101	Electronic Coin Drop Kit	Includes items 3-5; Euro, Denmark and Norway coins
	CK103	Electronic Coin Drop Kit	Includes items 3-5; Euro, Lithuania and Latvia coins
	CK106	Electronic Coin Drop Kit	Includes items 3-5; Malaysia, Russia, China and Singapore coins
	CK108	Electronic Coin Drop Kit	Includes items 3-5; South Africa coins
	CK109	Electronic Coin Drop Kit	Includes items 3-5; Euro coins
	CK110	Electronic Coin Drop Kit	Includes items 3-5; Mexico, Ecuador and United States coins
	CK113	Electronic Coin Drop Kit	Includes items 3-5; Japan and Taiwan coins
	CK116	Electronic Coin Drop Kit	Includes items 3-5; Malaysia and China coins
	CK117	Electronic Coin Drop Kit	Includes items 3-5; Russia coins
	CK118	Electronic Coin Drop Kit	Includes items 3-5; Philippine coins
	CK120	Electronic Coin Drop Kit	Includes items 3-5; Chile coins
	CK121	Electronic Coin Drop Kit	Includes items 3-5; Singapore coins
3	70294103P	Electronic Coin Drop Assembly	Euro and Great Britain coins
	70294104	Electronic Coin Drop Assembly	Euro, Denmark and Norway coins
	70294105P	Electronic Coin Drop Assembly	Australia, New Zealand, Hong Kong, South Korea and Malaysia coins
	70294106	Electronic Coin Drop Assembly	Mexico, Ecuador and United States coins
	70294107	Electronic Coin Drop Assembly	Euro, Lithuania and Latvia coins
	70294109	Electronic Coin Drop Assembly	Malaysia, Russia, China and Singapore coins
	70294110	Electronic Coin Drop Assembly	South Africa coins
	70294111	Electronic Coin Drop Assembly	Euro coins
	70294116	Electronic Coin Drop Assembly	Malaysia and China coins
	70294117	Electronic Coin Drop Assembly	Russia coins
	70294120	Electronic Coin Drop Assembly	Chile coins
	70294121	Electronic Coin Drop Assembly	Singapore coins
4	201216	Nut	For use with items 2 and 3
5	201104	Coin Drop Wire Harness	For use with items 2 and 3
6	CK096	Mounting Tool Kit	For use with items 2 and 3
7	201572	Clip	For use with items 2 and 3

Meter Case - Rear Control Coin Drop Models

Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGSS153CW01, HDENXRGSS173CW01,
HDGNERGS113CW01, HDGNXRGSS113CW01, SDENXRGSS433AW01, SDGNXRGSS303AW01,
SDLNXRGSS543NW23 and SDLNXRGSS543PW01

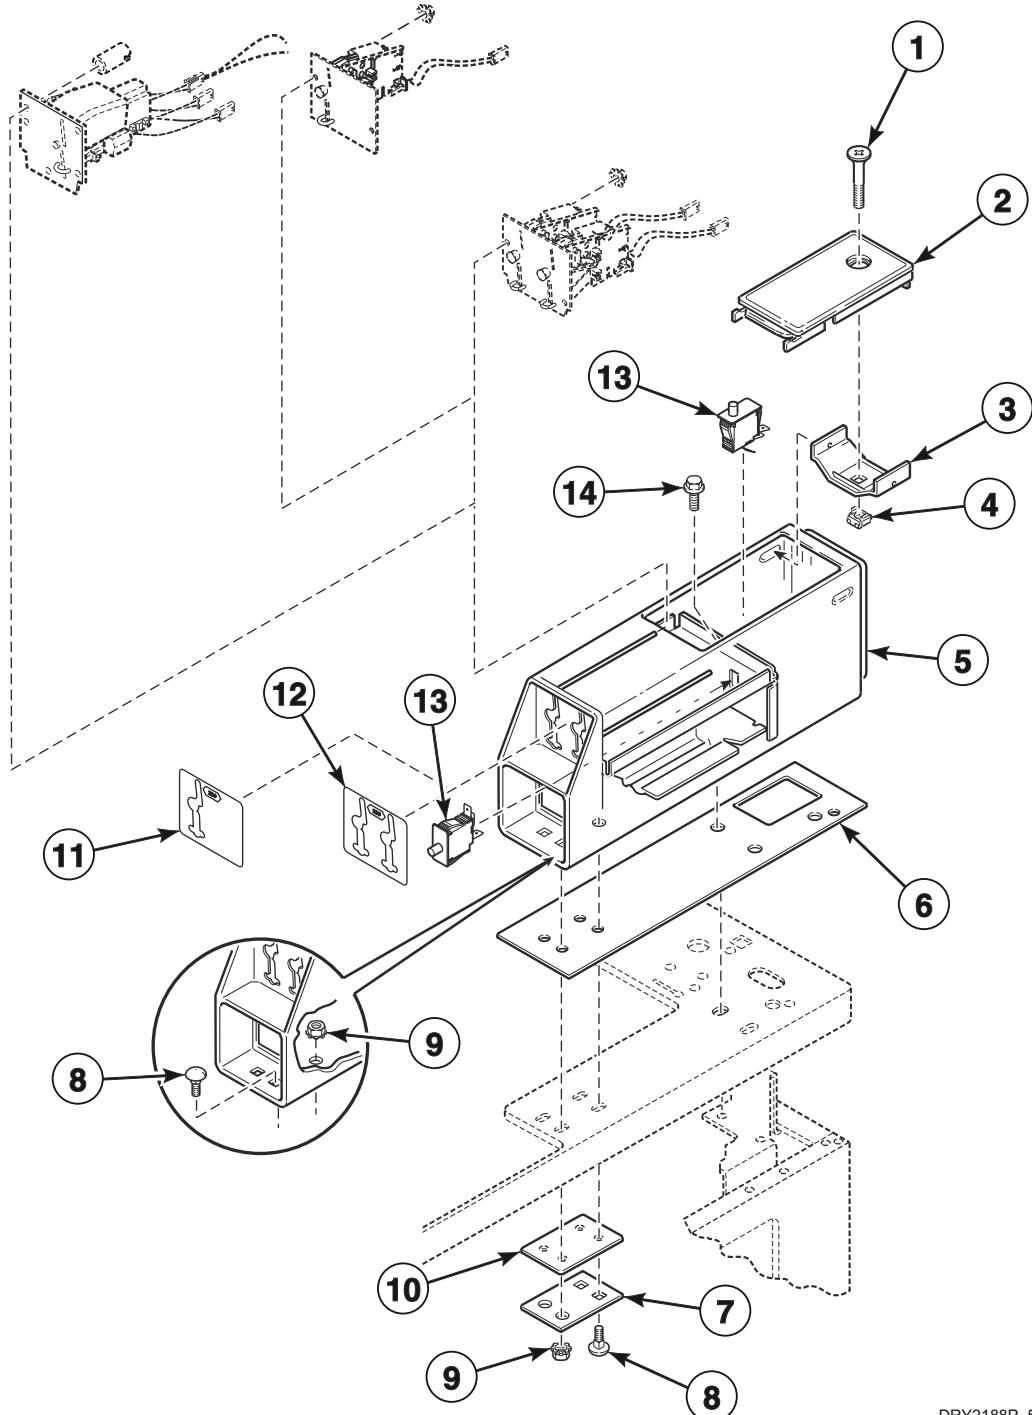


DRY2188P_515203

Meter Case - Rear Control Coin Drop Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	503673	Screw	
2	39874WP	Service Door Assembly	White
3	30642	Meter Case Locking Bracket	
4	30647	Nut	
5	802505W	Meter Case Assembly	White; For electronic coin drop; Models HDENERGS153CW01, HDENERGS173CW01 and HDGNERGS113CW01
	38724W	Meter Case Assembly	White; All other models
6	26354	Meter Case Gasket	
7	35525	Meter Case Lockdown Bracket	
8	02505	Bolt	
9	29786	Nut	
10	35526	Meter Case Bracket Gasket	
11	38717	Single Overlay	For non-electronic coin drops
	201091	Overlay	For electronic coin drops
12	39073	Dual Overlay	
13	512973	Switch	
14	36048	Screw	

Cabinet Top - Rear Control Models

Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGSS153CW01, HDENXRGSS173CW01,
HDENYRGSS153CW01, HDENYRGSS173CW01, HDGNERGS113CW01, HDGNXRGSS113CW01,
HDGNYRGSS113CW01, SDENXRGSS433AW01, SDENYRGSS303NW22, SDENYRGSS303ZW01,
SDGNXRGSS303AW01, SDLNXRGSS543NW23 and SDLNXRGSS543PW01

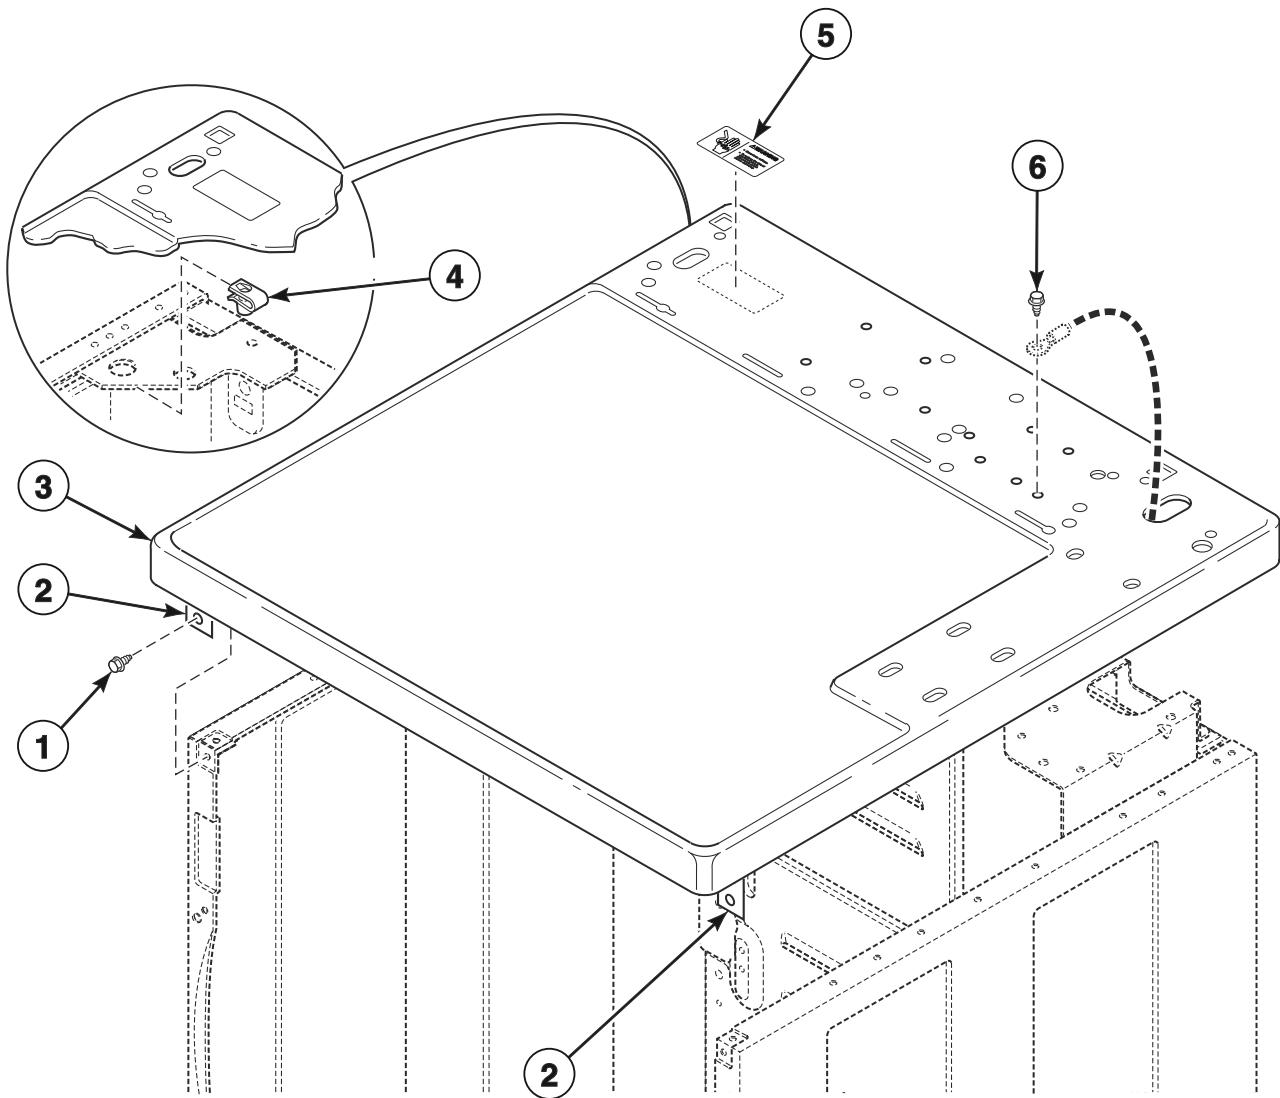


DRY2181P_515203

Cabinet Top - Rear Control Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	503688	Screw	
2	510146	Bracket	
3	511530WP	Top Panel Kit	White; Models HDENYRGS153CW01, HDENYRGS173CW01 and HDGNYRGS113CW01
	511527WP	Top Kit	White; All other models
4	27222	Nut	
5	505281	Disconnect Power Warning Label	Models SDENXRGS433AW01 and SDGNXRGS303AW01
	F8211201	Electrical Shock Label	Models SDENYRGS303NW22, SDENYRGS303ZW01, SDLNXRGS543NW23 and SDLNXRGS543PW01
	500316	Warning Label	All other models
6	503688	Screw	

Control Panel and Controls - 10 Degree Front Control Models

Models BD3NXAGS403UW01, BDGNXAGS303EW01, HDENEAGS153CW01, HDENEAGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGS543DW01, HDENYAGS153CW01, HDENYAGS173CW01, HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNYAGS113CW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JXAGS403UG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01 and SDGNXAGS543DW01

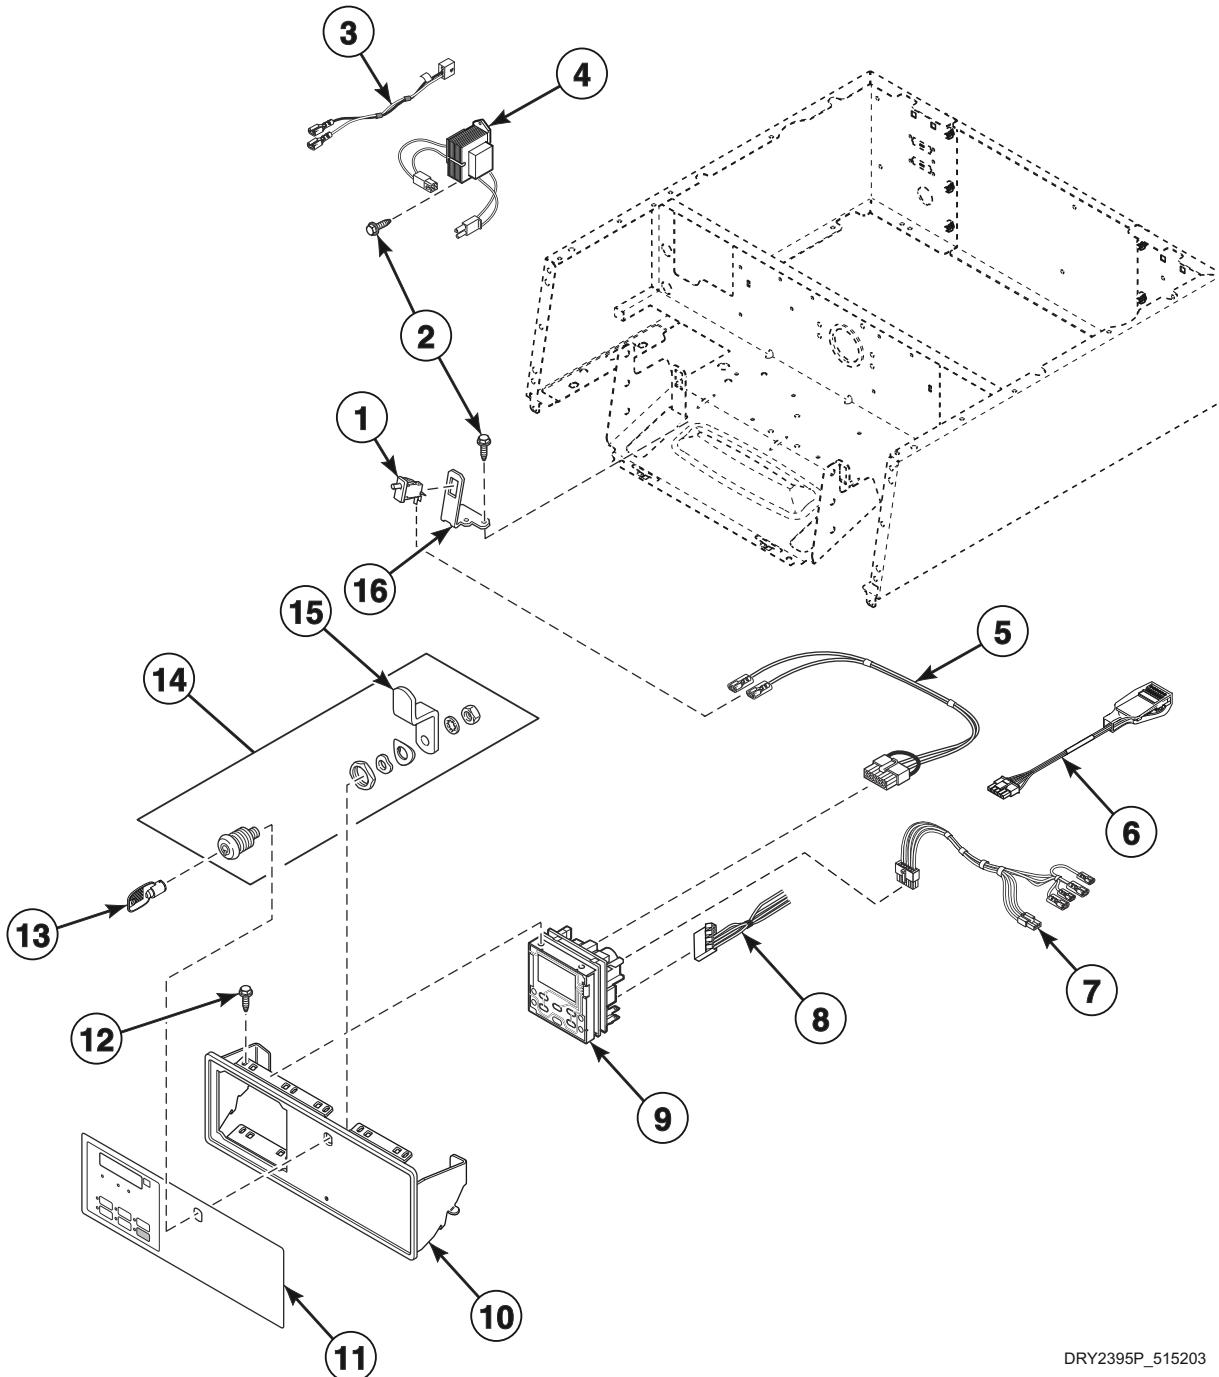


DRY2395P_515203

Control Panel and Controls - 10 Degree Front Control Models

REF	PART NO.	DESCRIPTION	COMMENTS
	203346	USB IR Interface Kit	
	203327	Wireless Network Kit	
	203328	Network Retrofit Kit	Wired
	NK220	Network Controller Kit	Wired
	NK320	Ethernet Gateway Kit	Wireless
	NK330	USB Gateway Kit	Wireless
1	512973	Switch	
2	503661	Screw	
3	514069	Transformer Harness	Model JDEJEAGW303EW01
	514072	Transformer Harness	Models HDENXAGS173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENYAGS153CW01 and HDENYAGS173CW01
	804795	Transformer Harness	Models HDGNXAGS113CN01, HDGNXAGS113CW01 and HDGNYAGS113CW01
4	202757	Transformer	Models HDENXAGS173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDGNXAGS113CN01, HDGNXAGS113CW01 and HDGNYAGS113CW01
	202758	Transformer	Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01 and JDGJGASW303EN01
5	202868	Wiring Harness Assembly	Models HDENYAGS153CW01, HDENYAGS173CW01, HDGNYAGS113CW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDGJGAGW303EW01 and JDGJGASW303EN01
6	203361P	Machine ID Control Assembly	Model or serial number is required when ordering
7	202871	Dual Coin Harness Assembly	Coin drop; All models except HDENYAGS153CW01, HDENYAGS173CW01, HDGNYAGS113CW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDGJGAGW303EW01 and JDGJGASW303EN01
8	511478	Central Pay Harness	
9	514139P	Control Assembly	Models BD3NXAGS403UW01 and BDGNXAGS303EW01
	514138P	Control Assembly	All other models
10	513777B	Control Panel and Bracket Assembly	Black; Models HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01 and ND3NXASS403UN01
	513777DG	Control Panel and Bracket Assembly	Dark gray; Models PD3JXAGS403UG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	513777W	Control Panel and Bracket Assembly	White; All other models
11	514373	Control Overlay	Models BD3NXAGS403UW01 and BDGNXAGS303EW01
	514657	Control Overlay	Models ND3NXASS403UN01, NDENXAGS303UW01 and NDGNXAGS303EW01
	514369	Control Overlay	Models SDENXAGS433AW01, SDENXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01 and SDGNXAGS543DW01
	514370	Control Overlay	Models HDENEAGS153CW01, HDENEAGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGS543DW01, HDENYAGS153CW01, HDENYAGS173CW01, HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, HDGNXAGS113CW01 and HDGNYAGS113CW01
	514479	Control Overlay	Models HDGNXAGS123DW01 and HDGNXAGS543DW01
	514659	Control Overlay	Models JDEJEAGW303EW01 and JDGJEAGW303EW01
	514926	Control Overlay	Models PD3JXAGS403UG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	515415	Control Overlay	Models JDEJGAGW303EW01, JDEJGASW303EN01, JDGJGAGW303EW01, JDGJGASW303EN01 and PDGJXAGS543ZG01
12	501524	Screw	
13	54612	Key	800
14	27260P	Lock Kit	Includes item 13
15	804338	Lock Cam	
16	800379	Audit Switch Bracket	

Non-Electronic Coin Drop - Front Control Models

Models BD3NXAGS403UW01, BDGNXAGS303EW01, HDENEAGS153CW01, HDENEAGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGS543DW01, HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, JDEJEAGW303EW01, JDGJEAGW303EW01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JXAGS403UG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01 and SDGNXAGS543DW01

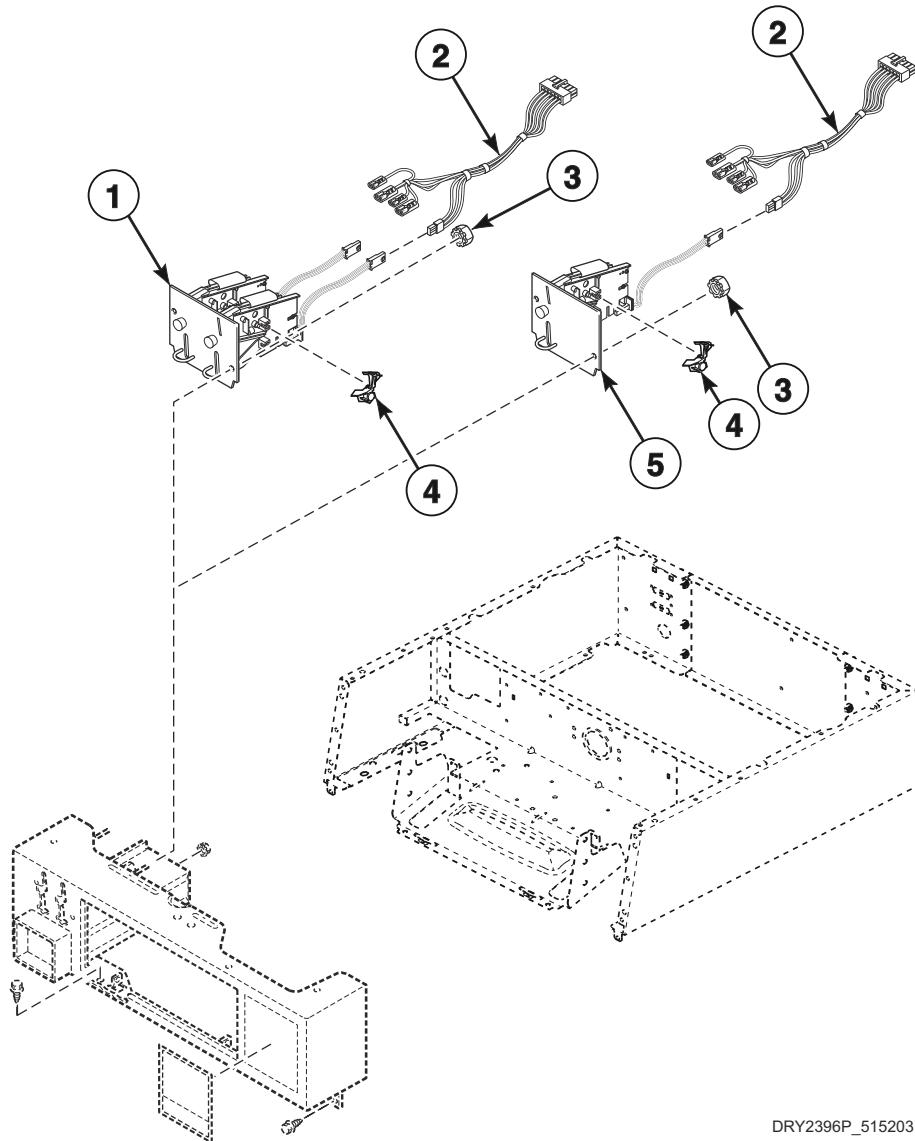


DRY2396P_515203

Non-Electronic Coin Drop - Front Control Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70441602	Coin Drop Assembly	Canada; .25 and 1.00
	38467	Coin Drop Assembly	Australia; .20 and 1.00
	38472	Coin Drop Assembly	England; 20 pence and 1 pound
	38519	Coin Drop Assembly	Japan; 100 and 500 yen
	38521	Coin Drop Assembly	Korea; 100 and 500 won
	70482401	Coin Drop Assembly	New Zealand; 1.00 and 2.00
	39157	Coin Drop Assembly	Israel; 1 and 5 shekel
2	802905	Harness Assembly	Coin drop
3	29786	Nut	
4	201595P	Wire Guard	Anti-stringing security device
5	38462P	Coin Drop Assembly	Token; 118-1 mzp; .880 diameter x .079 thick; Brass
	38463	Coin Drop Assembly	Token; 118-5 mzp; .990 diameter x .081 thick; Silver
	38464P	Coin Drop Assembly	Canada; .25
	38475	Coin Drop Assembly	Japan; 100 yen
	CK077	Coin Drop Kit	Taiwan; 10 NT
	70441601P	Coin Drop	U.S.; \$.25
	38963P	Coin Drop	Token 118-16 not available; Replacement for 38963P Coin Drop only
CK114	Coin Drop Assembly	Singapore; Old 1.00	
CK123	Coin Drop Assembly	Singapore; New 1.00	

Electronic Coin Drop - Front Control Models

Models BD3NXAGS403UW01, BDGNXAGS303EW01, HDENEAGS153CW01, HDENEAGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGS543DW01, HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, JDEJEAGW303EW01, JDGJEAGW303EW01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JXAGS403UG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01 and SDGNXAGS543DW01

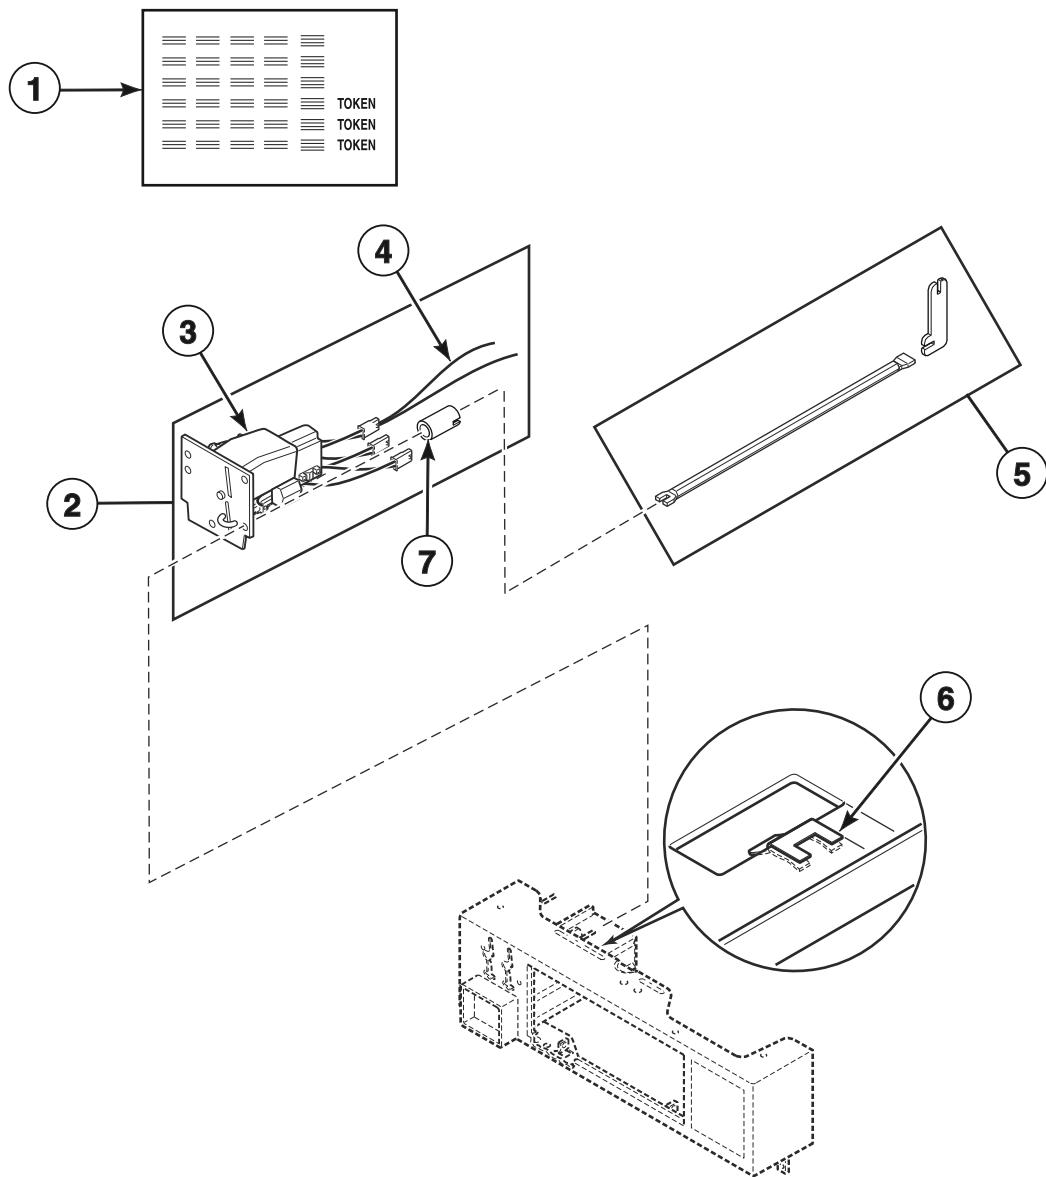

DRY2183P_515203


Electronic Coin Drop - Front Control Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	38725	Coin Identification Paper	For use with items 2 and 3
2	CK115	Electronic Coin Drop Kit	Includes items 3, 4 and 7; United States and Canada coins
	CK099	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Australia, New Zealand, Hong Kong and South Korea coins
	CK100	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Euro and Great Britain coins
	CK101	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Euro, Denmark and Norway coins
	CK103	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Euro, Lithuania and Latvia coins
	CK106	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Malaysia, Russia, China and Singapore coins
	CK108	Electronic Coin Drop Kit	Includes items 3, 4 and 7; South Africa coins
	CK109	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Euro coins
	CK110	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Mexico, Ecuador and United States coins
	CK113	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Japan and Taiwan coins
	CK116	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Malaysia and China coins
	CK117	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Russia coins
	CK118	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Philippine coins
	CK120	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Chile coins
	CK121	Electronic Coin Drop Kit	Includes items 3, 4 and 7; Singapore coins
3	70294103P	Electronic Coin Drop Assembly	Euro and Great Britain coins
	70294104	Electronic Coin Drop Assembly	Euro, Denmark and Norway coins
	70294105P	Electronic Coin Drop Assembly	Australia, New Zealand, Hong Kong, South Korea and Malaysia coins
	70294106	Electronic Coin Drop Assembly	Mexico, Ecuador and United States coins
	70294107	Electronic Coin Drop Assembly	Euro, Lithuania and Latvia coins
	70294109	Electronic Coin Drop Assembly	Malaysia, Russia, China and Singapore coins
	70294110	Electronic Coin Drop Assembly	South Africa coins
	70294111	Electronic Coin Drop Assembly	Euro coins
	70294112	Electronic Coin Drop Assembly	Euro, Great Britain and token
	70294116	Electronic Coin Drop Assembly	Malaysia and China coins
	70294117	Electronic Coin Drop Assembly	Russia coins
	70294120	Electronic Coin Drop Assembly	Chile coins
	70294121	Electronic Coin Drop Assembly	Singapore coins
4	201104	Coin Drop Wire Harness	For use with items 2 and 3
5	CK096	Mounting Tool Kit	For use with items 2 and 3
6	201572	Clip	For use with items 2 and 3
7	29786	Nut	

Control Cabinet Controls - 10 Degree Front Control Models

(Drawing 1 of 2)

Models BD3NXAGS403UW01, BDGNXAGS303EW01, HDENEAGS153CW01, HDENEAGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGS543DW01, HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JXAGS403UG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01 and SDGNXAGS543DW01

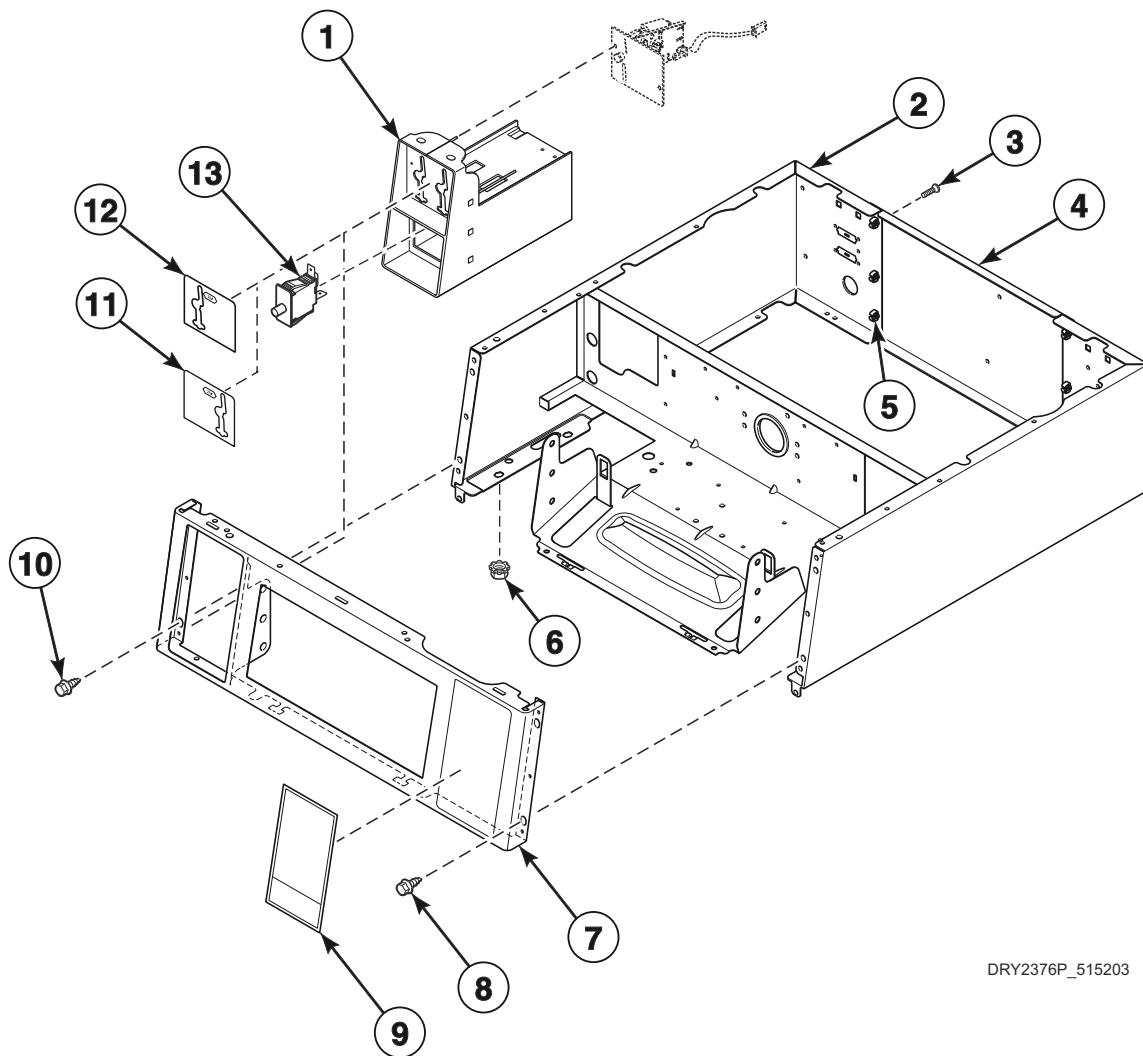


Control Cabinet Controls - 10 Degree Front Control Models

(Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	804009B	Meter Case Assembly	Black; Requires high capacity coin vault; Models HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJEAGW303EW01, JDGJEAGW303EW01 and ND3NXASS403UN01
	804009DG	Meter Case Assembly	Dark gray; Requires high capacity coin vault; Models PD3JXAGS403UG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	804009W	Meter Case Assembly	White; Requires high capacity coin vault; Models BD3NXAGS403UW01, BDGNXAGS303EW01, HDENEAGS153CW01, HDENEAGS173CW01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGSS543DW01, HDGNEAGS113CW01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGS113CW01, NDENXAGS303UW01, NDGNXAGS303EW01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01 and SDGNXAGS543DW01
2	804104B	Wrapper Assembly	Black; Models HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGW113CN01, JDEJGASW303EN01, JDGJGASW303EN01 and ND3NXASS403UN01
	804104DG	Wrapper Assembly	Dark gray; Models PD3JXAGS403UG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	804104W	Wrapper Assembly	White; All other models
3	70240301	Screw	6 required
4	803998	Rear Access Panel	
5	70030501	Expansion Clip	6 required
6	44087201	Nut	
7	803970B	Control Panel	Models JDEJGAGW303EW01, JDEJGASW303EN01, JDGJGAGW303EW01 and JDGJGASW303EN01
	803962BP	Control Panel	Black; Models HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJEAGW303EW01, JDGJEAGW303EW01 and ND3NXASS403UN01
	803962DG	Control Panel	Dark gray; Models PD3JXAGS403UG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	803962WP	Control Panel	White; All other models
8	M405188	Screw	Use with stainless steel side panels
	503688	Screw	Use with painted side panels
9	514392	Operating Instructions Label	Models BD3NXAGS403UW01, ND3NXASS403UN01 and NDENXAGS303UW01
	514681	Nameplate Overlay	Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01 and JDGJGASW303EN01
	514929	Operating Instructions Label	Models PD3JXAGS403UG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	514393	Operating Instructions Label	All other models
10	29651	Bolt	
11	803476	Single Drop Overlay	Models JDEJEAGW303EW01 and JDGJEAGW303EW01
12	201091	Overlay	Model HDGNEAGS113CW01
13	512973	Switch	

Control Cabinet Controls - 10 Degree Front Control Models (Drawing 2 of 2)

Models HDENYAGS153CW01, HDENYAGS173CW01 and HDGNYAGS113CW01

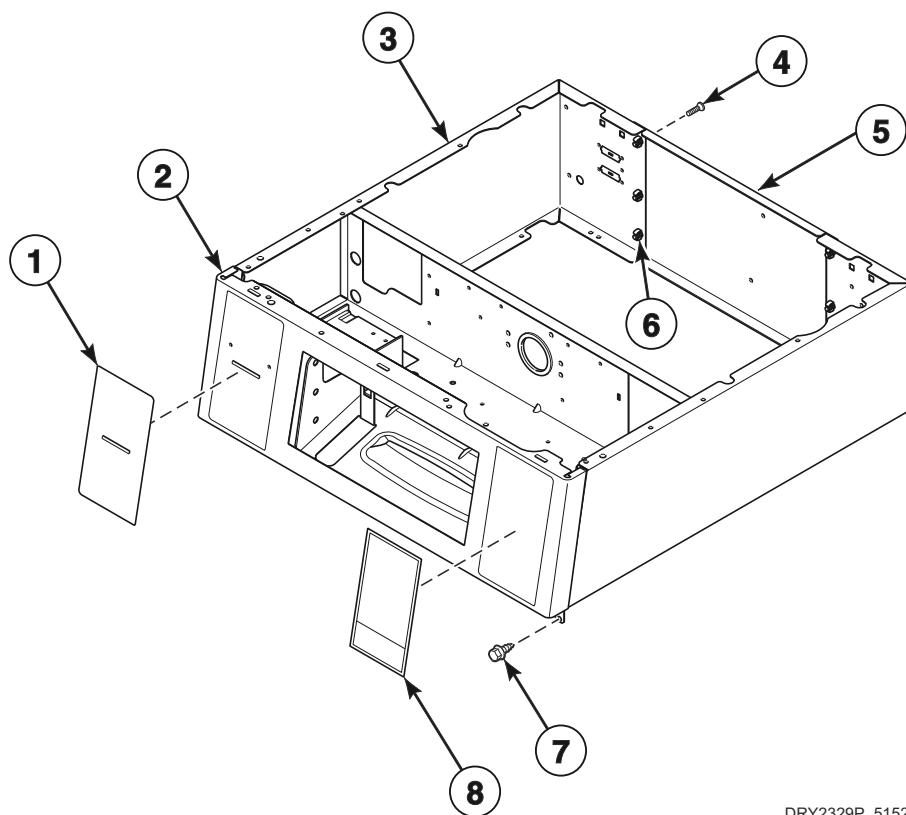


DRY2329P_515203

Control Cabinet Controls - 10 Degree Front Control Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	514873	Overlay	Gray
2	804149W	Security Cabinet Assembly	White
3	804112W	Wrapper Assembly	White
4	70240301	Screw	6 required
5	803998	Rear Access Panel	
6	70030501	Expansion Clip	6 required
7	503688	Screw	
8	514393	Operating Instructions Label	

Cabinet Top - 10 Degree Front Control Models

Models BD3NXAGS403UW01, BDGNXAGS303EW01, HDENEAGS153CW01, HDENEAGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGS543DW01, HDENYAGS153CW01, HDENYAGS173CW01, HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNYAGS113CW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JXAGS403UG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01 and SDGNXAGS543DW01

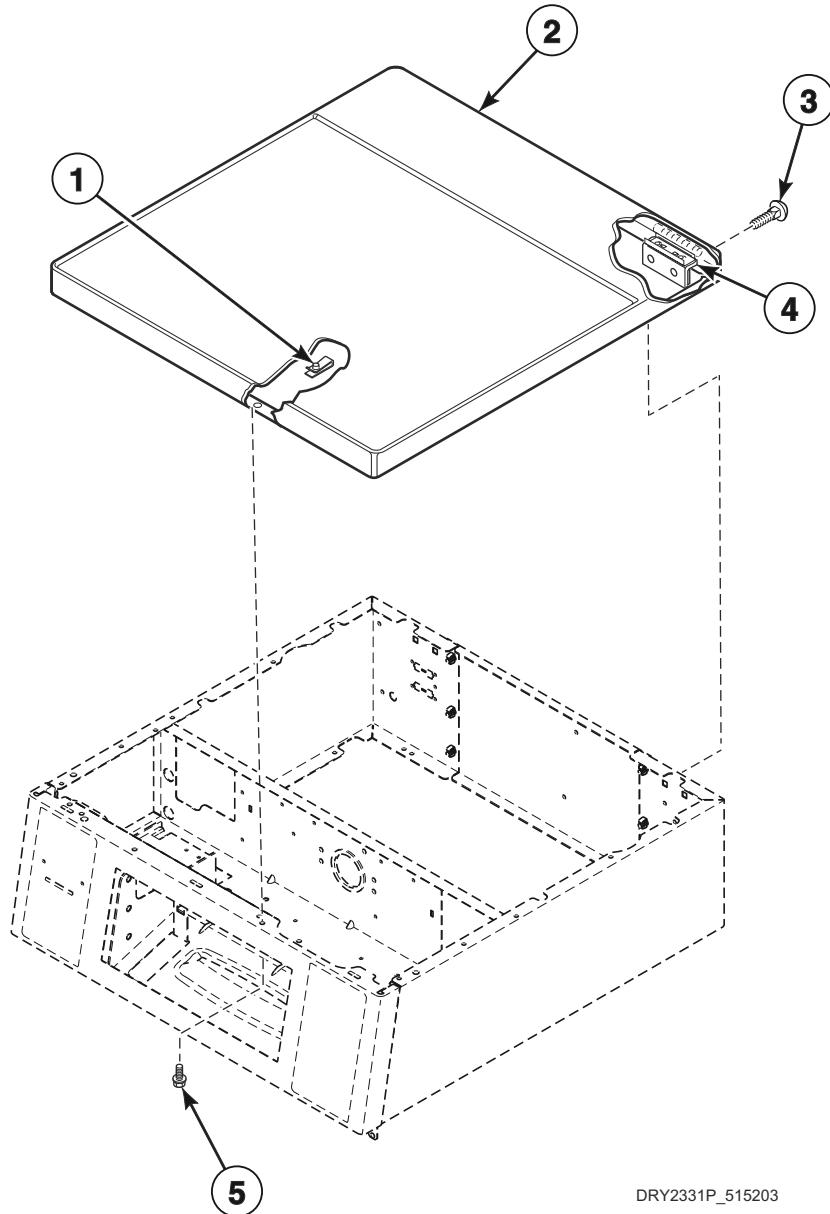


DRY2331P_515203

Cabinet Top - 10 Degree Front Control Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	36020	Nut	
2	803869	Top Panel	Stainless steel; Models HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGASW303EN01, JDGJGASW303EN01 and ND3NXASS403UN01
	804023DG	Top Panel	Dark gray; Models PD3JXAGS403UG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	803868WP	Top Panel	White; All other models
3	29651	Bolt	
4	504228	Top Mounting Bracket	
5	23008	Screw	

Control Cabinet - 45 Degree Front Control Models (Drawing 1 of 2)

Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BDGNGBGS303EW01, BDGNLBGS303EW01, HDENYBGS173CW01, HDGNYBGS113CW01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, PD3JGBGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01 and PDGJGBGS543ZG01

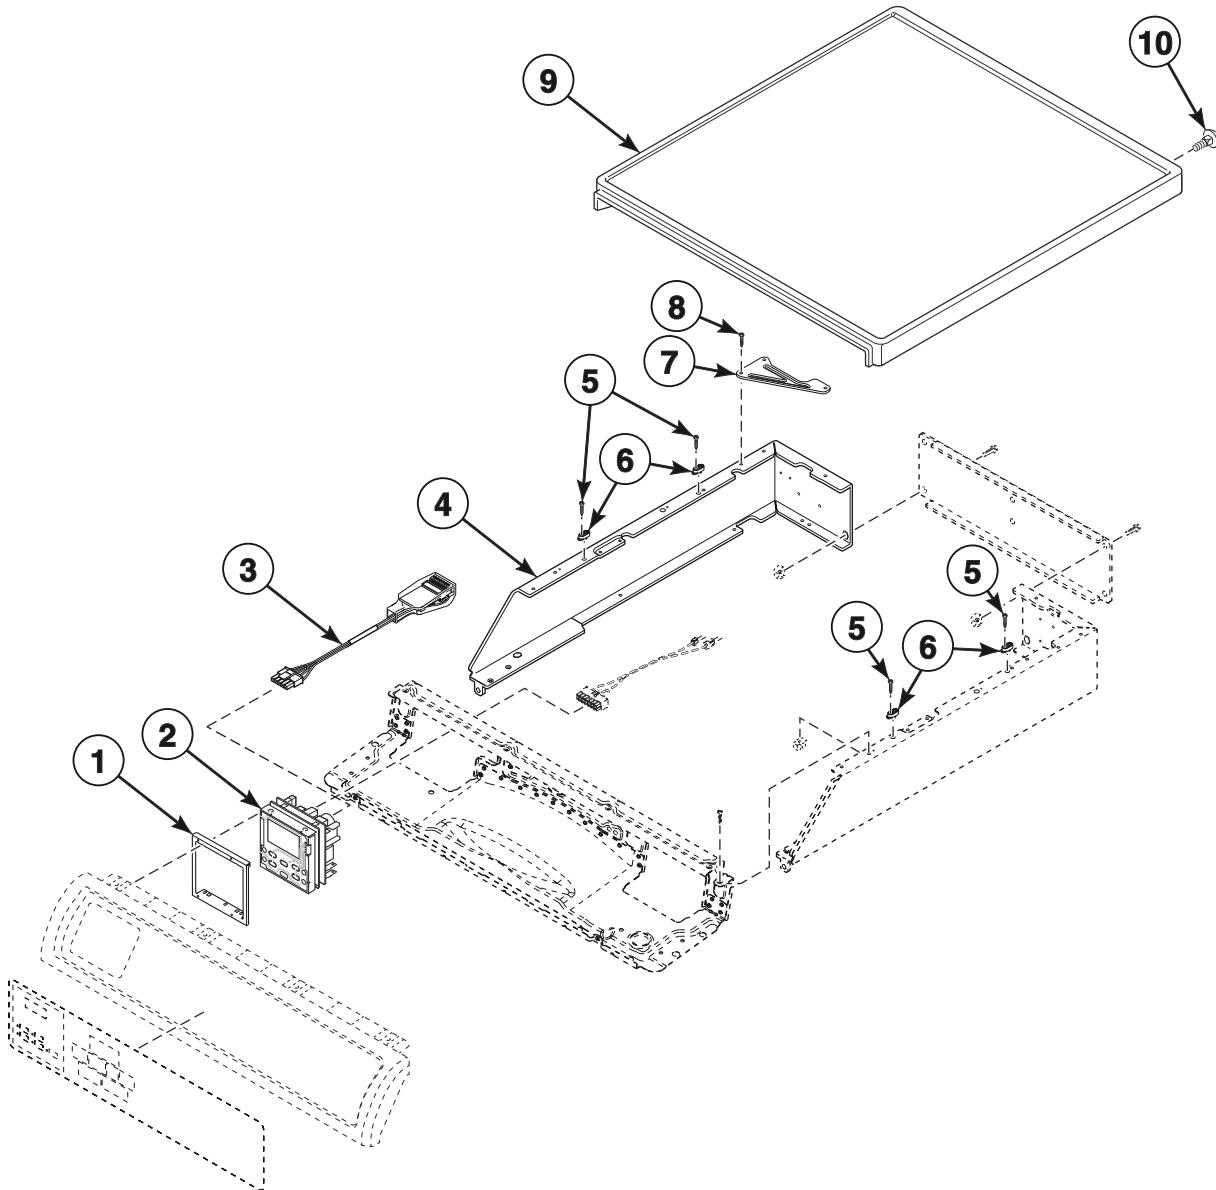


DRY2359P_515203

Control Cabinet - 45 Degree Front Control Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	36226	Bumper Pad	4 required
1	514261	Control Bracket	
2	514138P	Control Assembly	Models HDENYBGS173CW01, HDGNYBGS113CW01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, PD3JGBGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01 and PDGJGBGS543ZG01
	514139P	Control Assembly	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BDGNGBGS303EW01 and BDGNLBGS303EW01
3	203361P	Machine ID Control Assembly	Model or serial number is required when ordering
4	804627W	Control Wrapper	White; Left; Models BD3NGBGS403UW01, BD3NLBGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, HDENYBGS173CW01, HDGNYBGS113CW01, JDEJGBGW303EW01, JDGJGBGW303EW01, ND3NLBGS403NW22 and ND3NLBGS403ZW01
	804627B	Control Wrapper	Black; Left; Models BD3NGBSS403UN01, BD3NLBSS403UN01, JDEJGBSW303EN01, JDGJGBSW303EN01 and ND3NLBSS403UN01
	804627DG	Control Wrapper	Dark gray; Left; Models PD3JGBGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01 and PDGJGBGS543ZG01
5	39733	Screw	4 required
6	803761	Top Panel Guide	4 required
7	805345	Rear Wrapper Brace	2 required
8	503688	Screw	6 required
9	804684	Top Panel	Stainless steel; Models BD3NGBSS403UN01, BD3NLBSS403UN01, JDEJGBSW303EN01, JDGJGBSW303EN01 and ND3NLBSS403UN01
	804685WP	Top Panel	White; Models BD3NGBGS403UW01, BD3NLBGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, HDENYBGS173CW01, HDGNYBGS113CW01, JDEJGBGW303EW01, JDGJGBGW303EW01, ND3NLBGS403NW22 and ND3NLBGS403ZW01
	804685DG	Top Panel	Dark gray; Models PD3JGBGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01 and PDGJGBGS543ZG01
10	29651	Bolt	

Control Cabinet - 45 Degree Front Control Models (Drawing 2 of 2)

Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BDGNGBGS303EW01, BDGNLBGS303EW01, HDENYBGS173CW01, HDGNYBGS113CW01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, PD3JGBGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01 and PDGJGBGS543ZG01

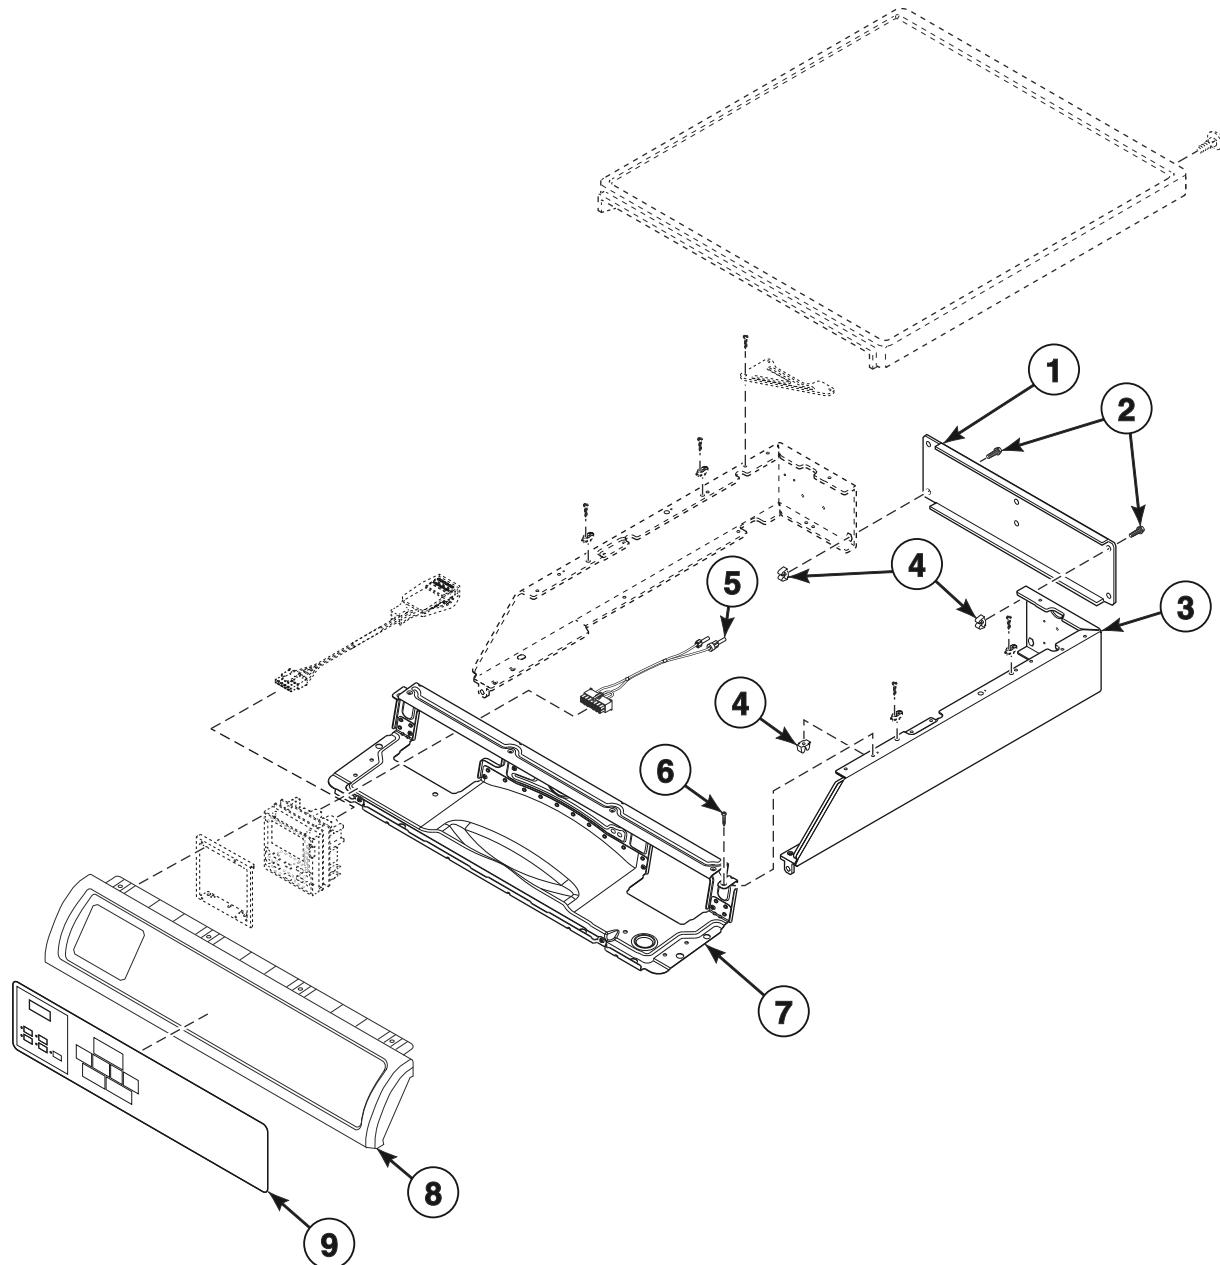


DRY2359PA_515203

Control Cabinet - 45 Degree Front Control Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	36226	Bumper Pad	4 required
1	804614	Rear Access Panel	
2	503688	Screw	
3	804630W	Control Wrapper	White; Right; Models BD3NGBGS403UW01, BD3NLBGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, HDENYBGS173CW01, HDGNYBGS113CW01, JDEJGBGW303EW01, JDGJGBGW303EW01, ND3NLBGS403NW22 and ND3NLBGS403ZW01
	804630B	Control Wrapper	Black; Right; Models BD3NGBSS403UN01, BD3NLBSS403UN01, JDEJGBSW303EN01, JDGJGBSW303EN01 and ND3NLBSS403UN01
	804630DG	Control Wrapper	Dark gray; Right; Models PD3JGBGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01 and PDGJGBGS543ZG01
4	70030501	Expansion Clip	
5	202869	Wiring Harness Assembly	
6	804667	Screw	
7	804613	Top Panel Brace Assembly	
8	514287W	Control Panel Assembly	Models HDENYBGS173CW01 and HDGNYBGS113CW01
	514454	Control Panel Assembly	Models BD3NGBGS403UW01, BD3NLBGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, ND3NLBGS403NW22 and ND3NLBGS403ZW01
	514455	Control Panel Assembly	Models BD3NGBSS403UN01, BD3NLBSS403UN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01 and ND3NLBSS403UN01
	514468	Control Panel Assembly	Models PD3JGBGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01 and PDGJGBGS543ZG01
9	515059	Control Overlay	Models HDENYBGS173CW01 and HDGNYBGS113CW01
	514656	Control Overlay	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BDGNGBGS303EW01 and BDGNLBGS303EW01
	514658	Control Overlay	Models ND3NLBGS403NW22, ND3NLBGS403ZW01 and ND3NLBSS403UN01
	514660	Control Overlay	Models JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJGBGW303EW01 and JDGJGBSW303EN01
	514928	Control Overlay	Models PD3JGBGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01 and PDGJGBGS543ZG01

Loading Door without Window

All Models Except JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01 and JDGJGBSW303EN01

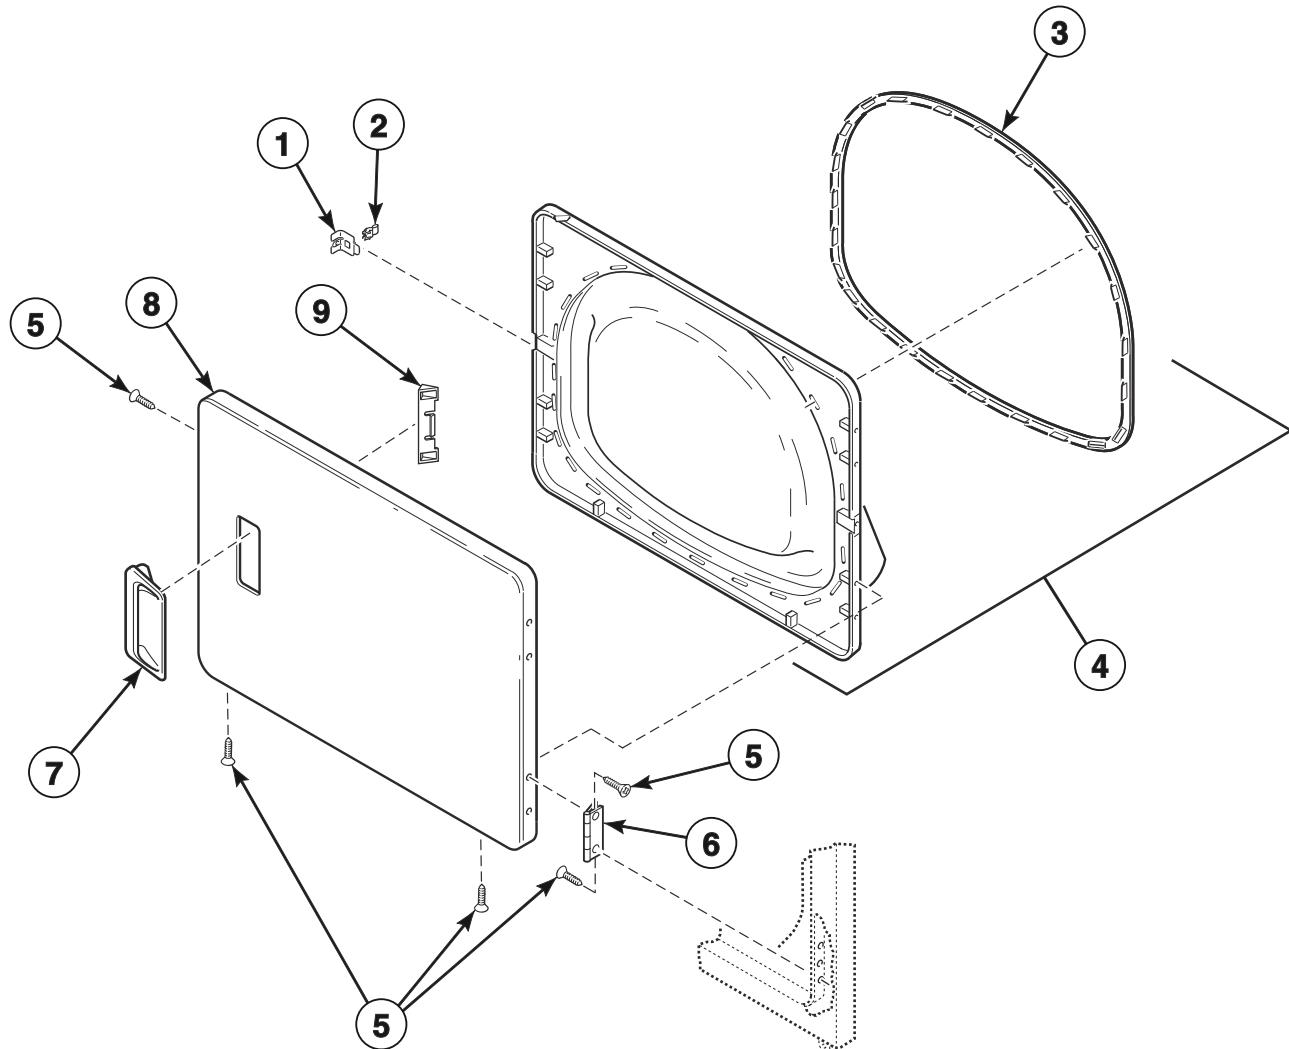


DRY1857P_515203

Loading Door without Window

REF	PART NO.	DESCRIPTION	COMMENTS
1	510127	Door Strike Mount	
2	510181	Door Strike	
3	510147P	Liner Door Seal	
4	513109P	Liner, Seal and Grill Assembly	Gray; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	510163WP	Liner, Seal and Grill Assembly	White; Includes item 3; All other models
5	514461	Screw	
6	511036	Hinge	
7	511213P	Door Pull and Wedge Kit	Black; Includes item 9; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	512947	Door Pull	Light gray; Includes item 9; Models PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	510103WP	Door Pull and Wedge Kit	White; Includes item 9; All other models
8	512969	Dryer Door	Stainless steel; Includes item 9; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	510013DG	Dryer Door	Dark gray; Includes item 9; Models PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	510013WP	Dryer Door	White; All other models
9	510129	Door Handle Wedge	

Loading Door with Window

Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01,
JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01,
JDGJGBGW303EW01 and JDGJGBSW303EN01

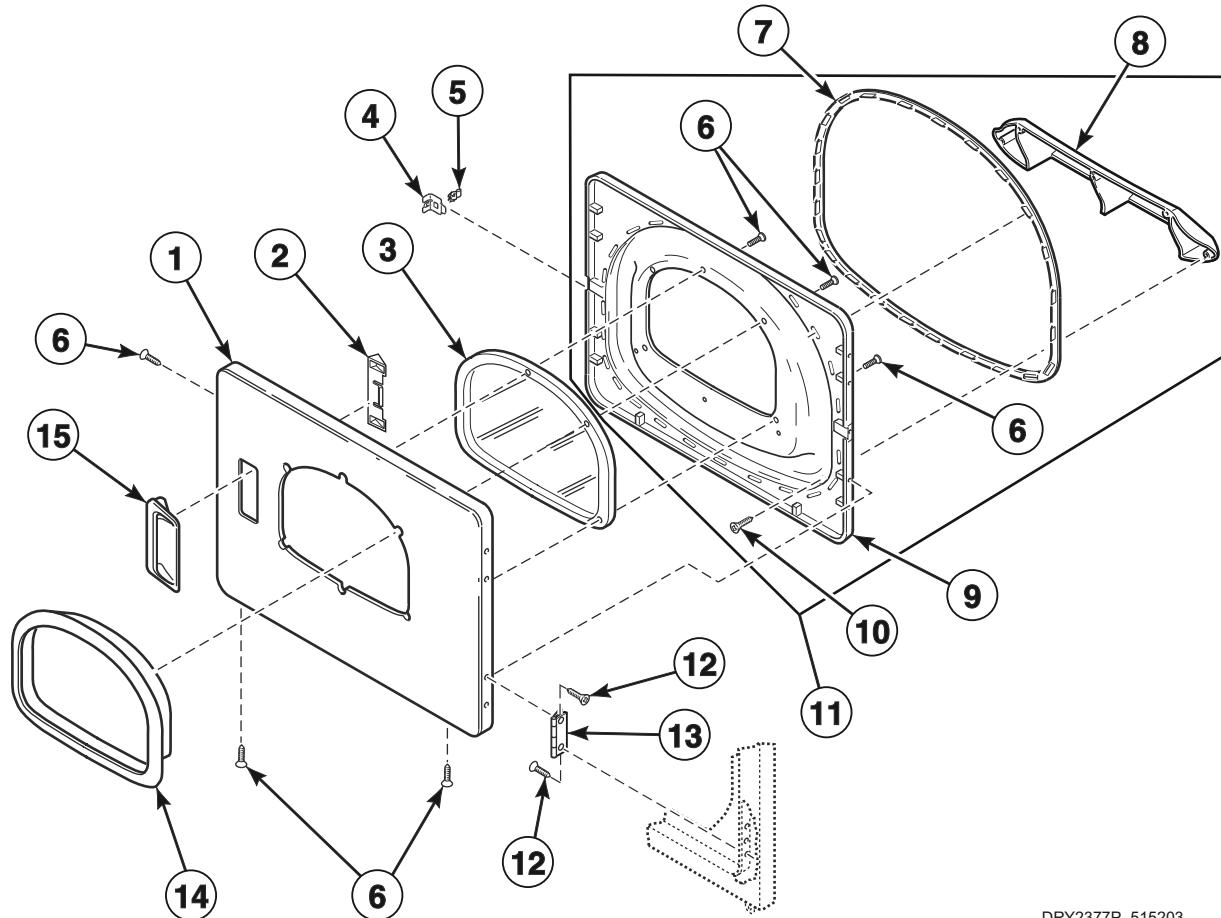


DRY2377P_515203

Loading Door with Window

REF	PART NO.	DESCRIPTION	COMMENTS
1	513225	Dryer Door	Stainless steel; Models JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01 and JDGJGBSW303EN01
	510082WP	Dryer Door	Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGBGW303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01 and JDGJGBGW303EW01
2	510129	Door Handle Wedge	Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGBGW303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01 and JDGJGBGW303EW01
	510129LG	Door Handle Wedge	Models JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01 and JDGJGBSW303EN01
3	503982P	Dryer Door Window	
4	510127	Door Strike Mount	
5	510181	Door Strike	
6	500226	Screw	
7	510147P	Liner Door Seal	
8	503870LG	Door Liner Grill	Models JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01 and JDGJGBSW303EN01
	503870W	Door Liner Grill	Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGBGW303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01 and JDGJGBGW303EW01
9	510098LG	Liner and Seal Assembly	Includes item 7; Models JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01 and JDGJGBSW303EN01
	510098W	Liner and Seal Assembly	Includes item 7; Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGBGW303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01 and JDGJGBGW303EW01
10	505870	Screw	
11	513109P	Liner, Seal and Grill Assembly	Gray; Includes items 7-10; Models JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01 and JDGJGBSW303EN01
12	514461	Screw	
13	511036	Hinge	
14	512633	Window Trim	Gray; Models JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01 and JDGJGBSW303EN01
	503981W	Window Trim	Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGBGW303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01 and JDGJGBGW303EW01
15	512947	Door Pull	Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGBGW303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01 and JDGJGBGW303EW01
	511213P	Door Pull and Wedge Kit	Black; Models JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01 and JDGJGBSW303EN01

Access Panel

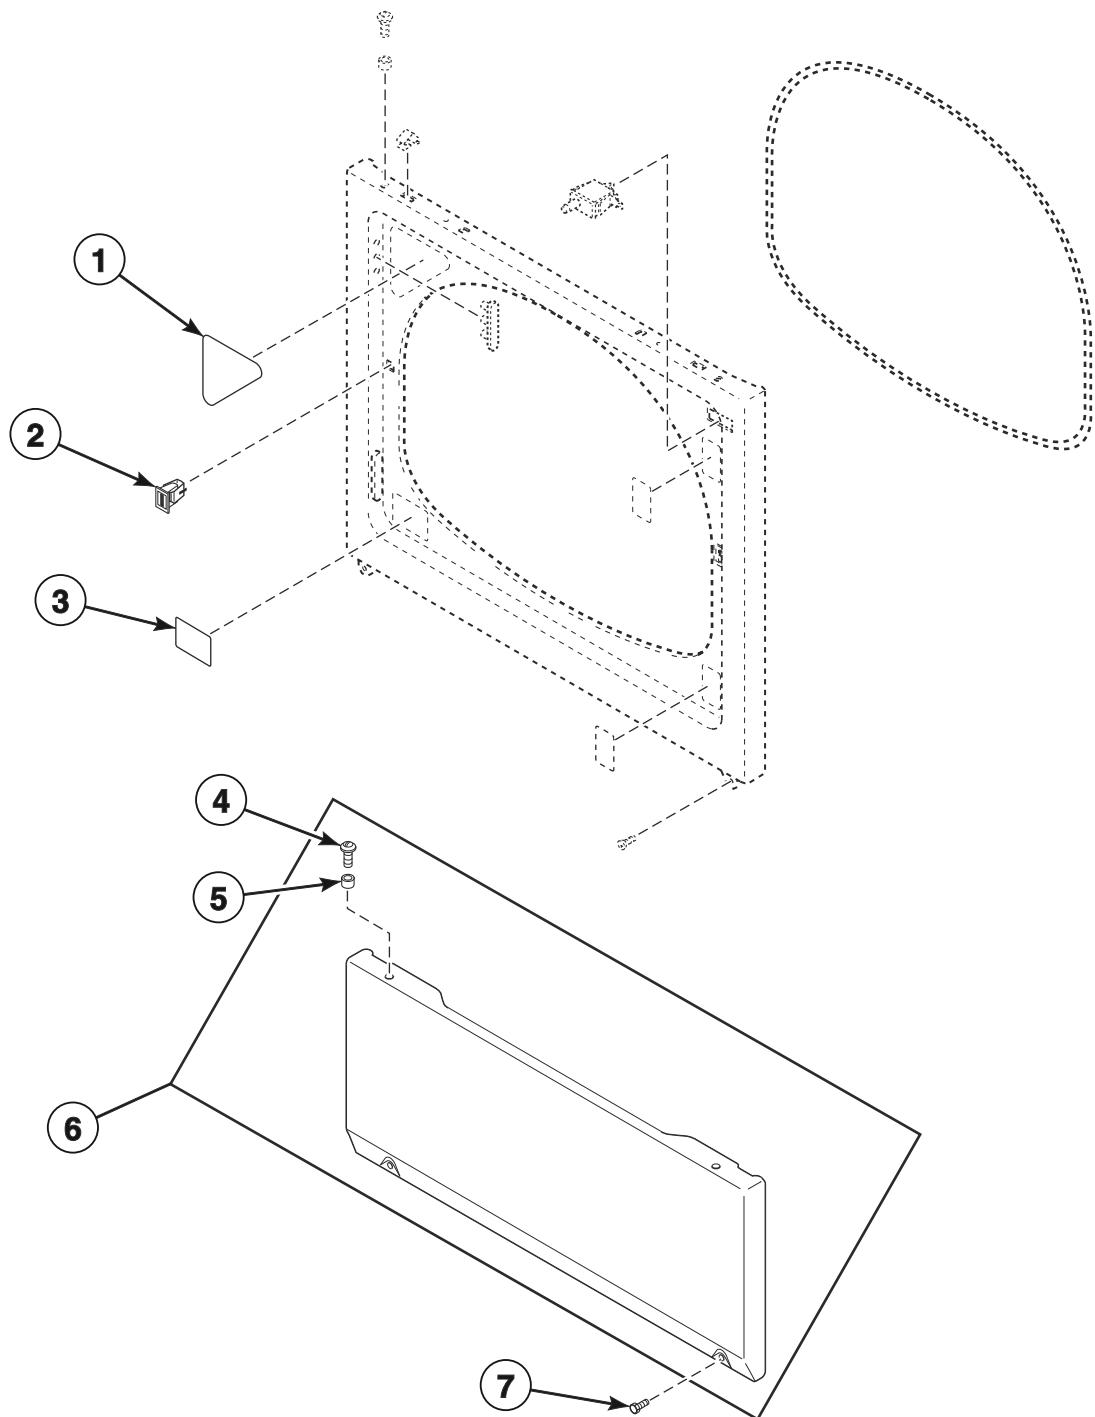


DRY1776P_515203

Access Panel

REF	PART NO.	DESCRIPTION	COMMENTS
1	514226	Warning Label	Models HDENXAGS543DW01, HDGNXAGS123DW01, HDGNXAGS543DW01, SDENXAGS543DW01, SDGNXAGS123DW01 and SDGNXAGS543DW01
	500253	Caution Label	Models HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXRGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01 and HDGNYRGS113CW01
	500281	Warning/Caution Label	All other models
2	510177	Door Catch Assembly	
3	502804	Clean Lint Label	Models SDENXAGS433AW01, SDENXRGS433AW01, SDGNXAGS303AW01 and SDGNXRGS303AW01
	502781	Lint Filter Label	All other models
4	39733	Screw	
5	56079	Panel Locator	
6	514251	Access Panel Assembly	Stainless steel; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01, JDGJGBSW303EN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	514253	Access Panel and Guard Assembly	Stainless steel; Models HDENXAGS173CN01 and HDENXAGW173CN01
	514250DG	Access Panel Assembly	Dark gray; Models PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	514250WP	Access Panel Assembly	White; All other models
7	33562	Screw	
	62853	Screw	Optional for added security

Front Panel and Seal

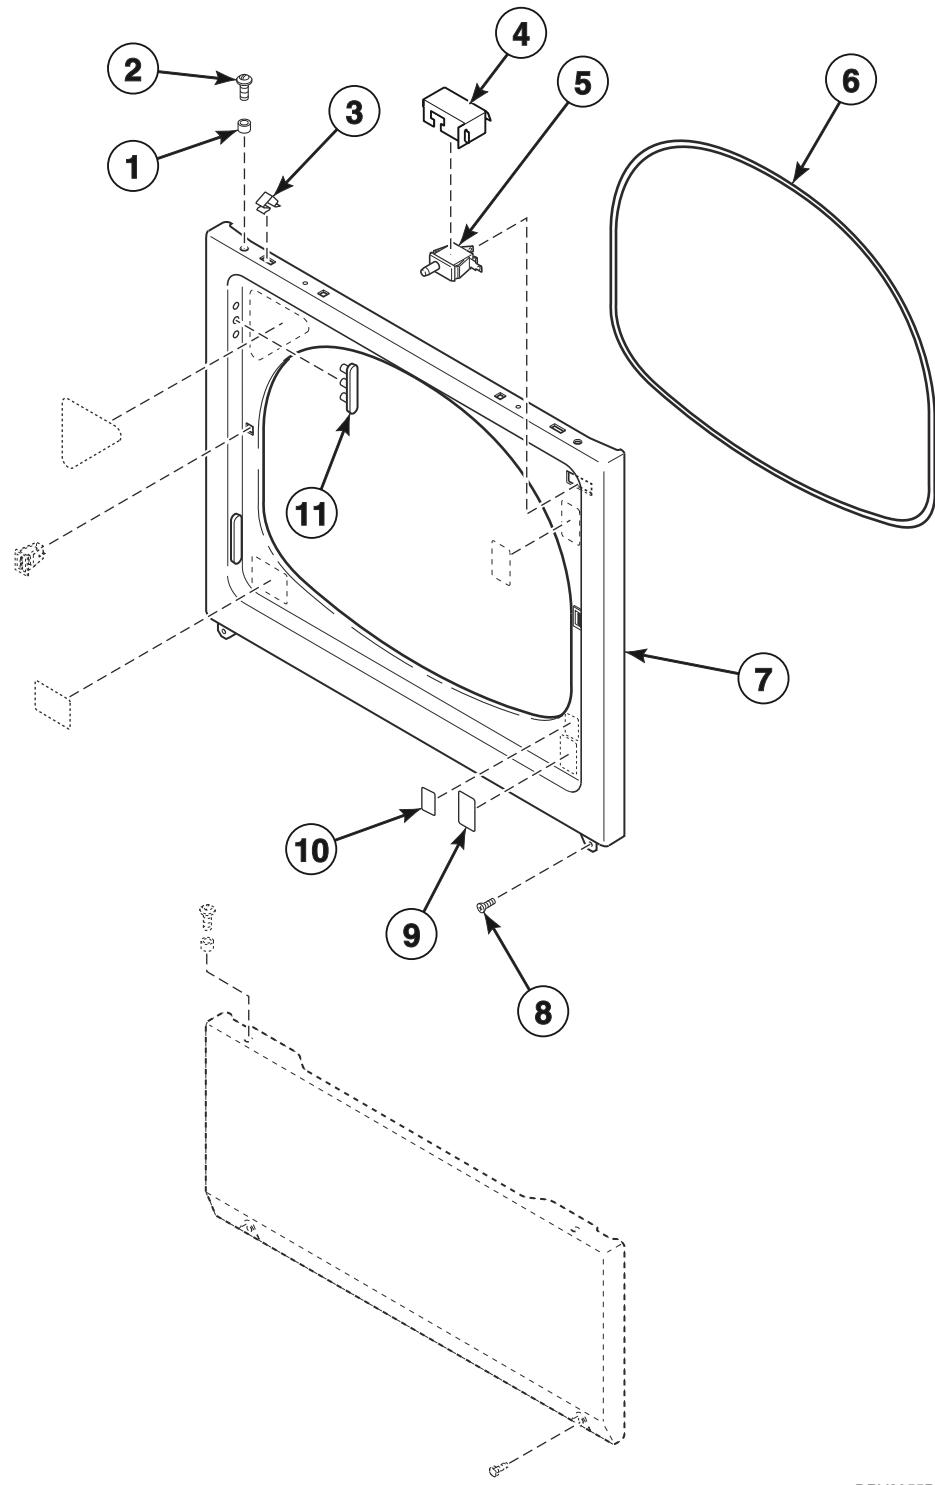


DRY2355P_515203

Front Panel and Seal

REF	PART NO.	DESCRIPTION	COMMENTS
1	56079	Panel Locator	
2	39733	Screw	
3	28835	Speed Clip	
4	514327	Drip Shield	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDENXAGS543DW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS543DW01, SDENYRGS303ZW01, SDGNXAGS123DW01, SDGNXAGS543DW01 and SDLNXRGS543PW01
5	512973	Switch	
6	511056	Front Panel Seal	
7	512542	Front Panel	Stainless steel; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01, JDGJGBSW303EN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	510066DG	Front Panel	Dark gray; Models PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	510066WP	Front Panel	White; All other models
8	M405188	Screw	Use with stainless steel side panels
	503688	Screw	Use with painted side panels
9	512263	Warning Label	Models SDENXAGS433AW01, SDENXRGS433AW01, SDGNXAGS303AW01 and SDGNXRGS303AW01
10	503887	Label	Models SDGNXAGS303AW01 and SDGNXRGS303AW01
11	510186	Hinge Hole Plug	


Motor and Belt

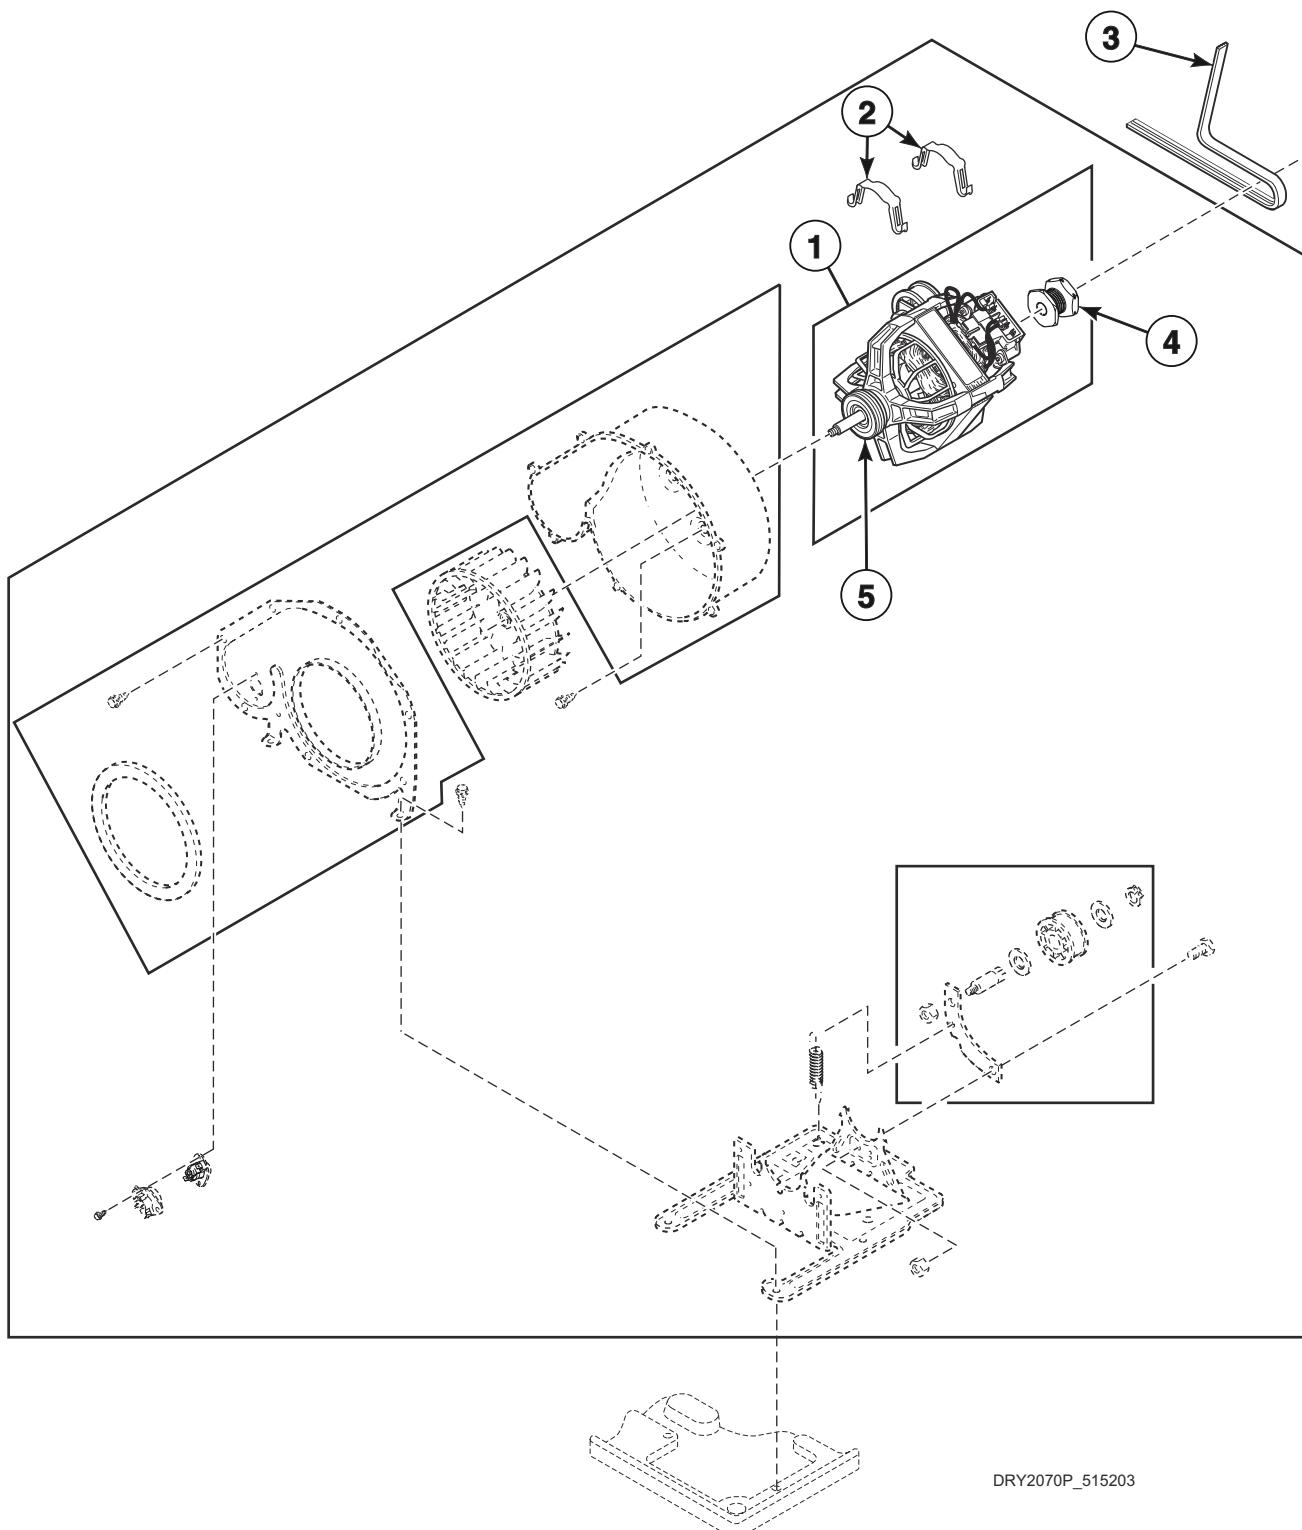

Motor and Belt

REF	PART NO.	DESCRIPTION	COMMENTS
	27604P	Anti-Seize Compound	Apply to motor shaft when installing blower fan assembly
1	505843P	Motor and Pulley Assembly	240 Volt/50 Hertz; Includes items 4-5; Apply anti-seize compound to motor shaft when installing blower fan assembly; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JGBGS403UG01, PDEJGBGS303UG01, PDGJGBGS303UG01, PDGJXAGS303UG01, SDENXAGS433AW01, SDENXRGS433AW01, SDENYRGS303NW22, SDENYRGS303ZW01, SDGNXAGS303AW01 and SDGNXRGS303AW01
	505869P	Motor and Pulley Assembly	240 Volt/60 Hertz; Includes items 4-5; Apply anti-seize compound to motor shaft when installing blower fan assembly; Models HDENXAGS543DW01, HDGNXAGS543DW01, PDEJGBGS543ZG01, PDGJGBGS543ZG01, PDGJXAGS543ZG01, SDENXAGS543DW01, SDGNXAGS543DW01, SDLNXRGS543NW23 and SDLNXRGS543PW01
	511629P	Motor and Pulley Assembly	120 Volt/60 Hertz; Includes items 4-5; Apply anti-seize compound to motor shaft when installing blower fan assembly; All other models
2	510180	Motor Mount Clamp	
3	511255P	Cylinder Belt	
4	500222	Motor Pulley	Use with 505843P Motor and Pulley Assembly; 50 Hertz; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDGJGBGS303UG01, PDGJXAGS303UG01, SDENXAGS433AW01, SDENXRGS433AW01, SDENYRGS303ZW01, SDGNXAGS303AW01 and SDGNXRGS303AW01
	500011	Motor Pulley	Use with 511629P and 505869P Motor and Pulley Assembly; 60 Hertz; All other models
5	590P3	Motor Hub Ring Kit	

Exhaust Fan and Idler

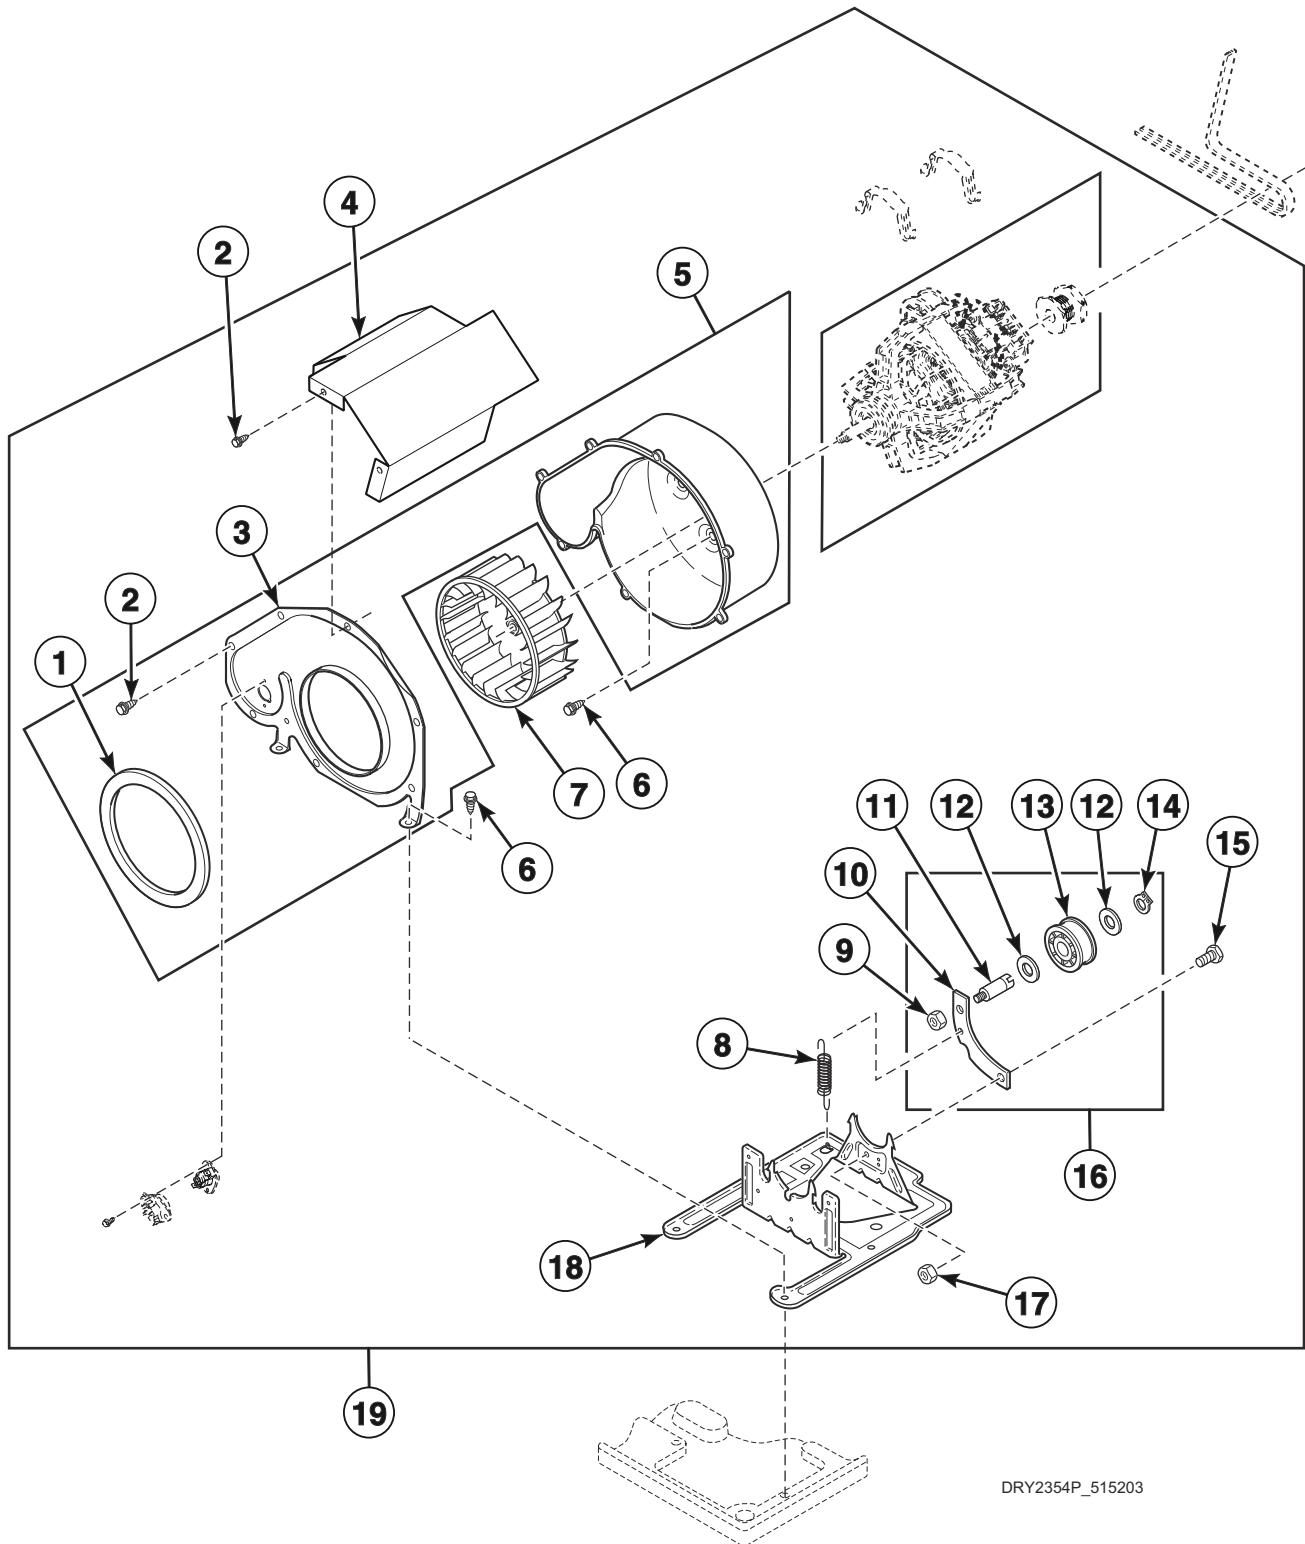


DRY2354P_515203

Exhaust Fan and Idler

REF	PART NO.	DESCRIPTION	COMMENTS
	27604P	Anti-Seize Compound	Apply to motor shaft when installing blower fan assembly
1	510238P	Blower Housing Seal	
2	31260	Screw	
3	511970	Blower Housing Cover	
4	514602	Motor Shield	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDENXAGS543DW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01, PDGXAGS543ZG01, SDENXAGS543DW01, SDENYRGS303ZW01, SDGNXAGS123DW01, SDGNXAGS543DW01 and SDLNXRGS543PW01
5	511969WP	Blower Housing	White; Includes items 1-3
	511969LG	Blower Housing	Gray; Includes items 1-3
6	503688	Screw	
7	510139P	Blower Fan Assembly	Apply anti-seize compound to motor shaft when installing blower fan assembly
8	510185	Idler Spring	
9	56156	Nut	
10	510133	Idler Lever	
11	56461P	Shaft	
12	52549	Washer	
13	510142P	Idler Wheel and Bearing Assembly	
14	23748	Retaining Ring	
15	500824	Screw	
16	510158	Idler Lever and Wheel Assembly	Includes items 9-14
17	52566	Nut	
18	510060	Motor Mount	
19	510717P	Blower and Fan Kit	Includes items 1, 2, 3 and 5-18, motor mount clamp, motor hub rings and motor and pulley assembly; Models HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXRGSG153CW01, HDENXRGSG173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDENYRGS173CW01, HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGSG113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01, HDGNYRGS113CW01, ND3NLBSS403UN01 and SDENXAGS543DW01

Thermistor

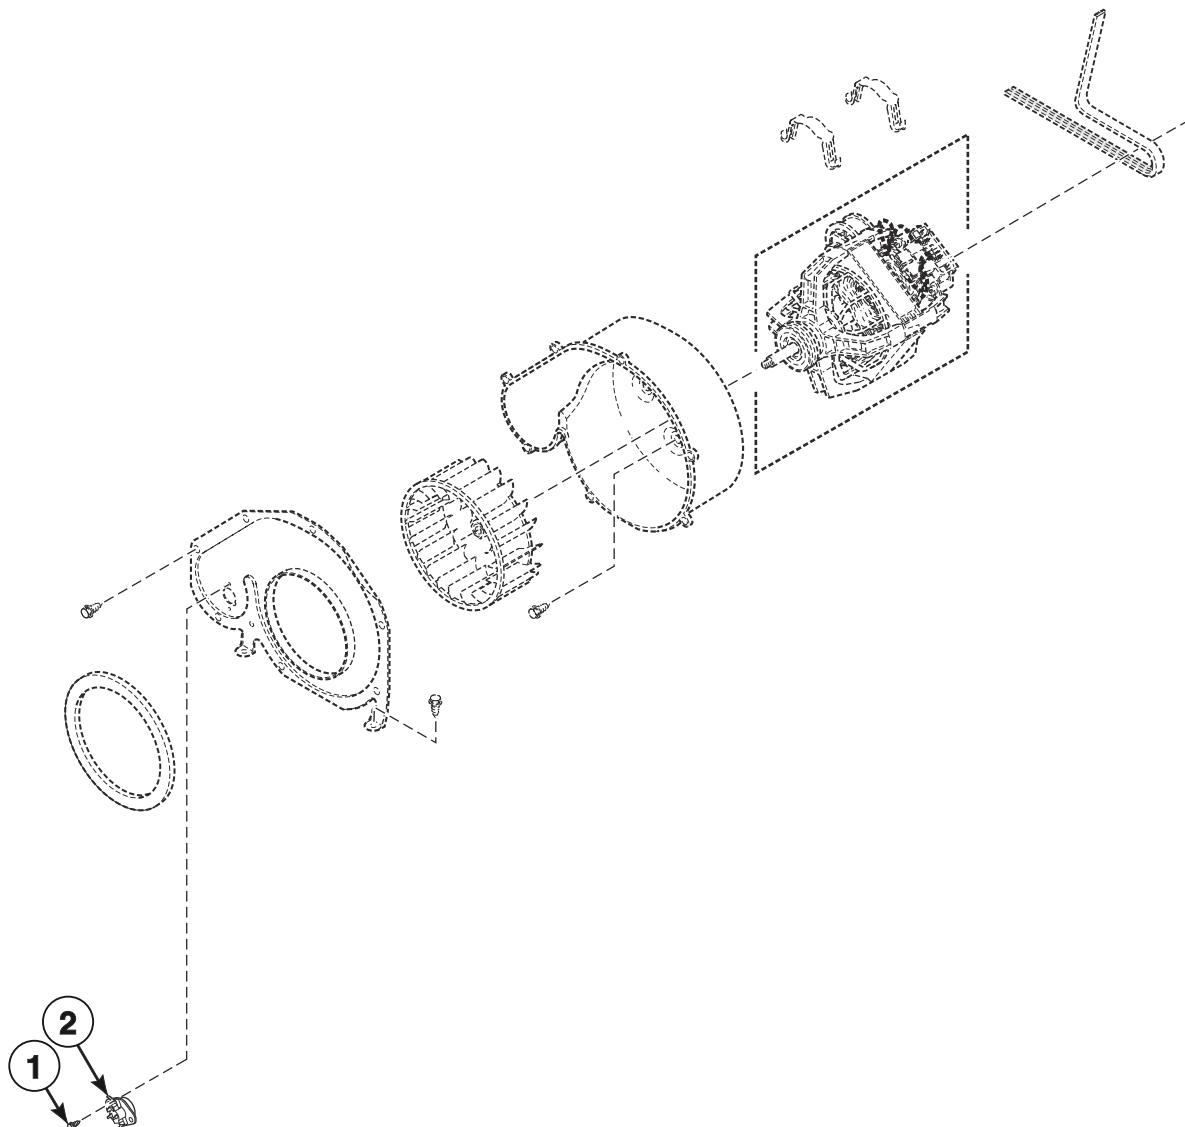


DRY2397P_515203

Thermistor

REF	PART NO.	DESCRIPTION	COMMENTS
1	502535	Screw	
2	502366	Thermistor Assembly	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDGJGBGS303UG01, PDGXAGS303UG01, SDENXAGS433AW01, SDENXRGS433AW01, SDENYRGS303NW22, SDENYRGS303ZW01, SDGNXAGS303AW01 and SDGNXRGS303AW01
	510523	Thermistor Assembly	All other models

Front Bulkhead, Air Duct and Felt Seal

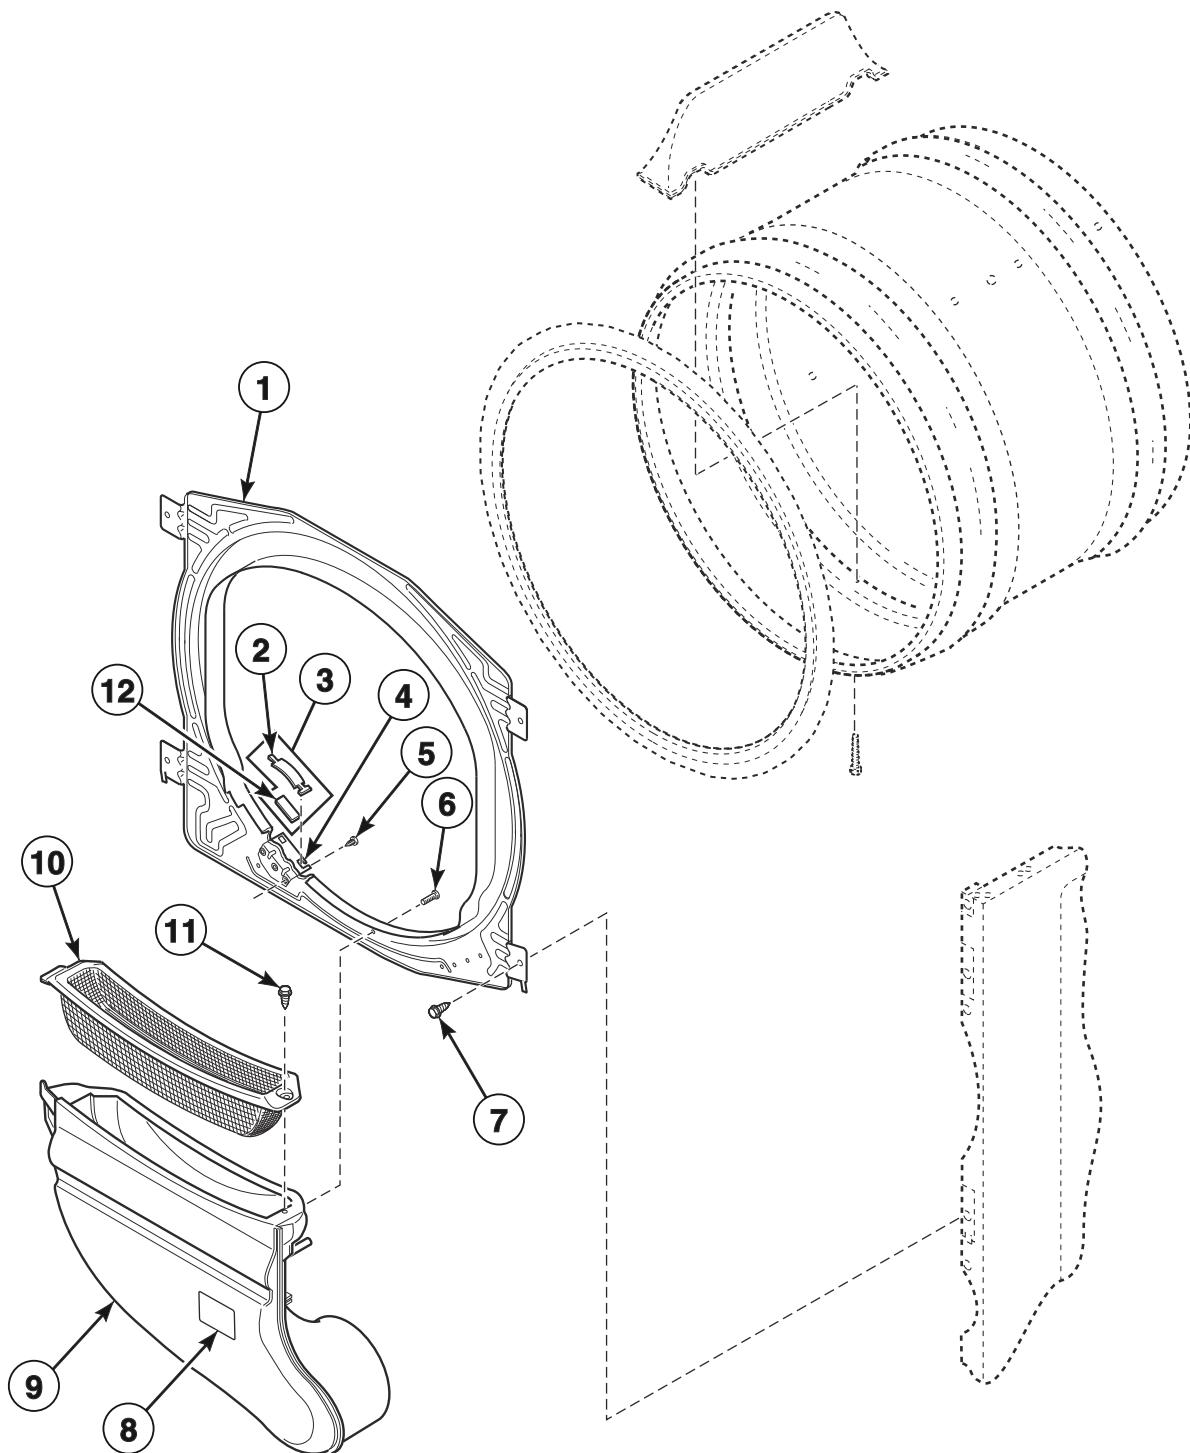


DRY1910P_515203

Front Bulkhead, Air Duct and Felt Seal

REF	PART NO.	DESCRIPTION	COMMENTS
1	510266P	Front Bulkhead Assembly	Unpainted; Includes 510207P Cylinder Seal Assembly and items 2-5 and 12
2	513710	Cylinder Glide	
3	RB170003	Glide Kit	Includes items 2 and 12; Quantity: 2 of each item
4	510145	Cylinder Glide Bracket	
5	52864	Screw	
6	514461	Screw	
7	503688	Screw	
8	F8211201	Electrical Shock Label	All models except HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXRGS153CW01, HDENXRGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01 and HDGNYRGS113CW01
	F8211301	Pinched Fingers Label	All models except HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXRGS153CW01, HDENXRGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01 and HDGNYRGS113CW01
	500049	Warning Label	Models SDENXAGS433AW01, SDENYRGS303NW22, SDENYRGS303ZW01, SDGNXAGS303AW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01
	44127701	Warning Label	Models HDENXAGS173CN01, HDENXAGW173CN01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, HDGNYAGS113CW01 and HDGNYBGS113CW01
	500314	Warning Label	All other models
9	510151LG	Air Duct Assembly	Light gray; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGBSW303EN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	510151W	Air Duct Assembly	White; All other models
10	503980LG	Lint Filter	Light gray; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGBSW303EN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	503980W	Lint Filter	White; All other models
11	501285	Screw	
12	510189	Felt Pad	

Cylinder Assembly

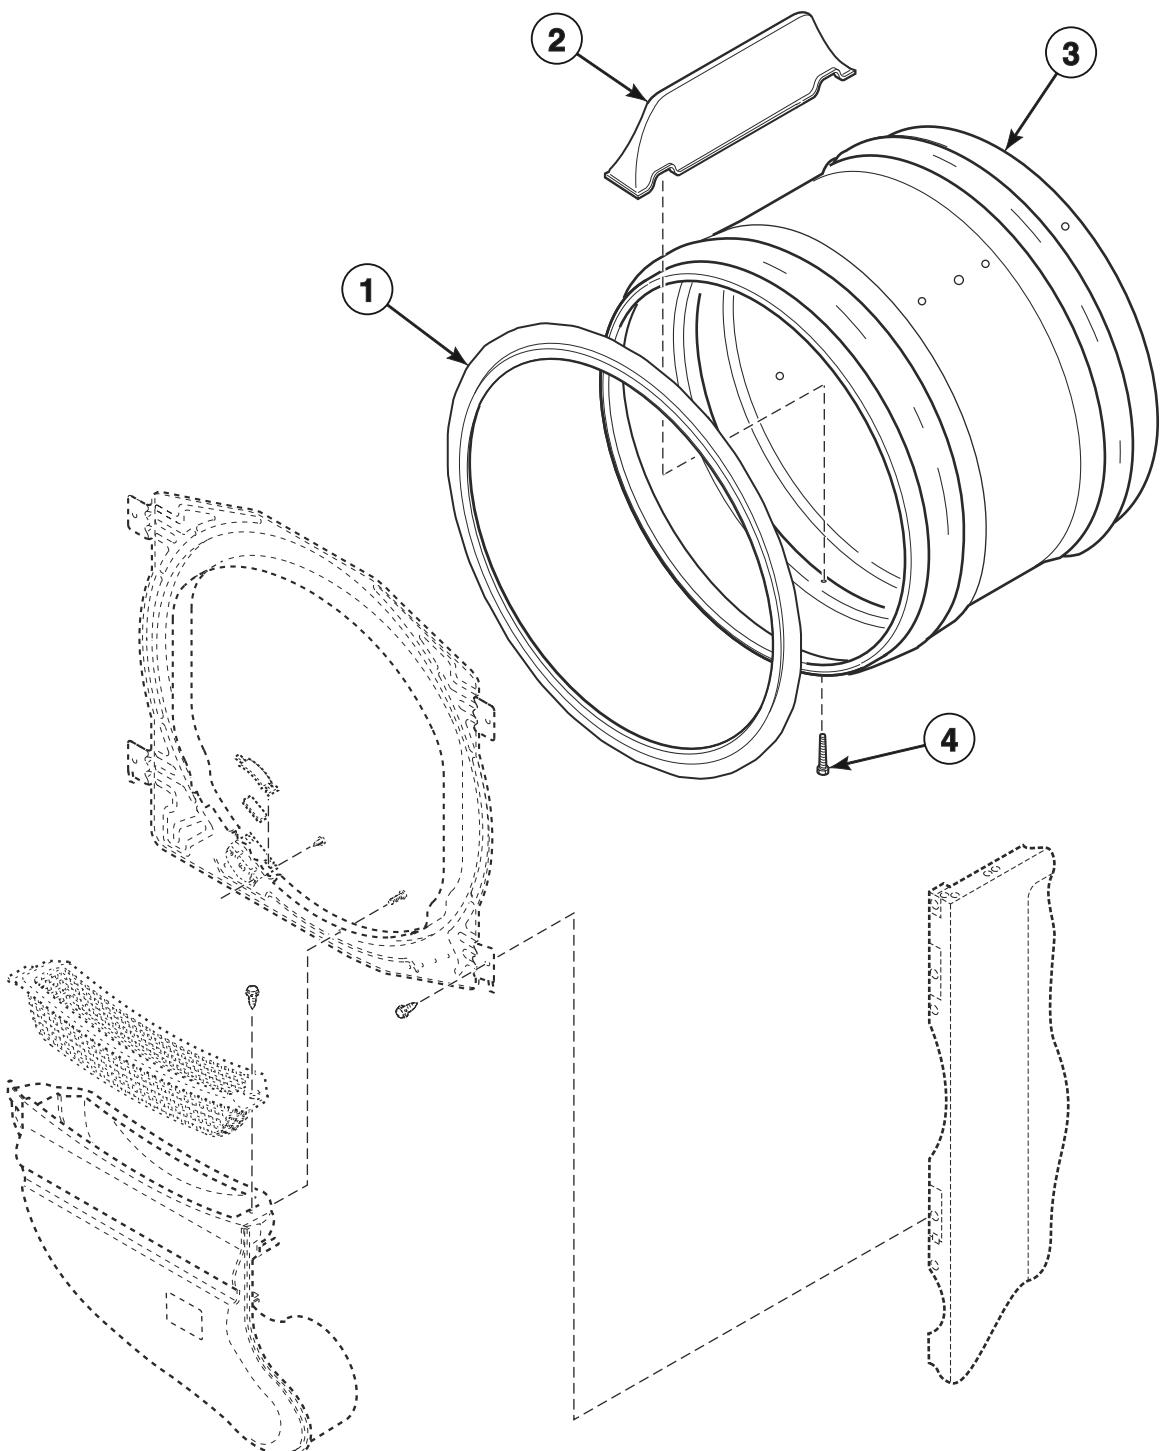


DRY1910PA_515203

Cylinder Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	510207P	Cylinder Seal Assembly	Apply adhesive when installing
	511637P	Adhesive	Apply to cylinder seal
	RB170001	Seal Kit	Includes 2 cylinder seals, 510238P Blower Housing Seal and 511637P Adhesive
2	510102LG	Cylinder Baffle	Light gray; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGASW303EN01, JDEJGASW303EN01, JDGJGBSW303EN01, JDGJGBSW303EN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	510102W	Cylinder Baffle	White; All other models
3	505929LGP	Cylinder Assembly	Stainless steel; Includes item 2; Models BD3NGBSS403UN01, BD3NLBSS403UN01, JDEJGASW303EN01, JDEJGASW303EN01, JDGJGBSW303EN01, JDGJGBSW303EN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	510265LGP	Cylinder Assembly	Galvanized; Includes item 2; Models HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGS153CW01, HDENXAGW173CN01, HDENXAGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDGNXAGS113CN01 and HDGNXAGW113CN01
4	510265WP	Cylinder Assembly	Galvanized; Includes item 2; All other models
	62588	Screw	

Rear Bulkhead, Felt Seal and Cylinder Roller

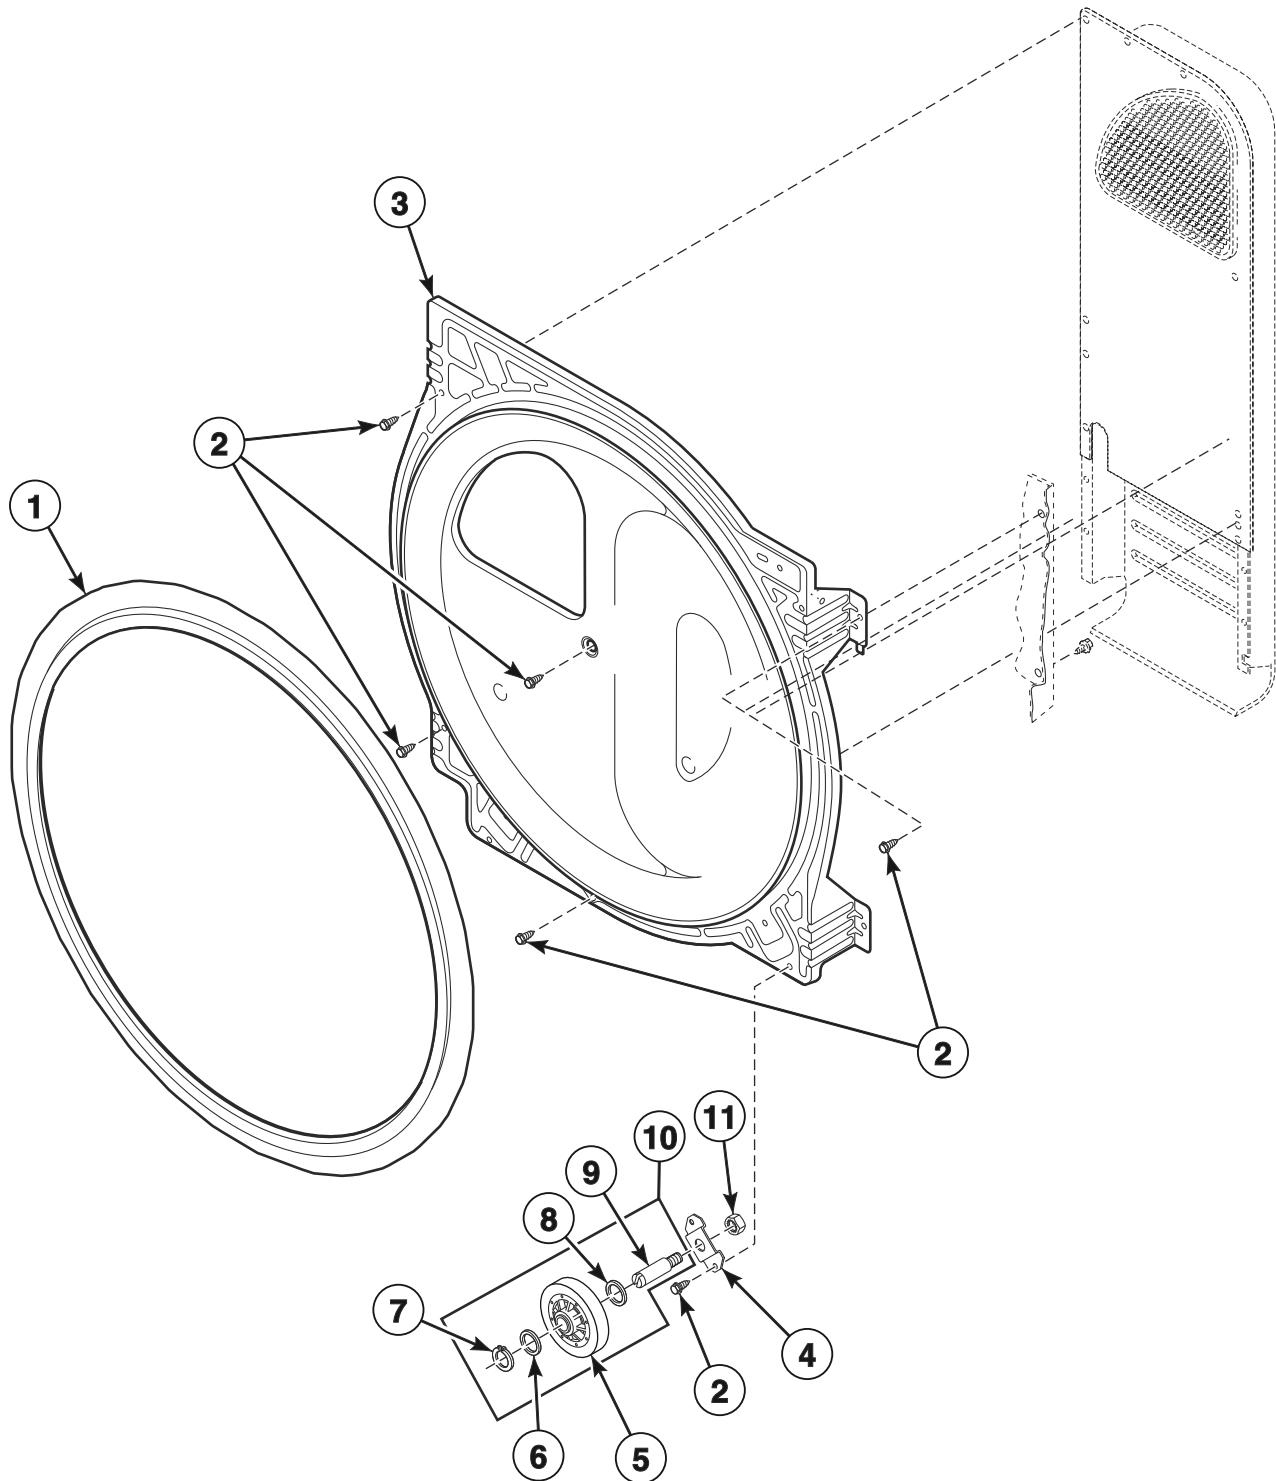


DRY2138P_515203

Rear Bulkhead, Felt Seal and Cylinder Roller

REF	PART NO.	DESCRIPTION	COMMENTS
1	510207P	Cylinder Seal Assembly	Apply adhesive when installing
	511637P	Adhesive	Apply to cylinder seal
	RB170001	Seal Kit	Includes 2 cylinder seals, 510238P Blower Housing Seal and 511637P Adhesive
2	M405188	Screw	Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01, JDGJGBSW303EN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	503688	Screw	All other models
3	505246	Rear Bulkhead Assembly	Stainless steel; Includes item 1; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGASW303EN01, JDEJGBSW303EN01, JDGJGASW303EN01, JDGJGBSW303EN01, ND3NLBSS403UN01 and ND3NXASS403UN01
	511082P	Rear Bulkhead Assembly	Galvanized; Includes item 1; All other models
4	510100	Cylinder Roller Bracket	
5	510708P	Cylinder Roller	
6	52549	Washer	
7	23748	Retaining Ring	
8	504082	Washer	
9	56461P	Shaft	
10	RB170002	Roller Kit	Includes items 5-9
11	56156	Nut	

Terminal Block - Gas and 1 Phase Electric Models

Models HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGS543DW01, HDENXRG5153CW01, HDENXRG5173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, HDGNYBGS113CW01, JDEJEAGW303EW01, JDEJAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJGAGW303EW01, JDGJGASW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRG5173AW01 and SDENYRGS303ZW01

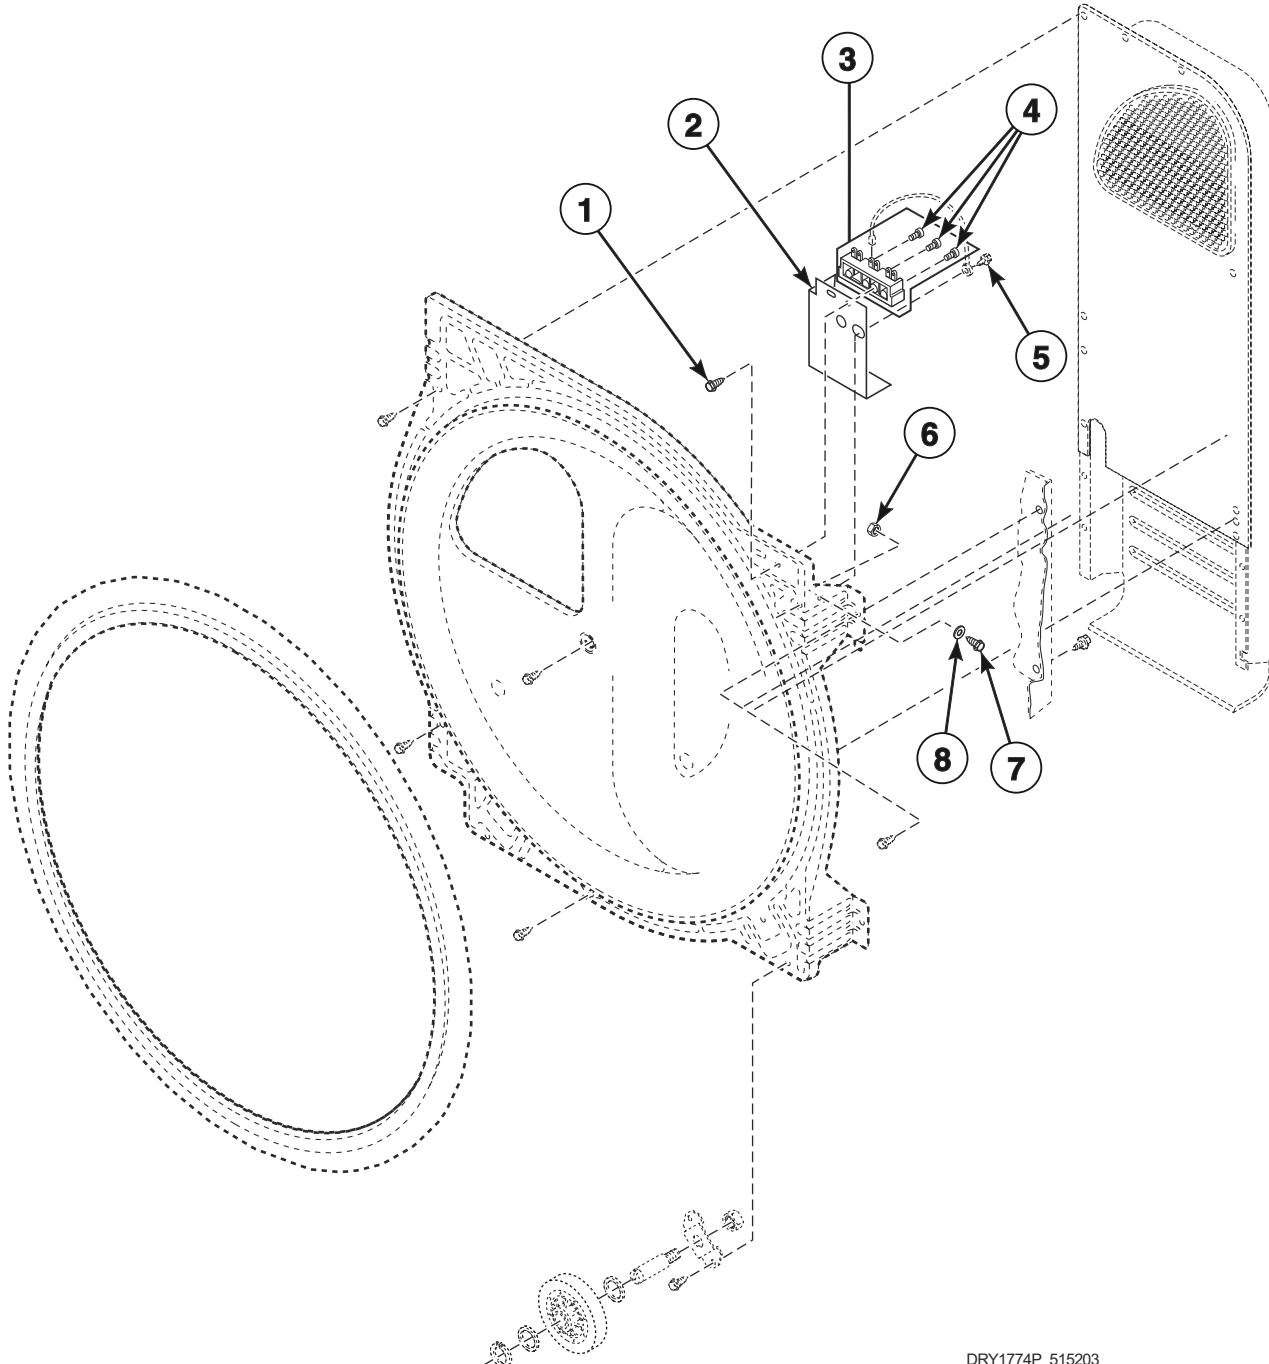


DRY1774P_515203

Terminal Block - Gas and 1 Phase Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	501285	Screw	
2	514330	Terminal Block Shield	Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJGASW303EN01, NDENXAGSS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS543DW01, SDENXRGS433AW01 and SDENYRGS303ZW01
	510237	Terminal Block Shield	All other models
3	510190P	Terminal Block Assembly	Includes 3 of item 4
4	61199	Screw	
5	503688	Screw	
6	28447	Nut	
7	28448	Screw	
8	28449	Washer	

Terminal Block - 3 Phase Electric Models

Model ND3NLBGS403NW22

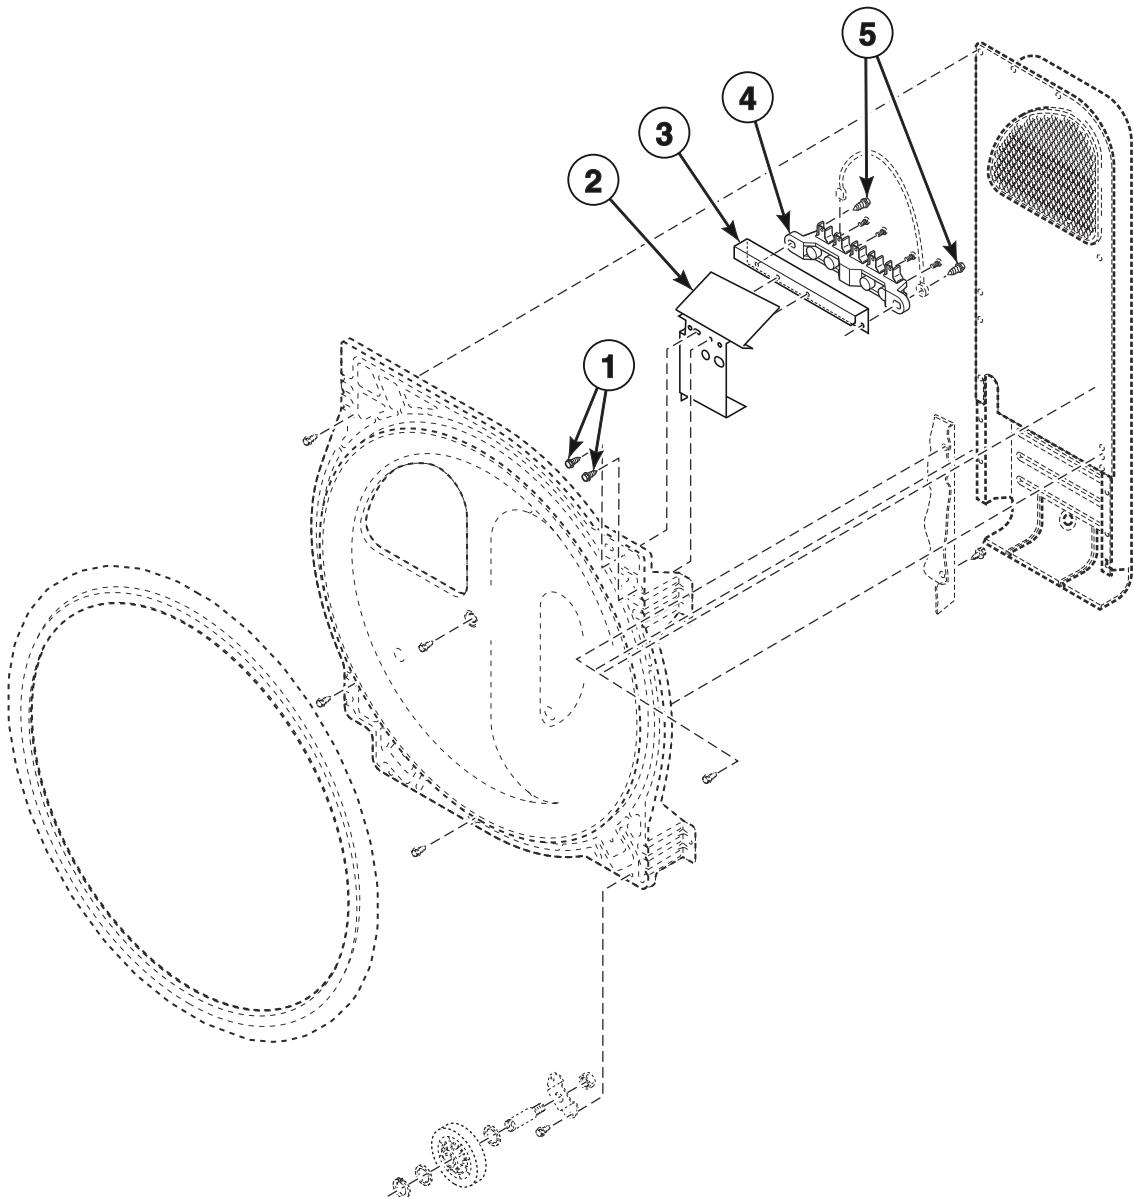


DRY9B_515203

Terminal Block - 3 Phase Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	20530	Screw	
2	514330	Terminal Block Shield	
3	505875	Terminal Block Support Bracket	
4	505876	Terminal Block Assembly	
5	503661	Screw	

Heater Duct Assembly - 3 Phase Electric Models

Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01,
BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01,
ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01

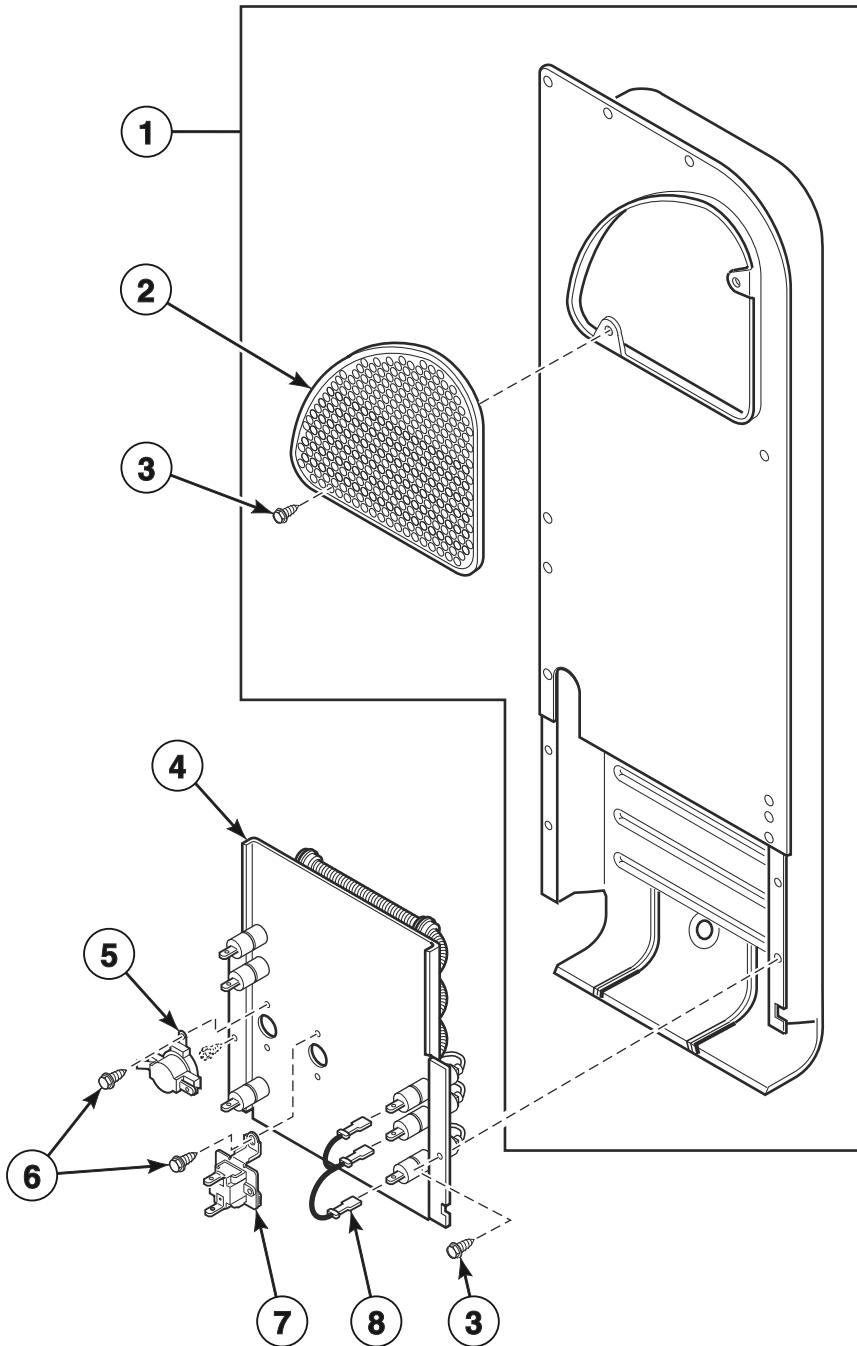


DRY2360P_515203

Heater Duct Assembly - 3 Phase Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
	756P3	Conversion Kit	400 Volt, 4 wire WYE to 240 Volt, 3 wire Delta
1	510025P	Heater Duct and Screw Assembly	Includes items 2 and 3
2	500820	Outlet Cover	
3	503688	Screw	
4	511014P	Heater	400 Volt/3 Phase
5	510701	Limit Thermostat	
6	23222	Screw	
7	511412	Thermal Fuse Assembly	
8	511270	Jumper Wire Assembly	3 Phase

Heater Duct and Element Assembly - 1 Phase Electric Models

Models HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXAGS543DW01, HDENXRG5153CW01, HDENXRG5173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01, HDENYRGS173CW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRG543AW01, SDENYRGS303NW22 and SDENYRGS303ZW01

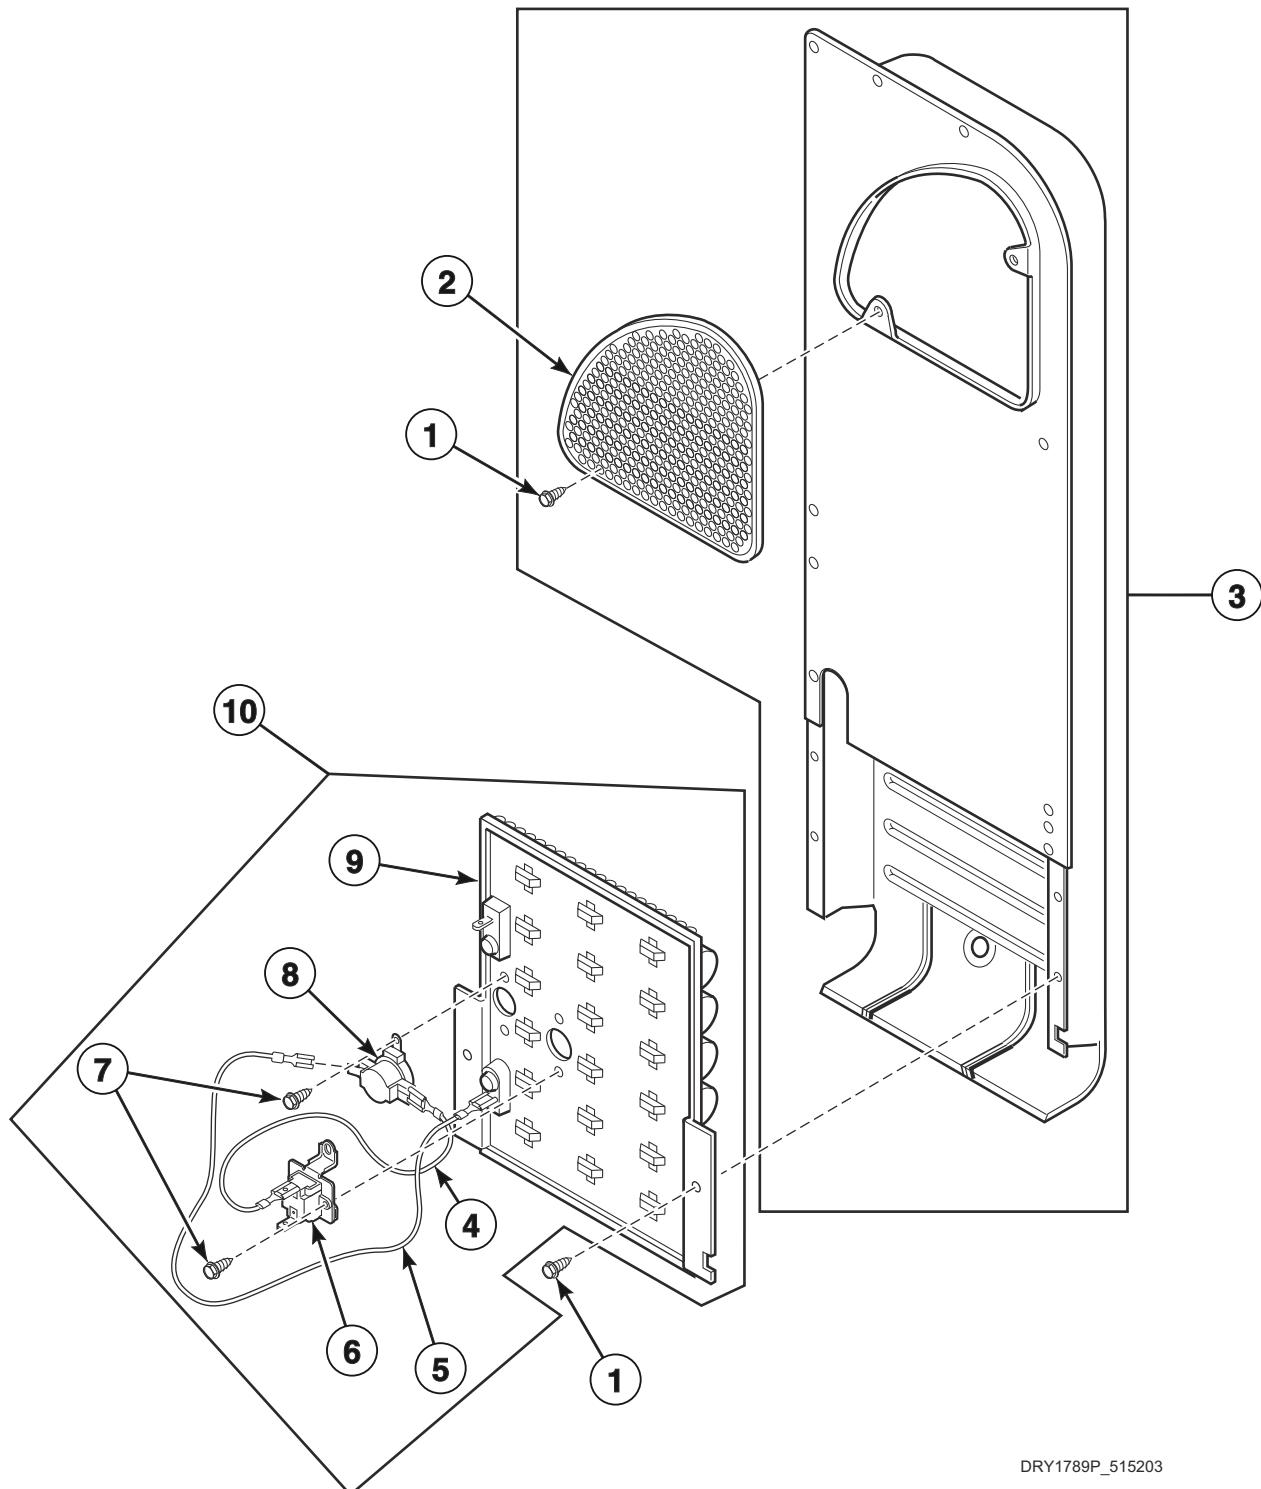


DRY1789P_515203

Heater Duct and Element Assembly - 1 Phase Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	503688	Screw	
2	514475	Outlet Cover	Models SDENXAGS433AW01 and SDENXRGS433AW01
	500820	Outlet Cover	All other models
3	510025P	Heater Duct and Screw Assembly	Includes items 1 and 2
4	510528	Wire Assembly	Orange; Thermostat jumper; Attaches to heater assembly
5	510527	Wire Assembly	Black; Fuse jumper; Attaches to heater assembly
6	511412	Thermal Fuse Assembly	
7	23222	Screw	
8	510701	Limit Thermostat	
9	510324P	Heater Assembly	240 Volt/60 Hertz; 5 kW; Models HDENEAGS173CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS173CW01, HDENXRGS173CW01, HDENYAGS173CW01, HDENYBGS173CW01 and HDENYRGS173CW01
	510329P	Heater Assembly	240 Volt/60 Hertz; 5.35 kW; Models HDENXAGS543DW01, PDEJGBGS543ZG01 and SDENXAGS543DW01
	510330P	Heater Assembly	208 Volt/60 Hertz; 4.25 kW; Models HDENEAGS153CW01, HDENERGS153CW01, HDENXAGS153CW01, HDENXRGS153CW01, HDENYAGS153CW01 and HDENYRGS153CW01
	510326P	Heater Assembly	240 Volt/50 Hertz; 4.8 kW; Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, SDENYRGS303NW22 and SDENYRGS303ZW01
	510327P	Heater Assembly	240 Volt/50 Hertz; 4 kW; Models SDENXAGS433AW01 and SDENXRGS433AW01
10	965P3	Heater Kit	208 Volt/60 Hertz; 4.25 kW; Includes items 4-9; Models HDENEAGS153CW01, HDENERGS153CW01, HDENXAGS153CW01, HDENXRGS153CW01, HDENYAGS153CW01 and HDENYRGS153CW01
	61927	Heater Kit Assembly	240 Volt/60 Hertz; 5 kW; Includes items 4-9; Models HDENEAGS173CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS173CW01, HDENXRGS173CW01, HDENYAGS173CW01, HDENYBGS173CW01 and HDENYRGS173CW01
	964P3	Heater Kit	240 Volt/60 Hertz; 5.35 kW; Models HDENXAGS543DW01, PDEJGBGS543ZG01 and SDENXAGS543DW01
	61929	Heater Kit Assembly	240 Volt/50 Hertz; 4.8 kW; Includes items 4-9; Models JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, SDENYRGS303NW22 and SDENYRGS303ZW01
	61930	Heater Kit Assembly	240 Volt/50 Hertz; 4 kW; Includes items 4-9; Models SDENXAGS433AW01 and SDENXRGS433AW01

Heater Duct Assembly - Gas Models

Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01, HDGNYRGS113CW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01, PDGXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01

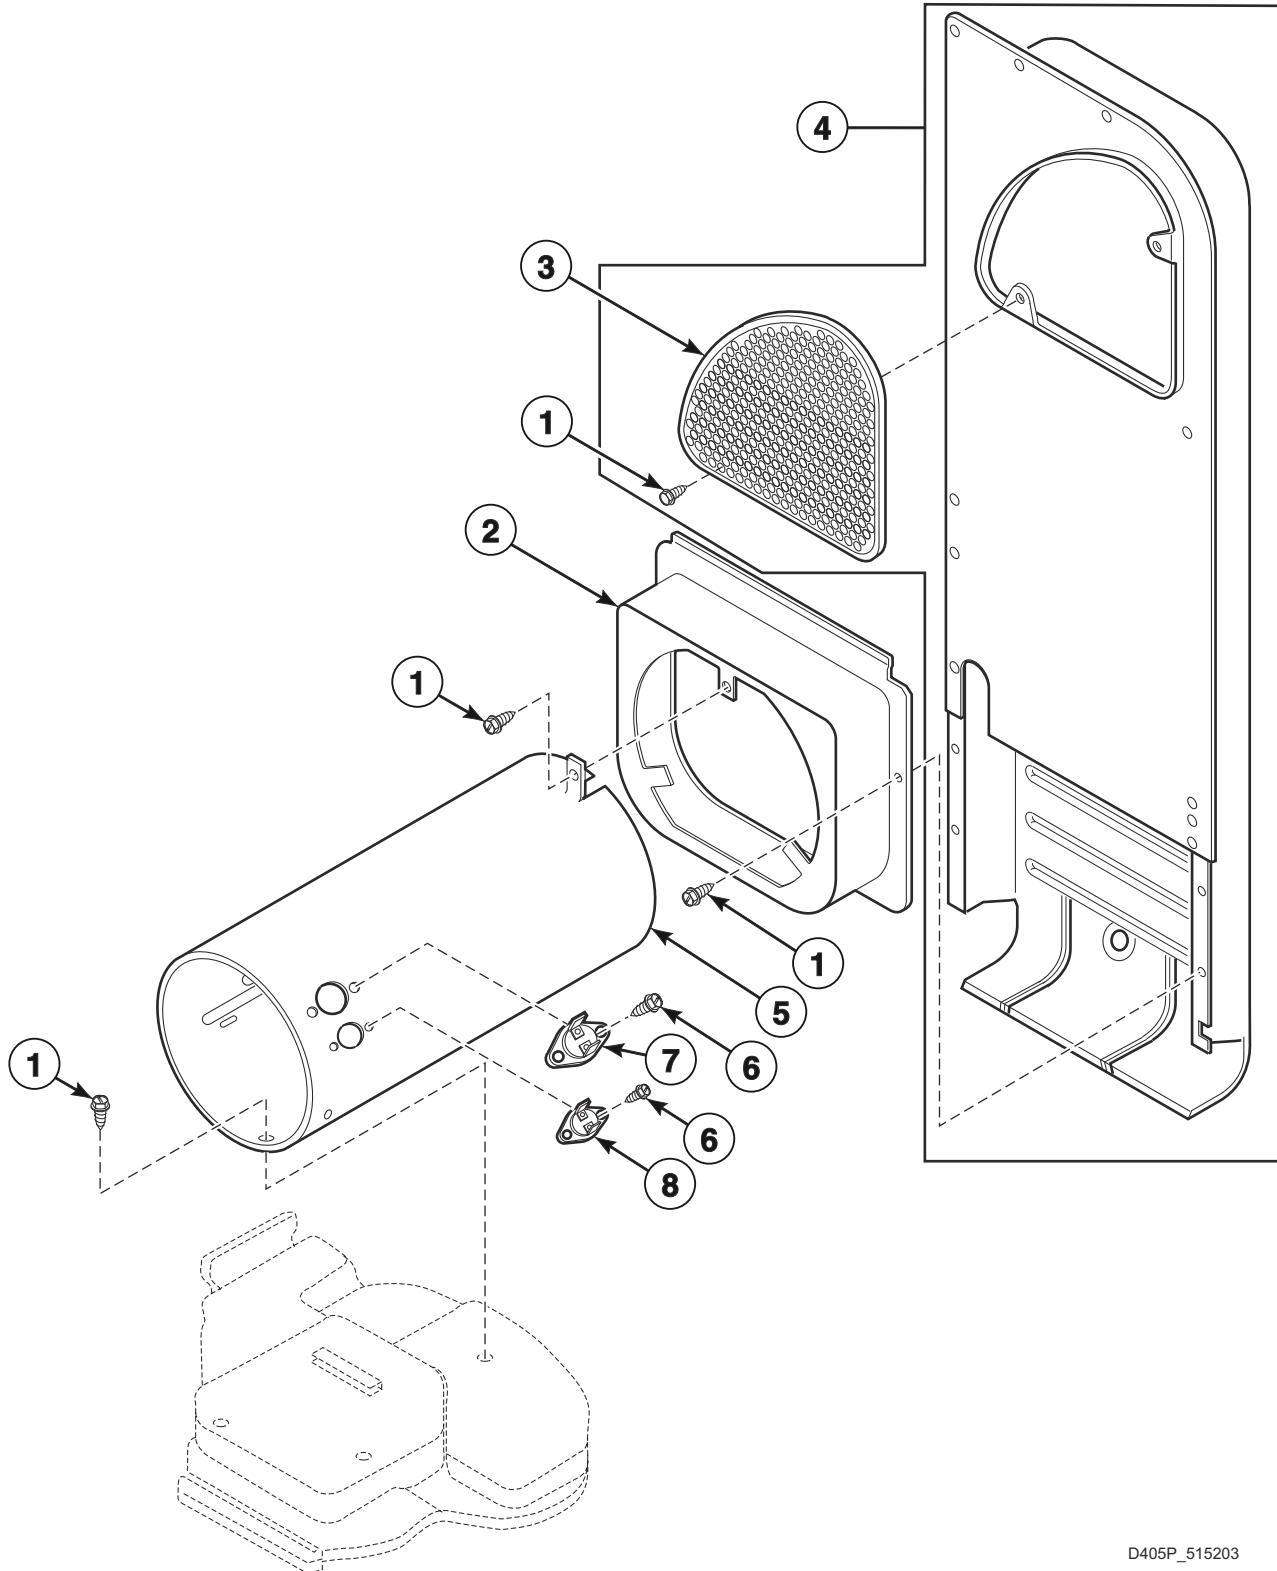


D405P_515203

Heater Duct Assembly - Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	503688	Screw	
2	510101	Heat Duct Shroud	
3	500820	Outlet Cover	
4	510025P	Heater Duct and Screw Assembly	Includes items 1 and 3
5	510131	Combustion Duct	Single thermostat
	510132	Combustion Duct	Double thermostat
6	51782	Screw	
7	510702	Limit Thermostat	Black
8	510703	Thermostat	

Gas Valve, Igniter and Gas Conversion Kits

Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01, HDGNYRGS113CW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01, PDGXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01

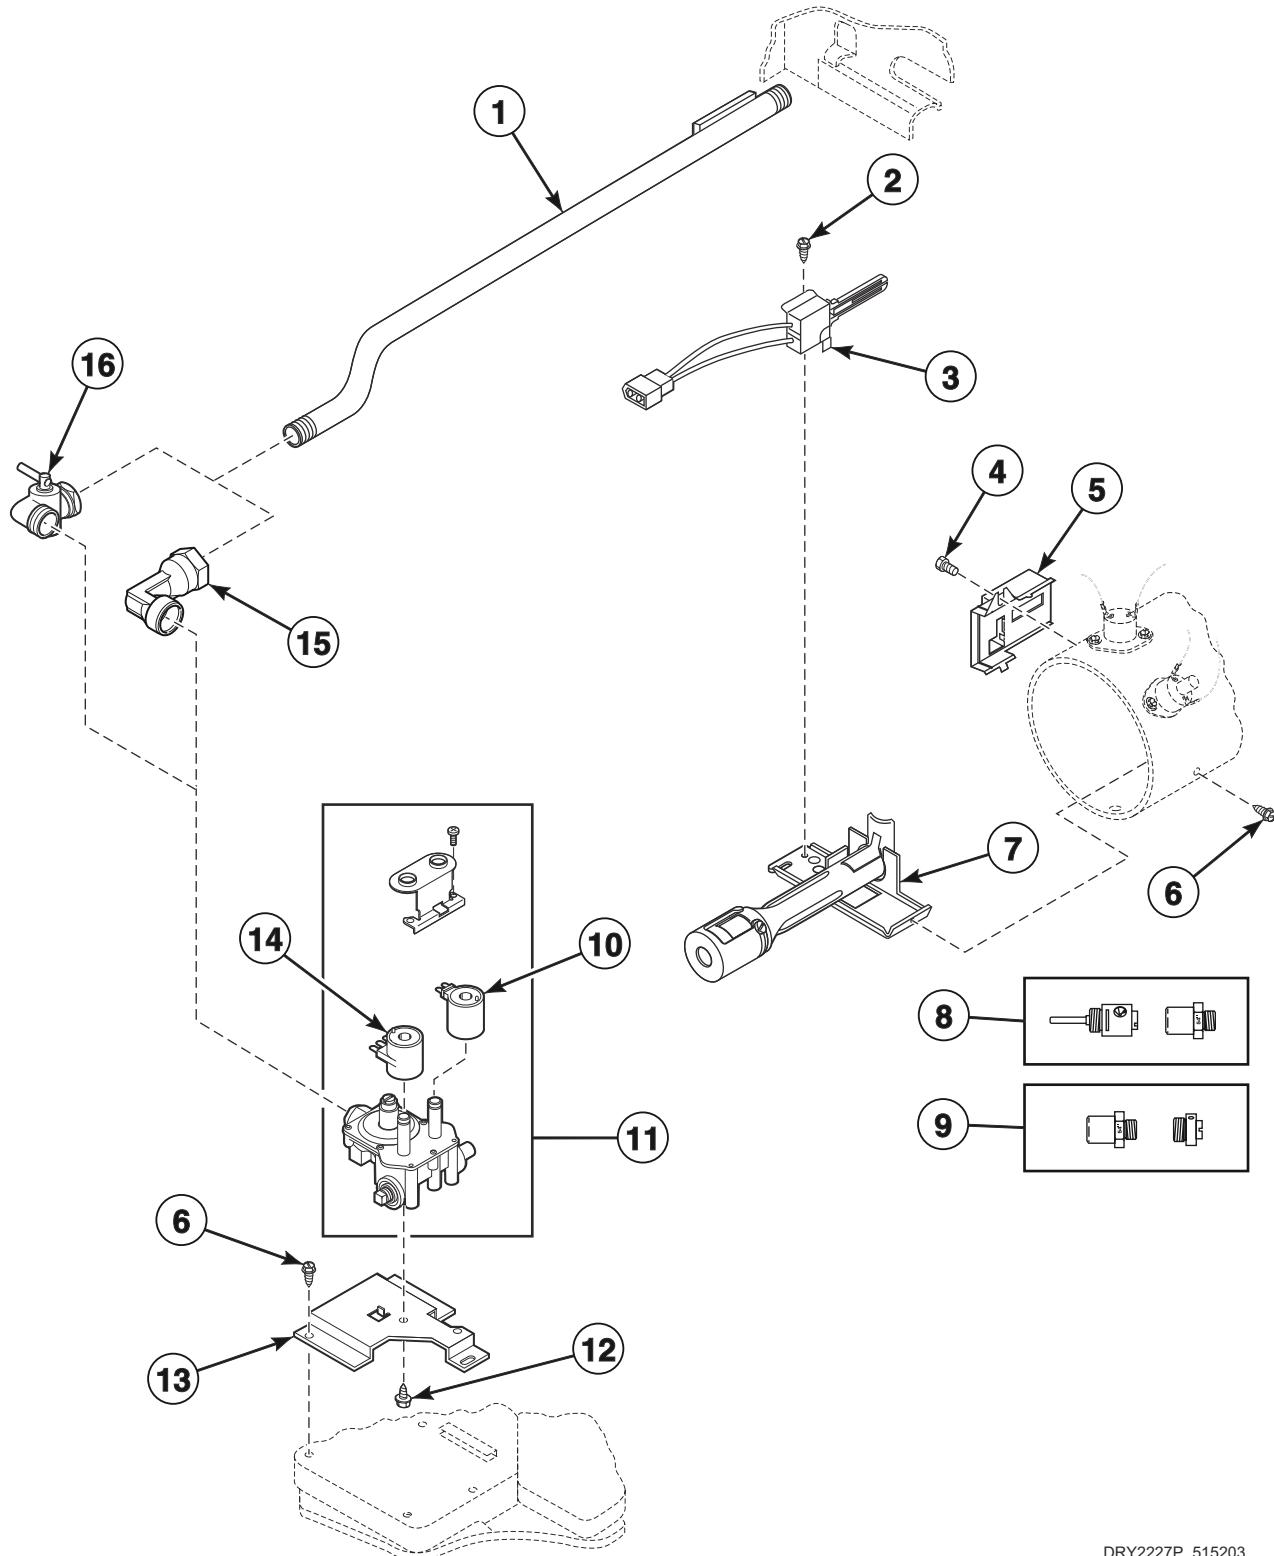


DRY2227P_515203

Gas Valve, Igniter and Gas Conversion Kits

REF	PART NO.	DESCRIPTION	COMMENTS
1	510204	Lead-In Pipe Assembly	
2	51782	Screw	
3	510184P	Igniter and Bracket Assembly	
4	23222	Screw	
5	510213	Sensor	
6	503688	Screw	
7	510149P	Burner Assembly	
8	458P3	L.P. Conversion Kit	Used to convert dryers from N.G. or Mixed Gas to L.P. for 25,000 Btu
9	459P3	N.G. Conversion Kit	Used to convert dryers from L.P. to N.G. or Mixed Gas for 25,000 Btu; Models HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01, HDGNYRGS113CW01, SDGNXAGS303AW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01
10	59063B	Secondary Coil	50 Hertz; Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJXAGS303UG01, SDGNXAGS303AW01 and SDGNXRGS303AW01
	58804B	Secondary Coil	60 Hertz; All other models
11	60443P	Valve Assembly	50 Hertz; 25,000 Btu; Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJXAGS303UG01, SDGNXAGS303AW01 and SDGNXRGS303AW01
	60353P	Gas Valve Assembly	60 Hertz; 25,000 Btu; All other models
12	56124	Screw	
13	510128	Gas Valve Mounting Bracket	
14	59063A	Booster and Holding Coil	50 Hertz; Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJXAGS303UG01, SDGNXAGS303AW01 and SDGNXRGS303AW01
	58804A	Booster and Holding Coil	60 Hertz; All other models
15	513072	Elbow	Models SDLNXRGS543NW23 and SDLNXRGS543PW01
16	510205	Elbow Shut-Off Valve	Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01, HDGNYRGS113CW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01 and SDGNXRGS303AW01

Burner Orifice Spuds - For Higher Elevations

Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01, HDGNYRGS113CW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01, PDGXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01

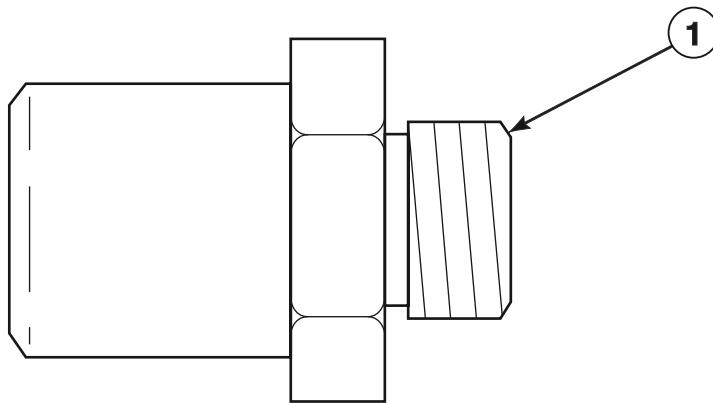


DRY2266P_515203

Burner Orifice Spuds - For Higher Elevations

REF	PART NO.	DESCRIPTION	COMMENTS
1	58755	L.P. Orifice	25,000 Btu; 7500-10,999 feet (2290-3354 m)
	503786	L.P. Orifice	25,000 Btu; 11,000 feet (3355 m) and higher
	503776	N.G. Orifice	25,000 Btu; 2000-2999 feet (610-914 m)
	510517	N.G. Orifice	25,000 Btu; 3000-5499 feet (915-1679 m)
	503778	N.G. Orifice	25,000 Btu; 5500-6999 feet (1680-2134 m)
	58719	Screw Orifice	25,000 Btu; 7000-8999 feet (2135-2744 m)
	503779	N.G. Orifice	25,000 Btu; 9000-10,499 feet (2745-3199 m)
	503780	N.G. Orifice	25,000 Btu; 10,500 feet (3200 m) and higher

Cabinet, Exhaust Duct and Base

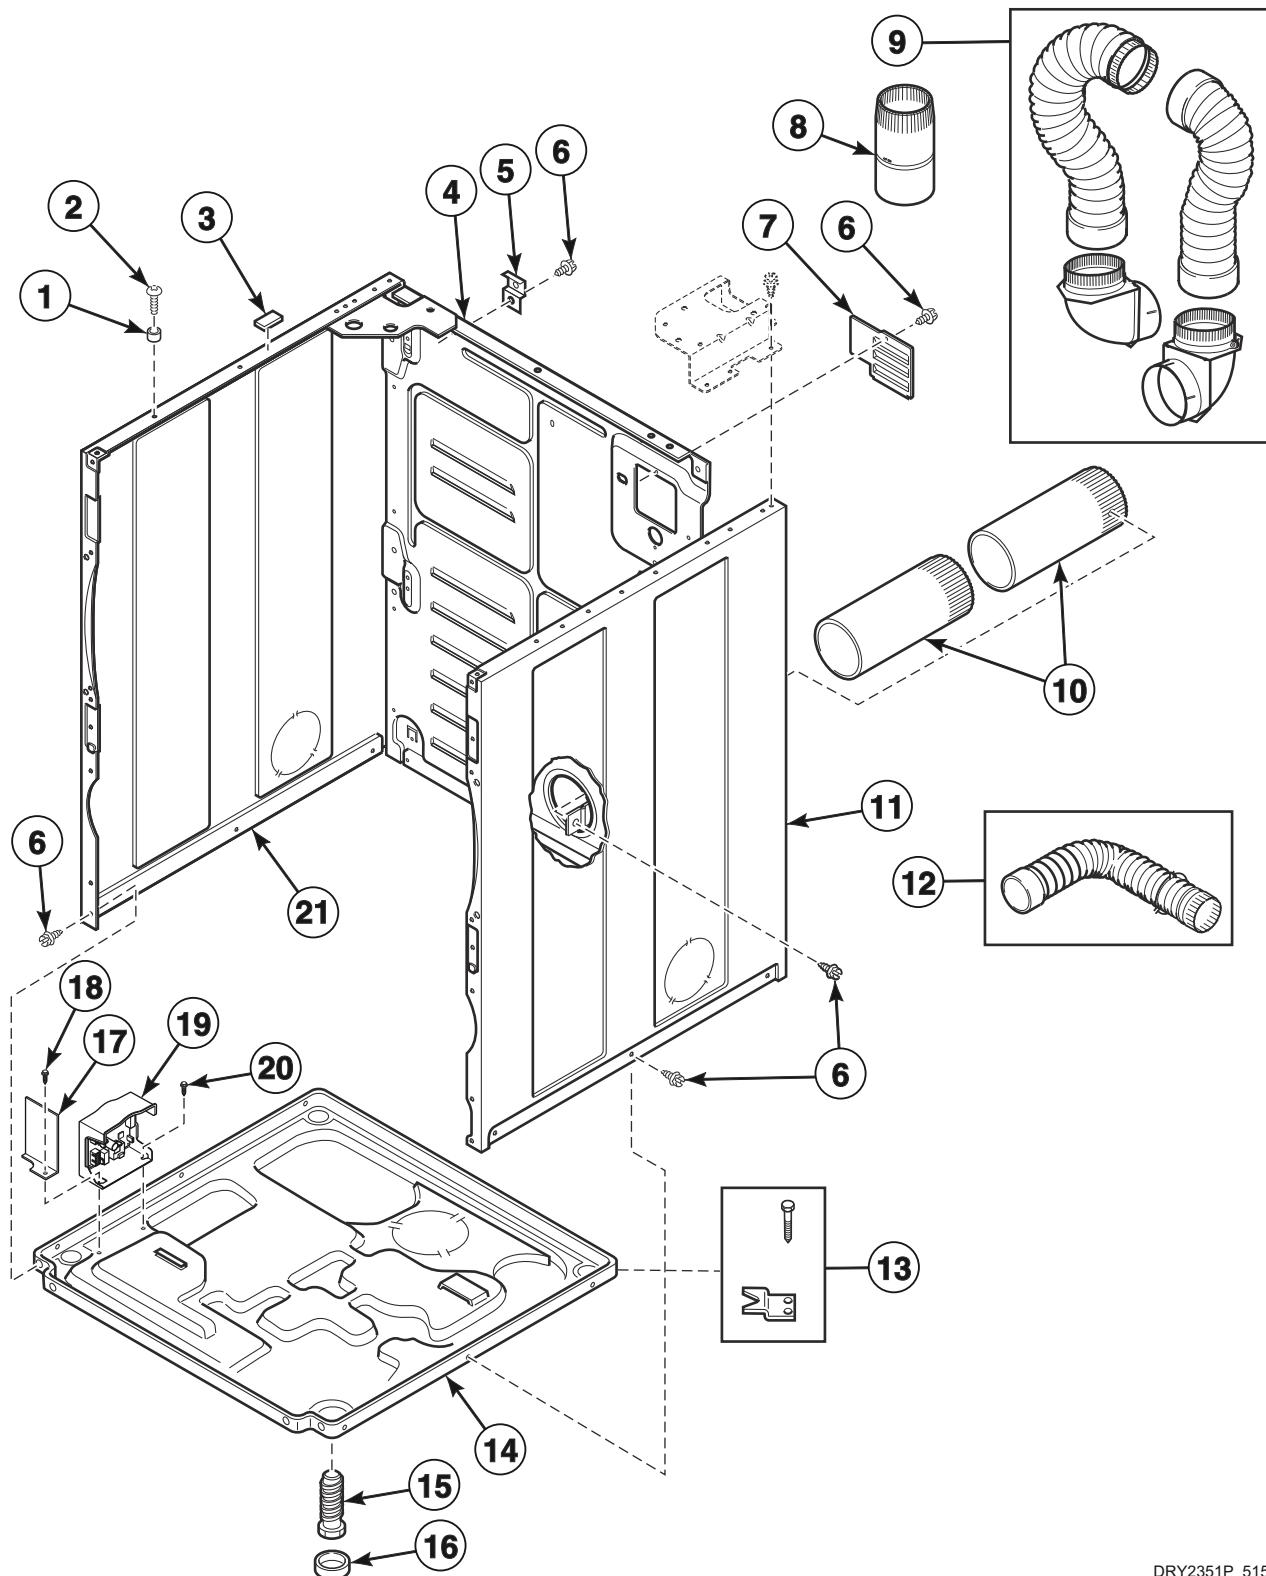


DRY2351P_515203

Cabinet, Exhaust Duct and Base

REF	PART NO.	DESCRIPTION	COMMENTS
	122P4P	Porcelain Touch-Up Paint	White
1	56079	Panel Locator	
2	512921	Screw	Use with stainless steel side panels
	39733	Screw	Use with painted side panels
3	56128	Bumper Pad	
4	510005P	Cabinet Rear Panel	
5	510136	Top Hinge	
6	503688	Screw	
7	510903	Access Panel Plate	
8	58786	Damper	Use when connecting to a manifold vent system
9	521P3	Flexible Venting Kit	
10	510137	Exhaust Duct	Each dryer requires 2 pieces
11	510002DGP	Cabinet Side Panel	Gray; Right; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGBSW303EN01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBSW303EN01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	510002WP	Cabinet Side Panel	White; Right; All other models
12	528P3	Directional Exhaust Kit	Used to vent dryer out the sides or bottom
13	526P3	Hold Down Kit	For mobile home installations
14	514245	Dryer Base	
15	510135	Leveling Leg	
16	501855	Rubber Foot	
17	514420	Output Board Shield	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGBGW303EW01, JDGJGASW303EN01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGS433AW01 and SDENYRGS303ZW01
18	514428	Screw	
19	513797P	Output Control Assembly	
20	804667	Screw	
21	510001DGP	Cabinet Side Panel	Gray; Left; Models BD3NGBSS403UN01, BD3NLBSS403UN01, HDENXAGS173CN01, HDENXAGW173CN01, HDGNXAGS113CN01, HDGNXAGW113CN01, JDEJGBSW303EN01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBSW303EN01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01 and PDGJXAGS543ZG01
	510001WP	Cabinet Side Panel	White; Left; All other models

Contactor and Transformer

Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNXAGS303EW01, HDGNXAGS543DW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDGNXAGS303EW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01

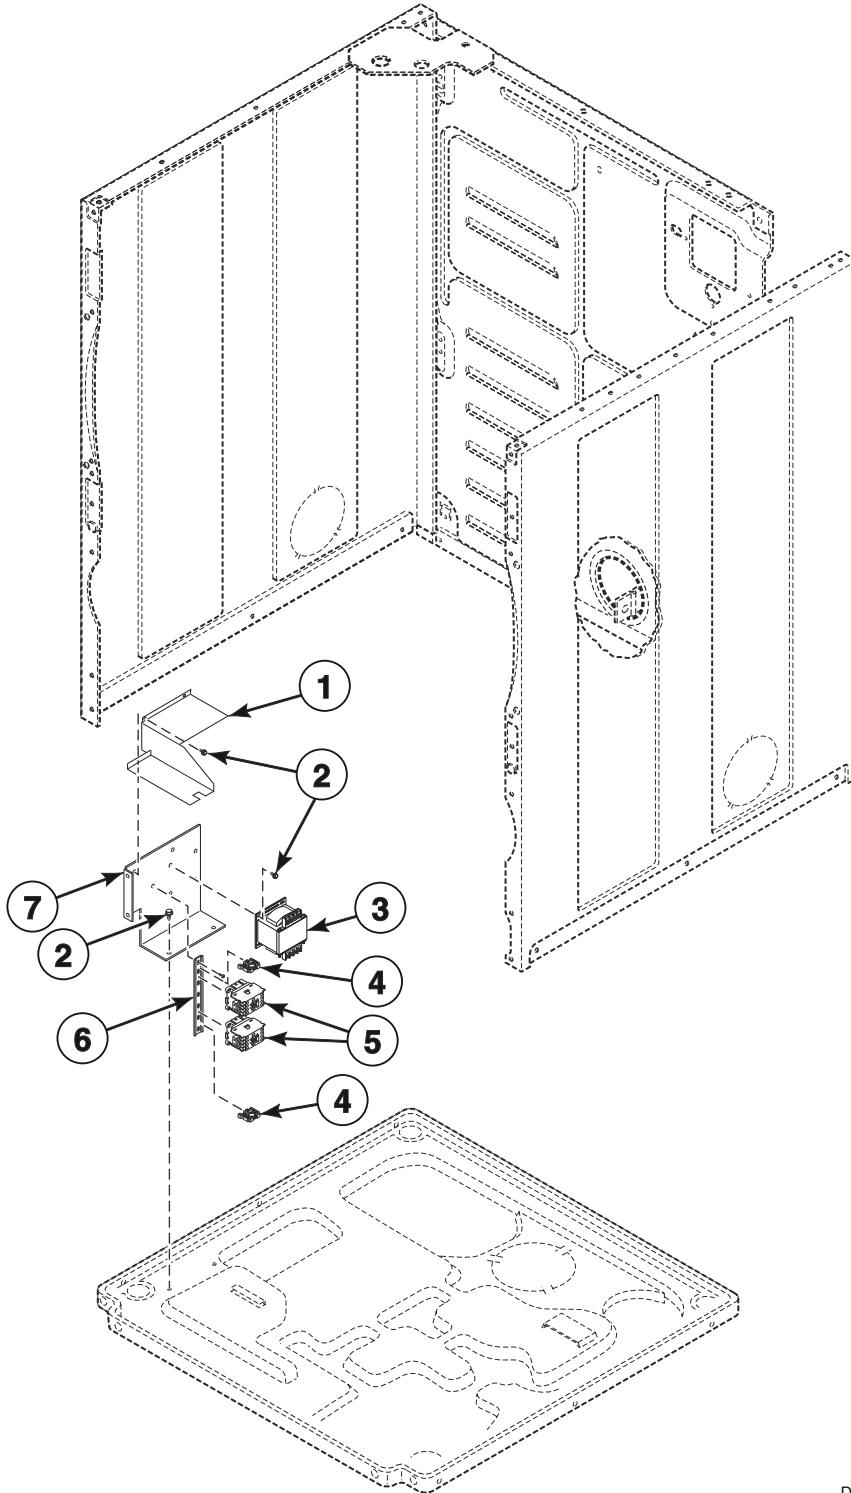


DRY2353P_515203

Contactor and Transformer

REF	PART NO.	DESCRIPTION	COMMENTS
	514000	Power Harness	Used between item 5 and 804844, 804864 or 514834P Filter; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
	514002	Heater Harness	Used between item 5 and heating element; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
	514054	Dual Contactor Harness	Used with item 5; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
1	514334	Transformer Shield	Models BDGNGBGS303EW01, BDGNXAGS303EW01, HDGNXAGS543DW01, JDGJGAGW303EW01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01
2	503688	Screw	
3	513763	Transformer	Models BDGNGBGS303EW01, BDGNXAGS303EW01, HDGNXAGS543DW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01
4	F8449801	End Stop	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
5	70482603	Contactor	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
6	M412693	Din Rail	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
7	511859	Contactor Bracket	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01

Power Cord

All Models Except ND3NLBGS403NW22 and SDENYRGS303NW22

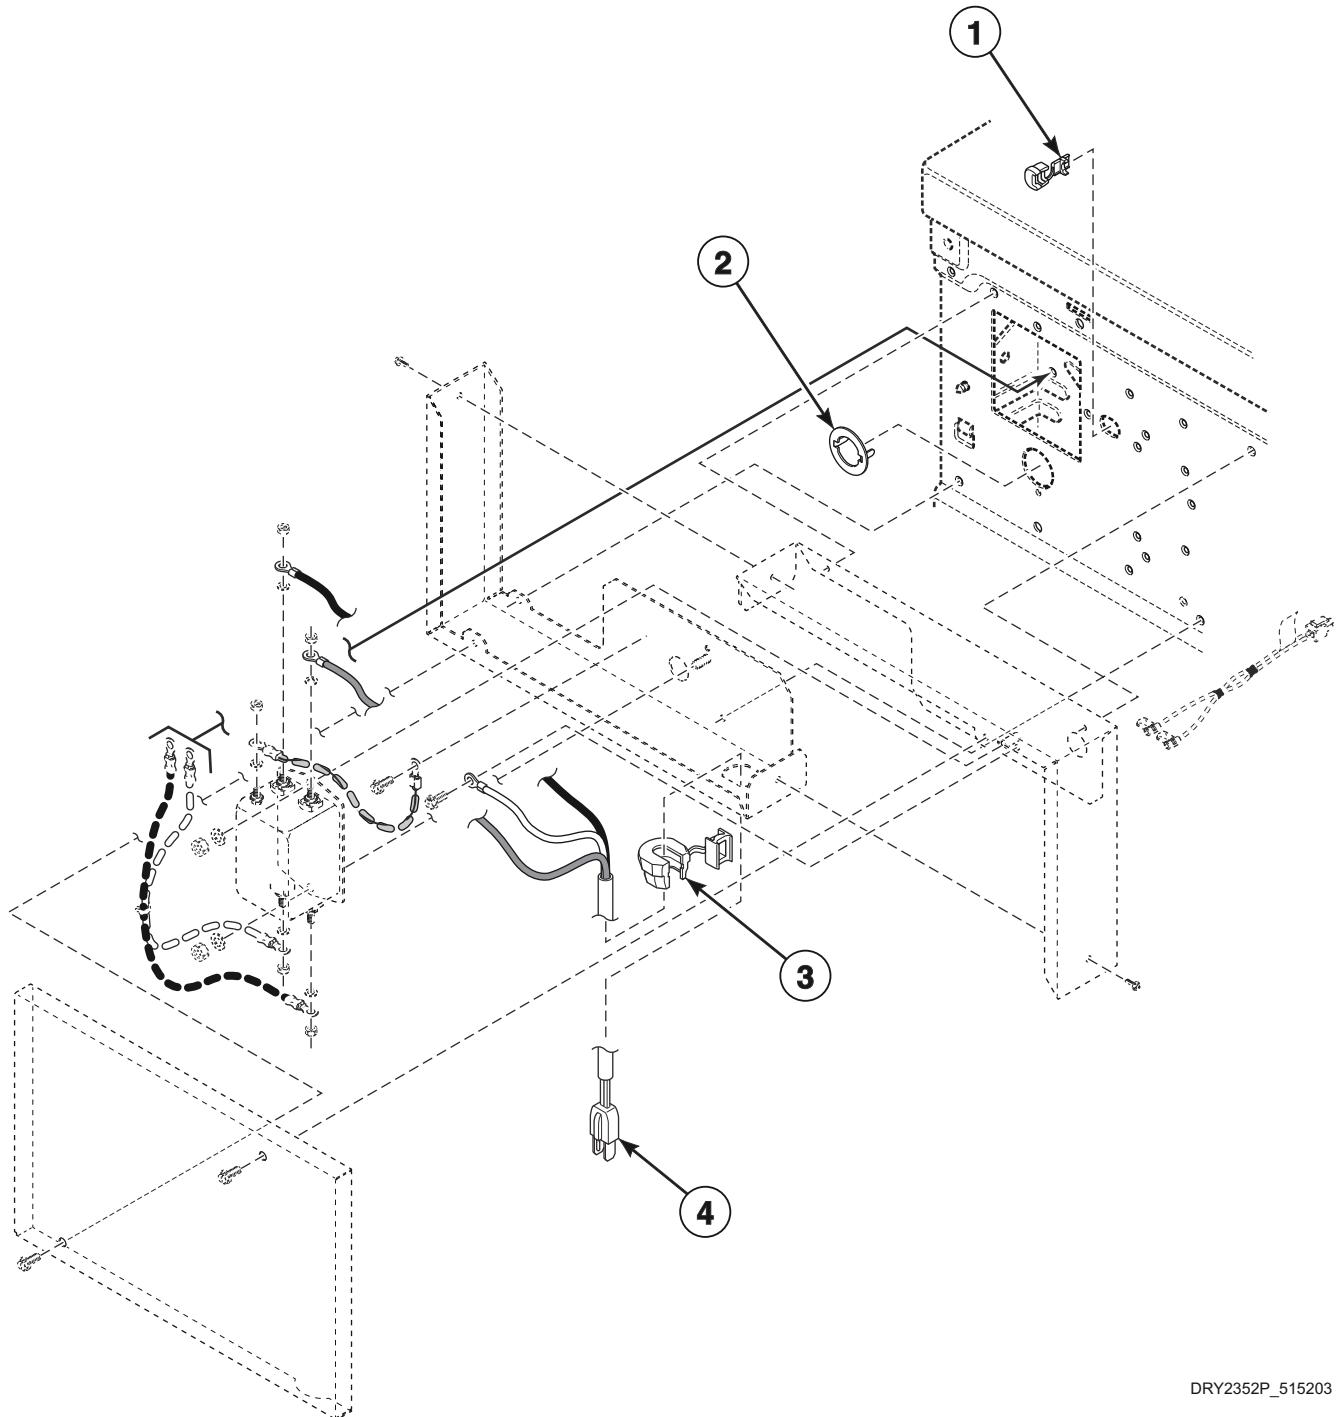


DRY2352P_515203

Power Cord

REF	PART NO.	DESCRIPTION	COMMENTS
	20530	Screw	
1	38384	Strain Relief	Models HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01 and HDGNYRGS113CW01
2	502496	Strain Relief Adapter	Model SDLNXRGS543NW23
3	52113	Strain Relief	Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGS433AW01 and SDENYRGS303ZW01
	60298	Strain Relief	Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01, PDGXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01
4	510505P	Lead-In Cord Assembly	Models HDENEAGS153CW01, HDENEAGS173CW01, HDENERGS153CW01, HDENERGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01, HDENXAGS153CW01, HDENXAGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01, HDENYBGS173CW01, HDENYRGS153CW01 and HDENYRGS173CW01
	503597	Lead-In Cord Assembly	Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS543DW01 and SDENYRGS303ZW01
	202777	Lead-In Cord	Models HDGNEAGS113CW01, HDGNERGS113CW01, HDGNXAGS113CN01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNXRGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01 and HDGNYRGS113CW01
	203208	Lead-In Cord	Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01 and PDGXAGS543ZG01
	202926	Lead-In Cord	Models SDGNXAGS303AW01 and SDGNXRGS303AW01
	203315	Lead-In Cord	Model SDLNXRGS543PW01
	61605P	Lead-In Cord Kit	Models SDENXAGS433AW01 and SDENXRGS433AW01
	203344	Lead-In Cord	Model SDLNXRGS543NW23
	514061	Lead-In Cord	Models HDGNXAGS123DW01, HDGNXAGS543DW01, SDGNXAGS123DW01 and SDGNXAGS543DW01
	506106	Lead-In Cord Assembly	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01

Junction Box

Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDENXAGS543DW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGS433AW01, SDENYRGS303ZW01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01 and SDLNXRGS543PW01

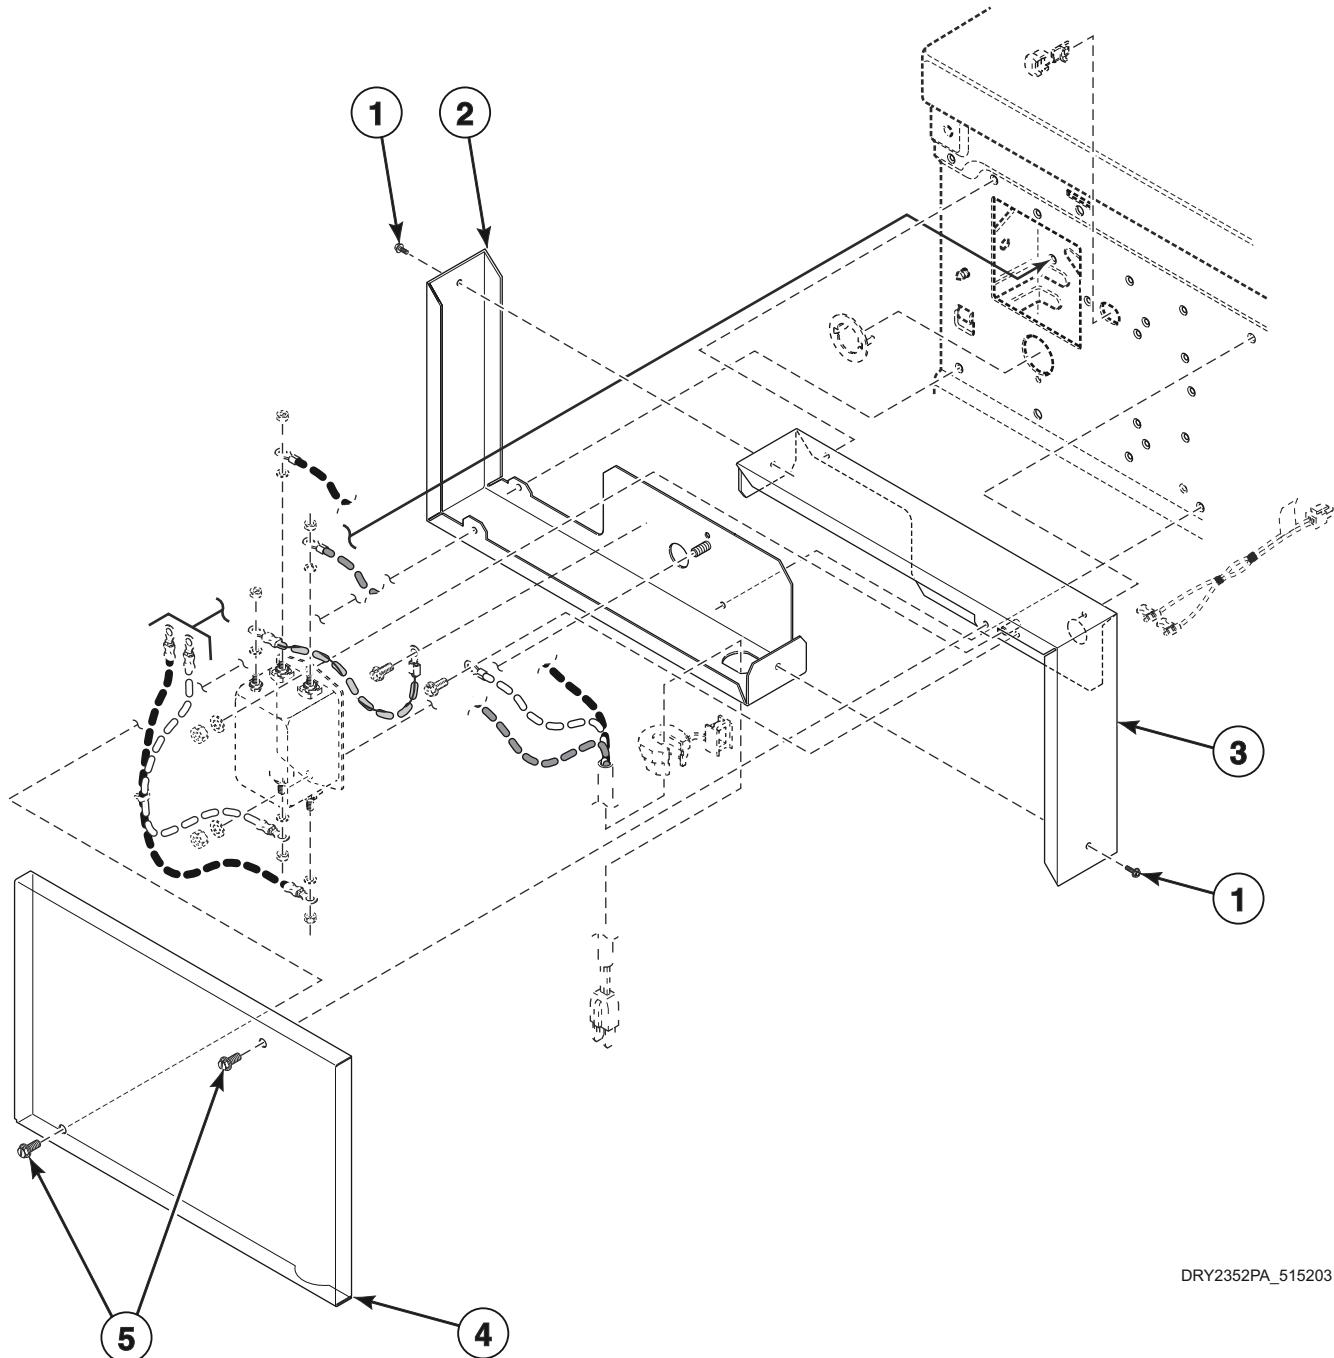


DRY2352PA_515203

Junction Box

REF	PART NO.	DESCRIPTION	COMMENTS
	514379P	Junction Box Seal	4 required
	514389P	Junction Box Assembly	Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGSS433AW01 and SDENYRGS303ZW01
	514390	Junction Box Assembly	Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01, PDGXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGSS303AW01 and SDLNXRGSS543PW01
	514394P	Junction Box Assembly	Includes items 2, 4, 6, 8, screw and nut; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
1	503688	Screw	2 required
2	514399	Junction Box Assembly	3 phase; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
	514402	Junction Box Assembly	1 phase; Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGSS433AW01 and SDENYRGS303ZW01
	514403	Lower Junction Box Assembly	Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01, PDGXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGSS303AW01 and SDLNXRGSS543PW01
3	514398	Junction Box Assembly	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
	514400	Junction Box Assembly	Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGSS433AW01 and SDENYRGS303ZW01
	514401	Upper Junction Box Assembly	Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGXAGS303UG01, PDGXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGSS303AW01 and SDLNXRGSS543PW01
4	514363	Junction Box Cover	
5	503661	Screw	2 required

Junction Box Filter and Harnesses

Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDENXAGS543DW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGSS433AW01, SDENYRGS303ZW01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGSS303AW01 and SDLNXRGS543PW01

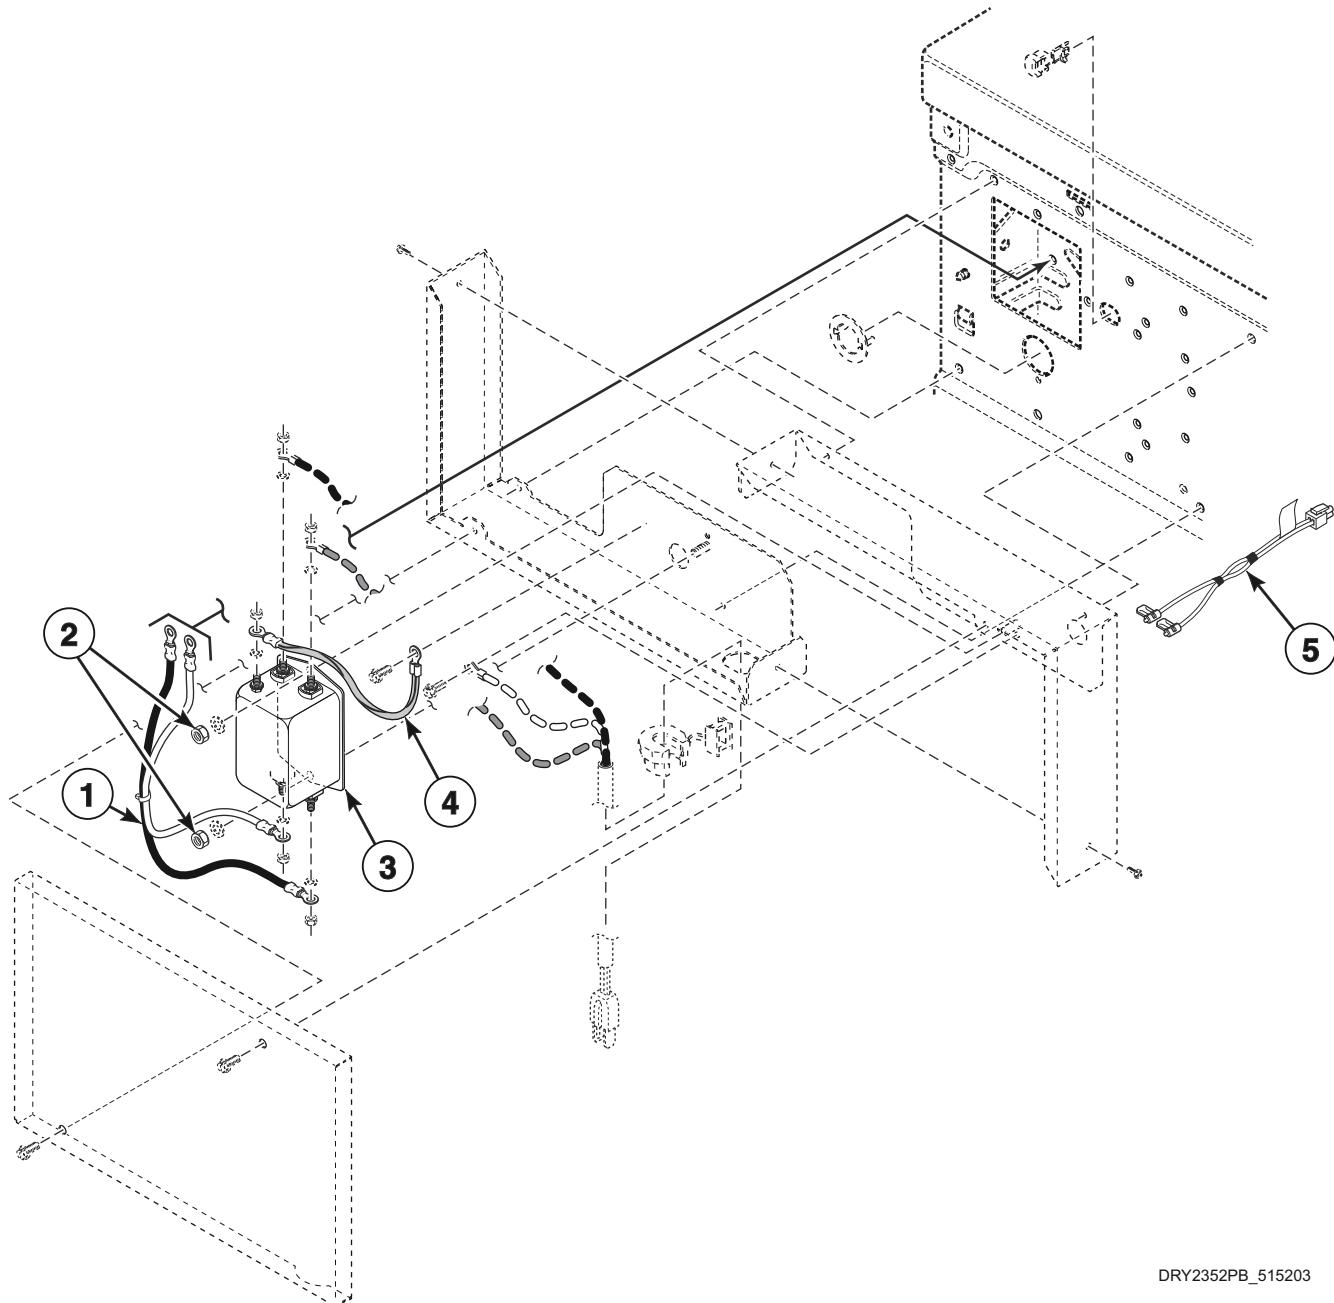


DRY2352PB_515203

Junction Box Filter and Harnesses

REF	PART NO.	DESCRIPTION	COMMENTS
	503688	Screw	4 required
1	514037	Filter Harness	Models HDGNXAGS123DW01, HDGNXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01 and SDGNXRGS303AW01
	514036	Filter Harness	Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGS433AW01 and SDENYRGS303ZW01
	514040	Filter Harness	3 Phase; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
2	51236	Nut	3 Phase; 4 required; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
	29787	Nut	2 required; All other models
3	804844	Line Filter	30 Amp; Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGS433AW01 and SDENYRGS303ZW01
	804864	Line Filter	10 Amp; Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNXAGS123DW01, HDGNXAGS543DW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01, SDGNXRGS303AW01 and SDLNXRGS543PW01
	514384P	Filter	3 Phase; Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
4	514038	Ground Filter Harness	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDENXRGS433AW01 and SDENYRGS303ZW01
	514039	Ground Filter Harness	Models HDGNXAGS123DW01, HDGNXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01, SDGNXAGS543DW01 and SDGNXRGS303AW01
5	804396	Filter Harness	Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01, PDGJXAGS543ZG01 and SDLNXRGS543PW01

Terminal Block and Terminals

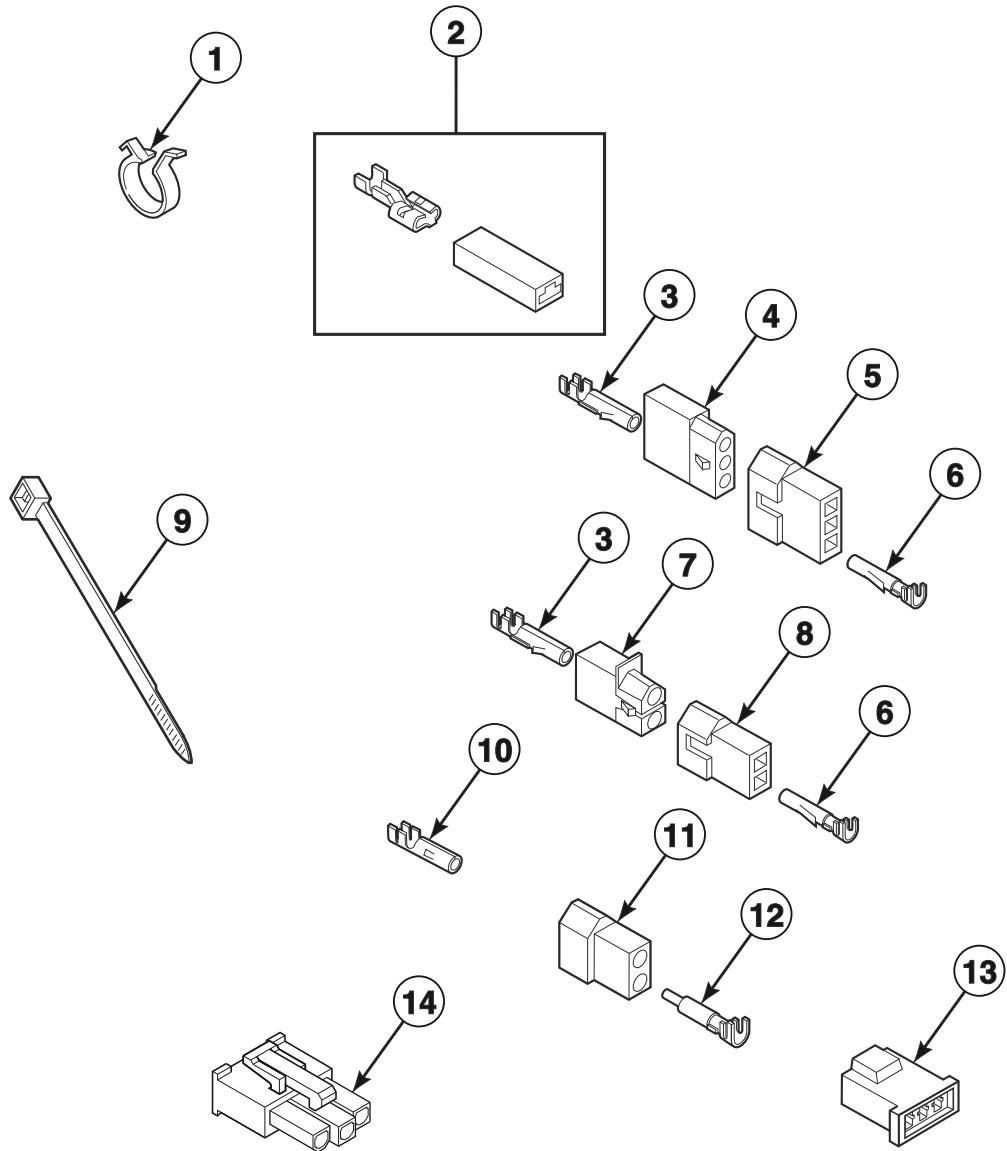


DRY2064P_515203

Terminal Block and Terminals

REF	PART NO.	DESCRIPTION	COMMENTS
1	504034	Wire Clip	11/16 inch
	687500	Wire Clip	1 inch
2	00360	Insulated Female Spade Terminal	(1) 12 gauge wire or (2) 18 gauge wires
3	00117	Female Pin Terminal	
4	23039	3 Circuit Receptacle	
	56265	2 Circuit Receptacle	
5	23040	Plug	3 circuit
6	00116	Male Pin Terminal	
7	56451	2 Circuit Receptacle	
8	56448	2 Circuit Plug	
9	55881	Harness Strap	
10	00130	Female Pin Terminal	1/8 inch; 16-18 gauge wire
	00128	Female Pin Terminal	1/8 inch; 10-14 gauge wire
11	56266	2 Circuit Plug	
12	00127	Male Pin Terminal	.18 insulation diameter
	00129	Male Pin Terminal	.12 insulation diameter
13	58800	3 Circuit Connector	
14	36170	3 Circuit Receptacle	

Terminals

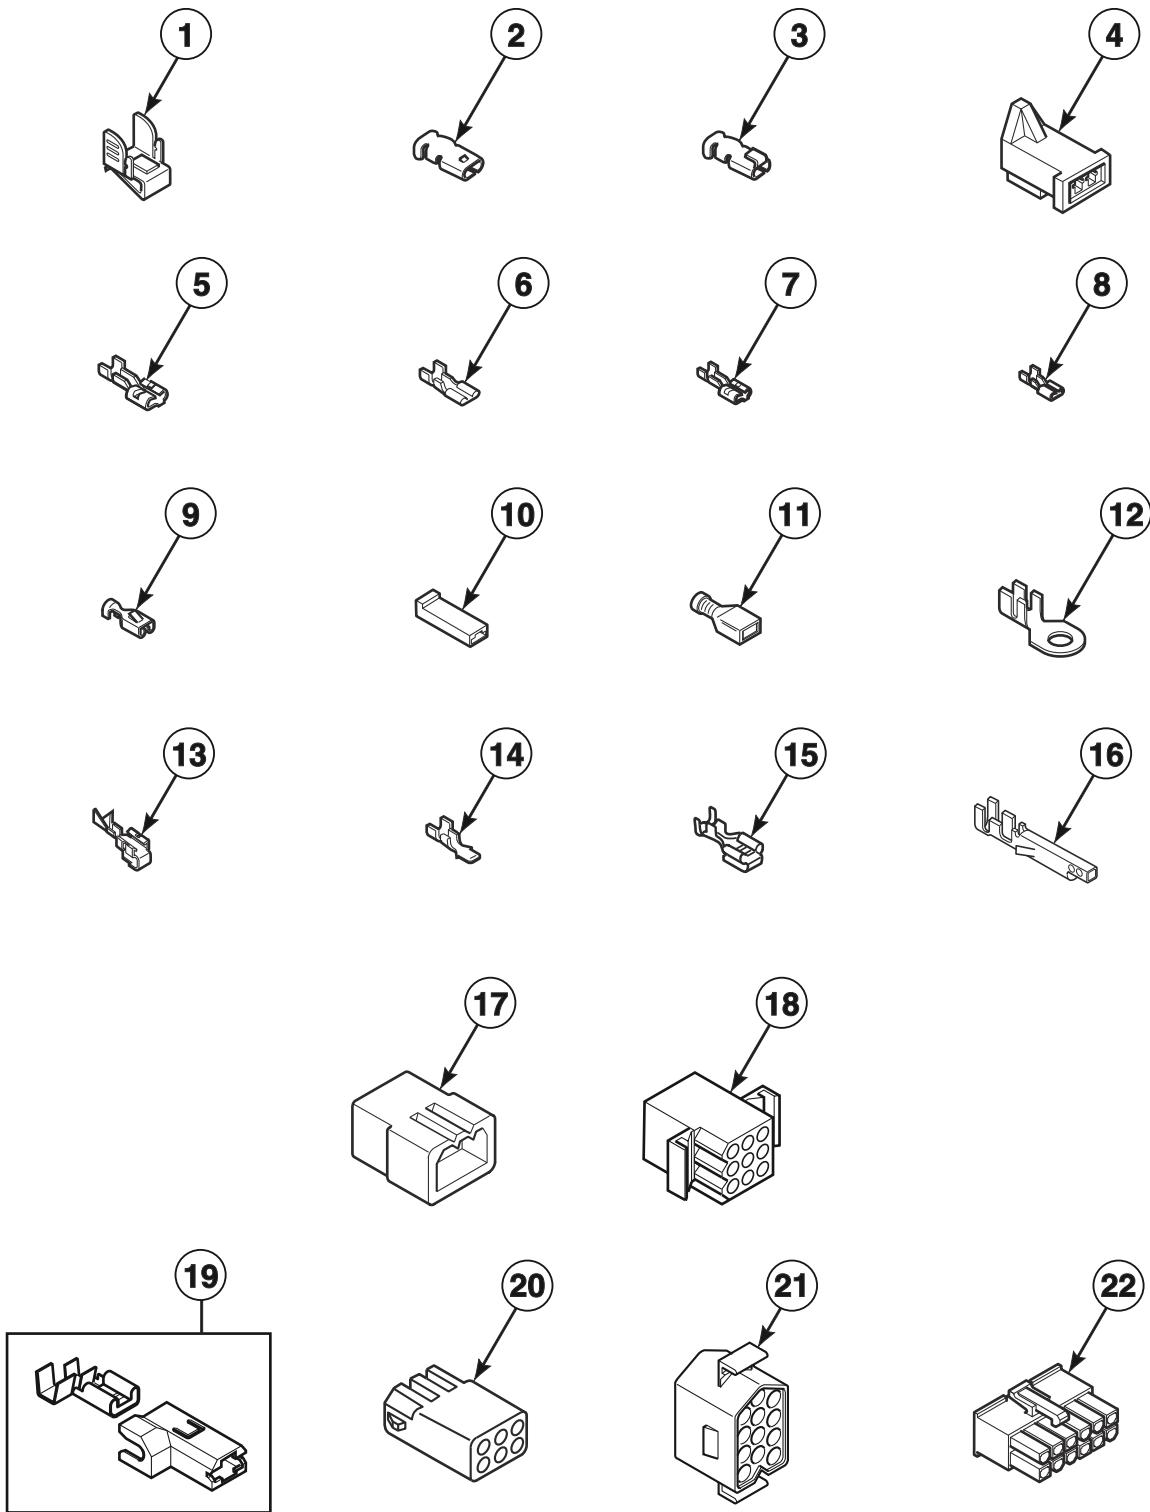


DRY2343P_515203

Terminals

REF	PART NO.	DESCRIPTION	COMMENTS
1	00161	Grounding Clip	
2	00189	Female Spade Terminal	
3	00361	Female Piggyback Terminal	
4	58799	2 Circuit Connector	
5	00223	Female Spade Terminal	1/4 inch; (1) 18 gauge wire
	00121	Female Spade Terminal	1/4 inch; (2) 18 gauge wires or (1) 12 gauge wire
	00245	Spade Terminal	1/4 inch; (1) 22 gauge wire
6	00124	Female Spade Terminal	3/16 inch; (1) 18 gauge wire; .020 tab
	00156	Female Spade Terminal	3/16 inch; Thermostat wire; .032 tab
7	00222	Female Spade Terminal	1/4 inch
8	00347	Terminal	
9	00115	Female Spade Terminal	1/4 inch; (1) 18 gauge wire
10	90789	Receptacle Housing	
11	00359	Insulated Female Spade Terminal	1/4 inch
	00165	Insulated Female Terminal	3/16 inch
12	00110	Ring Terminal	(1) 18 gauge wire
	00111	Ring Terminal	(2) 18 gauge wires or (1) 12 gauge wire
	00319	Ring Terminal	(2) 18 gauge wires or (1) 14 gauge wire
13	00114	Female Spade Terminal	1/4 inch; Double connector
14	00139	Male Tab Terminal	1/4 inch; (2) 18 gauge wires or (1) 12 gauge wire
15	00344	Female Tab Terminal	
16	00252	Terminal	
17	26302	1 Circuit Plug	
	23033	9 Circuit Plug	
	23041	6 Circuit Plug	
18	26163	9 Circuit Receptacle	
	56855	12 Circuit Receptacle	
19	00221	Insulated Female Flag Terminal	1/4 inch
20	26708	6 Circuit Receptacle	
	26301	1 Circuit Receptacle	
21	54522	Plug	
22	501333	12 Circuit Receptacle	
	34596	10 Circuit Receptacle	

Motor Connection Block and Tools

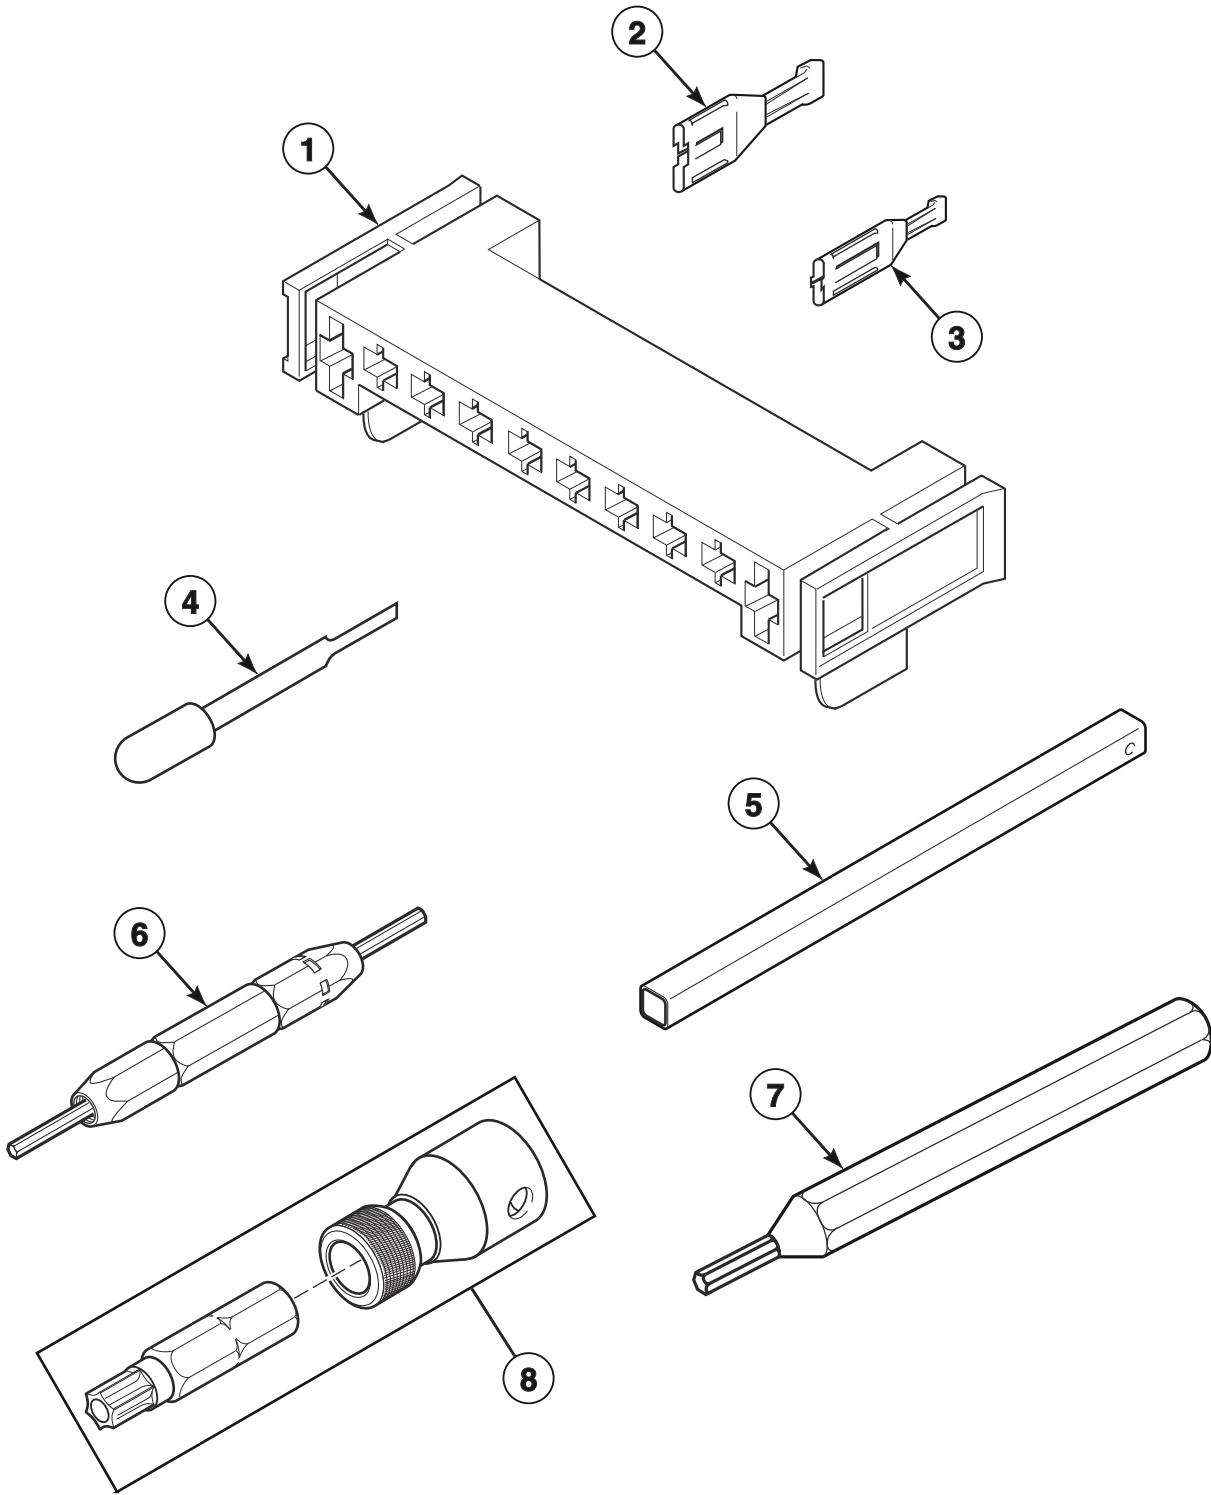


DRY2066P_515203

Motor Connection Block and Tools

REF	PART NO.	DESCRIPTION	COMMENTS
1	500338	10 Position Housing	
2	00255	Female Terminal	1/4 inch; For (1) 12 gauge wire
	00256	Female Terminal	1/4 inch; For (1) or (2) 18 gauge wires
3	00188	Female Terminal	For 1 or 2 wire application
4	283P4	Terminal Extractor Tool	For use on Molex connectors
5	310P4	Ratchet Extension Tool	1/4 inch; For coin drop installation
6	190P4	Extractor Tool	For use on electric dryer terminals
7	128P4	Extractor Tool	For use on gas dryer terminals
8	281P4	Torx Bit	T15 Tamper Resistant Bit
	282P4	Torx Bit	Use with 62853 Screw on access panel; T25 Tamper Resistant Bit
	292P4	Torx Bit	T20 Standard Bit
	93501	Torx Drive Tool	T10 Standard Bit

Wire Harnesses and Wires - Front Control Models (Drawing 1 of 2)

Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDENXAGS543DW01, HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGS543DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, NDENXAGS303UW01, NDGNXAGS303EW01, PD3JGBGS403UG01, PD3JXAGS403UG01, PDEJGBGS303UG01, PDEJGBGS543ZG01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDENXAGS433AW01, SDENXAGS543DW01, SDGNXAGS123DW01, SDGNXAGS303AW01 and SDGNXAGS543DW01

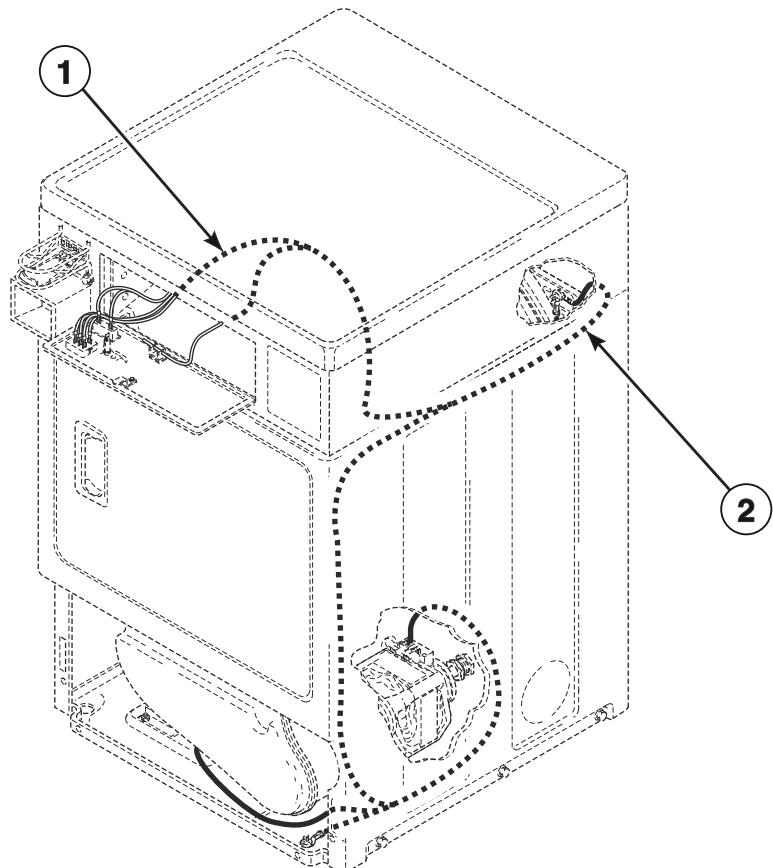

DRY1915PA_515203


Wire Harnesses and Wires - Front Control Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	45380	12 Gauge Wire	Orange; Order wire by foot; Order terminals and connectors as required
	45001	18 Gauge Wire	Black; Order wire by foot; Order terminals and connectors as required
1	512422P	Wire Harness Assembly	
2	513970	Electric Harness	Models HDENXAGS543DW01, JDEJEAGW303EW01, JDEJGAGW303EW01, JDEJGASW303EN01, JDEJGBGW303EW01, JDEJGBSW303EN01, NDENXAGS303UW01, PDEJGBGS303UG01, PDEJGBGS543ZG01, SDENXAGS433AW01 and SDENXAGS543DW01
	513978	Lower Front Harness	Models BD3NGBGS403UW01, BD3NGBSS403UN01, BD3NLBGS403UW01, BD3NLBSS403UN01, BD3NXAGS403UW01, ND3NLBGS403NW22, ND3NLBGS403ZW01, ND3NLBSS403UN01, ND3NXASS403UN01, PD3JGBGS403UG01 and PD3JXAGS403UG01
	513977	Gas Harness	Models BDGNGBGS303EW01, BDGNLBGS303EW01, BDGNXAGS303EW01, HDGNXAGS543DW01, JDGJEAGW303EW01, JDGJGAGW303EW01, JDGJGASW303EN01, JDGJGBGW303EW01, JDGJGBSW303EN01, NDGNXAGS303EW01, PDGJGBGS303UG01, PDGJGBGS543ZG01, PDGJXAGS303UG01, PDGJXAGS543ZG01, SDGNXAGS303AW01 and SDGNXAGS543DW01
	513969	Gas Harness	Models HDGNEAGS113CW01, HDGNXAGS113CN01, HDGNXAGS123DW01, HDGNXAGW113CN01, HDGNXAGS113CW01, HDGNYAGS113CW01, HDGNYBGS113CW01 and SDGNXAGS123DW01

NOTE: Individual wires are not available separately. Order complete harness, or order wire by the foot. When applying terminals to wires, it is recommended that the terminals be soldered to the wires.

Wire Harnesses and Wires - Front Control Models (Drawing 2 of 2)

Models HDENEAGS153CW01, HDENEAGS173CW01, HDENXAGS173CN01, HDENXAGW173CN01,
HDENXAGS153CW01, HDENXAGS173CW01, HDENYAGS153CW01, HDENYAGS173CW01 and
HDENYBGS173CW01

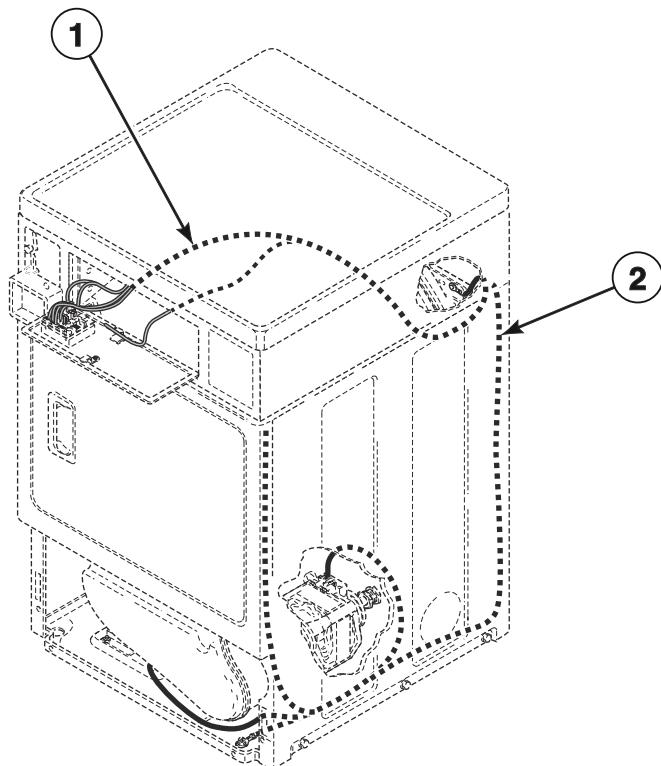

DRY2286P_515203


Wire Harnesses and Wires - Front Control Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	45380	12 Gauge Wire	Orange; Order wire by foot; Order terminals and connectors as required
	45001	18 Gauge Wire	Black; Order wire by foot; Order terminals and connectors as required
1	512422P	Wire Harness Assembly	
2	514008	Electric Harness	

NOTE: Individual wires are not available separately. Order complete harness, or order wire by the foot. When applying terminals to wires, it is recommended that the terminals be soldered to the wires.

Wire Harnesses and Wires - Rear Control Models

Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGSS153CW01, HDENXRGSS173CW01,
HDENYRGSS153CW01, HDENYRGSS173CW01, HDGNERGS113CW01, HDGNXRGSS113CW01,
HDGNYRGSS113CW01, SDENXRGSS433AW01, SDENYRGSS303NW22, SDENYRGSS303ZW01,
SDGNXRGSS303AW01, SDLNXRGSS543NW23 and SDLNXRGSS543PW01

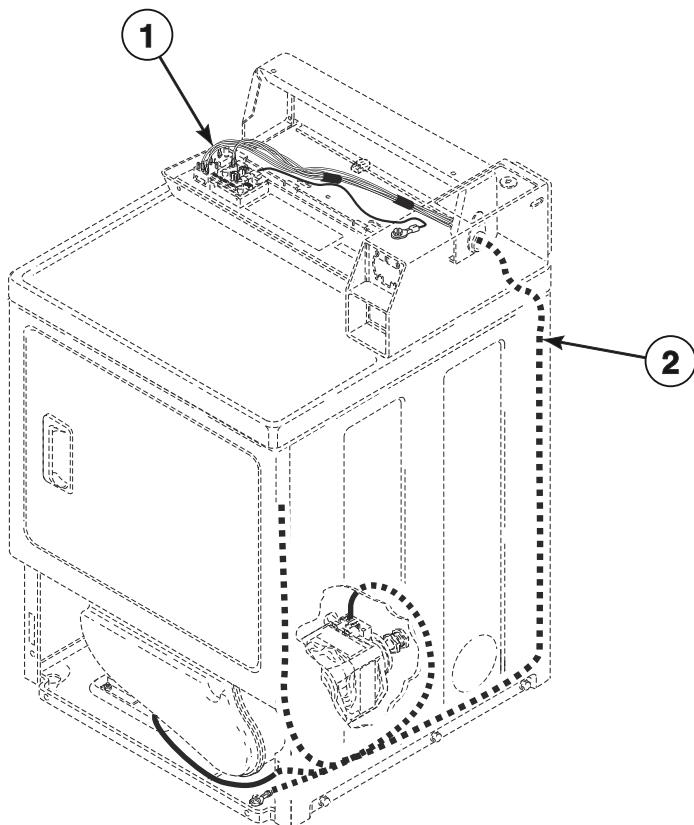


DRY2363P_515203

Wire Harnesses and Wires - Rear Control Models

REF	PART NO.	DESCRIPTION	COMMENTS
	45380	12 Gauge Wire	Orange; Order wire by foot; Order terminals and connectors as required
	45001	18 Gauge Wire	Black; Order wire by foot; Order terminals and connectors as required
	510550	Ground Wire Assembly	Model SDENYRGS303NW22
1	512422P	Wire Harness Assembly	
2	513987	Gas Harness	Models SDGNXRGS303AW01, SDLNXRGS543NW23 and SDLNXRGS543PW01
	513983	Gas Harness	Models HDGNERGS113CW01, HDGNXRGS113CW01 and HDGNYRGS113CW01
	513984	Electronic Harness	Models SDENXRGS433AW01, SDENYRGS303NW22 and SDENYRGS303ZW01
	514024	Electric Harness	Models HDENERGS153CW01, HDENERGS173CW01, HDENXRGS153CW01, HDENXRGS173CW01, HDENYRGS153CW01 and HDENYRGS173CW01

NOTE: Individual wires are not available separately. Order complete harness, or order wire by the foot. When applying terminals to wires, it is recommended that the terminals be soldered to the wires.

Label Location on Rear of Cabinet

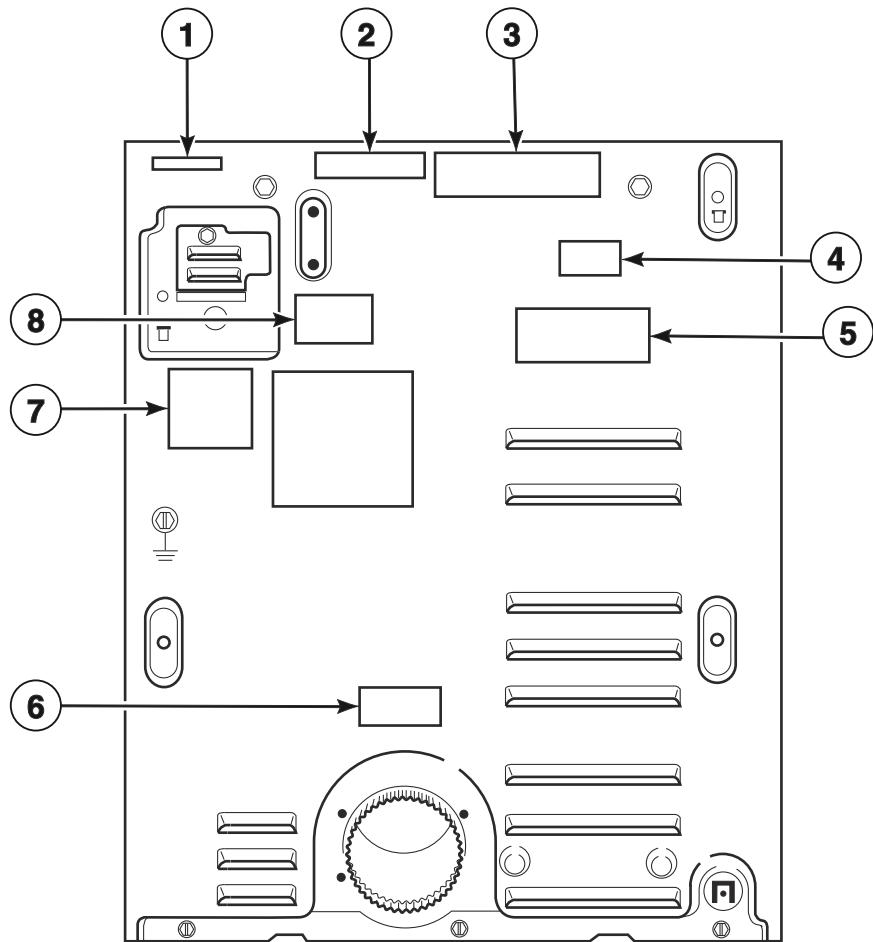

DRY2303P_515203

Label Location on Rear of Cabinet

REF	PART NO.	DESCRIPTION	COMMENTS
1	501288	Terminal Block Label	
2	505281	Disconnect Power Warning Label	
3	44127701	Warning Label	
4	501140	Natural Gas Notice Label	
5	502791	Venting Instruction Label	
6	500497	Exhaust Warning Label	
7	500496	20 Amp Notice Label	
8	803260	Warning Label	

Notes

Parts Index

A

Access Panel and Guard Assembly 514253	39
Access Panel Assembly 514250DG.....	39
514250WP	39
514251	39
Access Panel Plate 510903	69
Adhesive 511637P	51, 53
Air Duct Assembly 510151LG	49
510151W.....	49
Anti-Seize Compound 27604P	43, 45
Audit Switch Bracket 800379	19

B

Blower and Fan Kit 510717P.....	45
Blower Fan Assembly 510139P	45
Blower Housing 511969LG.....	45
511969WP.....	45
Blower Housing Cover 511970	45
Blower Housing Seal 510238P.....	45
Bolt 02505	15
29651	25, 29, 31
Booster and Holding Coil 58804A.....	65
59063A.....	65
Bracket 510146	17
Bumper Pad 36226	31, 33
56128	69
Burner Assembly 510149P.....	65

C

Cabinet Rear Panel 510005P.....	69
Cabinet Side Panel 510001DGP	69
510001WP	69
510002DGP	69
510002WP	69
Card Reader Wire Harness Assembly 800125P.....	9

Caution Label 500253	39
Central Pay Harness 511478.....	7, 9, 19
Clean Lint Label 502804	39
Clip 201572	13, 23
Coin Drop 38963P	11, 21
70441601P	11, 21
Coin Drop Assemby CK114.....	11, 21
CK123	11, 21
38462P	11, 21
38463	11, 21
38464P	11, 21
38467	11, 21
38472	11, 21
38475	11, 21
38519	11, 21
38521	11, 21
39157	11, 21
70441602	11, 21
70482401	11, 21
Coin Drop Kit CK077	11, 21
Coin Drop Wire Harness 201104.....	13, 23
Coin Identification Paper 38725	13, 23
Combustion Duct 510131	63
510132	63
Connector, 2 Circuit 58799	81
Connector, 3 Circuit 58800	79
Contactor 70482603	71
Contactor Bracket 511859.....	71
Control Assembly 514138P	7, 9, 19, 31
514139P	19, 31
Control Bracket 514261	31
Control Hood 502567W	7
511253W	9
Control Overlay 514367	7
514368	9
514369	19
514370	19
514479	19
514485	7
514654	7
514655	9
514656	33
514657	19
514658	33
514659	19

N/A items do not appear in index.

514660	33
514926	19
514928	33
515059	33
515415	19
Control Panel	
510067W.....	7
511055W.....	9
803962BP.....	25
803962DG.....	25
803962WP.....	25
803970B.....	25
Control Panel and Bracket Assembly	
513777B.....	19
513777DG.....	19
513777W.....	19
Control Panel Assembly	
514287W.....	33
514454	33
514455	33
514468	33
Control Wrapper	
804627DG.....	31
804627W.....	31
804630B.....	33
804630DG.....	33
804630W.....	33
Control Overlay	
514373	19
Conversion Kit	
756P3.....	59
Cylinder Assembly	
505929LGP.....	51
510265LGP.....	51
510265WP.....	51
Cylinder Baffle	
510102LG	51
510102W.....	51
Cylinder Belt	
511255P.....	43
Cylinder Glide	
513710	49
Cylinder Glide Bracket	
510145	49
Cylinder Roller	
510708P.....	53
Cylinder Roller Bracket	
510100	53
Cylinder Seal Assembly	
510207P.....	51, 53

D

Damper	
58786	69
Diagnostic Wire Harness Assembly	
202869	33
Din Rail	
M412693	71
Directional Exhaust Kit	
528P3.....	69
Disconnect Power Warning Label	
505281	17, 91

Door Catch Assembly	
510177	39
Door Handle Wedge	
510129	35, 37
510129LG.....	37
Door Liner Grill	
503870LG.....	37
503870W	37
Door Pull	
512947	35, 37
Door Pull and Wedge Kit	
510103WP.....	35
511213P	35, 37
Door Strike	
510181	35, 37
Door Strike Mount	
510127	35, 37
Drip Shield	
514327	41
Dryer Base	
514245	69
Dryer Door	
510013DG.....	35
510013WP.....	35
510082WP.....	37
512969	35
513225	37
Dryer Door Window	
503982P	37
Dual Coin Harness Assembly	
202871	7, 19
Dual Contactor Harness	
514054	71
Dual Overlay	
39073	15

E

Elbow	
513072	65
Elbow Shut-Off Valve	
510205	65
Electric Harness	
513970	85
514008	87
514024	89
Electrical Shock Label	
F8211201.....	17, 49
Electronic Coin Drop Assembly	
70294103P	13, 23
70294104	13, 23
70294105P	13, 23
70294106	13, 23
70294107	13, 23
70294109	13, 23
70294110	13, 23
70294111	13, 23
70294112	23
70294116	13, 23
70294117	13, 23
70294120	13, 23
70294121	13, 23
Electronic Coin Drop Kit	
CK099	13, 23

N/A items do not appear in index.

CK100	13, 23	
CK101	13, 23	
CK103	13, 23	
CK106	13, 23	
CK108	13, 23	
CK109	13, 23	
CK110	13, 23	
CK113	13, 23	
CK115	13, 23	
CK116	13, 23	
CK117	13, 23	
CK118	13, 23	
CK120	13, 23	
CK121	13, 23	
Electronic Harness		
513984	89	
End Cap		
210108W	9	
210109W	9	
End Stop		
F8449801	71	
Ethernet Gateway Kit		
NK320	7, 9, 19	
Exhaust Duct		
510137	69	
Exhaust Warning Label		
500497	91	
Expansion Clip		
70030501	25, 27, 33	
Extractor Tool		
128P4	83	
190P4	83	
F		
Felt Pad		
510189	49	
Female Piggyback Terminal		
00361	81	
Female Pin Terminal		
00117	79	
00128	79	
00130	79	
Female Spade Terminal		
00114	81	
00115	81	
00121	81	
00124	81	
00156	81	
00189	81	
00222	81	
00223	81	
Female Tab Terminal		
00344	81	
Female Terminal		
00188	83	
00255	83	
00256	83	
Filter		
514384P	77	
Filter Harness		
514036	77	
514037	77	
514040	77	
804396	77	
Flexible Venting Kit		
521P3	69	
Front Bulkhead Assembly		
510266P	49	
Front Panel		
510066DG	41	
510066WP	41	
512542	41	
Front Panel Seal		
511056	41	
G		
Gas Harness		
513969	85	
513977	85	
513983	89	
513987	89	
Gas Valve Assembly		
60353P	65	
Gas Valve Mounting Bracket		
510128	65	
Glide Kit		
RB170003	49	
Ground Filter Harness		
514038	77	
514039	77	
Ground Wire Assembly		
510550	89	
Grounding Clip		
00161	81	
H		
Harness		
804832	7, 9	
Harness Assembly		
802905	21	
Harness Strap		
55881	79	
Heat Duct Shroud		
510101	63	
Heater		
511014P	59	
Heater Assembly		
510324P	61	
510326P	61	
510327P	61	
510329P	61	
510330P	61	
Heater Duct and Screw Assembly		
510025P	59, 61, 63	
Heater Harness		
514002	71	
Heater Kit		
964P3	61	
965P3	61	
Heater Kit Assembly		
61927	61	
61929	61	
61930	61	

N/A items do not appear in index.

Hinge	
511036	35, 37
Hinge Hole Plug	
510186	41
Hold Down Kit	
526P3.....	69
Hood Back Panel	
804886	7
Housing, 10 Position	
500338	83

I

Idler Lever	
510133	45
Idler Lever and Wheel Assembly	
510158	45
Idler Spring	
510185	45
Idler Wheel and Bearing Assembly	
510142P.....	45
Igniter and Bracket Assembly	
510184P.....	65
Insulated Female Flag Terminal	
00221	81
Insulated Female Spade Terminal	
00359	81
00360	79
Insulated Female Terminal	
00165	81

J

Jumper Wire Assembly	
511270	59
Junction Box Assembly	
514389P.....	75
514390	75
514394P.....	75
514398	75
514399	75
514400	75
514402	75
Junction Box Cover	
514363	75
Junction Box Seal	
514379P.....	75

K

Key	
54612	19

L

Label	
503887	41
Lead-In Cord	
202777	73
202926	73

N/A items do not appear in index.

203208	73
203315	73
203344	73
514061	73
Lead-In Cord Assembly	
503597	73
506106	73
510505P.....	73
Lead-In Cord Kit	
61605P	73
Lead-In Pipe Assembly	
510204	65
Leveling Leg	
510135	69
Limit Thermostat	
510701	59, 61
510702	63
Line Filter	
804844	77
804864	77
Liner and Seal Assembly	
510098LG.....	37
510098W	37
Liner Door Seal	
510147P.....	35, 37
Liner, Seal and Grill Assembly	
510163WP.....	35
513109P.....	35, 37
Lint Filter	
503980LG.....	49
503980W	49
Lint Filter Label	
502781	39
Lock Cam	
804338	19
Lock Kit	
27260P	19
Lower Front Harness	
513978	85
Lower Junction Box Assembly	
514403	75
L.P. Conversion Kit	
458P3	65
L.P. Orifice	
503786	67
58755	67

M

Machine ID Control Assembly	
203361P	7, 9, 19, 31
Male Pin Terminal	
00116.....	79
00127	79
Male Tab Terminal	
00139	81
Meter Case Assembly	
38724W	15
802505W.....	15
804009B	25
804009DG	25
804009W	25

Meter Case Bracket Gasket	
35526	15
Meter Case Gasket	
26354	15
Meter Case Lockdown Bracket	
35525	15
Meter Case Locking Bracket	
30642	15
Motor and Pulley Assembly	
505843P.....	43
505869P.....	43
511629P	43
Motor Hub Ring Kit	
590P3.....	43
Motor Mount	
510060	45
Motor Mount Clamp	
510180	43
Motor Pulley	
500011	43
500222	43
Motor Shield	
514602	45
Mounting Tool Kit	
CK096	13, 23

N

Nameplate Overlay	
514681	25
Natural Gas Notice Label	
501140	91
Network Controller Kit	
NK220	7, 9, 19
Network Retrofit Kit	
203328	7, 9, 19
Notice Label, 20 Amp	
500496	91
Nut	
201216	13
27222	17
28447	55
29786	11, 15, 21, 23
29787	77
30647	15
36020	29
44087201	25
51236	77
52566	7, 45
56156	45, 53
N.G. Conversion Kit	
459P3.....	65
N.G. Orifice	
503776	67
503778	67
503779	67
503780	67
510517	67

O

Operating Instructions Label	
514392	25
514393	25, 27
514929	25
Opto Coupler	
200674P	11
Outlet Cover	
500820	59, 61, 63
514475	61
Output Board Shield	
514420	69
Output Control Assembly	
513797P	69
Overlay	
201091	15, 25
514873	27

P

Panel Locator	
56079	39, 41, 69
Pinched Fingers Label	
F8211301.....	49
Plug	
54522	81
Plug, 1 Circuit	
26302	81
Plug, 2 Circuit	
56266	79
56448	79
Plug, 6 Circuit	
23041	81
Plug, 9 Circuit	
23033	81
Porcelain Touch-Up Paint	
122P4P	69
Power Harness	
514000	71

R

Ratchet Extension Tool	
310P4	83
Rear Access Panel	
803998	25, 27
804614	33
Rear Bulkhead Assembly	
505246	53
511082P	53
Rear Panel	
804884	9
Rear Wrapper Brace	
805345	31
Receptacle Housing	
90789	81
Receptacle, 1 Circuit	
26301	81

N/A items do not appear in index.

Receptacle, 10 Circuit	
34596	81
Receptacle, 12 Circuit	
501333	81
56855	81
Receptacle, 2 Circuit	
56265	79
56451	79
Receptacle, 3 Circuit	
23039	79
36170	79
Receptacle, 6 Circuit	
26708	81
Receptacle, 9 Circuit	
26163	81
Retaining Ring	
23748	45, 53
Ring Terminal	
00110	81
00111	81
00319	81
Roller Kit	
RB170002	53
Rubber Foot	
501855	69

S

Screw	
M405188	25, 41, 53
02916	7, 9
20530	57, 73
23008	29
23222	59, 61, 65
28448	55
31260	45
33562	39
35528	7, 9
36048	15
39733	31, 39, 41, 69
500226	37
500824	45
501086	7, 9
501285	49, 55
501524	19
502535	47
503661	19, 57, 75
503673	15
503688	7, 9, 17, 25, 27, 31, 33, 41, 45, 49, 53, 55, 59, 61, 63, 65, 69, 71, 75, 77
505870	37
512921	69
514428	69
514461	35, 37, 49
51782	63, 65
52864	7, 9, 49
56124	65
61199	55
62588	51
62853	39
70240301	25, 27
803527P	33
804667	69
Screw Orifice	
58719	67

Seal Kit	
RB170001	51, 53
Secondary Coil	
58804B	65
59063B	65
Security Cabinet Assembly	
804149W	27
Security Kit	
905P3	7, 9
Sensor	
510213	65
Service Door Assembly	
39874WP	15
Shaft	
56461P	45, 53
Single Drop Overlay	
803476	25
Single Overlay	
38717	15
Spade Terminal	
00245	81
Speed Clip	
28835	41
Strain Relief	
38384	73
52113	73
60298	73
Strain Relief Adapter	
502496	73
Switch	
512973	15, 19, 25, 41
T	
Terminal	
00252	81
00347	81
Terminal Block Assembly	
505876	57
510190P	55
Terminal Block Label	
501288	91
Terminal Block Shield	
510237	55
514330	55, 57
Terminal Block Support Bracket	
505875	57
Terminal Extractor Tool	
283P4	83
Thermal Fuse Assembly	
511412	59, 61
Thermistor Assembly	
502366	47
510523	47
Thermostat	
510703	63
Top Hinge	
510136	69
Top Kit	
511527WP	17
Top Mounting Bracket	
504228	29

N/A items do not appear in index.

Top Panel	
803868WP	29
803869	29
804023DG	29
804684	31
804685DG	31
804685WP	31
Top Panel Brace Assembly	
804613	33
Top Panel Guide	
803761	31
Top Panel Kit	
511530WP	17
Torx Bit	
281P4	83
282P4	83
292P4	83
Torx Drive Tool	
93501	83
Transformer	
202757	7, 9, 19
202758	9, 19
513763	71
Transformer Harness	
514069	19
514071	7, 9
514072	19
514073	9
804795	19
Transformer Shield	
514334	71
200608	7, 9
28449	55
504082	53
52549	45, 53
Window Trim	
503981W	37
512633	37
Wire Assembly	
510527	61
510528	61
Wire Clip	
504034	79
687500	79
Wire Guard	
201595P	11, 21
Wire Harness Assembly	
512422P	85, 87, 89
Wireless Network Kit	
203327	7, 9, 19
Wire, 12 Gauge	
45380	85, 87, 89
Wire, 18 Gauge	
45001	85, 87, 89
Wiring Harness Assembly	
202868	19
202869	9
Wrapper Assembly	
804104B	25
804104DG	25
804104W	25
804112W	27

U

Upper Junction Box Assembly	
514401	75
USB Gateway Kit	
NK330	7, 9, 19
USB IR Interface Kit	
203346	7, 9, 19

V

Valve Assembly	
60443P	65
Venting Instruction Label	
502791	91

W

Warning Label	
44127701	49, 91
500049	49
500314	49
500316	17
512263	41
514226	39
803260	91
Warning/Caution Label	
500281	39
Washer	
M400017	7

N/A items do not appear in index.

Notes